



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp®2006 =

36.4

SPECfp_base2006 =

35.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

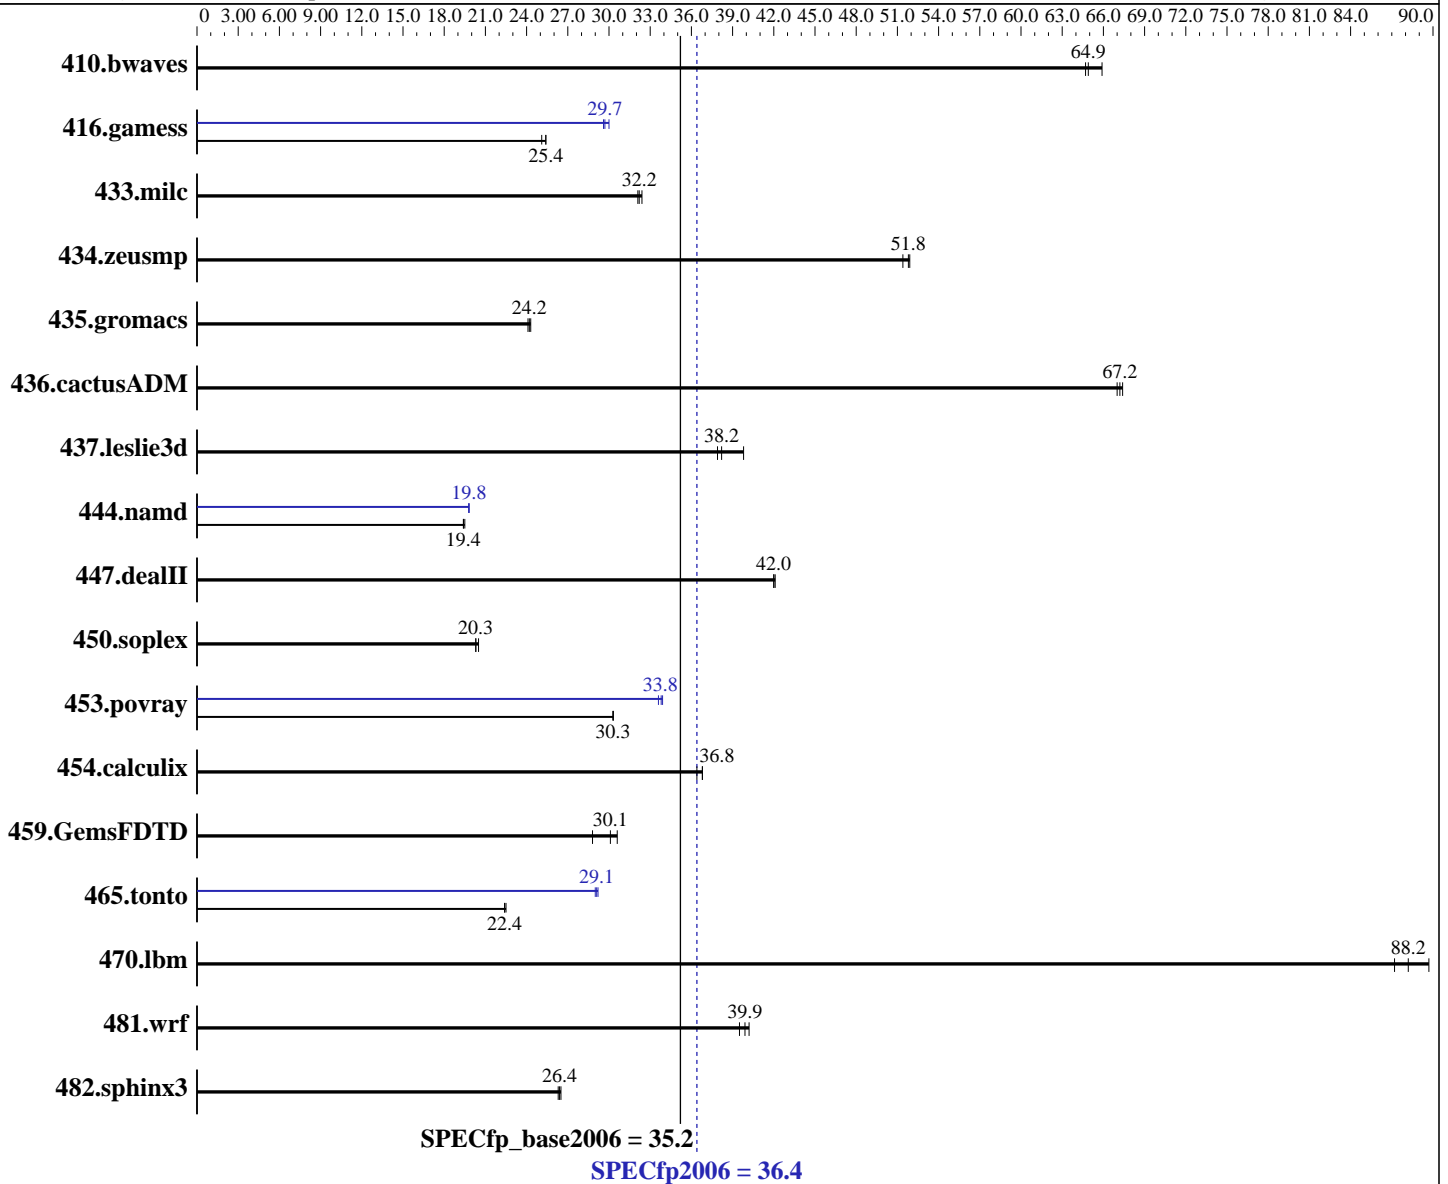

Hardware

CPU Name: AMD A10-7850K
 CPU Characteristics: AMD Turbo CORE technology up to 4.00 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	209	64.9	210	64.7	206	65.9	209	64.9	210	64.7	206	65.9
416.gamess	770	25.4	781	25.1	771	25.4	658	29.7	661	29.6	652	30.0
433.milc	285	32.2	286	32.1	284	32.4	285	32.2	286	32.1	284	32.4
434.zeusmp	175	51.9	177	51.4	176	51.8	175	51.9	177	51.4	176	51.8
435.gromacs	294	24.3	296	24.1	295	24.2	294	24.3	296	24.1	295	24.2
436.cactusADM	178	67.2	177	67.4	178	67.0	178	67.2	177	67.4	178	67.0
437.leslie3d	246	38.2	236	39.8	248	37.9	246	38.2	236	39.8	248	37.9
444.namd	411	19.5	413	19.4	414	19.4	406	19.8	406	19.8	405	19.8
447.dealII	272	42.0	272	42.1	273	42.0	272	42.0	272	42.1	273	42.0
450.soplex	410	20.3	407	20.5	411	20.3	410	20.3	407	20.5	411	20.3
453.povray	176	30.3	176	30.3	176	30.3	158	33.6	157	33.9	157	33.8
454.calculix	224	36.8	224	36.8	226	36.4	224	36.8	224	36.8	226	36.4
459.GemsFDTD	353	30.1	347	30.6	368	28.8	353	30.1	347	30.6	368	28.8
465.tonto	440	22.4	436	22.5	439	22.4	337	29.2	339	29.1	339	29.0
470.lbm	156	88.2	153	89.7	158	87.2	156	88.2	153	89.7	158	87.2
481.wrf	280	39.9	278	40.2	283	39.5	280	39.9	278	40.2	283	39.5
482.sphinx3	740	26.4	737	26.5	740	26.3	740	26.4	737	26.5	740	26.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltD850E6BC6E8A Tue Jul 1 02:00:03 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro

OS Version : 6.3.9600 N/A Build 9600

System Manufacturer: System manufacturer

System Model : System Product Name

Processor(s) : 1 Processor(s) Installed.

[01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3700 Mhz

BIOS Version : American Megatrends Inc. 0703, 12/30/2013

Total Physical Memory: 7,106 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0

L2CacheSize : 4096

L3CacheSize : 0

MaxClockSpeed : 3700

Name : AMD A10-7850K APU with Radeon(TM) R7 Graphics

NumberOfCores : 2

NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores

KMP_AFFINITY set to granularity=fine,scatter

Binaries compiled on a system with 1x Intel Core i7-860 CPU

+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

```

Benchmarks using both Fortran and C:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc10 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc10

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp2006 = 36.4

SPECfp_base2006 = 35.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
           /F1000000000
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:10:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.