



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13


Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

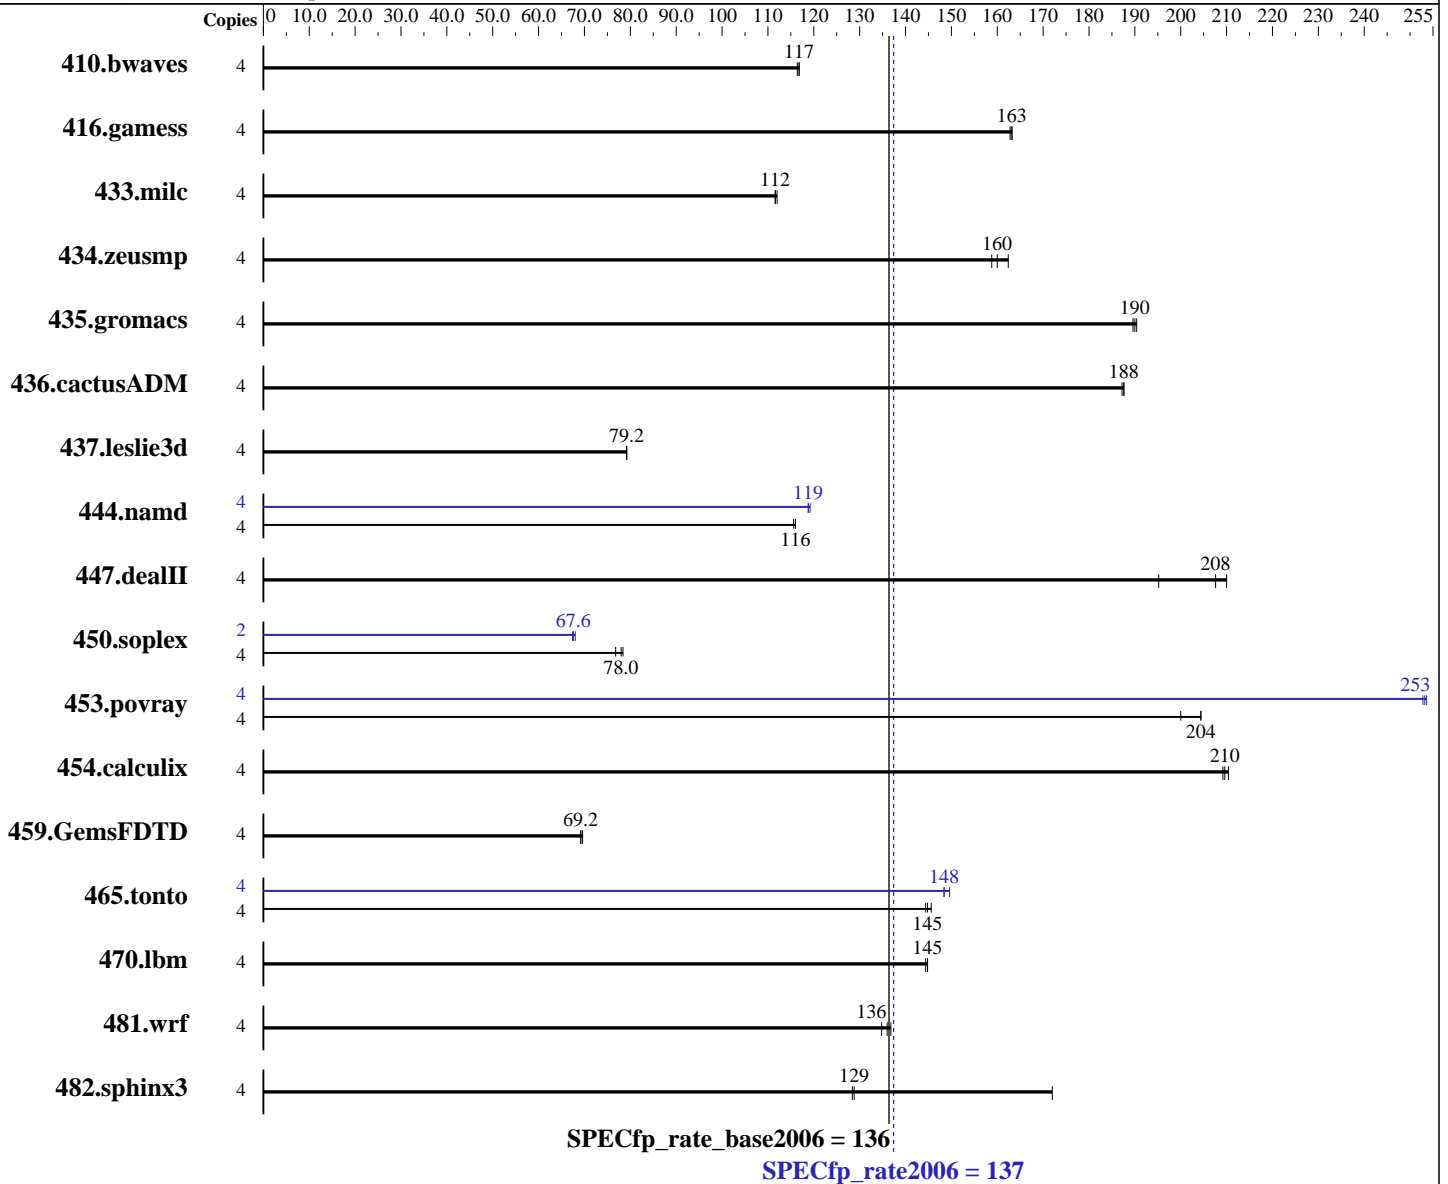

Hardware

CPU Name: Intel Core i5-4690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	467	116	466	117	465	117	4	467	116	466	117	465	117
416.gamess	4	480	163	482	163	480	163	4	480	163	482	163	480	163
433.milc	4	329	112	328	112	329	112	4	329	112	328	112	329	112
434.zeusmp	4	229	159	228	160	224	162	4	229	159	228	160	224	162
435.gromacs	4	151	190	150	190	150	190	4	151	190	150	190	150	190
436.cactusADM	4	255	188	256	187	255	188	4	255	188	256	187	255	188
437.leslie3d	4	474	79.2	474	79.2	474	79.2	4	474	79.2	474	79.2	474	79.2
444.namd	4	277	116	276	116	277	116	4	270	119	270	119	270	119
447.dealII	4	218	210	235	195	221	208	4	218	210	235	195	221	208
450.soplex	4	428	78.0	435	76.8	425	78.4	2	247	67.6	248	67.4	246	68.0
453.povray	4	104	204	104	204	107	200	4	84.2	253	83.9	254	84.0	253
454.calculix	4	157	210	157	210	158	209	4	157	210	157	210	158	209
459.GemsFDTD	4	612	69.2	612	69.2	611	69.6	4	612	69.2	612	69.2	611	69.6
465.tonto	4	270	146	273	144	272	145	4	263	150	265	148	265	148
470.lbm	4	380	145	380	145	380	144	4	380	145	380	145	380	144
481.wrf	4	332	135	328	136	326	137	4	332	135	328	136	326	137
482.sphinx3	4	605	129	608	128	453	172	4	605	129	608	128	453	172

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DED56 Sat Jun 28 07:23:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model : All Series
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3501 Mhz
BIOS Version : American Megatrends Inc. 2001, 6/13/2014
Total Physical Memory: 8,005 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 6144
MaxClockSpeed : 3501
Name : Intel(R) Core(TM) i5-4690 CPU @ 3.50GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

ASUS H97M-PLUS Motherboard (Intel Core i5-4690)

SPECfp_rate_base2006 = 136

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 11:02:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.