



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## SGI

**SPECint<sup>®</sup>\_rate2006 = 9470**

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

**SPECint\_rate\_base2006 = 9140**

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Nov-2014

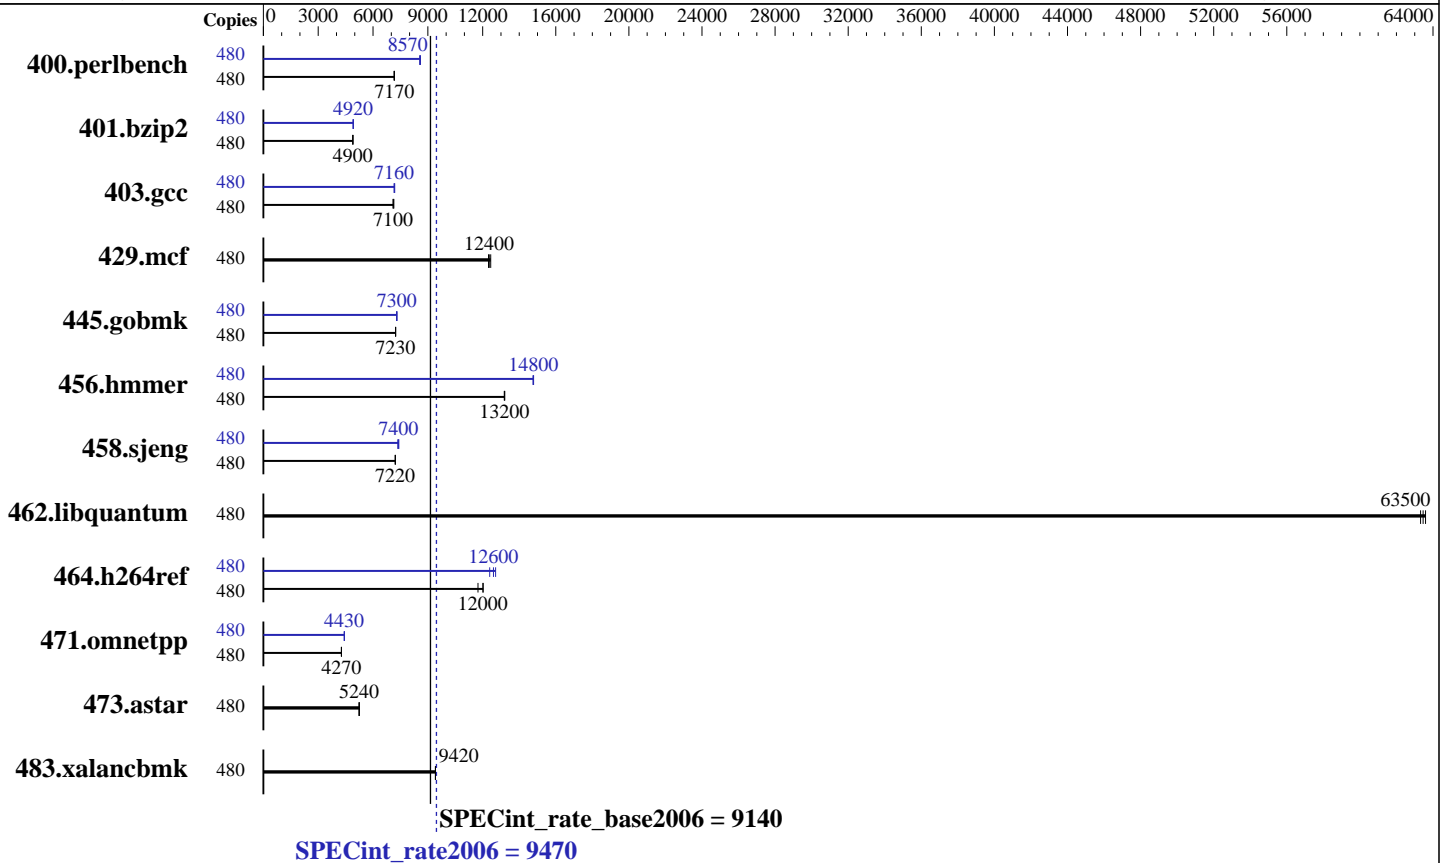

### Hardware

CPU Name: Intel Xeon E7-8890 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 240 cores, 16 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 4-32 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 37.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 2 TB (256 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)  
 Disk Subsystem: 2 TB tmpfs  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP3, Kernel 3.0.101-0.46-default  
 Compiler: C/C++; Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0, SGI Foundation Software 2.11, Build 711rp42.sles11sp3-1412152100



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## SGI

SPECint\_rate2006 = 9470

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

SPECint\_rate\_base2006 = 9140

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Nov-2014

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	480	654	7170	<b>654</b>	<b>7170</b>	656	7150	480	546	8600	548	8560	<b>547</b>	<b>8570</b>
401.bzip2	480	946	4890	946	4900	<b>946</b>	<b>4900</b>	480	<b>942</b>	<b>4920</b>	943	4910	941	4920
403.gcc	480	541	7140	<b>544</b>	<b>7100</b>	544	7100	480	538	7190	<b>540</b>	<b>7160</b>	540	7160
429.mcf	480	<b>354</b>	<b>12400</b>	355	12300	352	12400	480	<b>354</b>	<b>12400</b>	355	12300	352	12400
445.gobmk	480	<b>696</b>	<b>7230</b>	696	7230	695	7240	480	688	7310	<b>690</b>	<b>7300</b>	691	7280
456.hammer	480	340	13200	339	13200	<b>340</b>	<b>13200</b>	480	303	14800	304	14800	<b>303</b>	<b>14800</b>
458.sjeng	480	804	7220	<b>805</b>	<b>7220</b>	805	7220	480	<b>785</b>	<b>7400</b>	784	7400	790	7350
462.libquantum	480	<b>157</b>	<b>63500</b>	156	63600	157	63300	480	<b>157</b>	<b>63500</b>	156	63600	157	63300
464.h264ref	480	883	12000	<b>884</b>	<b>12000</b>	905	11700	480	836	12700	858	12400	<b>844</b>	<b>12600</b>
471.omnetpp	480	703	4270	702	4270	<b>702</b>	<b>4270</b>	480	677	4430	678	4430	<b>678</b>	<b>4430</b>
473.astar	480	<b>643</b>	<b>5240</b>	642	5250	643	5240	480	<b>643</b>	<b>5240</b>	642	5250	643	5240
483.xalancbmk	480	<b>352</b>	<b>9420</b>	352	9420	352	9410	480	<b>352</b>	<b>9420</b>	352	9420	352	9410

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem set up with:

```
mkdir -p /mnt/shm
mount -t tmpfs -o size=2048g,rw tmpfs /mnt/shm/
```

Turbo mode activated with:

```
modprobe acpi_cpufreq
cpupower frequency-set -u 3400MHz -d 3400MHz -g performance
```

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/mnt/shm/cpu2006-1.2/libs/32:/mnt/shm/cpu2006-1.2/libs/64:/mnt/shm/cpu2006-1.2/sh"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 9470**

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

**SPECint\_rate\_base2006 = 9140**

**CPU2006 license:** 4

**Test date:** Dec-2014

**Test sponsor:** SGI

**Hardware Availability:** Dec-2014

**Tested by:** SGI

**Software Availability:** Nov-2014

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/sw/sdev/intel/parallel\_studio\_2015/composer\_xe\_2015/lib/ia32/

C++ benchmarks:

icpc -m32 -L/sw/sdev/intel/parallel\_studio\_2015/composer\_xe\_2015/lib/ia32/

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/sw/sdev/intel/parallel\_studio\_2015/composer\_xe\_2015/lib/ia32/

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/sw/sdev/intel/parallel\_studio\_2015/composer\_xe\_2015/lib/ia32/



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 9470**

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

**SPECint\_rate\_base2006 = 9140**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Dec-2014

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2014

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**SGI**

**SPECint\_rate2006 = 9470**

SGI UV 300 (Intel Xeon E7-8890 v2, 2.8 GHz)

**SPECint\_rate\_base2006 = 9140**

**CPU2006 license:** 4

**Test date:** Dec-2014

**Test sponsor:** SGI

**Hardware Availability:** Dec-2014

**Tested by:** SGI

**Software Availability:** Nov-2014

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.html>

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 27 13:29:48 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 January 2015.