



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 2680

Express5800/A2040c (Intel Xeon E7-8880 v3)

SPECint_rate_base2006 = 2590

CPU2006 license: 9006


Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

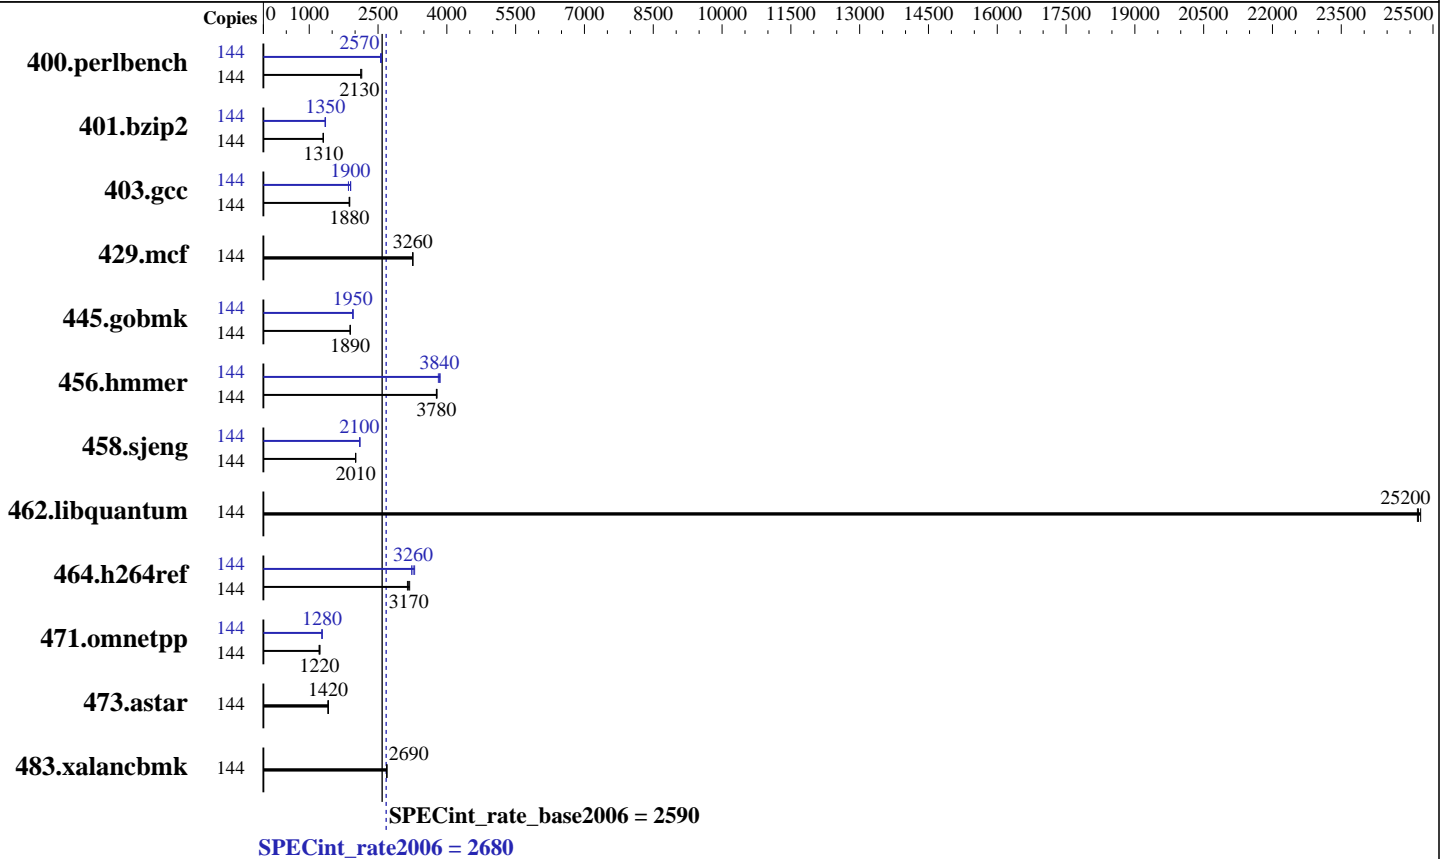

Hardware

CPU Name: Intel Xeon E7-8880 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 3 x 300 GB SAS, 15000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Kernel 2.6.32-504.12.2.el6.x86_64
 Compiler: C/C++: Version 14.0.3.174 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Multi-Core V10.01



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 2680

Express5800/A2040c (Intel Xeon E7-8880 v3)

SPECint_rate_base2006 = 2590

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	144	662	2120	656	2150	662	2130	144	551	2550	548	2570	546	2580		
401.bzip2	144	1068	1300	1062	1310	1062	1310	144	1033	1350	1029	1350	1026	1350		
403.gcc	144	618	1880	620	1870	615	1880	144	625	1850	610	1900	609	1900		
429.mcf	144	403	3260	403	3260	403	3260	144	403	3260	403	3260	403	3260		
445.gobmk	144	798	1890	798	1890	797	1900	144	775	1950	774	1950	772	1960		
456.hammer	144	355	3790	356	3780	356	3770	144	350	3840	349	3850	352	3810		
458.sjeng	144	867	2010	866	2010	866	2010	144	828	2100	829	2100	829	2100		
462.libquantum	144	118	25200	118	25200	119	25200	144	118	25200	118	25200	119	25200		
464.h264ref	144	1006	3170	999	3190	1015	3140	144	976	3260	986	3230	966	3300		
471.omnetpp	144	737	1220	740	1220	729	1240	144	702	1280	705	1280	704	1280		
473.astar	144	713	1420	719	1410	714	1420	144	713	1420	719	1410	714	1420		
483.xalancbmk	144	370	2690	369	2690	369	2700	144	370	2690	369	2690	369	2700		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS Settings:
Memory RAS Mode: Independent
VT-x : Disabled
Processor C6 Report : Disabled
OS Performance Tuning : Disabled
Energy Performance : Performance
Patrol Scrub : Disabled
Demand Scrub : Disabled
Memory P.E. Retry : Disabled



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 2680

Express5800/A2040c (Intel Xeon E7-8880 v3)

SPECint_rate_base2006 = 2590

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = */opt/SmartHeap_10mc/lib:/opt/SmartHeap_10mc/lib64:/opt/intel/composer_xe_2013_sp1.3.174/compiler/lib/ia32:/opt/intel/composer_xe_2013_sp1.3.174/compiler/lib/intel64*

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

```
-opt-mem-layout-trans=3 -Wl,-z,muldefs
```

```
-L/opt/SmartHeap_10mc/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 2680

Express5800/A2040c (Intel Xeon E7-8880 v3)

SPECint_rate_base2006 = 2590

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 2680

Express5800/A2040c (Intel Xeon E7-8880 v3)

SPECint_rate_base2006 = 2590

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_10mc/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040c-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040c-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 30 16:15:38 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 June 2015.