



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 998

Express5800/A2040c (Intel Xeon E7-4809 v3)

SPECint_rate_base2006 = 964

CPU2006 license: 9006


Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

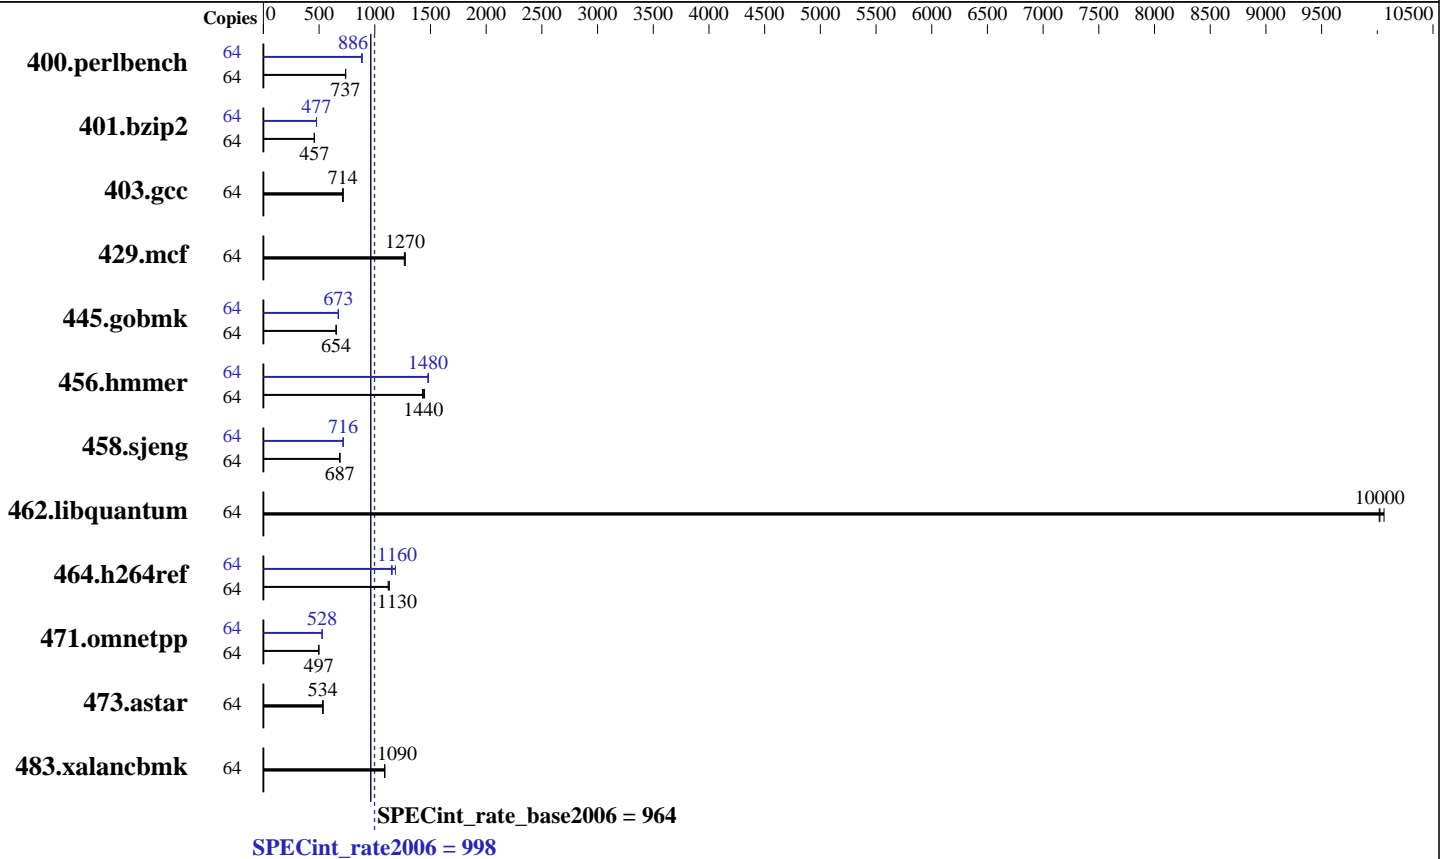

Hardware

CPU Name: Intel Xeon E7-4809 v3
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 3 x 300 GB SAS, 15000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Kernel 2.6.32-504.12.2.el6.x86_64
 Compiler: C/C++: Version 14.0.3.174 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Multi-Core V10.01



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 998

Express5800/A2040c (Intel Xeon E7-4809 v3)

SPECint_rate_base2006 = 964

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	848	737	848	737	846	739	64	705	886	710	881	706	886
401.bzip2	64	1350	457	1351	457	1347	458	64	1296	477	1295	477	1296	477
403.gcc	64	719	717	725	711	722	714	64	719	717	725	711	722	714
429.mcf	64	459	1270	459	1270	461	1270	64	459	1270	459	1270	461	1270
445.gobmk	64	1027	654	1027	653	1027	654	64	998	673	998	673	997	673
456.hammer	64	418	1430	413	1450	416	1440	64	403	1480	404	1480	404	1480
458.sjeng	64	1127	687	1128	686	1128	687	64	1082	716	1082	716	1080	717
462.libquantum	64	132	10000	132	10100	132	10000	64	132	10000	132	10100	132	10000
464.h264ref	64	1264	1120	1255	1130	1254	1130	64	1232	1150	1195	1190	1225	1160
471.omnetpp	64	802	499	808	495	805	497	64	757	528	758	528	758	528
473.astar	64	843	533	838	536	841	534	64	843	533	838	536	841	534
483.xalancbmk	64	406	1090	405	1090	405	1090	64	406	1090	405	1090	405	1090

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS Settings:
Memory RAS Mode: Independent
VT-x : Disabled
Processor C6 Report : Disabled
OS Performance Tuning : Disabled
Energy Performance : Performance
Patrol Scrub : Disabled
Demand Scrub : Disabled
Memory P.E. Retry : Disabled



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 998

Express5800/A2040c (Intel Xeon E7-4809 v3)

SPECint_rate_base2006 = 964

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = */opt/SmartHeap_10mc/lib:/opt/SmartHeap_10mc/lib64:/opt/intel/composer_xe_2013_sp1.3.174/compiler/lib/ia32:/opt/intel/composer_xe_2013_sp1.3.174/compiler/lib/intel64*

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs

-L/opt/SmartHeap_10mc/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 998

Express5800/A2040c (Intel Xeon E7-4809 v3)

SPECint_rate_base2006 = 964

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 998

Express5800/A2040c (Intel Xeon E7-4809 v3)

SPECint_rate_base2006 = 964

CPU2006 license: 9006

Test date: Jun-2015

Test sponsor: NEC Corporation

Hardware Availability: Jul-2015

Tested by: NEC Corporation

Software Availability: Mar-2015

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_10mc/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040c-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040c-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 14 16:21:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 July 2015.