



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint®_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

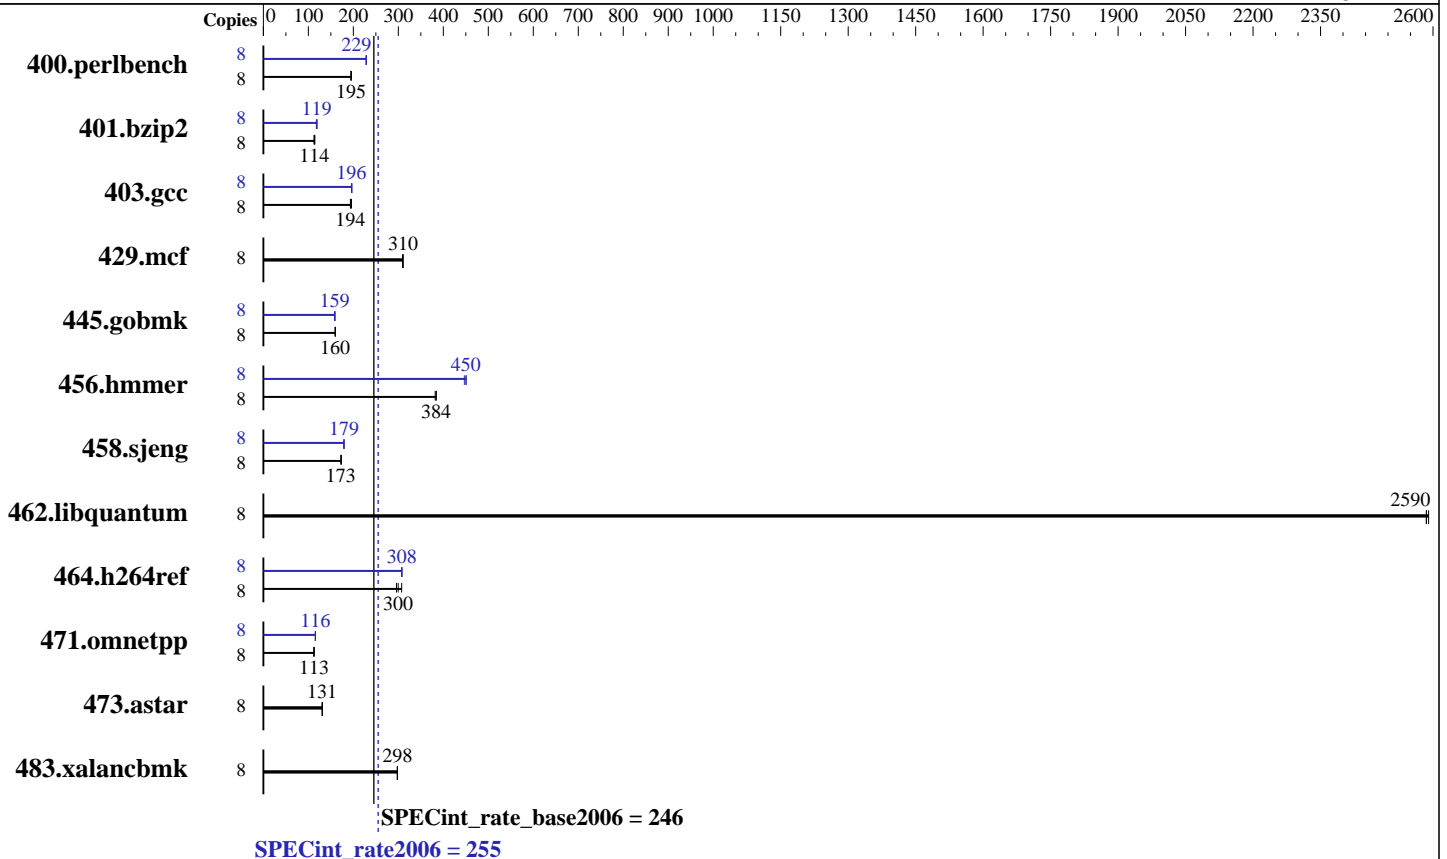

Hardware

CPU Name: Intel Xeon E3-1230 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
 Disk Subsystem: 1 x 1 TB SATA, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	401	195	402	195	399	196	8	342	229	341	229	342	228
401.bzip2	8	676	114	677	114	686	113	8	649	119	647	119	656	118
403.gcc	8	329	196	333	194	333	194	8	327	197	329	196	328	196
429.mcf	8	235	310	235	311	236	309	8	235	310	235	311	236	309
445.gobmk	8	524	160	525	160	526	159	8	529	159	528	159	528	159
456.hammer	8	194	384	195	382	194	384	8	166	450	167	447	166	451
458.sjeng	8	561	172	561	173	559	173	8	540	179	540	179	541	179
462.libquantum	8	64.1	2590	64.0	2590	64.1	2590	8	64.1	2590	64.0	2590	64.1	2590
464.h264ref	8	591	300	598	296	576	307	8	575	308	576	307	575	308
471.omnetpp	8	445	112	444	113	444	113	8	433	115	433	116	432	116
473.astar	8	428	131	430	131	429	131	8	428	131	430	131	429	131
483.xalancbmk	8	185	298	185	298	185	298	8	185	298	185	298	185	298

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches

Platform Notes

BIOS Configuration:
HP Power Regulator set to HP Static High Performance Mode
Thermal Configuration set to Maximum Cooling
Minimum Processor Idle Power Core State set to C6 State
Minimum Processor Idle Power Package State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
HP Power Profile set to Custom
Thermal configuration set to Maximum Cooling
Sysinfo program /home/spec/config/sysinfo.rev6914

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on DL20host Tue Dec 22 14:53:14 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1230 v5 @ 3.40GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 32689388 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.1 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.1"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:

Linux DL20host 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 21 15:29

SPEC is set to: /home/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	865G	16G	850G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U22 09/24/2015

Memory:

4x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarthearp

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
 -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
 -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
 -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.40 GHz, Intel Xeon E3-1230 v5)

SPECint_rate2006 = 255

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 12 15:46:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7