



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X
(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint®_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

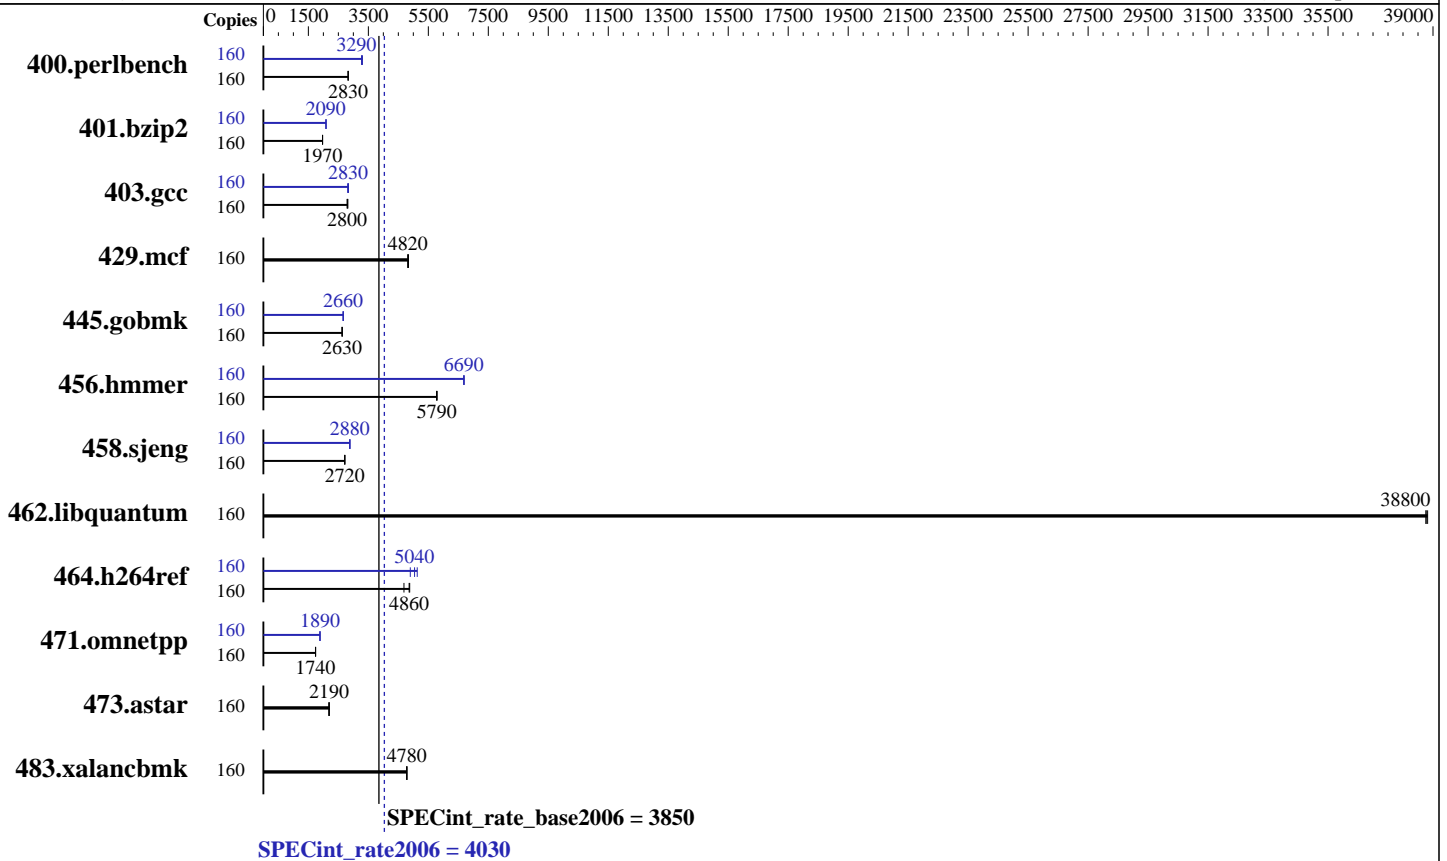

Hardware

CPU Name: Intel Xeon E7-8891 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 2 to 16 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 2 TB (64 x 32 GB 4Rx4 PC4-2133P-L, running at 1600 MHz)
Disk Subsystem: 8 x C8S59A, 900 GB 10 K RPM SAS
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
Kernel 3.12.49-11-default
Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 5 (multi-user, w/GUI)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	160	553	2830	553	2830	<u>553</u>	<u>2830</u>	160	473	3300	477	3270	<u>476</u>	<u>3290</u>
401.bzip2	160	782	1970	<u>782</u>	<u>1970</u>	783	1970	160	739	2090	<u>739</u>	<u>2090</u>	740	2090
403.gcc	160	<u>461</u>	<u>2800</u>	457	2820	461	2800	160	<u>455</u>	<u>2830</u>	454	2830	458	2810
429.mcf	160	302	4840	303	4820	<u>303</u>	<u>4820</u>	160	302	4840	303	4820	<u>303</u>	<u>4820</u>
445.gobmk	160	<u>638</u>	<u>2630</u>	638	2630	641	2620	160	630	2670	631	2660	<u>631</u>	<u>2660</u>
456.hammer	160	<u>258</u>	<u>5790</u>	258	5790	258	5770	160	223	6700	223	6680	<u>223</u>	<u>6690</u>
458.sjeng	160	714	2710	713	2720	<u>713</u>	<u>2720</u>	160	671	2880	672	2880	<u>671</u>	<u>2880</u>
462.libquantum	160	<u>85.5</u>	<u>38800</u>	85.5	38800	85.4	38800	160	<u>85.5</u>	<u>38800</u>	85.5	38800	85.4	38800
464.h264ref	160	<u>729</u>	<u>4860</u>	755	4690	726	4880	160	<u>702</u>	<u>5040</u>	723	4900	690	5130
471.omnetpp	160	<u>575</u>	<u>1740</u>	574	1740	576	1740	160	529	1890	530	1890	<u>530</u>	<u>1890</u>
473.astar	160	515	2180	<u>512</u>	<u>2190</u>	511	2200	160	515	2180	<u>512</u>	<u>2190</u>	511	2200
483.xalancbmk	160	231	4790	<u>231</u>	<u>4780</u>	231	4780	160	231	4790	<u>231</u>	<u>4780</u>	231	4780

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Power profile set with: cpupower -c all frequency-set -g performance
Setting the value of perf-bias: cpupower set -b 0
Tuned profile set with: tuned-adm profile throughput-performance
```

Platform Notes

```
Firmware settings:
Memory RAS Configuration set to Maximum Performance
Sysinfo program /home/cpul7/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on gh10 Sat Oct 8 22:46:13 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X
(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8891 v3 @ 2.80GHz

8 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 4 6 8 17 19 20 23

physical 1: cores 0 1 2 4 6 8 17 19 20 23

physical 2: cores 0 1 2 4 6 8 17 19 20 23

physical 3: cores 0 1 2 4 6 8 17 19 20 23

physical 4: cores 0 1 2 4 6 8 17 19 20 23

physical 5: cores 0 1 2 4 6 8 17 19 20 23

physical 6: cores 0 1 2 4 6 8 17 19 20 23

physical 7: cores 0 1 2 4 6 8 17 19 20 23

cache size : 46080 KB

From /proc/meminfo

MemTotal: 2117603700 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux gh10 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)

x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Oct 8 22:13

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X
(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Platform Notes (Continued)

SPEC is set to: /home/cpul7

Filesystem	Type	Size	Used	Avail
Use% Mounted on				
/dev/mapper/3600c0ff0002626a42792985701000000-part4	xfs	1.8T	285G	1.5T
16% /home				

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP Bundle: 008.004.084 SFW: 043.025.000 08/16/2016

Memory:

64x HP M386A4G40DM0-CPB 32 GB 4 rank 2133 MHz, configured at 1600 MHz
128x not defined not defined

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have one line reading as:
64x HP M386A4G40DM0-CPB 32 GB 4 rank 2133 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpul7/libs/32:/home/cpul7/libs/64:/home/cpul7/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -D_FILE_OFFSET_BITS=64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X
(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Base Portability Flags (Continued)

458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
 -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
 -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -auto-ilp32
 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X
(80 core, 2.80 GHz, Intel Xeon E7-8891 v3)

SPECint_rate2006 = 4030

SPECint_rate_base2006 = 3850

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2016

Hardware Availability: Aug-2016

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2)
             -qopt-ra-region-strategy=block
             -qopt-mem-layout-trans=3 -Wl,-z,muldefs
             -L/sh10.2 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 2 10:38:53 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 November 2016.