



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECint®_rate2006 = 1030

HPC S2600WT2R (Intel Xeon E5-2650 v4, 2.2 GHz)

SPECint_rate_base2006 = 983

CPU2006 license: 4204


Test date: Jan-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

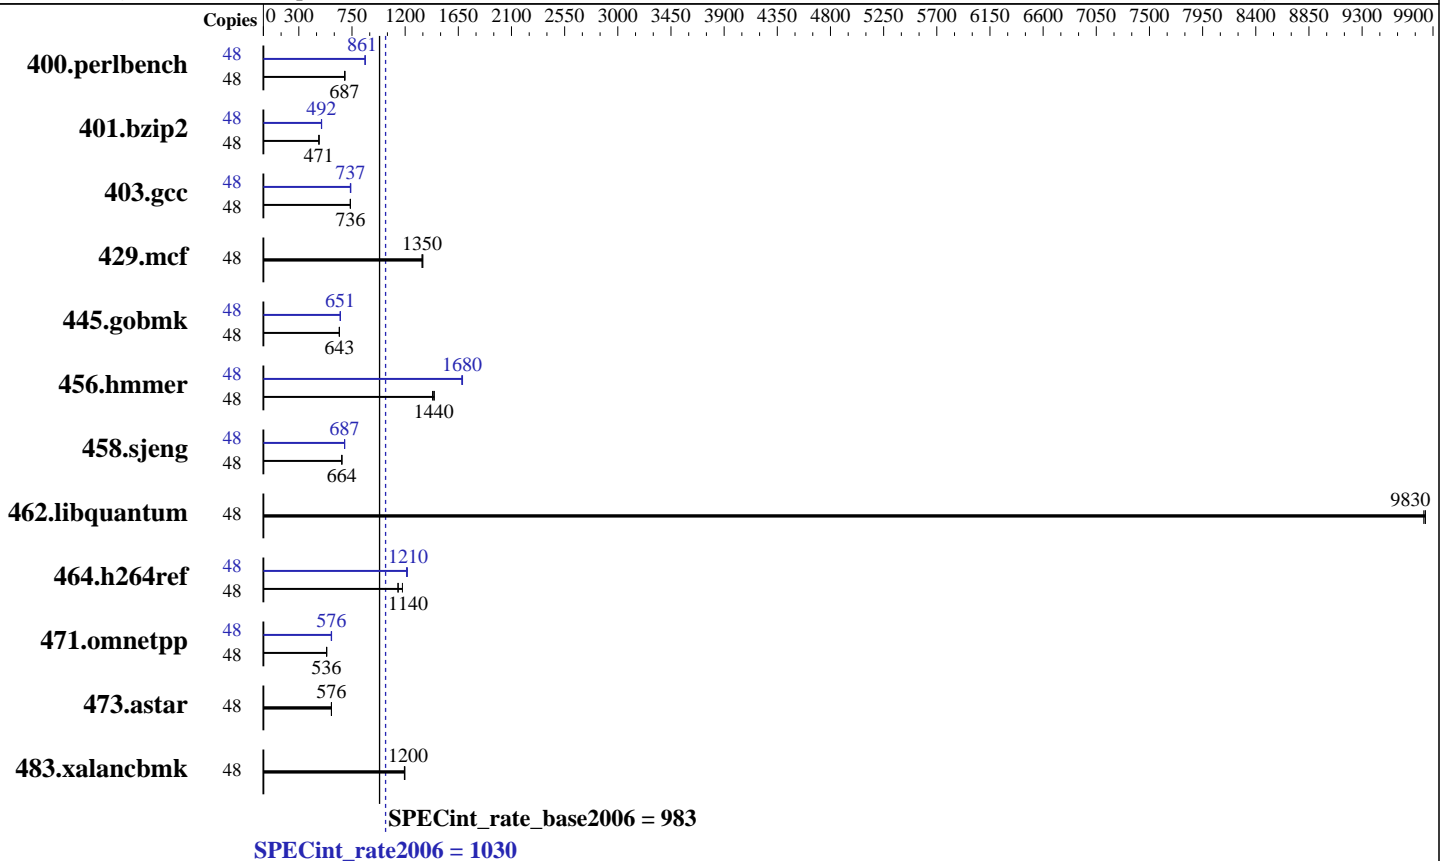

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2400 MHz)
 Disk Subsystem: 1 x 300 GB SAS 15k
 Other Hardware: None

Software

Operating System: CentOS 7.2
 3.10.0-327.18.2.el7.x86_64
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECint_rate2006 = 1030

HPC S2600WT2R (Intel Xeon E5-2650 v4, 2.2 GHz)

SPECint_rate_base2006 = 983

CPU2006 license: 4204

Test date: Jan-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	678	691	682	687	682	687	48	544	861	544	862	545	861
401.bzip2	48	984	471	985	470	984	471	48	943	491	940	493	941	492
403.gcc	48	524	737	525	736	525	736	48	522	740	524	737	525	736
429.mcf	48	324	1350	325	1350	326	1340	48	324	1350	325	1350	326	1340
445.gobmk	48	783	643	783	643	782	643	48	774	651	773	652	774	651
456.hammer	48	309	1450	311	1440	313	1430	48	267	1680	266	1690	266	1680
458.sjeng	48	874	664	875	664	875	664	48	844	688	845	687	845	687
462.libquantum	48	101	9820	101	9840	101	9830	48	101	9820	101	9840	101	9830
464.h264ref	48	930	1140	903	1180	933	1140	48	876	1210	875	1210	871	1220
471.omnetpp	48	561	535	560	536	560	536	48	521	576	520	577	522	575
473.astar	48	586	575	584	577	585	576	48	586	575	584	577	585	576
483.xalancbmk	48	278	1190	277	1200	277	1200	48	278	1190	277	1200	277	1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches

Platform Notes

BIOS Configuration:
CPU and Power Performance Policy = Performance
Set Fan Profile = Performance
Fan PWM Offset = 100

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh:\$/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/intel64_lin"

Binaries compiled on a system with 2x Intel Xeon E5-2650 v4 CPU + 256GB memory using CentOS 7.2

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECint_rate2006 = 1030

HPC S2600WT2R (Intel Xeon E5-2650 v4, 2.2 GHz)

SPECint_rate_base2006 = 983

CPU2006 license: 4204

Test date: Jan-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/ia32_lin

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECint_rate2006 = 1030

HPC S2600WT2R (Intel Xeon E5-2650 v4, 2.2 GHz)

SPECint_rate_base2006 = 983

CPU2006 license: 4204

Test date: Jan-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECint_rate2006 = 1030

HPC S2600WT2R (Intel Xeon E5-2650 v4, 2.2 GHz)

SPECint_rate_base2006 = 983

CPU2006 license: 4204

Test date: Jan-2017

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/MComputers-Platform-Settings-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 25 10:54:17 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 January 2017.