



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55


Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

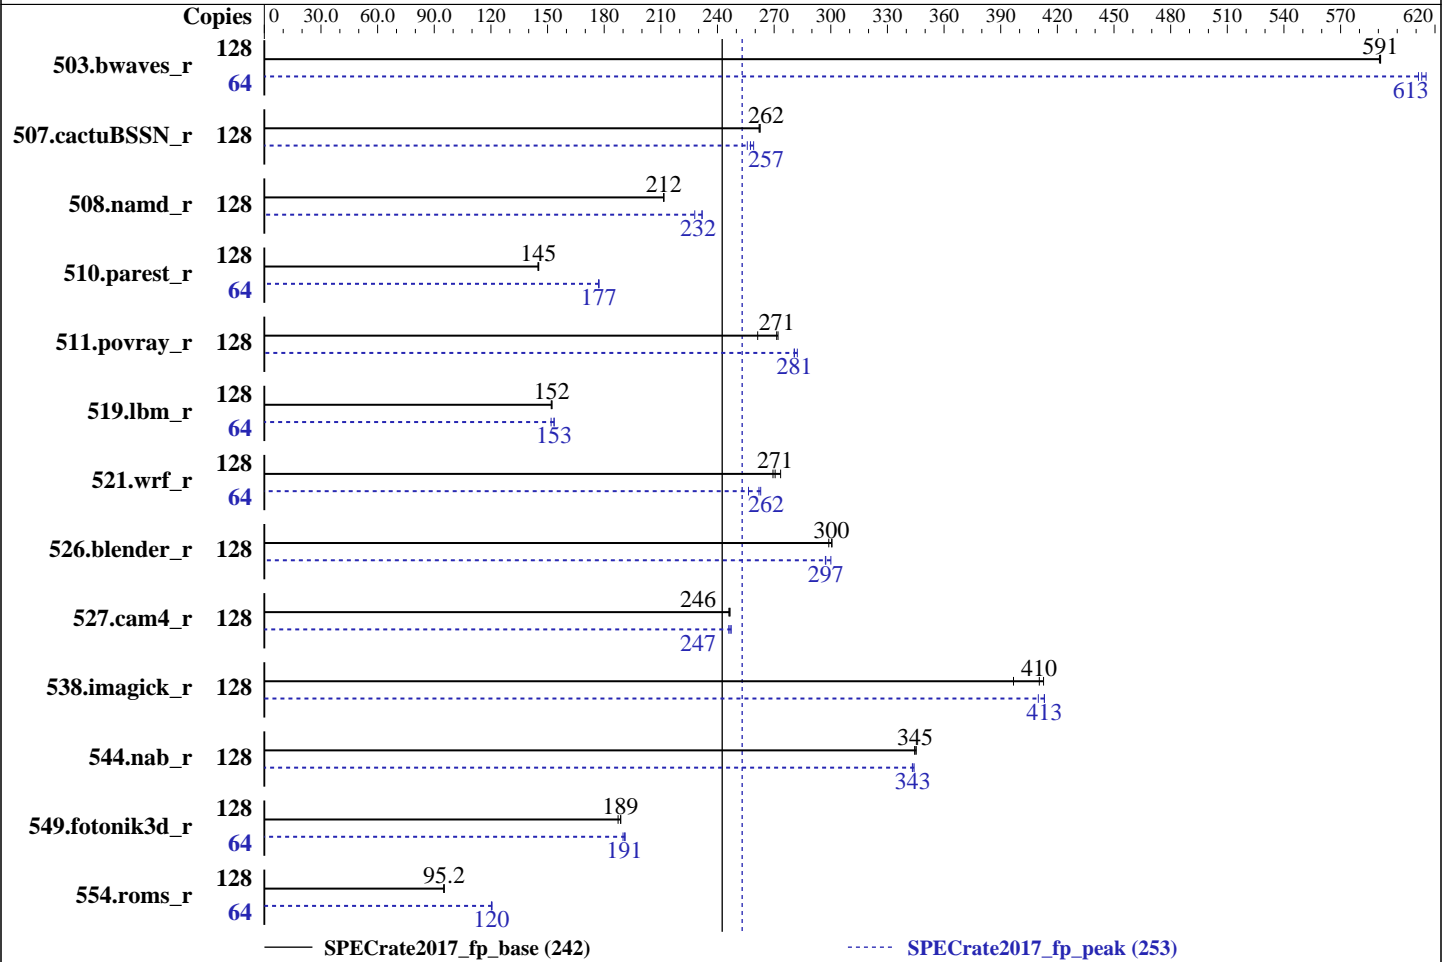

### Hardware

CPU Name: AMD EPYC 7501  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4DRx4 PC4-2666V-L, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64) kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.0.9 released Jan-2018  
 File System: xfs  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library, version 4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2018  
Hardware Availability: Feb-2018  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>2171</u>	<u>591</u>	2173	591	2171	591	64	<u>1047</u>	<u>613</u>	1050	611	1043	615
507.cactuBSSN_r	128	<u>618</u>	<u>262</u>	617	263	618	262	128	<u>629</u>	<u>257</u>	634	256	625	259
508.namd_r	128	575	211	<u>575</u>	<u>212</u>	575	212	128	533	228	524	232	<u>525</u>	<u>232</u>
510.parest_r	128	2304	145	<u>2306</u>	<u>145</u>	2311	145	64	945	177	<u>945</u>	<u>177</u>	946	177
511.povray_r	128	1099	272	<u>1101</u>	<u>271</u>	1144	261	128	<u>1065</u>	<u>281</u>	1059	282	1065	281
519.lbm_r	128	<u>886</u>	<u>152</u>	886	152	888	152	64	444	152	<u>440</u>	<u>153</u>	439	153
521.wrf_r	128	1049	273	1064	269	<u>1060</u>	<u>271</u>	64	<u>547</u>	<u>262</u>	545	263	559	256
526.blender_r	128	652	299	<u>649</u>	<u>300</u>	648	301	128	<u>656</u>	<u>297</u>	650	300	656	297
527.cam4_r	128	910	246	908	247	<u>908</u>	<u>246</u>	128	<u>908</u>	<u>247</u>	905	247	910	246
538.imagick_r	128	<u>776</u>	<u>410</u>	802	397	771	413	128	770	413	<u>771</u>	<u>413</u>	777	410
544.nab_r	128	<u>625</u>	<u>345</u>	624	345	625	344	128	<u>627</u>	<u>343</u>	628	343	626	344
549.fotonik3d_r	128	2662	187	<u>2643</u>	<u>189</u>	2643	189	64	1313	190	1305	191	<u>1307</u>	<u>191</u>
554.roms_r	128	<u>2136</u>	<u>95.2</u>	2135	95.3	2141	95.0	64	843	121	<u>845</u>	<u>120</u>	846	120

SPECrate2017\_fp\_base = 242

SPECrate2017\_fp\_peak = 253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.2/amd1704-rate-libs-revC/64;/home/cpu2017-1.0.2/amd1704-rate-libs-revC/32:"
MALLOCCONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran.

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCCONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

sysinfo program /home/cpu2017-1.0.2/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-o8ns Thu Mar 8 00:14:48 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7501 32-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2018  
Hardware Availability: Feb-2018  
Software Availability: Sep-2017

## Platform Notes (Continued)

29 30 31  
physical 1: cores 0 1 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28  
29 30 31

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                 1
Model name:            AMD EPYC 7501 32-Core Processor
Stepping:              2
CPU MHz:               1996.175
BogoMIPS:              3992.35
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120
NUMA node1 CPU(s):    2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122
NUMA node2 CPU(s):    4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124
NUMA node3 CPU(s):    6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126
NUMA node4 CPU(s):    1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121
NUMA node5 CPU(s):    3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123
NUMA node6 CPU(s):    5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125
NUMA node7 CPU(s):    7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca
```

/proc/cpuinfo cache data  
cache size : 512 KB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120
node 0 size: 128623 MB
node 0 free: 128378 MB
node 1 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122
node 1 size: 129021 MB
node 1 free: 128841 MB
node 2 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124
node 2 size: 129021 MB
node 2 free: 128853 MB
node 3 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126
node 3 size: 129021 MB
node 3 free: 128848 MB
node 4 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121
node 4 size: 129021 MB
node 4 free: 128848 MB
node 5 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123
node 5 size: 129021 MB
node 5 free: 128841 MB
node 6 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125
node 6 size: 129021 MB
node 6 free: 128849 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127
node 7 size: 129019 MB
node 7 free: 128844 MB

```

```

node distances:
node  0  1  2  3  4  5  6  7
  0:  10 16 16 16 28 28 22 28
  1:  16 10 16 16 28 28 28 22
  2:  16 16 10 16 22 28 28 28
  3:  16 16 16 10 28 22 28 28
  4:  28 28 22 28 10 16 16 16
  5:  28 28 28 22 16 10 16 16
  6:  22 28 28 28 16 16 10 16
  7:  28 22 28 28 16 16 16 10

```

From /proc/meminfo

MemTotal: 1056533368 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-o8ns 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 7 11:54

SPEC is set to: /home/cpu2017-1.0.2

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda4 xfs 844G 11G 834G 2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.9 01/05/2018

Memory:

16x 802C8632802C 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666

16x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
FC 507.cactuBSSN\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
    peak)
=====
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
=====
```

```
=====
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madox
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madox
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)
-mavx -madox -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -mavx2 -madvx -funroll-loops -ffast-math
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -O3(clang) -mavx -ffast-math
-O3(gfortran) -funroll-loops -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2
-madvx -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 242

PowerEdge R7425 (AMD EPYC 7501, 2.00 GHz)

SPECrate2017\_fp\_peak = 253

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: Feb-2018

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -O3 -mavx2 -madox -funroll-loops -ffast-math
-fplugin-dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/amd1704-Dell-platform-revB-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-08 01:14:47-0500.

Report generated on 2019-02-21 13:56:24 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-03.