



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro


A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

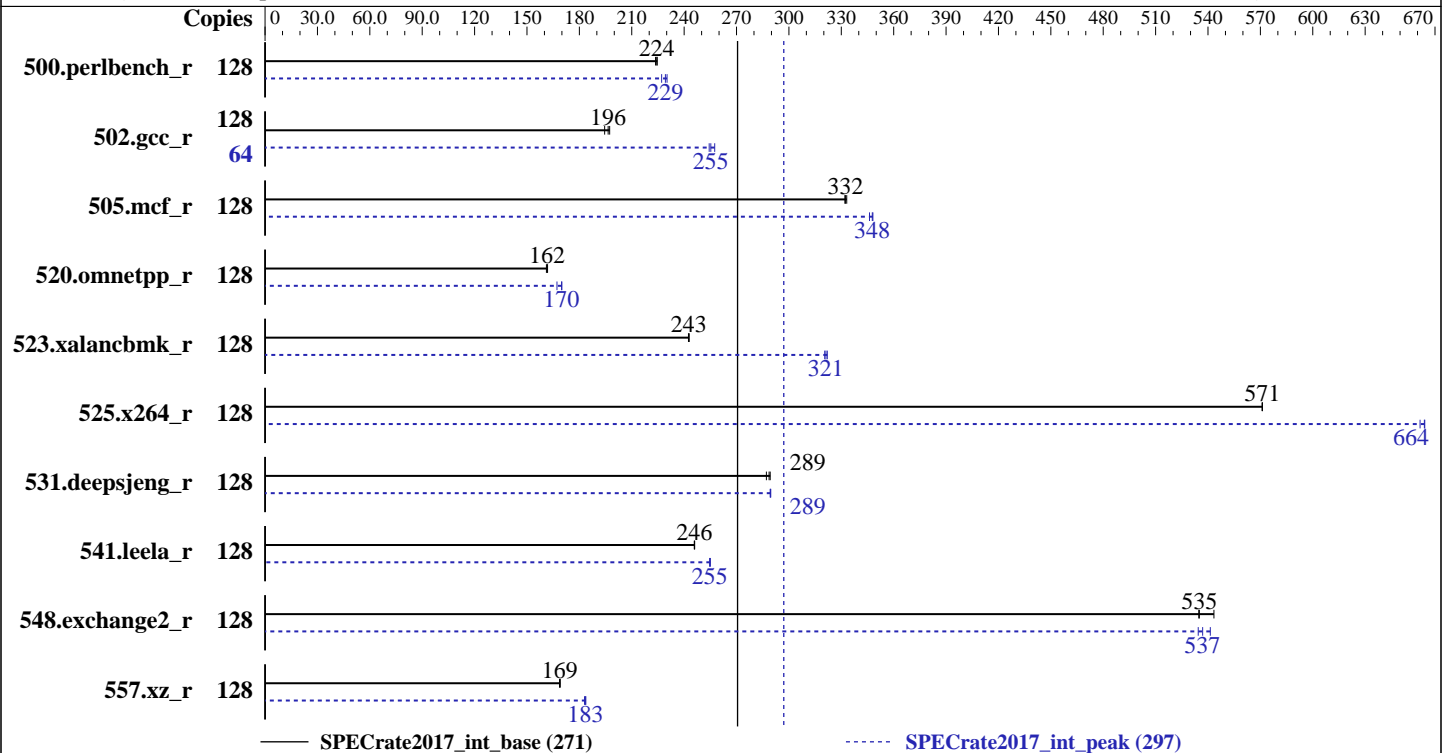

Hardware

CPU Name: AMD EPYC 7551
Max MHz.: 3000
Nominal: 2000
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 64 KB I + 32 KB D on chip per core
L2: 512 KB I+D on chip per core
L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other: None
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Storage: 1 x 200 GB SATAIII SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
kernel 4.4.114-94.11-default
Compiler: C/C++: Version 1.0.0 of AOCC
Fortran: Version 4.8.2 of GCC
Parallel: No
Firmware: Supermicro BIOS version 1.0b released Feb-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc general purpose malloc implementation V4.5.0



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	911	224	908	224	907	225	128	885	230	897	227	889	229
502.gcc_r	128	932	194	922	196	918	197	64	355	255	356	254	352	258
505.mcf_r	128	623	332	622	332	621	333	128	595	348	594	348	598	346
520.omnetpp_r	128	1040	162	1038	162	1042	161	128	989	170	988	170	1005	167
523.xalancbmk_r	128	557	242	557	243	557	243	128	420	322	422	321	421	321
525.x264_r	128	392	571	392	571	393	571	128	337	664	338	664	339	661
531.deepsjeng_r	128	511	287	507	289	508	289	128	507	289	506	290	507	289
541.leela_r	128	862	246	862	246	862	246	128	832	255	832	255	831	255
548.exchange2_r	128	627	535	627	535	617	543	128	625	537	628	534	620	541
557.xz_r	128	818	169	820	169	819	169	128	754	183	756	183	753	184

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B, AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers

<http://developer.amd.com/amd-aocc/>

with gfortran. It is available here:

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCONF with values narenas and lg_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.

lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to $2^{21} = 2\text{MiB}$.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-pm02 Thu Mar 22 10:26:22 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7551 32-Core Processor

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Platform Notes (Continued)

```

2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                1
Model name:            AMD EPYC 7551 32-Core Processor
Stepping:              2
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              4000.20
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111
NUMA node6 CPU(s):    48-55,112-119
NUMA node7 CPU(s):    56-63,120-127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Platform Notes (Continued)

```
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpxt perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128850 MB
node 0 free: 128697 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129021 MB
node 1 free: 128899 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129021 MB
node 2 free: 128883 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129021 MB
node 3 free: 128888 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 129021 MB
node 4 free: 128854 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129021 MB
node 5 free: 128839 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129021 MB
node 6 free: 128844 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 129019 MB
node 7 free: 128783 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      1056765484 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-pm02 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 22 10:24

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   145G  2.8G  142G   2% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 1.0b 02/07/2018
Memory:
16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

```

Compiler Version Notes

=====
CC 502.gcc_r(peak)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 523.xalancbmk_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base) 557.xz_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base,
peak) 541.leela_r(base)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CC 500.perlbench_r(peak) 525.x264_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
CXXC 541.leela_r(peak)

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====
FC 548.exchange2_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Base Portability Flags (Continued)

531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madox  
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B , AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2123BT-HNC0R
(H11DST-B, AMD EPYC 7551)

SPECrate2017_int_base = 271

SPECrate2017_int_peak = 297

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2018
Hardware Availability: Jun-2017
Software Availability: Nov-2017

Peak Optimization Flags (Continued)

520.omnetpp_r (continued):

```
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant

```
-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000  
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: -flto -Wl, -plugin-opt= -merge-constant

```
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm  
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math  
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split  
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran  
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-21 22:26:21-0400.

Report generated on 2019-02-21 14:41:53 by CPU2017 PDF formatter v6067.

Originally published on 2018-04-17.