



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175


Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

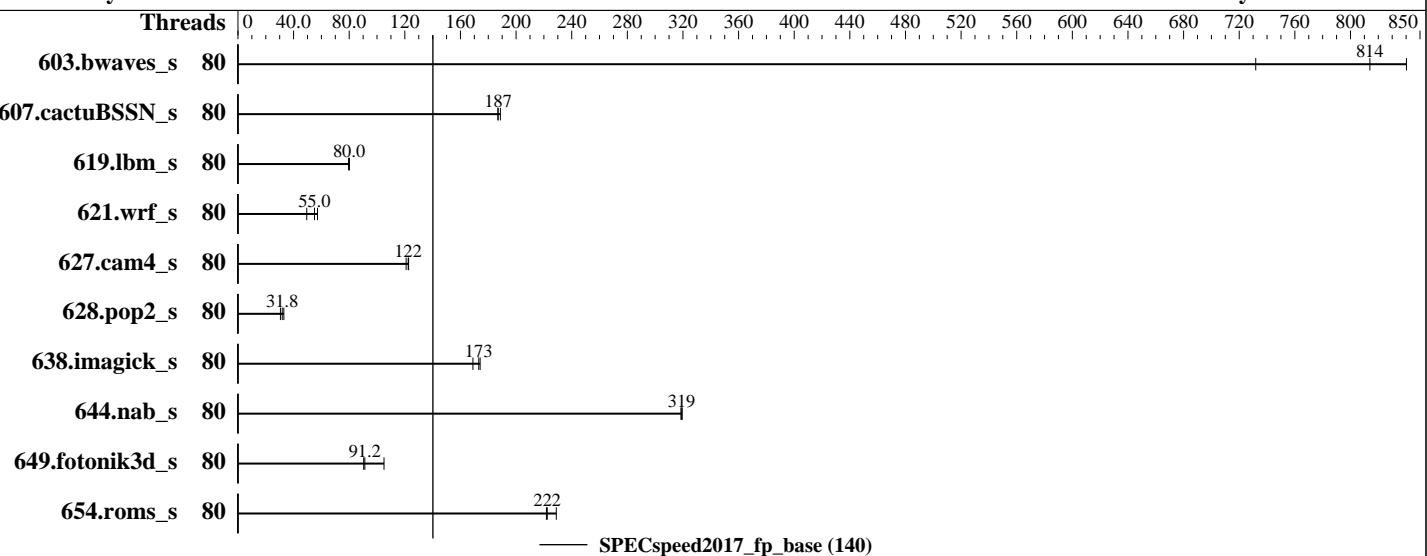

Hardware

CPU Name: Intel Xeon Gold 6138
Max MHz.: 3700
Nominal: 2000
Enabled: 80 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 27.5 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 900 GB SAS HDD, 10K RPM
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
4.4.120-92.70-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: Yes
Firmware: Version 0.80 released Feb-2018
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds
603.bwaves_s	80	72.5	814	70.2	840	80.6	732							
607.cactuBSSN_s	80	88.3	189	89.2	187	89.1	187							
619.lbm_s	80	65.5	80.0	65.8	79.6	65.4	80.0							
621.wrf_s	80	240	55.0	267	49.5	231	57.2							
627.cam4_s	80	73.3	121	72.2	123	72.4	122							
628.pop2_s	80	360	33.0	389	30.5	373	31.8							
638.imagick_s	80	85.4	169	82.8	174	83.3	173							
644.nab_s	80	54.8	319	54.7	319	54.9	319							
649.fotonik3d_s	80	101	90.4	99.9	91.2	86.8	105							
654.roms_s	80	68.8	229	70.8	222	71.0	222							
SPECspeed2017_fp_base = 140														
SPECspeed2017_fp_peak = Not Run														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Hyper-Threading set to Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-oyf8 Fri Jun 1 04:11:14 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 20
    siblings : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list: 0-79
Thread(s) per core:  1
Core(s) per socket:  20
Socket(s):            4
NUMA node(s):         8
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_base = 140

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
Stepping: 4
CPU MHz: 1200.000
CPU max MHz: 2001.0000
CPU min MHz: 1000.0000
BogoMIPS: 4000.07
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39
NUMA node4 CPU(s): 40-42,45,46,50-52,55,56
NUMA node5 CPU(s): 43,44,47-49,53,54,57-59
NUMA node6 CPU(s): 60-62,65,66,70-72,75,76
NUMA node7 CPU(s): 63,64,67-69,73,74,77-79

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxtsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16
node 0 size: 191756 MB
node 0 free: 190516 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19
node 1 size: 193524 MB
node 1 free: 192455 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36
node 2 size: 193524 MB
node 2 free: 193280 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39
node 3 size: 193524 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 3 free: 193299 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56
node 4 size: 193524 MB
node 4 free: 193189 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59
node 5 size: 193524 MB
node 5 free: 193270 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76
node 6 size: 193524 MB
node 6 free: 193187 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79
node 7 size: 193367 MB
node 7 free: 193055 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  20  20  20  20  20  20
  1: 20  10  20  20  20  20  20  20
  2: 20  20  10  20  20  20  20  20
  3: 20  20  20  10  20  20  20  20
  4: 20  20  20  20  10  20  20  20
  5: 20  20  20  20  20  10  20  20
  6: 20  20  20  20  20  20  10  20
  7: 20  20  20  20  20  20  20  10
```

From /proc/meminfo

```
MemTotal:      1583380332 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Platform Notes (Continued)

```
uname -a:  
Linux linux-oyf8 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 5 May 30 11:56  
  
SPEC is set to: /home/cpu2017  
Filesystem      Type   Size  Used Avail Use% Mounted on  
/dev/sda4        btrfs  736G   14G  721G   2% /home  
  
Additional information from dmidecode follows.  WARNING: Use caution when you interpret  
this section. The 'dmidecode' program reads system data which is "intended to allow  
hardware to be accurately determined", but the intent may not be met, as there are  
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
BIOS INSYDE Corp. 0.80 02/24/2018  
Memory:  
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666  
  
(End of data from sysinfo program)
```

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)  
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====  
FC 607.cactubSSN_s(base)  
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====  
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)  
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 140

Huawei 5885H V5 (Intel Xeon Gold 6138)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: May-2018

Tested by: Huawei

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-31 16:11:13-0400.

Report generated on 2018-10-31 17:29:55 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.