

Universal Access in the Information Society

A review of assistive spatial orientation and navigation technologies for the visually impaired

--Manuscript Draft--

Manuscript Number:	UAIS-D-16-00078R3	
Full Title:	A review of assistive spatial orientation and navigation technologies for the visually impaired	
Article Type:	Review paper	
Funding Information:	Fundação para a Ciência e a Tecnologia (SFRH/BD/89759/2012)	Mr. Hugo Fernandes
Abstract:	<p>Purpose - The overall objective of this work is to review the assistive technologies that have been proposed by researchers in recent years to address the limitations in user mobility posed by visual impairment.</p> <p>Method - This work presents an "umbrella review".</p> <p>Results - Visually impaired people often want more than just information about their location and often need to relate their current location to the features existing in the surrounding environment. Extensive research has been dedicated into building assistive systems. Assistive systems for human navigation, in general, aim to allow their users to safely and efficiently navigate in unfamiliar environments by dynamically planning the path based on the user's location, respecting the constraints posed by their special needs.</p> <p>Conclusions - Modern mobile assistive technologies are becoming more discrete and include a wide range of mobile computerized devices, including ubiquitous technologies like mobile phones. Technology can be used to determine the user's location, his relation to the surroundings (context), generate navigation instructions and deliver all this information to the blind user.</p>	
Corresponding Author:	Hugo Fernandes, Ph.D INESC TEC and University of Trás-os-Montes e Alto Douro PORTUGAL	
Corresponding Author Secondary Information:		
Corresponding Author's Institution:	INESC TEC and University of Trás-os-Montes e Alto Douro	
Corresponding Author's Secondary Institution:		
First Author:	Hugo Fernandes, Ph.D	
First Author Secondary Information:		
Order of Authors:	Hugo Fernandes, Ph.D Paulo Costa, MSc. Vitor Filipe, Ph.D Hugo Paredes, Ph.D João Barroso, Ph.D	
Order of Authors Secondary Information:		
Author Comments:	Thank you very much for the revisions you sent on our paper. We have adopted the recommendations made by the reviewers, resulting in changes throughout the document, strongly improving our work.	
Response to Reviewers:	The authors would like to thank the reviewers and the editor for all the cooperation and assistance. Your contributions significantly improved the manuscript and our work	

methodology. Our sincere thanks.

[Click here to view linked References](#)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Abstract

Purpose – The overall objective of this work is to review the assistive technologies that have been proposed by researchers in recent years to address the limitations in user mobility posed by visual impairment.

Method – This work presents an “umbrella review”.

Results – Visually impaired people often want more than just information about their location and often need to relate their current location to the features existing in the surrounding environment. Extensive research has been dedicated into building assistive systems. Assistive systems for human navigation, in general, aim to allow their users to safely and efficiently navigate in unfamiliar environments by dynamically planning the path based on the user's location, respecting the constraints posed by their special needs.

Conclusions - Modern mobile assistive technologies are becoming more discrete and include a wide range of mobile computerized devices, including ubiquitous technologies such as mobile phones. Technology can be used to determine the user's location, his relation to the surroundings (context), generate navigation instructions and deliver all this information to the blind user.

A review of assistive spatial orientation and navigation technologies for the visually impaired

Hugo Fernandes¹

Paulo Costa²

Vitor Filipe¹

Hugo Paredes¹

João Barroso¹

¹ INESC TEC and Universidade de Trás-os-Montes e Alto Douro, Portugal

² Polytechnic Institute of Leiria, Portugal

1. INTRODUCTION

The World Health Organization (WHO) [1] reported in 2013 that 285 million people are estimated to be visually impaired worldwide: 39 million are blind and 246 million suffer from low vision. From the overall population with visual impairment, about 90% of the world's visually impaired live in developing countries and 82% of people living with blindness are aged 50 and above. Regrettably, this percentage is expected to increase in the coming decades. Visual impairment has a significant impact on individuals' quality of life, including their ability to work and to develop personal relationships. Almost half (48%) of the visually impaired feel “moderately” or “completely” cut off from people and things around them [2].

There are four levels of visual function, according to the International Classification of Diseases (ICD - 10, Update and Revision 2006): normal vision, moderate visual impairment, severe visual impairment and blindness [3]. Moderate visual impairment combined with severe visual impairment may be grouped under the term “low vision”; low vision combined with blindness represents all forms of visual impairment [1].

In order to overcome or lessen the difficulties imposed by visual impairment, extensive research has been dedicated to building assistive systems. The need for assistive technologies has long been a constant in the daily lives of people with visual impairment and will remain so in future years. There are various definitions for assistive technology in general. Common to all of them, however, is the concept of an item or piece of equipment that enables individuals with disabilities to enjoy full inclusion and integration into society [4-6]. Traditional assistive technologies for the blind

include white canes, guide dogs, screen readers, and so forth. However, the detectable ranges of white canes are very short (at most 1.5 meters) and, consequently, the visually impaired can only immediately detect nearby obstacles at ground level. Guide dogs are also used by the visually impaired to navigate to their destinations avoiding the dangers they may encounter along their path. However, it is difficult to provide a sufficient number of guide dogs because of the long-time periods needed to train them, as well as the high costs associated with their training. Furthermore, it is also quite difficult for the visually impaired to take care of the living dogs appropriately [7].

Modern mobile assistive technologies are becoming more discrete and include (or are delivered via) a wide range of mobile computerized devices, including ubiquitous technologies like mobile phones. Such discrete technologies can help alleviate the cultural stigma associated with the more traditional (and noticeable) assistive devices [8].

Visual impairment imposes many restrictions and specific requirements on human mobility. The overall objective of this work is to review the assistive technologies that have been proposed by researchers in recent years to address the limitations in user mobility resulting from visual impairment. This work does not focus on the analysis and description of individual systems. Instead it will review how technology is being used in recent years to individually address the different tasks related to assistive human navigation and how the components of traditional navigation systems can be adapted to address the limitations and requirements of visually impaired users. Human navigation, in general, requires an estimation of the user location, the relation to its

6 context and finding a way to a specific destination.
7 This work will cover these topics in dedicated
8 sections. In this work, the term “visual impairment”
9 incorporates any condition that impedes an
10 individual’s ability to execute typical daily activities
11 due to visual loss. Because the aim of this work is to
12 present a general review of navigation and
13 orientation assistive technologies for the visually
14 impaired, low vision is not separated from total
15 blindness and so these terms are used
16 interchangeably.
17

18 2. UNDERSTANDING HUMAN NAVIGATION

19 Human beings have the ability to acquire and use
20 information obtained from the surrounding
21 environment using their natural sensors. They have
22 developed a number of evolutionary mechanisms
23 that enable the distinction between different objects
24 and the triggering of events and complex processes
25 based on their perception of reality.
26

27 Cognition concerns knowledge and knowing in
28 intelligent entities, especially by human beings, but
29 also nonhuman animals and synthetic
30 computational entities such as robots [9]. Cognition
31 includes the mental structures and processes
32 involved in perception, attention, thinking and
33 reasoning, learning, memory, linguistic and non-
34 linguistic communication. It also includes external
35 symbolic structures and processes, such as maps or
36 written procedures for carrying out formal spatial
37 analysis, which assist internal cognition. Similarly,
38 cognition is often about space, place, or environment,
39 so cognitive acts are quite often of geographic
40 nature [9].
41

42 Cognitive mapping [10] is of extreme importance for
43 individuals in terms of creating a conceptual model
44 of the surrounding space and objects around them,
45 thereby supporting their interaction with the
46 physical environment [11]. In new environments,
47 finding your way can be time consuming and may
48 require a considerable amount of attention. In these
49 types of scenario visual impairment is a major
50 limitation to user mobility. On one hand,
51 individuals with visual impairments often need the
52 help of sighted people to navigate and cognitively
53 map new environments, which is time consuming,
54 not always available and leads to lower mobility [12].
55 On the other hand, individuals with cognitive
56 impairment may experience difficulty in learning
57 new environments and following directions.
58
59
60
61
62
63
64
65

Assistive systems for human navigation generally aim to allow their users to safely and efficiently navigate in unfamiliar environments, without getting lost, by dynamically planning the path based on the user's location, respecting the constraints posed by their special needs. Collecting the specific needs or specificities of any impairment is a key point for the development of any assistive system. Using direct observational and interview-based knowledge elicitation methods, researchers of The Haptic Sight study [13] tried to gain a better understanding of a visually impaired person's indoor walking behaviour and the information required for him to walk independently. They found that the visually impaired need to be aware of their current location, the direction they are heading, the direction they need to go and the path to their destination. Only after the research team had identified these parameters did they develop a handheld device-based application. In other words, users with visual impairment must be aware of their physical location, their relation to the surrounding environment (context) and the route they must follow to navigate to a desired destination. When designing an assistive system for human navigation, separate processing units (or modules) can address these identified tasks, namely: Location, Orientation, Navigation and Interface, as seen in Figure 1.

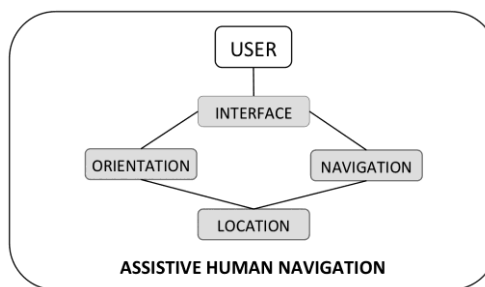


Fig. 1: Units addressing the tasks required for assistive human navigation.

This work reviews different ways with which different researchers addressed the use of technology to fill the gaps and needs presented by visual impairment in each of these topics. As with the design of any assistive system, the interface with the user must be adequate to the user's limitations. This work will cover this topic in a dedicated section as well.

3. LOCATION

All guidance/navigation systems must include a basic form of localization, i.e., the determination of a user's location and/or pose. The estimation of the user's location is sometimes referred to as 'positioning' [14]. The most common localization methods can be grouped into four different categories: (1) direct sensing, (2) dead reckoning, (3) triangulation, and (4) pattern-recognition [15]. It is important to understand that depending on the technology used, the user location may be estimated by the direct application of techniques, or by using computational methods to process data that can indirectly contribute to estimate the location. It is also important to distinguish between the two. If, on one hand, direct sensing techniques can almost directly provide an indication of the user's location, other methods, such as dead reckoning, use the components of locomotion (heading, acceleration, speed, etc.) to computationally estimate the displacement from a known location. The same applies to triangulation and pattern-recognition. In the case of pattern recognition, it is not the actual detection of the visual pattern that provides an estimation of the location. Instead, some of the metrics and data outputting from the detection (such as pose and distance from the detected pattern) can be used to computationally make the estimation. The location can be used for both planning the path (navigation) and providing surrounding (contextual) information (orientation). If the user's location is known, the system can also find a new path in case the user gets lost or calculate an alternative path, if needed. The planned path is then used to generate and provide guiding directions to a user-specified destination.

3.1. Direct sensing techniques

Localization techniques based on direct sensing determine the location of the user through the sensing of identifiers (or tags), which have been installed in the environment.

Typical direct sensing technologies include the use of Radio Frequency Identification (RFID) tags that can either be passive [16-19] or active [20] (some systems use both active and passive tags [21,22]), infrared (IR) transmitters that are installed in known positions where each transmitter broadcasts a unique ID [23,24], Bluetooth beacons [25] or visual barcodes [26,27]. All of these technologies require the user to carry extra equipment to sense the identifiers. In the case of radio-frequency

identification, though single RFID tags are quite inexpensive, in order to massively install them in large environments may become costly. Another disadvantage is the range of detection. In the case of passive tags the range is too low. In the case of active tags the range is higher but they require individual power supply (and respective maintenance). Infrared emitters require the user to be in the line-of-sight and, even so, they are strongly affected by sunlight interference. Bluetooth beacons, when used for localization, require the user to walk more slowly than with other sensing techniques because of the communication/pairing delay. Barcodes are, in a way, very similar to radio-frequency identification. This approach is low cost, easy to install and to maintain. The main limitation is that the user has to find each barcode and scan it, which may be cumbersome and will slow down navigation. In the case of blind users, using a system that searches for printed barcodes that they cannot see is also very demanding and prone to reading failure.

3.2. Dead-Reckoning

Humans maintain (update) their sense of orientation as they move around via a combination of two processes, i.e. landmark-based and dead reckoning processes. Landmark-based updating involves recognizing specific features in the world that may be associated with known places. Dead reckoning updating involves keeping track of the components of locomotion (including heading, velocity or acceleration) and travel duration. Dead reckoning is sometimes referred to as 'path integration' [15].

While the user is moving, a dead-reckoning system estimates the user's location through a combination of odometry readings. Odometry readings can be acquired through a combination of sensors such as accelerometers, magnetometers, compasses, and gyroscopes [28-31] or using a user's specific walking pattern (such as the user's average walking speed) [32].

An initial location is typically determined using a global navigation satellite system (GNSS) like the Global Positioning System (GPS)[29], Radio-frequency identification (RFID) tags [30], or cellular phone positioning (GSM broadcasting stations) [31]. Since the location estimation is a recursive process, inaccuracy in location estimation translates into errors that accumulate over time. The accumulated error can be corrected using environmental

6 knowledge. The users' position can be synchronized
7 using periodic updates from direct sensing
8 localization techniques such as RFID tags, or
9 pattern-matching localization methods such as the
10 use of data extracted from the recognition of known
11 visual landmarks. A benefit of processing data from
12 pattern-matching over direct sensing techniques is
13 a lower installation cost, as a smaller number of
14 identifiers must be installed.

15 16 3.3. Triangulation

17 Though most direct sensing techniques try to locate
18 the user by sensing one unique identifier, several
19 systems employ multiple identifiers and use
20 triangulation computational methods to locate the
21 user. These methods locate the user by
22 triangulating the sensed tags installed in known
23 locations. The tags that have been frequently used
24 for indoor or outdoor localization include RFID [33],
25 Infrared (IR) [34,23], and ultrasound [35,36].

26 Lateration uses the distance between the user and
27 at least three known points, whereas angulation
28 uses the angular measurements from at least three
29 known points to the user to determine the users'
30 location [37]. Global Positioning System (GPS) is
31 the most commonly used system for outdoor
32 localization [38-40] and uses a trilateration
33 computational method to locate the user, based on
34 known satellite positions. GPS receivers analyze a
35 periodic signal sent out by each satellite to compute
36 the latitude, longitude, and altitude at the users'
37 position. For outdoor navigation, GPS has become
38 the standard as it is free, reliable, and it is available
39 any place on Earth in any weather condition. The
40 main disadvantage of GPS localization is that the
41 GPS signal strongly degrades inside buildings,
42 between tall buildings or in dense forest areas (such
43 as parks). There are two alternative triangulation-
44 based techniques, which are available in contexts
45 where GPS signals are not sensed, or available.
46 Cell-tower positioning [41] uses the triangulation of
47 the known locations of cell towers with the provided
48 signal strength of each cell phone tower, whereas
49 wireless local area networks (WLAN) positioning
50 [42,24] triangulates the location of wireless base
51 stations using the signal of each emitting station.
52 Both techniques have a lower precision than GPS
53 due to multi path reflection problems.

54 Another way of using the signal from wireless
55 emitting stations, such as Wi-Fi, is signal
56

fingerprinting. This approach is based on signal
strength observations on previously known
locations. An estimate of the location is obtained
based on these measurements and a signal
propagation model. The propagation model can be
obtained by simulation or with prior calibration
measurements in certain locations. In this last case,
the measured signal strength values at a certain
location are compared with the signal strengths
values of pre-calibrated points stored in a database.
This approach, with proper calibration, can provide
extremely high accuracy, in comparison with GNSS-
based approaches and has been successfully
adopted in the field of robotics and unmanned
vehicle applications. The major limitation in its
application on the blind user case is the cost-over-
benefit. The required time and costly signal
strength system calibration is very high in the
beginning [43,44].

3.4. Pattern Recognition

Recently, systems have been developed which use
Computer Vision techniques, like pattern matching,
to sense the surrounding environment and detect
visual landmarks. Although at first glance it may be
quite obvious that pattern-recognition alone cannot
provide an indication of the user location, an
estimation can indirectly be extracted using the
outputting data from the pattern detection, such as
pose and distance to the detected pattern. The most
common artificial vision systems developed to
support the guidance of blind users extract this type
of information by analyzing the characteristics of
the objects detected in the captured image using
classical image-processing techniques [45,46]. Some
systems go further by combining vision sensors with
positioning sensors or even combining multiple
vision sensors to obtain a 3D representation of the
scene (to obtain depth information).

3.4.1. Motion and pose estimation

Systems that use computer vision to estimate the
location and orientation of the user, enable him/her
to perceive their relative position to a detected
georeferenced visual landmark [47-49]. When the
user is carrying a camera whose position and
orientation relative to the user's body are known,
the motion of the features detected in the captured
images may be used to assess information about the
carrier's pose and motion. Visual motion

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

information is not affected by the same error sources as global navigation satellite systems or self-contained sensors (like inertial sensors), and is therefore a complementary information source for increasing the accuracy of the positioning measurements [50]. Research related to visual positioning methods has been mainly focused on the autonomous navigation of vehicles and mobile robots.

The first papers related to the use of computer vision assistance in pedestrian navigation were published in the late 90s [51]. They described the use of databases preloaded with images of samples taken of the expected surroundings, which were tagged with information about their geographic location. The position of the pedestrian was provided when a match was found between an image taken by the pedestrian and an image stored in the database [52]. The database and the image processing could be made locally or remotely on a server, depending on processing power requirements [53].

A visual pedestrian navigation system independent of a server and of pre-existing databases usually needs integration with other positioning sensors to be functional. In such a system, monitoring the motion of features in consecutive images taken by the user device and integrating the information with measurements obtained with other sensors or a Global Navigation Satellite System (GNSS) receiver can be used to obtain the relative position of the user. Initial absolute position information can be used to reduce drift and other errors, as without initial position the visual perception only provides information about the user's motion. Such server-independent systems have been proposed [54] using visual-aided Inertial Measurement Unit (IMU) measurements. Other techniques, like the ones used in Simultaneous Localization and Mapping (SLAM) systems, produce a map of the unknown environment while simultaneously locating the user. Traditionally, mapping has been done using inertial sensors, though in recent years SLAM systems that also integrate a camera (visual SLAM systems) have been developed [55].

The magnitude of the motion of a figure in an image is dependent on the relative depth of the object within the captured scene, i.e. the distance of the object from the camera. Because the distance of objects from the camera in the environment is usually unknown, a scale problem arises and different methods for overcoming it have been used

[50]. Tools for resolving the distance, like laser rangefinders, have been integrated with a camera [56]. The requirement for carrying special equipment reduces the applicability of this method for pedestrian navigation, especially for blind users. Another approach is the use of computer vision algorithms to detect artificial landmarks with known indoor location (georeferenced landmarks). Recently, indoor navigation systems have been proposed, which use computer vision to detect and decode fiduciary markers in real-time, using standard camera phones. One of the most common markers used are 2-D barcodes. The barcode provides a unique ID and a fixed sized template, which may be used to estimate the pose of the viewer [57]. Using these types of special markers, a standard smartphone may be used in these kinds of systems, without the need to carry any extra equipment. Once the marker is in the camera's field of vision, the user can receive a warning about his relative bearing to the marker, as well as an approximate distance.

3.4.2. 3D Sensing

Distance is one of the most important aspects of navigation, as it is used to avoid collisions or recognize nearby objects. The way human vision uses different perspectives of the same scene to create a three-dimensional perception of the world inspired the use of multiple cameras to model/recognize the world in three dimensions. When a stereo camera is used, the distance to objects may be estimated using triangulation [58]. In the case of stereovision, the distance between the two cameras, called the baseline, affects the accuracy of the motion obtained from the images. The farther the two cameras are from each other, the better the accuracy will be [59]. Stereovision may be used to obtain 3D range information and area correlation methods can be used for approximate depth information. This information has been successfully used in combination with pedestrian detection models [60]. Methods using genetic algorithms have been used to perform stereovision correlation and generate dense disparity maps, as well. These disparity maps, in turn, provide rough distance estimates to the user, allowing them to navigate through the environment [61]. Simpler approaches use one relative view (right or left camera) and a depth map (from the stereo vision equipment) to perform fuzzy-based clustering segmentation of the scenario into object

clusters [62]. After, knowing the clusters' locations, it is possible to detect near and far obstacles and feed this information to the user. The detection of changes in a 3D space based on fusing range data and image data captured by the cameras may also be used to create a 3D representation of the surrounding space that can be transmitted to the user through an appropriate interface, namely haptic [63].

Having a short-term depth map computed about the user's immediate environment may be used to classify the path/scene as having (or not) any immediate obstacles, whether they are ground based, aerial or their relative position (left/right).

Recently, 3D vision sensors have evolved considerably and have been applied in several popular devices such as smartphones and game consoles, greatly reducing its cost.

Stereovision has been successfully applied to mobile devices (smartphones) allowing the structure of the environment to be estimated and for some kind of obstacle classification to be performed [64]. Theoretically, stereovision camera phones can work and be used to extract the same type of information as other standard stereovision systems. In the case of the use of smartphones, the main limitation is their low processing power in terms of real time execution. In recent years, it has been significantly increased. However real world scenes are usually very structured and obstacle classification in real time is still only used to work as a virtual stick, or white cane (not replacing it entirely, for security reasons).

In many cases, stereoscopic vision has been replaced by the Microsoft Kinect sensor [65]. This led to the mass use of these sensors in scientific research with good results [66-68]. The Kinect sensor includes a depth sensor and an RGB camera. The depth sensor is composed by an infrared laser source that projects non-visible light with a coded pattern combined with a monochromatic CMOS image sensor that captures the reflected light. The pattern received by the RGB sensor is a deformed version of the original pattern, projected by the laser source and deformed by the objects on the scene. The algorithm that deciphers the light coding generates a depth image representing the scene. Using machine-learning techniques, such as neural networks, to analyse depth images obtained from the Microsoft Kinect sensor enables the recognition of pre-defined

features/patterns of the surrounding environment [69]. Generally, in terms of the contribution that data extracted from computer vision pattern recognition can give to location systems, whether using stereovision or other image-based sensors like the Kinect, distance can be estimated and, in combination with data from pattern/feature detection and an appropriate geographic information system, contribute to assess the location of the user.

In this context, data for vision-based localization must also be present in the geographic information system used. The geographic information system is a central element to provide any type of location-based service, and its importance is discussed further in this paper.

3.5. Summary

All the technology referred to in the previous sections can be summarized as seen in Table 1.

Table 1: Summary of technology application scenario

		Indoor	Outdoor	Needs Infrastructure
Direct-sensing	RFID	✓	✓	✓
	Bluetooth	✓	✓	✓
	IR	✓	-	✓
	Barcodes	✓	✓	✓
Dead-reckoning	IMU	✓	✓	-
Triangulation	from direct-sensing	✓	✓	✓
	GNSS	-	✓	-
	Fingerprint	✓	✓	✓
Pattern-recognition	Markers	✓	✓	✓
	Natural elements	✓	✓	-
	3D sensing	✓	✓	-

Using different sensors as an input for estimating the geographical location of the user generates a high degree of redundancy, assuring that the location is always available, reducing the dependence on the infrastructure (as it is with the case of separate use of RFID, fiducial markers or GPS). This type of location system would provide a base layer on which all the remaining location-based services (such as orientation and navigation) would rely on (Fig. 1).

4. SPATIAL ORIENTATION

Visually impaired people often want more than just information about their location, having the need to relate their current location to the features existing in the surrounding environment.

Orientation and mobility are essential skills for performing a proper navigation [70]. In this process, mobility, or micro navigation, relates to obstacle detection and avoidance in the immediate physical environment. Orientation, or macro navigation, translates as the ability to create and maintain awareness of one's position in the physical space relative to both the landmarks in the surrounding environment, whether they are points of interest (POI) or obstacles (from micro navigation), and to the user's desired destination [71].

A wide range of systems and tools is available for enhancing the mobility of visually impaired individuals. The white cane and the guide dog are the most popular. The white cane is the simplest, cheapest, most reliable and the most popular. However, it does not provide all the necessary information of context such as speed, volume and distances. The eyes usually gather this information, which is necessary for the perception and control of locomotion [72]. Several approaches have been conducted over the last decades to address problems relevant to blind mobility and context awareness. They can be classified into two main categories. 'Electronic Travel Aids' (ETAs) are designed to improve mobility by detecting obstacles in the user's surroundings. In order to improve the blind user's autonomy, 'Electronic Orientation Aids' (EOAs) provide the blind with some degree of situational awareness and guidance in unknown environments [73].

Apart from a few implementations that use some of the location techniques described in the previous section, up to now, EOAs have mainly been based on GNSS and Location-Based Services. However, in recent years, computer vision techniques have successfully been used to provide contextual awareness and orientation indications. In general, these assistive orientation systems use computer vision techniques to provide information ranging from the simple presence of obstacles, or the distinction between fixed and moving obstacles, to the recognition of specific objects in the captured image. In some cases, even the distance and relative displacement of the detected objects to the user is provided, using depth information.

Although very simple in their purpose, systems designed to provide the blind user with information about the existence of objects in his path (through the use of artificial vision sensors) use a wide range of techniques to analyze the image. Traditional image processing techniques can be used to detect the contours of objects in the scene [74,75,47]. More advanced approaches use artificial intelligence techniques to detect obstacles in the captured image [76] and even to classify the scene, presenting basic forms of characterization/description of the environment as being very cluttered or relatively broad [77]. Other classification methods may provide information regarding the spatial distribution of the obstacles/objects in the scene [49], achieving the overall objective of providing direct specific orientation instructions and simple contextual awareness.

More advanced systems, which apply object recognition algorithms to detect and recognize specific objects in the scene, go even further trying to reduce the gap between sighted and non-sighted people. Using their natural sensors, sighted users not only detect the existence of objects and obstacles in their immediate surroundings, but they are also able to recognize them and their attributes, such as color, shape and relative spatial orientation. The simplest approaches use markers placed at specific points-of-interest [78]. When detected, these markers are used to estimate the user location and, subsequently, the objects that are expected to be found on the scene. Additionally, it is also possible to inform the user about the distance and relative position to the marker (pose). However, the most common systems that use object recognition to provide contextual information try to locate and recognize natural objects in the scene without the need to use artificial markers placed in the infrastructure. As discussed in earlier subsections, the placement of markers/sensors in the infrastructure is costly and requires a lot of maintenance. Given this fact, many assistive systems nowadays try to give the user information about the presence and orientation of natural objects in the scene, such as crosswalks [79-81] or text commonly found in places like Buses or office doors [82,83,48]. Even the distinction between similar objects used in everyday life that may be easily confused by blind users, like different bank notes [84], food or medicine containers [85], can be incorporated in spatial orientation systems which use advanced computer vision techniques to provide

spatial awareness through the recognition of natural objects. Although not specifically related to spatial orientation, the techniques used in these examples provide awareness about the presence of physical items in the context of the user, and the same techniques may be extended to the purpose of spatial awareness.

Table 2 summarizes the features provided by the most common spatial orientation devices, as well as their availability in terms of indoor vs. outdoor scenario.

Table 2: Summary of the features provided by the most common spatial orientation assistive devices

	Traditional		Electronic	
	White cane	Guide dog	EOA	Comp. Vision
Environment	Indoor/ Outdoor	Indoor/ Outdoor	Outdoor	Indoor/ Outdoor
Speed	-	-	✓	-
Distance	✓	-	✓	✓
Obstacles	✓	✓	✓	✓
Object recognition	-	-	-	✓
Environment description	-	-	✓	✓

With the recent advances in 3D vision and depth sensors, an all-new kind of contextual input may be used in the context of assistive systems for the visually impaired: depth information. Using feature descriptors and machine learning techniques, different objects can be extracted and classified [86]. These types of systems can recognize three-dimensional objects from the depth data, and inform visually impaired users not only about the existence of objects but also their class, such as chairs and upward stairs [87,7,88], working similarly to a conventional white cane, with an extended range. Some systems even incorporate the detection and distinction between fixed and moving obstacles and object recognition in one global solution, mostly for pedestrian detection and avoidance [89-92].

5. NAVIGATION

The term ‘navigation’ defines the behaviour of moving towards a destination, with all the motor,

sensory, and cognitive processes that it implies [70]. Downs and Stea define navigation as “the process of solving one class of spatial problems, the movement of a person from one location on the earth’s surface to another” [93]. They divided the process into four tasks: orienting oneself in the environment, choosing the route, keeping on track and recognizing that the destination has been reached. Human navigation is performed using a combination of mobility and orientation [94]. In general, human navigation in indoor and outdoor environments is performed by measuring the distance and relative orientation to one, or multiple, reference points (context). People employ either path integration, orienting themselves relative to a starting position, or landmark-based navigation, where they rely upon perceptual cues together with an external or cognitive map. Humans may also use a combination of both path integration and landmark-based navigation [95]. A number of features in the environment can be used to help determine the location. To maintain a sense of where they are in such situations, humans rely on their estimates of the direction and velocity of movement obtained from their vestibular, proprioceptive, and kinesthetic senses, here referred to as path integration [96].

In the case of path integration, a single reference point is used throughout the navigation, and the location is estimated based on the addition of all the changes in position and orientation [97].

In the case of landmark-based navigation, users change from reference point (landmarks) to reference point as they navigate in the environment, considering the relative position of the landmarks. In this case, a physical or cognitive map of the environment is used. By periodically measuring the displacement and changes in the orientation (based on heading and motion) and combining them with the distance and orientation relative to a reference point, such as a landmark, users can estimate their new location and orientation while navigating in an environment.

A powerful assistive device combines both micro navigation (sensing the immediate environment) and macro navigation (reaching a remote destination) functionalities. The micro navigation functions serve to restore a set of sensorimotor behaviors based on visual object localization (context). The macro navigation functions provide

the user with global orientation and navigation skills [70].

All navigation systems have three functional components: an input module to determine the location and orientation in space, a spatial database of the environment and an interface, which delivers information to the user. Location information is usually obtained using the individual location technologies discussed in a previous section, or by a fusion or combination of different inputs, including computer vision. These three components are used as well in the case of navigation systems designed for the visually impaired [98].

The location can be used for both planning the path and providing contextual information. The advantage of using a navigation system to plan a route is that the path can be optimized based on different concurring paths and specific user requirements, such as shortest or safest path. In the case of individuals with vision impairments, a path that goes along walls reduces the chance of the user getting lost and a path that avoids low ceilings is much safer [15].

In this context, a geographic information system (GIS) designed to enable all these assistive features must provide ways to store and deliver data of much broader extent than simple points-of-interest and POI categorization. An appropriate geographic system is a core element in any navigation system. Path planning algorithms use graphs or grids to represent the environment. These elements must also be stored in the GIS. To plan a path using graph-based approaches, the environment is divided into sets of nodes and edges connecting these nodes. Edges connect nodes based on the environment map and if one node is accessible from the other one. In this case, each edge may have a weight assigned to it based on different criteria for the path planning. A graph-based approach has the advantage of creating the nodes only if there are objects. Edges are created only if objects are accessible from each other. In complicated environments with many objects, the graph may become big and decrease the performance of the path-planning algorithm. The weight associated with edges or cells plays an important role when customizing a path. For example, in the case of a path that should avoid stairs, the edges with stairs receive higher weights, and edges with low ceiling have higher weights when planning a path for individuals with visual impairments. Most of the

current navigation systems use either Dijkstra [29,30,99,100] or A* [29,101,32] for path planning.

6. INTERFACE

Accurate recognition and distinction between the contextual elements found in the environment, whether by using computer vision or any other form of input is of the highest importance on an EOA device. Interfacing with the user to provide information about the elements found in the scene is also crucial, as the interpretation of the reality around the user directly influences his safety and, ultimately, the adoption of this kind of assistive technology. The most commonly found ways of interfacing with the user nowadays are sonification, audio description and haptic interfaces. These are the most commonly found ways to interface with an electronic assistive system for the blind, and its use is valid to both receiving alerts about the physical elements detected, as well as to receive and understand wayfinding instructions.

Sonification is, by definition, the use of non-speech audio to convey information or perceptualize data. The use of acoustic (sound/sonification) patterns to provide this information to the user is very common among EOAs for the visually impaired [76,74,46]. In some cases, sonification is even used to provide the relative position of the detected obstacles [49,102]. These systems use 3D audio (Fig. 2) to provide audio cues that can be perceived as if they were being generated by the detected landmark. The concept behind 3D audio is the use of different sound sources, located at different locations to provide the feeling of directional hearing (Fig. 2).



Fig. 2: Perceptual feeling provided by 3D audio (<http://www.auro-3d.com/consumer/>).

The most obvious advantage of adding spatial sound modelling to audio interfaces over sequential

6 techniques is the natural perception. Individuals
7 without hearing impairment use their directional
8 hearing for orientation at all times [103]. This kind
9 of interface can be used to provide simple, yet
10 immediately perceivable cues about bearing or
11 relative position (pose) to an obstacle. The fact that
12 blind people often rely on audio cues from the
13 environment for orientation creates restraints on
14 using headphones for acoustic feedback.
15 Alternatives like bonephones are viable [104].

16 Audio description has the same considerations as
17 the sonification methods. According to [105] “one
18 major issue to be considered in the design of an
19 interface is whether a rich description of the scene,
20 or only highly symbolic information, should be
21 provided to the user”.

22 Another approach is to present the information
23 about the obstacles detected in the image through
24 the use of haptic interfaces [106,75,7]. 3D range
25 data may be converted into a 2D vibrating array
26 attached to the user’s body [63]. With appropriate
27 signal coding, the use of 2D vibrating patterns can
28 reproduce depth information. Haptic interfaces are
29 also used in a way in which an array of pins works
30 in a similar way as Braille display [107].

31 Some other, less usual, forms of interface are still in
32 investigational devices, not available for
33 commercial use. One example [108] consists of a
34 camera (mounted in sunglasses), one transducer
35 and a postage-stamp-size electrode array that is
36 positioned on the top surface of the tongue. The
37 recorded images are translated into gentle electrical
38 signals and displayed on the tongue. The generated
39 stimulation patterns reflect key features of the
40 recorded images like high contrast objects and their
41 movements.
42

43 As a general consideration, any of the user’s
44 remaining sensory channels (tactile or acoustic) can
45 be used. However their use should be carefully
46 considered as it may interfere with performing
47 other tasks that the blind users cannot do without.
48 The amount of information to be presented to the
49 user should be carefully considered as well, as
50 information capacity of the nonvisual senses is
51 much smaller than vision [109]. The cues provided
52 by these interface channels represent the most
53 common ways of interfacing with assistive devices,
54 for the blind, and provide the means to understand
55 the information generated that can be used whether
56 for context description or wayfinding.
57
58
59
60
61
62
63
64
65

7. CONCLUSIONS

This work presented a general review of navigation and orientation assistive technologies for the visually impaired. As with the development of any other assistive technology, the development of these types of systems must be centred on the specific needs and restrictions of the user and his impairment. The use of an assistive system must not pose any interference with everyday life activities or it will be considered as an obstacle itself. If this happens, the community will not adopt the system. Sometimes the technologies used are not perfectly adequate or do not meet specific needs, either due to its mode of operation, or to the way they convey information to the user.

In terms of location systems, despite the efforts to create cheap, reliable and accurate positioning systems, it has been difficult to find a system with a good balance between these three factors. Of the various technologies used to locate the user, the most common are RFID, GPS, Wi-Fi and Computer Vision. The use of RFID proves to be very accurate. However, from the user's point of view alone, it is unreliable because the user easily gets lost in case of failure in reading multiple successive tags. This can happen due to the long reading times required (in relation to the white cane swipe movement) and/or low tag density. From the point of view of implementation, despite its low cost (compared to the benefit), such a system requires extensive maintenance. Although, ideally most places could benefit from installing such systems, in practice the only places that will consider their use are those where the relationship between benefit over cost is attractive. These places can include shopping areas, public libraries, etc. The use of GPS has enough accuracy for most users without any special need; it is free and covers the earth’s entire surface. However, its availability inside buildings is very low and, even in places with good reception of GPS signal, common systems based on smartphone, or cheap commercial antennas, do not offer the precision needed to safely guide a blind user. Often, an error of 5 meters is the difference between being in the sidewalk, or the in the middle of the road. The use of Wi-Fi is very similar to RFID in the aspect that the characteristics of a source (georeferenced) signal are used to assess or estimate the user's location. As in the case of RFID, it may work on exterior and interior environments. It has the great

1
2
3
4
5
6 advantage of having more range than RFID, though
7 suffers from serious accuracy problems due to
8 problems with signal reflection (multiple path). In
9 the case of the use of Computer Vision, this
10 technology can cover all types of environments,
11 indoors and outdoors and its accuracy is sufficient;
12 however, it has some limitations. If the system is
13 based on recognizing known artificial landmarks
14 (fiducial markers), an infrastructure management
15 effort is required, as well as a large information
16 system to support the georeferenced data. In the
17 cases when natural landmarks are used, object
18 recognition involves the use of more complex
19 algorithms, more prone to errors, which may limit
20 real-time operation. The most successful systems
21 resort to the combined use of various technologies,
22 either in a redundant manner or in a
23 complementary way. Combining the occasional use
24 of these direct-sensing technologies for error
25 correction (or minimization) and the permanent use
26 of inertial measurements for constant location
27 estimation, such a multisensorial location system
28 would allow for the creation of a reliable and
29 “always available” location system, increasing the
30 trust of the users concerning these types of assistive
31 technologies, while reducing installation costs and
32 infrastructure dependency. From the summary of
33 the variety of techniques, methods and technologies
34 that may be used to assist a blind user on knowing
35 his location, a powerful location module would be
36 one that could combine all the different types of
37 possible location inputs and fuse them into a unique,
38 hybrid, location system based on a multisensorial
39 approach. Using different sensors as an input for
40 estimating the geographical location of the user
41 generates a high degree of redundancy, assuring
42 that the location is always available, reducing the
43 dependence on the infrastructure (as it is with the
44 case of separate use of RFID, fiducial markers or
45 GPS). This type of location system would provide a
46 base layer on which all the remaining location-
47 based services (like orientation and navigation)
48 would rely on.

51 With regard to orientation systems, for user
52 guidance/contextualization, most of them try to
53 somehow extract context information and provide
54 more information to the user than just his location.
55 The location input can be used to provide contextual
56 information (orientation or micro navigation),
57 either about the features of the surrounding
58 environment, or about the services available in the
59 premises. A key factor in that respect is the

60 structuration of the information stored in the GIS.
61 To be useful, the information must be transmitted
62 to the user in a manner in which it is easily
63 understood, using a natural language as interface.
64 To achieve this goal, the user must be able to define
65 (and configure, in real time) a certain degree of
awareness, to create a different user experience
when travelling in familiar or usual places, or when
in a completely unknown environment, where his
sense of awareness of things and objects around him
must be highly enhanced.

The most common systems use databases populated
with points of interest (landmarks) whose
description is triggered by the current location of
the user and his personal preferences. More
advanced systems also try to extract some features
from the environment that are not georeferenced.
These landmarks may arise because the databases
are not frequently updated, or because some
unforeseen danger has arisen (hole in the ground,
for example), or simply because the user is using the
system in a place that does not have a map. In
general, these systems based on Computer Vision,
work together with location systems. Some newer
systems use 3D cameras to add distance (depth)
information to the existing information about the
detected elements/landmarks.

Navigation systems for the blind, in general, use
technology that is commonly found in traditional
navigation systems aimed at people without any
special restriction. One example is the routing
algorithm known as A*. However, this type of
algorithm should be used to make the route
calculation, taking into account certain limitations
or preferences of the users that are not usually
taken into consideration, designing a route that fits
the user’s preferences, not only considering the
shortest path, but possibly also the safest or the
most enjoyable. For example, blind people avoid
paths with very large open spaces, or certain spaces
with protruding structures such as balconies. Due
to the noise on crowded sidewalks, they may prefer
more quiet gardens, or alternative streets. The blind
usually prefer to follow paths accompanied by walls
or other guiding elements. They should also be
informed in the case of existing dangers in the
vicinity of the route. Certain restrictions may even
be considered by the routing algorithms to help
people with other special needs, such as the
existence of stairs for people in wheelchairs.

Regarding the user interface, although there are
several ways to interface with the user’s natural

6 senses, in general the implementation of interface
7 technology should be carefully considered as it may
8 interfere with performing other tasks that the blind
9 users cannot do without. The amount of information
10 to be presented to the user should be carefully
11 filtered as well, as the information capacity of the
12 non-visual senses is much smaller than vision.
13 While navigating to a specific point of interest
14 (macro navigation), the use of natural language
15 must provide timely and accurate directions. For
16 example, in the specific case of blindness, a
17 directional pointing system using the clock position
18 system is more easily understood than using the
19 exact amount of degrees to turn (very accurate,
20 difficult to follow) or relative amounts of left/right
21 (“little to the left” or “hard right”, for example, is
22 easy to be understood though results in different
23 interpretations of the quantities). The clock position
24 system is a good example of a natural interface to be
25 used to transmit navigational information, which is
26 sufficiently fast to interpret while maintaining
27 accuracy. The interface must be adaptive in order to
28 differentiate between the different types of use
29 (micro or macro navigation) and combine each state
30 to the level of awareness the user requires in each
31 moment/place, creating a form of contextual
32 awareness. Specific points in which immediate
33 danger may cause harm to the user (e.g., stairs)
34 must bypass all the awareness settings, and the
35 interface must be able to respond as well.

36 Fusing ideas from these different concepts and
37 techniques, such as the concepts of micro and macro
38 navigation and path planning algorithms, a
39 sophisticated navigation module could combine the
40 inputs from the orientation module (micro
41 navigation) and the route planning techniques
42 (macro navigation) to create a personalized user
43 experience, creating routes that are designed to fit
44 the user’s preferences, not only considering the
45 shortest path, but also possibly the safest (according
46 to the type of impairment) or the most enjoyable (for
47 example through a garden instead of a concrete
48 sidewalk).

49 This review demonstrates that a lot of work already
50 exists in this field, although it is very fragmented.
51 Research in the field of creating assistive technology
52 to assist the orientation and navigation of blind
53 users should follow in the direction of creating
54 integrated products, which use the benefits of
55 different technologies in a combined/integrated way.
56
57
58

In order to do so, the evolution of sensing technology
will help achieve massive use.

ACKNOWLEDGMENTS

The work presented in this paper has been supported by the project CE4blind - Context extraction for the blind using computer vision, with project reference UTAP-EXPL/EEI-SII/0043/2014, by the award “Inclusion and Digital Literacy Prize 2015” promoted by the Portuguese ICT and Society Network, and research grant with reference SFRH/BD/89759/2012. All funding has been granted by the Portuguese Foundation for Science and Technology (FCT).

REFERENCES

1. WHO (2014) Visual impairment and blindness, Fact Sheet n°282. <http://www.who.int/mediacentre/factsheets/fs282/en/>. Accessed March 16th, 2015 2015
2. Hakobyan L, Lumsden J, O’Sullivan D, Bartlett H (2013) Mobile assistive technologies for the visually impaired. *Survey of Ophthalmology* 58 (6):513-528. doi:10.1016/j.survophthal.2012.10.004
3. WHO (2010) International Statistical Classification of Diseases and Related Health Problems (ICD-10). vol 2. WHO,
4. Foley A, Ferri BA (2012) Technology for people, not disabilities: ensuring access and inclusion. *Journal of Research in Special Educational Needs* 12 (4):192-200. doi:10.1111/j.1471-3802.2011.01230.x
5. Mountain G (2004) Using the Evidence to Develop Quality Assistive Technology Services. *Journal of Integrated Care* 12 (1):19-26. doi:10.1108/14769018200400005
6. Scherer MJ (2000) Living in the state of stuck: How assistive technology impacts the lives of people with disabilities.
7. Takizawa H, Yamaguchi S, Aoyagi M, Ezaki N, Mizuno S (2013) Kinect Cane : Object Recognition Aids for the Visually Impaired. In: Paja WA, Wilamowski BM (eds) 2013 6th International Conference on Human System Interactions. Conference on Human System Interaction. pp 473-478
8. (BRE) BRE (2003) Research Findings No 4: Helping people with sight loss in their homes: housing-related assistive technology. <http://www.pocklington-trust.org.uk/researchandknowledge/publications/op3>. Accessed March 10th 2015
9. Montello DR (2009) Cognitive Research in GIScience: Recent Achievements and Future Prospects. *Geography Compass* 3 (5):1824-1840. doi:10.1111/j.1749-8198.2009.00273.x
10. Jacobson RD (1998) Cognitive mapping without sight: Four preliminary studies of spatial learning. *Journal of Environmental Psychology* 18 (3):289-305. doi:10.1006/jevp.1998.0098
11. Jacquet C, Bellik Y, Bourda Y (2006) Electronic Locomotion Aids for the Blind: Towards More Assistive Systems. In: Ichalkaranje N, Ichalkaranje A, Jain LC (eds) *Intelligent Paradigms for Assistive and Preventive Healthcare*, vol 19. Studies in Computational Intelligence. Springer Berlin Heidelberg, pp 133-163. doi:10.1007/11418337_5
12. Passini R, Proulx G, Rainville C (1990) The Spatio-Cognitive Abilities of the Visually Impaired Population. *Environment and Behavior* 22 (1):91-118. doi:10.1177/0013916590221005
13. Song J-W, Yang S-H (2010) Touch your way: haptic sight for visually impaired people to walk with independence.
14. Manduchi R, Kurniawan S, Bagherinia H (2010) Blind guidance using mobile computer vision: a usability study. Paper presented at the

Proceedings of the 12th international ACM SIGACCESS conference on Computers and accessibility, Orlando, Florida, USA,

15. Fallah N, Apostolopoulos I, Bekris K, Folmer E (2013) Indoor Human Navigation Systems: A Survey. *Interacting with Computers* 25 (1):21-33. doi:10.1093/iwc/iws010
16. D'Atri E, Medaglia CM, Serbanati A, Ceipidor UB A system to aid blind people in the mobility: A usability test and its results. In: *Systems, 2007. ICONS '07. Second International Conference on*, 22-28 April 2007 2007. pp 35-35. doi:10.1109/ICONS.2007.7
17. Kulyukin V, Gharpure C, Nicholson J, Osborne G (2006) Robot-assisted wayfinding for the visually impaired in structured indoor environments. *Auton Robot* 21 (1):29-41. doi:10.1007/s10514-006-7223-8
18. Willis S, Helal S RFID information grid for blind navigation and wayfinding. In: *Wearable Computers, 2005. Proceedings. Ninth IEEE International Symposium on*, 18-21 Oct. 2005 2005. pp 34-37. doi:10.1109/ISWC.2005.46
19. Fernandes H, Filipe V, Costa P, Barroso J (2014) Location based services for the blind supported by RFID technology. *Procedia Computer Science* 27:2-8
20. Bin D, Haitao Y, Xiaoning Z, Li J The Research on Blind Navigation System Based on RFID. In: *Wireless Communications, Networking and Mobile Computing, 2007. WiCom 2007. International Conference on*, 21-25 Sept. 2007 2007. pp 2058-2061. doi:10.1109/WICOM.2007.514
21. Chumkamon S, Tuvaphanthaphiphat P, Keeratiwintakorn P A blind navigation system using RFID for indoor environments. In: *Electrical Engineering/Electronics, Computer, Telecommunications and Information Technology, 2008. ECTI-CON 2008. 5th International Conference on*, 14-17 May 2008 2008. pp 765-768. doi:10.1109/ECTICON.2008.4600543
22. Fernandes H, Faria J, Paredes H, Barroso J An integrated system for blind day-to-day life autonomy. In: *The proceedings of the 13th international ACM SIGACCESS conference on Computers and accessibility*, 2011. ACM, pp 225-226
23. Baus J, Krüger A, Wahlster W (2002) A resource-adaptive mobile navigation system. Paper presented at the Proceedings of the 7th international conference on Intelligent user interfaces, San Francisco, California, USA,
24. Tsetsos V, Anagnostopoulos C, Kikiras P, Hadjiefthymiades S (2006) Semantically enriched navigation for indoor environments. *Int J Web Grid Serv* 2 (4):453-478. doi:10.1504/ijwgs.2006.011714
25. Haosheng H, Gartner G, Schmidt M, Yan L Smart Environment for Ubiquitous Indoor Navigation. In: *New Trends in Information and Service Science, 2009. NISS '09. International Conference on*, June 30 2009-July 2 2009 2009. pp 176-180. doi:10.1109/NISS.2009.16
26. Chang Y-J, Tsai S-K, Wang T-Y (2008) A context aware handheld wayfinding system for individuals with cognitive impairments. Paper presented at the Proceedings of the 10th international ACM SIGACCESS conference on Computers and accessibility, Halifax, Nova Scotia, Canada,
27. Smailagic A, Martin R Metronaut: a wearable computer with sensing and global communication capabilities. In: *Wearable Computers, 1997. Digest of Papers., First International Symposium on*, 13-14 Oct. 1997 1997. pp 116-122. doi:10.1109/ISWC.1997.629927
28. Fischer C, Muthukrishnan K, Hazas M, Gellersen H (2008) Ultrasound-aided pedestrian dead reckoning for indoor navigation. Paper presented at the Proceedings of the first ACM international workshop on Mobile entity localization and tracking in GPS-less environments, San Francisco, California, USA,
29. Höllerer T, Hallaway D, Tinna N, Feiner S Steps toward accommodating variable position tracking accuracy in a mobile augmented reality system. In: *Proc. AIMS, 2001. Citeseer*, pp 31-37
30. Koide S, Kato M 3-D human navigation system considering various transition preferences. In: *Systems, Man and Cybernetics, 2005 IEEE International Conference on*, 10-12 Oct. 2005 2005. pp 859-864 Vol. 851. doi:10.1109/ICSMC.2005.1571254
31. Retscher G Pedestrian navigation systems and location-based services. In: *3G Mobile Communication Technologies, 2004. 3G 2004. Fifth IEEE International Conference on*, 2004 2004. pp 359-363. doi:10.1049/cp:20040696
32. Wu H, Marshall A, Yu W Path planning and following algorithms in an indoor navigation model for visually impaired. In: *Internet Monitoring and Protection, 2007. ICIMP 2007. Second International Conference on*, 2007. IEEE, pp 38-38
33. Amemiya T, Yamashita J, Hirota K, Hirose M Virtual leading blocks for the deaf-blind: a real-time way-finder by verbal-nonverbal hybrid interface and high-density RFID tag space. In: *Virtual Reality, 2004. Proceedings. IEEE*, 27-31 March 2004 2004. pp 165-287. doi:10.1109/VR.2004.1310070
34. Brabyn J, Crandall W, Gerrey W Talking signs: a remote signage, solution for the blind, visually impaired and reading disabled. In: *Engineering in Medicine and Biology Society, 1993. Proceedings of the 15th Annual International Conference of the IEEE*, 1993 1993. pp 1309-1310. doi:10.1109/IEMBS.1993.979150
35. Priyantha NB, Chakraborty A, Balakrishnan H (2000) The Cricket location-support system. Paper presented at the Proceedings of the 6th annual international conference on Mobile computing and networking, Boston, Massachusetts, USA,
36. Ran L, Helal S, Moore S (2004) Drishti: An Integrated Indoor/Outdoor Blind Navigation System and Service. Paper presented at the Proceedings of the Second IEEE International Conference on Pervasive Computing and Communications (PerCom'04),
37. Zheng P, Ni L (2005) Smart Phone and Next Generation Mobile Computing (Morgan Kaufmann Series in Networking (Paperback)). Morgan Kaufmann Publishers Inc.,
38. Etter R, Specht M (2005) Melodious walkabout - implicit navigation with contextualized personal audio contents. In: *In Adj. Proc. Pervasive Computing, 2005. Technology*, p 43
39. Helal A, Moore SE, Ramachandran B Drishti: an integrated navigation system for visually impaired and disabled. In: *Wearable Computers, 2001. Proceedings. Fifth International Symposium on*, 2001 2001. pp 149-156. doi:10.1109/ISWC.2001.962119
40. Huang B, Liu N (2004) Mobile Navigation Guide for the Visually Disabled. *Transportation Research Record*
41. Arikawa M, Konomi S, Ohnishi K (2007) Navitime: Supporting Pedestrian Navigation in the Real World. *Pervasive Computing, IEEE* 6 (3):21-29. doi:10.1109/MPRV.2007.61
42. Retscher G, Thienelt M (2004) NAVIO—A navigation and guidance service for pedestrians. *Positioning* 1 (08)
43. Mok E, Retscher G (2007) Location determination using WiFi fingerprinting versus WiFi trilateration. *Journal of Location Based Services* 1 (2):145-159
44. Faragher R, Harle R (2015) Location fingerprinting with bluetooth low energy beacons. *IEEE Journal on Selected Areas in Communications* 33 (11):2418-2428
45. Capp M, Picton P (2000) The optophone: an electronic blind aid. *Engineering Science & Education Journal* 9 (3):137-143
46. Ancuti C, Ancuti C, Bekaert P (2009) ColEnViSon: Color Enhanced Visual Sonifier A Polyphonic Audio Texture and Salient Scene Analysis.
47. Praveen RG, Paily RP (2013) Blind Navigation Assistance for Visually Impaired Based on Local Depth Hypothesis from a Single Image. *Procedia Engineering* 64:351-360
48. Tian Y, Yang X, Yi C, Arditi A (2013) Toward a computer vision-based wayfinding aid for blind persons to access unfamiliar indoor environments. *Machine vision and applications* 24 (3):521-535
49. Yu X, Ganz A Audible vision for the blind and visually impaired in indoor open spaces. In: *Engineering in Medicine and Biology Society (EMBC), 2012 Annual International Conference of the IEEE*, 2012. IEEE, pp 5110-5113
50. Ruotsalainen L (2013) Vision-Aided Pedestrian Navigation for Challenging GNSS Environments. *Suomen geodeettisen laitoksen julkaisuja-Publications of the Finnish Geodetic Institute*; 151
51. Aoki H, Schiele B, Pentland A Realtime personal positioning system for a wearable computer. In: *Wearable Computers, 1999. Digest of Papers. The Third International Symposium on*, 1999. IEEE, pp 37-43
52. Wei Z, Kosecka J Image Based Localization in Urban Environments. In: *3D Data Processing, Visualization, and Transmission, Third*

1
2
3
4 A review of assistive spatial orientation and navigation technologies for the visually impaired

- 5 International Symposium on, 14-16 June 2006 2006. pp 33-40.
6 doi:10.1109/3DPVT.2006.80
- 7 53. Hile H, Borriello G (2007) Information Overlay for Camera Phones in
8 Indoor Environments. In: Hightower J, Schiele B, Strang T (eds) Location-
9 and Context-Awareness, vol 4718. Lecture Notes in Computer Science.
10 Springer Berlin Heidelberg, pp 68-84. doi:10.1007/978-3-540-75160-1_5
- 11 54. Hide C, Botterill T, Andreotti M Vision-aided IMU for handheld
12 pedestrian navigation. In: Proceedings of the institute of navigation GNSS
13 2010 Conference, Portland, Oregon, 2010.
- 14 55. Chekhlov D, Pupilli M, Mayol W, Calway A Robust Real-Time Visual
15 SLAM Using Scale Prediction and Exemplar Based Feature Description.
16 In: Computer Vision and Pattern Recognition, 2007. CVPR '07. IEEE
17 Conference on, 17-22 June 2007 2007. pp 1-7.
18 doi:10.1109/CVPR.2007.383026
- 19 56. Zhang X, Rad AB, Wong Y-K (2012) Sensor Fusion of Monocular
20 Cameras and Laser Rangefinders for Line-Based Simultaneous
21 Localization and Mapping (SLAM) Tasks in Autonomous Mobile Robots.
22 Sensors 12 (1):429-452
- 23 57. Mulloni A, Wagner D, Barakonyi I, Schmalstieg D (2009) Indoor
24 Positioning and Navigation with Camera Phones. Pervasive Computing,
25 IEEE 8 (2):22-31. doi:10.1109/MPRV.2009.30
- 26 58. Jirawimut R, Prakoonwit S, Cecelja F, Balachandran W (2003) Visual
27 odometer for pedestrian navigation. Instrumentation and Measurement,
28 IEEE Transactions on 52 (4):1166-1173. doi:10.1109/TIM.2003.815996
- 29 59. Holzmann C, Hochgatterer M Measuring Distance with Mobile Phones
30 Using Single-Camera Stereo Vision. In: Distributed Computing Systems
31 Workshops (ICDCSW), 2012 32nd International Conference on, 18-21
32 June 2012 2012. pp 88-93. doi:10.1109/ICDCSW.2012.22
- 33 60. Lee S-w, Kang S, Lee S-w (2008) A Walking Guidance System for the
34 Visually Impaired. International Journal of Pattern Recognition and
35 Artificial Intelligence 22 (06):1171-1186.
36 doi:doi:10.1142/S0218001408006727
- 37 61. Anderson JD, Dah-Jye L, Archibald JK Embedded stereo vision system
38 providing visual guidance to the visually impaired. In: Life Science
39 Systems and Applications Workshop, 2007. LISA 2007. IEEE/NIH, 8-9
40 Nov. 2007 2007. pp 229-232. doi:10.1109/LSSA.2007.4400926
- 41 62. Penedo A, Costa P, Fenandes H, Pereira A, Barroso J Image
42 segmentation in systems of stereo vision for visually impaired people. In:
43 DSAI2009-Proceedings of 2nd International Conference on Software
44 Development for Enhancing Accessibility and Fighting Info-exclusion,
45 2009. pp 149-156
- 46 63. Bourbakis N (2008) Sensing surrounding 3-D space for navigation of
47 the blind. Engineering in Medicine and Biology Magazine, IEEE 27 (1):49-
48 55
- 49 64. Saez J, Escolano F, Lozano M (2014) Aerial obstacle detection with 3D
50 mobile devices.
- 51 65. MicrosoftRobotics (2011) Kinect Sensor.
52 <https://msdn.microsoft.com/en-us/library/hh438998.aspx>. Accessed April
53 16th, 2015
- 54 66. Henry P, Krainin M, Herbst E, Ren X, Fox D (2014) RGB-D Mapping:
55 Using Depth Cameras for Dense 3D Modeling of Indoor Environments. In:
56 Khatib O, Kumar V, Sukhatme G (eds) Experimental Robotics, vol 79.
57 Springer Tracts in Advanced Robotics. Springer Berlin Heidelberg, pp 477-
58 491. doi:10.1007/978-3-642-28572-1_33
- 59 67. Biswas J, Veloso M Depth camera based indoor mobile robot
60 localization and navigation. In: Robotics and Automation (ICRA), 2012
61 IEEE International Conference on, 2012. IEEE, pp 1697-1702
- 62 68. Khoshelham K, Elberink SO (2012) Accuracy and resolution of kinect
63 depth data for indoor mapping applications. Sensors 12 (2):1437-1454
- 64 69. Filipe V, Fernandes F, Fernandes H, Sousa A, Paredes H, Barroso J
65 (2012) Blind Navigation Support System based on Microsoft Kinect.
Procedia Computer Science 14 (0):94-101.
doi:http://dx.doi.org/10.1016/j.procs.2012.10.011
70. Kammoun S, Parseihian G, Gutierrez O, Brilhault A, Serpa A, Raynal
M, Oriola B, Macé M-M, Auvray M, Denis M (2012) Navigation and space
perception assistance for the visually impaired: The NAVIG project. Irbm
33 (2):182-189
71. Ross DA, Blasch BB (2002) Development of a wearable computer
orientation system. Personal and Ubiquitous Computing 6 (1):49-63
72. Dakopoulos D, Bourbakis NG (2010) Wearable obstacle avoidance
electronic travel aids for blind: a survey. Systems, Man, and Cybernetics,
Part C: Applications and Reviews, IEEE Transactions on 40 (1):25-35
73. Brilhault A, Kammoun S, Gutierrez O, Truillet P, Jouffrais C Fusion of
Artificial Vision and GPS to Improve Blind Pedestrian Positioning. In:
New Technologies, Mobility and Security (NTMS), 2011 4th IFIP
International Conference on, 7-10 Feb. 2011 2011. pp 1-5.
doi:10.1109/NTMS.2011.5721061
74. Moreno M, Shahrabadi S, José J, du Buf JH, Rodrigues JM (2012)
Realtime local navigation for the blind: detection of lateral doors and sound
interface. Procedia Computer Science 14:74-82
75. Wu J, Zhang J, Yan J, Liu W, Song G (2012) Design of a vibrotactile
vest for contour perception. International Journal of Advanced Robotic
Systems 9
76. Nagarajan R, Yaacob S, Sainarayanan G Fuzzy-based human vision
properties in stereo sonification system for the visually impaired. In:
Intelligent Systems and Advanced Manufacturing, 2001. International
Society for Optics and Photonics, pp 525-534
77. Murai Y, Kawahara M, Tatsumi H, Araki T, Miyakawa M Congestion
recognition for arm navigation. In: Systems Man and Cybernetics (SMC),
2010 IEEE International Conference on, 10-13 Oct. 2010 2010. pp 1530-
1535. doi:10.1109/ICSMC.2010.5642428
78. Coughlan J, Manduchi R (2009) Functional assessment of a camera
phone-based wayfinding system operated by blind and visually impaired
users. International Journal on Artificial Intelligence Tools 18 (03):379-
397
79. Ivanchenko V, Coughlan J, Shen H (2008) Crosswatch: a camera phone
system for orienting visually impaired pedestrians at traffic intersections.
Springer,
80. Ivanchenko V, Coughlan J, Shen H Detecting and locating crosswalks
using a camera phone. In: Computer Vision and Pattern Recognition
Workshops, 2008. CVPRW'08. IEEE Computer Society Conference on,
2008. IEEE, pp 1-8
81. Karacs K, Radvanyi M, Gorog M, Kusnyerik A, Roska T A mobile
visual navigation device: New algorithms for crosswalk and pictogram
recognition. In: Applied Sciences in Biomedical and Communication
Technologies, 2009. ISABEL 2009. 2nd International Symposium on,
2009. IEEE, pp 1-2
82. Karacs K, Roska T Route number recognition of Public Transport
Vehicles via the Bionic Eyeglass. In: Cellular Neural Networks and Their
Applications, 2006. CNNA '06. 10th International Workshop on, 28-30
Aug. 2006 2006. pp 1-6. doi:10.1109/CNNA.2006.341608
83. Guida C, Comanducci D, Colombo C (2011) Automatic bus line
number localization and recognition on mobile phones—a computer vision
aid for the visually impaired. In: Image Analysis and Processing—ICIAP
2011. Springer, pp 323-332
84. Hasanuzzaman FM, Yang X, Tian Y (2012) Robust and effective
component-based banknote recognition for the blind. Systems, Man, and
Cybernetics, Part C: Applications and Reviews, IEEE Transactions on 42
(6):1021-1030
85. Matusiak K, Skulimowski P, Strumillo P Object recognition in a mobile
phone application for visually impaired users. In: Human System
Interaction (HSI), 2013 The 6th International Conference on, 2013. IEEE,
pp 479-484
86. Gomez JD, Mohammed S, Bologna G, Pun T Toward 3D scene
understanding via audio-description: Kinect-iPad fusion for the visually
impaired. In: The proceedings of the 13th international ACM SIGACCESS
conference on Computers and accessibility, 2011. ACM, pp 293-294
87. Takizawa H, Yamaguchi S, Aoyagi M, Ezaki N, Mizuno S Kinect cane:
an assistive system for the visually impaired based on three-dimensional

- object recognition. In: System Integration (SII), 2012 IEEE/SICE International Symposium on, 2012. IEEE, pp 740-745
88. Wang S, Pan H, Zhang C, Tian Y (2014) RGB-D image-based detection of stairs, pedestrian crosswalks and traffic signs. *Journal of Visual Communication and Image Representation* 25 (2):263-272
89. Kang S, Lee S-W Object detection and classification for outdoor walking guidance system. In: *Biologically Motivated Computer Vision*, 2002. Springer, pp 601-610
90. Kang S, Byun H, Lee S-w (2003) Real-time pedestrian detection using support vector machines. *International journal of pattern recognition and artificial intelligence* 17 (03):405-416
91. Alghamdi S, van Schyndel R, Khalil I Safe trajectory estimation at a pedestrian crossing to assist visually impaired people. In: *Engineering in Medicine and Biology Society (EMBC), 2012 Annual International Conference of the IEEE*, 2012. IEEE, pp 5114-5117
92. Muthulakshmi L, Ganesh AB (2012) Bimodal based Environmental Awareness System for visually impaired people. *Procedia Engineering* 38:1132-1137
93. Downs RM, Stea D (1977) *Maps in minds: Reflections on cognitive mapping*. HarperCollins Publishers,
94. Foulke E (1982) Perception, cognition and the mobility of blind pedestrians. *Spatial abilities: Development and physiological foundations*:55-76
95. Loomis JM, Klatzky RL, Golledge RG (2001) Navigating without vision: basic and applied research. *Optometry & Vision Science* 78 (5):282-289
96. Kalia AA, Schrater PR, Legge GE (2013) Combining path integration and remembered landmarks when navigating without vision. *PloS one* 8 (9):e72170
97. Iaria G, Petrides M, Dagher A, Pike B, Bohbot VD (2003) Cognitive strategies dependent on the hippocampus and caudate nucleus in human navigation: variability and change with practice. *The journal of neuroscience* 23 (13):5945-5952
98. Riehle T, Lichter P, Giudice N An indoor navigation system to support the visually impaired. In: *Engineering in Medicine and Biology Society, 2008. EMBS 2008. 30th Annual International Conference of the IEEE*, 2008. IEEE, pp 4435-4438
99. Lertlakkhanakul J, Li Y, Choi J, Bu S GongPath: Development of BIM based indoor pedestrian navigation system. In: *INC, IMS and IDC, 2009. NCM'09. Fifth International Joint Conference on*, 2009. IEEE, pp 382-388
100. Lyardet F, Grimmer J, Muhlhauser M CoINS: context sensitive indoor navigation system. In: *Multimedia, 2006. ISM'06. Eighth IEEE International Symposium on*, 2006. IEEE, pp 209-218
101. Petrie H, Johnson V, Strothotte T, Raab A, Fritz S, Michel R (1996) MoBIC: Designing a travel aid for blind and elderly people. *Journal of Navigation* 49 (01):45-52
102. Dingler T, Lindsay J, Walker BN Learnability of sound cues for environmental features: Auditory icons, earcons, spearcons, and speech. In: *Proceedings of the 14th International Conference on Auditory Display*, Paris, France, 2008. pp 1-6
103. Frauenberger C, Noistering M (2003) 3D audio interfaces for the blind.
104. Walker BN, Lindsay J Navigation performance in a virtual environment with bonephones. In: *Proceedings of the International Conference on Auditory Display (ICAD2005)*, 2005. vol 3. pp 1-26
105. Manduchi R, Coughlan J (2012) (Computer) vision without sight. *Communications of the ACM* 55 (1):96-104
106. Johnson LA, Higgins CM A navigation aid for the blind using tactile-visual sensory substitution. In: *Engineering in Medicine and Biology Society, 2006. EMBS'06. 28th Annual International Conference of the IEEE*, 2006. IEEE, pp 6289-6292
107. Pissaloux E, Maingreud F, Velazquez R, Fontaine E (2006) Concept of the Walking Cognitive Assistance: Experimental Validation. *AMSE Int J on Advances in Modelling (Serie C: Automatic Control)* 67:75-86
108. Technology BV (2010) BrainPort Vision Technology Web Page. <http://vision.wicab.com>. Accessed April 23, 2015 2010
109. Strumillo P Electronic interfaces aiding the visually impaired in environmental access, mobility and navigation. In: *Human System Interactions (HSI), 2010 3rd Conference on*, 2010. IEEE, pp 17-24

Title

A review of assistive spatial orientation and navigation technologies for the visually impaired

Authors

Hugo Fernandes*¹, Paulo Costa², Vitor Filipe¹ and João Barroso¹

¹ School of Science and Technology, INESC TEC and Universidade de Trás-os-Montes e Alto Douro, Quinta de Prados, Apt.1013, 5001-801, Vila Real, Portugal.

² Polytechnic Institute of Leiria, Portugal

*Contact author: Hugo Fernandes, School of Science and Technology, INESC TEC and Universidade de Trás-os-Montes e Alto Douro, Quinta de Prados, Apt.1013, 5001-801, Vila Real, Portugal, phone: +351 350 380, email: hugof@utad.pt

Keywords

blind, review, assistive technology, location, orientation, navigation, computer vision, accessibility.