

# Enhanced photon emission from a double-layer target at moderate laser intensities

Martin Jirka<sup>1,2\*</sup>, Ondrej Klimo<sup>1,2</sup>, Yan-Jun Gu<sup>1,3</sup>, and Stefan Weber<sup>1,4</sup>

<sup>1</sup>Institute of Physics of the CAS, ELI-Beamlines Project, Na Slovance 2, Prague, 182 21, Czech Republic

<sup>2</sup>Faculty of Nuclear Sciences and Physical Engineering, Czech Technical University in Prague, Brehova 7, Prague, 115 19, Czech Republic

<sup>3</sup>Institute of Plasma Physics of the CAS, Za Slovankou 1782/3, Prague, 182 00, Czech Republic

<sup>4</sup>School of Science, Xi'an Jiaotong University, Xi'an, 710049, China

\*martin.jirka@eli-beams.eu

## ABSTRACT

In this paper we study photon emission in the interaction of the laser beam with an under-dense target and the attached reflecting plasma mirror. Photons are emitted due to the inverse Compton scattering when accelerated electrons interact with a reflected part of the laser pulse. The enhancement of photon generation in this configuration lies in using the laser pulse with a steep rising edge. Such a laser pulse can be obtained by the preceding interaction of the incoming laser pulse with a thin solid-density foil. Using numerical simulations we study the origin of such a laser pulse and its effect on photon emission. As a result, accelerated electrons can interact directly with the most intense part of the laser pulse that enhances photon emission. This approach increases the number of created photons and improves photon beam divergence.


## Introduction

Using today's laser systems, electrons can be accelerated up to 8 GeV in 20 cm long capillary discharge waveguide<sup>1</sup>. When a bunch of accelerated electrons collides head-on with an intense laser pulse, these electrons will emit high-energy photons due to the inverse Compton scattering<sup>2,3</sup>. The goal is therefore the realization of the all-optical compact source of high-energy  $\gamma$ -ray beam<sup>4,5</sup>. However, the efficiency of such a source depends on the properties of the electron and laser beams and on precise alignment of their interaction. Probability of photon emission is characterized by the parameter  $\chi_e = \gamma/E_S \sqrt{(\mathbf{E} + \mathbf{v} \times \mathbf{B})^2 - (\mathbf{v} \cdot \mathbf{E}/c)^2}$ , where  $\gamma$  is the relativistic factor of the emitting particle (electron),  $\mathbf{E}$  and  $\mathbf{B}$  are the electric and magnetic fields,  $\mathbf{v}$  is the particle velocity and  $c$  is the speed of light in SI units<sup>6</sup>. In previous equation  $E_S$  is the Sauter (Schwinger) limit field  $E_S = m_e^2 c^3 / (e\hbar) \approx 1.33 \times 10^{18}$  V/m,  $m_e$  is the electron rest mass,  $e$  is the elementary (positive) charge and  $\hbar$  is the reduced Planck constant<sup>7,8</sup>. This parameter is maximized, when the electron is colliding head-on with the laser pulse. In such a case, the value of  $\chi_e$  can be approximated as  $\chi_e \approx 2\gamma E_0/E_S$ , where  $E_0$  is the amplitude of the laser field<sup>9</sup>. Then photon emission probability is only controlled by the energy of the incoming electron and the amplitude of the laser field.

Electrons in plasma can be accelerated by Laser Wake-Field Acceleration (LWFA) or Direct Laser Acceleration (DLA) mechanisms<sup>10-12</sup>. The latter becomes more important in the case of plasma densities higher than  $10^{20}$  cm<sup>-3</sup> and intensities going beyond today's world record ( $> 10^{22}$  W/cm<sup>2</sup>)<sup>13-17</sup>. To achieve such a high intensity, the laser pulse has to be tightly focused that will result in rapid diffraction of the laser field. Thus, the higher plasma density is required to compensate for diffraction in this case.

Nevertheless, head-on collision remains an issue from the experimental point of view due to the spatio-temporal alignment of the interaction<sup>2</sup>. This can be overcome by employing a plasma mirror. As the laser pulse impinges on the over-dense plasma mirror, it is reflected and thus previously accelerated electrons can interact with a counter-propagating laser field that leads to efficient photon emission<sup>5,18</sup>. This double-layer interaction setup can be further optimized by tuning the target properties (density, thickness) with respect to the laser intensity and focal spot radius to create the highest number of high-energy photons<sup>19-27</sup>.

In this paper, we study photon emission in such an interaction scheme when various temporal profiles of the incoming laser pulse are assumed. For efficient photon production in a laser-electron collision is crucial for the electron to get in the highest intensity region. As the electron enters the laser field, it starts losing energy and thus can be expelled by the ponderomotive force before reaching the laser field amplitude. This effect that acts against efficient photon emission can be overcome by employing a tailored temporal profile of the laser pulse. The laser pulse with a steep front edge ensures that accelerated electrons will interact directly with the most intense part of the laser pulse and that consequently enhances photon emission, see Fig. 1. Using

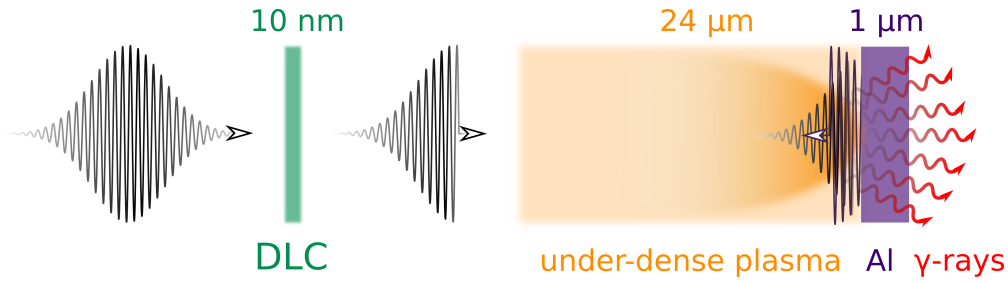

**Figure 1.** Interaction setup: the laser pulse gains a steep front edge after passing through the Diamond-Like-Carbon (DLC) layer (green). In the next stage, it accelerates electrons in the under-dense target and collides with them as it is reflected from Al plasma mirror. As a result of this interaction,  $\gamma$ -ray photons are emitted.

numerical simulations we study the origin of such a laser pulse and its effect on photon emission.

## Results

To analyze photon emission in this interaction setup, we have performed 2D Particle-In-Cell (PIC) simulations in the code EPOCH<sup>28,29</sup>. At first, we considered the interaction of the laser pulse with 24  $\mu\text{m}$ -thick under-dense target containing electrons and protons of a density  $0.1n_c$ , where  $n_c = \omega_0^2 m_e \epsilon_0 / e^2$  is the critical electron density and  $\epsilon_0$  is the vacuum permittivity. At the rear side of the under-dense target, 1  $\mu\text{m}$ -thick Al<sup>11+</sup> foil of the electron density  $385n_c$  is attached. This part of the double-layer target serves as a reflecting mirror for the laser pulse.


The incoming laser pulse has a wavelength of 805 nm and Full-Width-At-Half-Maximum duration of  $\tau = 30$  fs. The peak intensity  $I_0 = 5 \times 10^{21}$  W/cm<sup>2</sup> of the focused laser beam corresponds to the normalized laser amplitude  $a_0 = eE_0 / (m_e \omega_0 c) = 45$  where  $\omega_0$  is the laser angular frequency. These laser parameters are well within the capabilities of today's laser systems such as J-Karen-P<sup>17</sup>. We compared the interaction in which the laser pulse had either the Gaussian (Setup I) or perfectly tailored (Setup II) temporal duration. The latter case was modelled by cutting the front edge of the laser pulse so that the electric field was equal to zero up to one-quarter of the laser period before the peak amplitude. Such a beam therefore delivers by almost 50% less energy onto the target compared to Setup I. Depending on the temporal profile of the laser pulse, the acceleration of electrons and consequently photon emission differ.

In Setup I, when the laser pulse has the Gaussian temporal envelope, the propagation distance of 24  $\mu\text{m}$  in under-dense plasma is not long enough for a wakefield to become fully developed. By contrast, employing a tailored laser beam leads to considerable enhancement of electron acceleration. This is represented by Setup II. In such a case, the laser beam has both a shorter duration and a steeper rise of the front edge. Therefore, the bubble behind the laser pulse develops more rapidly compared to the previous case as the laser pulse propagates through under-dense plasma. That enables more efficient acceleration of electrons via LWFA mechanism and improves the injection of electrons into the laser pulse structure for DLA mechanism. In Fig. 2a we show electron energy spectra at the time when the laser pulse reaches the end of the under-dense target. By comparing lines I and II it is clear that much more electrons with higher energies are produced when the laser beam has a tailored temporal profile.

Photon emission can only be enhanced when these high-energy electrons collide with the laser field reflected from the attached aluminium foil. In Fig. 2b we present the energy spectra distribution of generated photons during the interaction. The cut-off energy of generated photons in Setup II is below 50 MeV even though electrons can be accelerated up to 130 MeV in this case, see Fig. 2a. However, the electrons having the highest energy are trapped in the front part of the tailored laser pulse, thus these DLA electrons can not collide with a sufficiently long part of the reflected laser pulse. High-energy photons are more likely generated by DLA electrons locked in the rear part of the laser pulse as well as by LWFA electrons dragged behind the laser pulse. The results for all presented Setups are summarized in Tab. 1: efficiency of photon emission, i.e. number of photons, their mean energy and efficiency of laser energy conversion to photons. Employing the laser pulse with a steep front edge results in generating 5x more photons. The mean photon energy in such a case is about 40% higher and conversion efficiency is increased by a factor of six compared to Setup I.

The laser beam with a steep front edge can be realized by the interaction of the laser pulse with a thin solid-density foil<sup>30–33</sup>. Since the foil is over-dense for the incoming laser pulse, the front part of the laser pulse is reflected. As the peak of the laser pulse impinges upon the foil surface, the relativistic mass of electrons suddenly increases that, in turn, causes the foil to become relativistically transparent for the rest of the laser pulse. Therefore, the laser pulse gains a steep front edge after passing through the foil.

To model this interaction, we have performed another simulation, Setup III, in which a 10 nm-thin Diamond-Like-Carbon

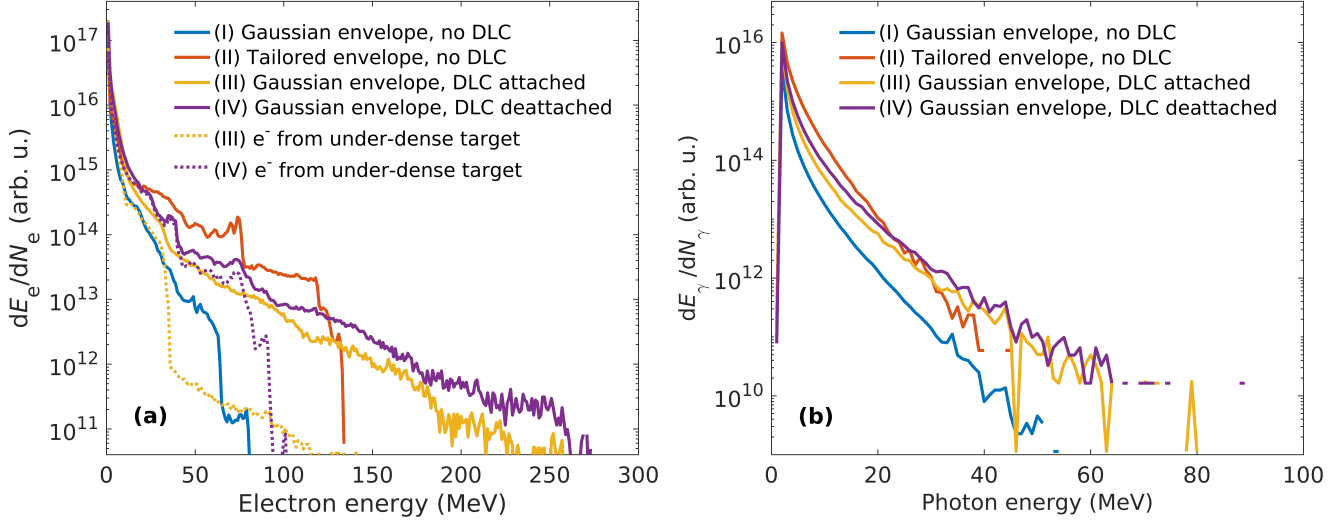


**Figure 2.** Energy distribution of (a) electrons at the time when the laser beam reaches the end of the under-dense target and of (b) photons at the end of the interaction. The laser beam has either (I) the Gaussian or (II) tailored temporal profile; or the laser beam with the Gaussian temporal profile is assumed while the DLC layer is (III) attached or (IV) detached from the under-dense target. Dotted lines represent only electrons from the under-dense target in corresponding runs.

**Table 1.** The number of photons  $N_\gamma$ , their mean energy  $\langle E_\gamma \rangle$  and conversion efficiency  $\eta_\gamma$  of laser energy to photons for simulation Setups I–IV. Energy is normalized to the energy of the Gaussian laser pulse.


	I	II	III	IV
$N_\gamma$ (1/m)	$5.2 \times 10^{15}$	$2.5 \times 10^{16}$	$1.2 \times 10^{16}$	$1.5 \times 10^{16}$
$\langle E_\gamma \rangle$ (MeV)	1.52	2.12	1.66	1.89
$\eta_\gamma$ (%)	0.035	0.23	0.088	0.12

(DLC) foil is attached at the front side of the target<sup>34,35</sup>. The fully ionized DLC foil has the electron density  $384n_c$ . As the laser pulse initially having the Gaussian temporal profile passes through the DLC foil, it gets a steep front edge, as shown in Fig. 3. By cutting the front part of the laser pulse, it loses about 15% of its initial energy. Then the tailored laser pulse interacts

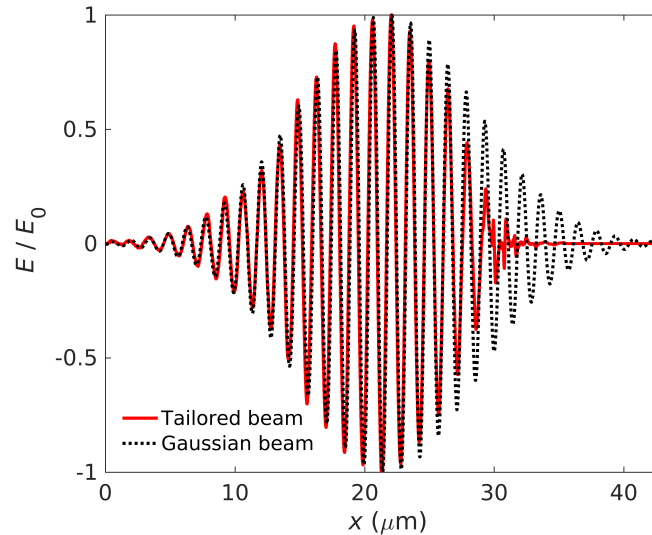


**Figure 3.** The result from 2D PIC simulation:  $E_y$  component of the laser pulse before (black) and after (red) passing through the DLC layer.

with the double-layer target. In this case, the number and mean energy of created photons are much lower than in Setup II, see Tab. 1, as the presented DLC foil is not dense enough to create ideally tailored laser beam. However, the number and mean energy of created photons are still higher compared to Setup I. Nevertheless, the dynamics of DLC electrons negatively affects the acceleration of electrons originating in under-dense plasma. These electrons are immediately expelled by the laser pulse while the DLC ones are attracted by protons to compensate for the charge separation field created behind the laser pulse. For this reason, the electrons which are expelled sideways by the ponderomotive force can not form the bubble and thus are not trapped at the back of this structure, see Fig. 4a. Thus, the acceleration of electrons in under-dense plasma is efficiently reduced. It agrees with the electron spectrum presented in Fig. 2a showing that in Setup III electrons belonging to the under-dense target (dotted line) have much lower cut-off energy than the DLC ones. In Setup III, the cut-off energy for photons is 80 MeV. As shown in Fig. 2a, there are much more DLC electrons with energy higher than 50 MeV. Therefore, mainly the DLC electrons located in the rear part of the laser pulse are the ones responsible for generation of high-energy photons.

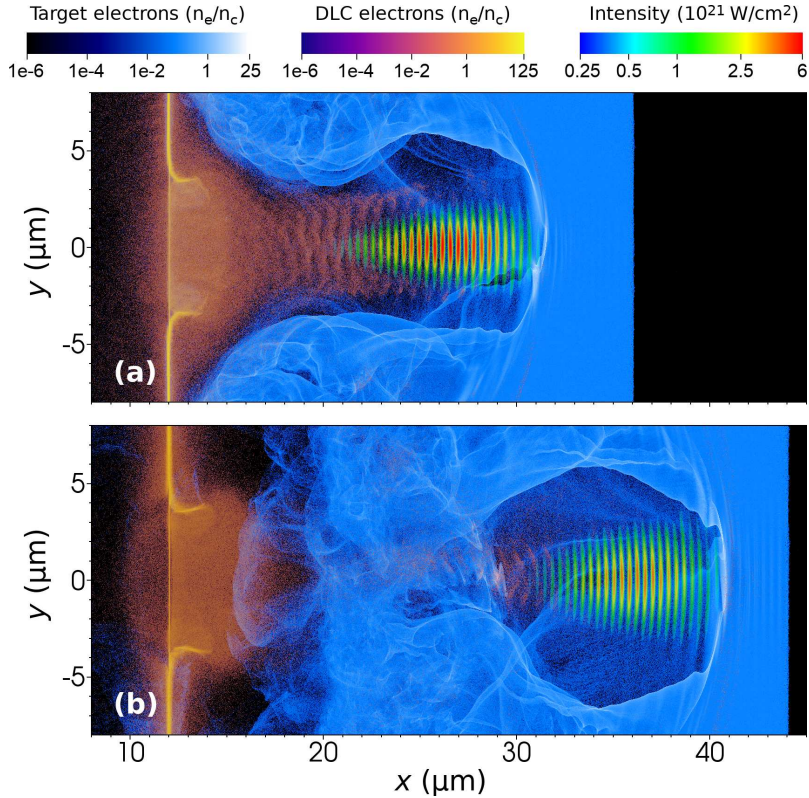

**Figure 4.** The density of DLC (orange) and target (blue) electrons in simulation Setup III and IV in which the DLC layer is either (a) attached or (b) detached from the under-dense target, respectively. The incoming laser pulse has the Gaussian temporal profile.

As the main disadvantage of the previous interaction setup is that the laser wake-field structure can not fully develop in the under-dense target we propose another configuration, Setup IV, in which the DLC layer is initially detached from the double-layer target by a  $8 \mu\text{m}$  vacuum gap. Due to the vacuum gap between the DLC layer and the under-dense target, the DLC electrons do not prevent forming of the bubble in plasma, as shown in Fig. 4b. It leads to a more efficient LWFA of electrons originating their motion in the under-dense target. These electrons are trapped behind the laser pulse and thus they have the favourable position for emitting photons when they interact with the reflected laser pulse. As a result, more photons are emitted compared to Setup III as shown in Fig. 2b. However, the cut-off in the photon energy spectrum is still about 80 MeV despite the improvement in the electron energy spectrum cut-off. This is due to the fact that the most energetic electrons are the DLC ones locked in the front part of the laser pulse which do not have a chance to significantly contribute to photon emission. Nevertheless, employing the detached DLC layer allows creating the highest number of high-energy photons in comparison with all the Setups presented above, see Fig. 2b. The theory predicts photons with typical energy around 2 MeV for Setup IV<sup>36</sup>. This agrees with our results from PIC simulations presented in Tab. 1. The conversion of the laser energy to photons is increased by a factor of 3.4 compared to Setup I. Optimizing the distance between the DLC layer and the target with respect to the target density can further enhance conversion efficiency. The length of a vacuum gap allows the DLC electrons to expand

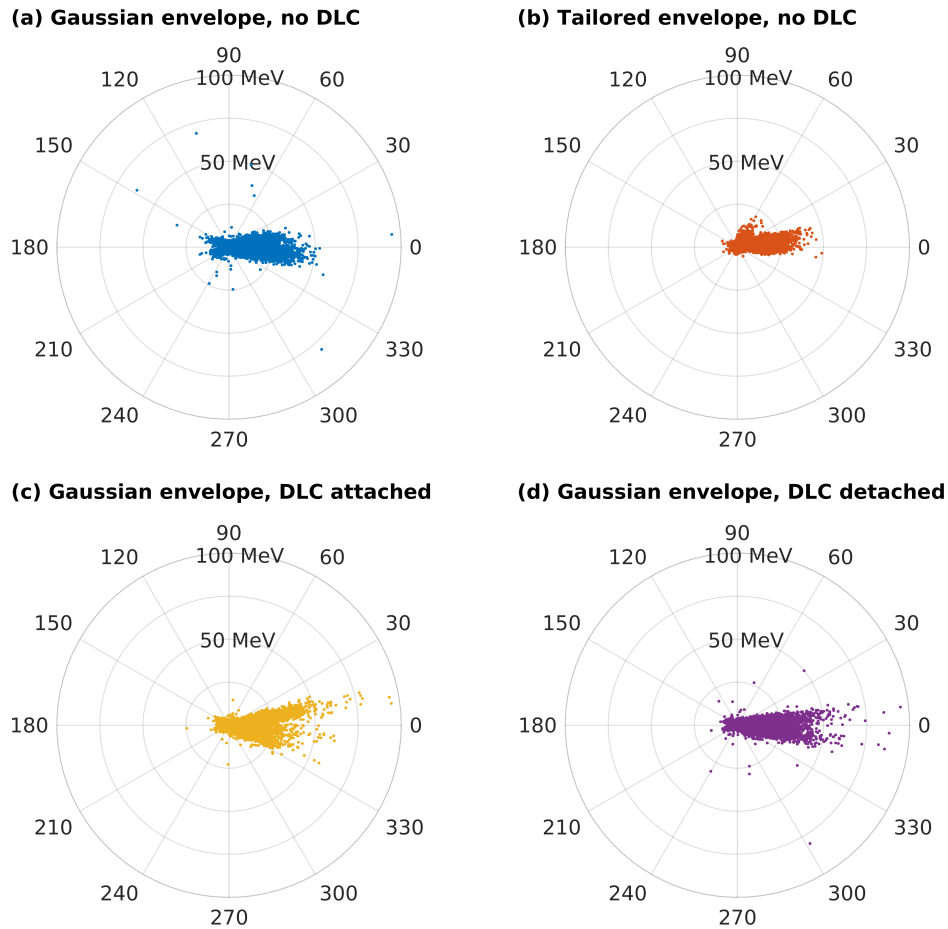

**Figure 5.** The angular energy distribution of photons for Setups I–IV at the end of the simulation. The laser beam has either (a) the Gaussian or (b) tailored temporal profile; or the laser beam with the Gaussian temporal profile is assumed while the DLC layer is (c) attached or (d) detached from the under-dense target.

and thus reduce their number which enters the under-dense target. For example, in our case the optimal length of the vacuum gap is about  $4 \mu\text{m}$  according to the results of PIC simulations. The conversion efficiency of laser energy to photons in such a case is four times higher compared to Setup I.

Moreover, the angular characteristics of the emitted photon beam are also improved, see Fig. 5. When the DLC layer is employed and detached from the target (Setup IV), the LWFA mechanism can develop that results in a narrower angular distribution of emitted photons compared to Setup III, compare Figs. 5(c,d).

## Discussion

Up to this point, we have assumed the fixed target density while the distance from the DLC layer was varied. Increasing the plasma density leads to a creation of a higher number of photons by electrons from the under-dense target and thus more efficient laser energy conversion provided that the relativistic critical density  $\gamma n_c$  is not reached. However, if the plasma density is too high then the laser pulse can be rapidly depleted. On the other hand, if an intense laser pulse propagates in near-critical-density plasma for a sufficiently long distance, it may undergo the effect of relativistic self-focusing that increases the laser intensity and reduces diffraction<sup>37,38</sup>. That, in turn, can lead to emission of photons with higher energy. The optimal propagation distance with respect to a given plasma density is therefore limited by these two effects<sup>23,39,40</sup>.

To assess the role of a higher plasma density, we have performed additional simulations, in which the target density has been increased by a factor of 10 from  $0.1n_c$  to  $1n_c$ . Targets of such a density have been already demonstrated, e.g. Refs.<sup>41,42</sup>. Due to self-focusing, the laser pulse gains a smaller transverse profile and a higher peak intensity. In our case, the peak intensity of the laser field in  $1n_c$  target is by 25% higher than in  $0.1n_c$  one. Moreover, the DLA is more efficient at such a plasma density as it enables to accelerate a higher number of electrons. As a result, the laser energy conversion to photons is higher by a factor of 15 compared to Setup I, i.e. when the DLC layer is not considered. Employing the DLC layer is still feasible for



such a dense target as it enhances photon production by a factor of 1.3. This confirms the applicability of our setup even for near-critical-density plasma targets.

The efficiency of laser energy conversion to photons in Setup IV is approximately the same as in the case when 20 pC LWFA electron bunch having energy 0.5 GeV collides with the laser pulse of the same properties as described above. In such a case we obtain  $\eta_\gamma \approx 0.10\%$  according to Ref.<sup>43</sup>. Although it is possible to achieve higher electron energies using LWFA compared to our setup, it might be complicated to reflect and focus the driving laser pulse to initiate photon emission<sup>44,45</sup>. The presented setup is therefore more robust as it encompasses both the acceleration and photon-emission stages while the latter does not rely on a focusing mirror.

It has been shown that photon emission in the interaction of a laser pulse with the under-dense target and reflecting plasma mirror can be enhanced by employing a laser pulse with a steep front edge. Such a beam can be provided by the preceding interaction of the laser pulse with a thin solid-density foil. The shaped laser pulse then propagates through the vacuum into the under-dense target in which electrons are accelerated via LWFA and DLA mechanisms. The vacuum gap between the foil and the target ensures that electrons dragged from this foil will not counteract the acceleration of electrons in the under-dense target. The accelerated electrons then interact with the most intense part of the laser pulse reflected from the plasma mirror. Therefore, employing the solid-density foil will result in a more efficient conversion of the laser energy to photons. For the parameters described above we obtained three times higher conversion efficiency and a narrower angular distribution of emitted photons compared to the interaction without the thin solid-density foil. This can be further improved by adjusting the density and thickness of the foil to provide the optimal temporal profile of the laser pulse. As the laser pulse loses its energy in the under-dense target very slowly, the length of the electron acceleration stage could be optimized with respect to the laser intensity to get the highest number of accelerated electrons.

## Methods

### Numerical Modelling

To analyze the presented laser-plasma interaction we used the PIC code EPOCH in which photon emission is considered as a step-like quantum process<sup>29</sup>. For details about the implementation of photon emission into this code the reader is referred to Ref.<sup>28</sup>.

In 2D simulations of Setups I–IV, the box was spanning from 0 to 50  $\mu\text{m}$  in the  $x$ -direction and from  $-15 \mu\text{m}$  to 15  $\mu\text{m}$  in the  $y$ -direction. Such a simulation domain was resolved with  $22,320 \times 13,392$  cells. This is sufficient as for a density of  $385n_c$  the plasma skin depth is about 6.5 nm. The spatial resolution remained unchanged for all other performed 2D simulations (e.g. parameter scan for the optimal length of a vacuum gap), while the size of the simulation box was enlarged. The laser pulse enters the box at a boundary  $x = 0 \mu\text{m}$ . The DLC layer of thickness 10 nm was located at  $x = 11.99 \mu\text{m}$  (Setups III and IV) while the under-dense target was spanning from 12  $\mu\text{m}$  to 36  $\mu\text{m}$  (Setups I–III) or from 20  $\mu\text{m}$  to 44  $\mu\text{m}$  (Setup IV). At the rear side of the under-dense target a 1  $\mu\text{m}$ -thick  $\text{Al}^{11+}$  foil was attached. The laser pulse having the Gaussian temporal envelope propagates in the positive  $x$ -direction while being polarized along the  $y$ -axis. It is focused to a focal spot of radius  $w_0 = 1.5 \mu\text{m}$  located at  $x = 12 \mu\text{m}$  in the simulation box.

### Data Availability Statement

The datasets generated and analyzed during the current study are available from the corresponding author on reasonable request.

## References

1. Gonsalves, A. J. *et al.* Petawatt laser guiding and electron beam acceleration to 8 GeV in a laser-heated capillary discharge waveguide. *Phys. Rev. Lett.* **122**, 084801 (2019).
2. Cole, J. M. *et al.* Experimental evidence of radiation reaction in the collision of a high-intensity laser pulse with a laser-wakefield accelerated electron beam. *Phys. Rev. X* **8**, 011020 (2018).
3. Poder, K. *et al.* Experimental signatures of the quantum nature of radiation reaction in the field of an ultraintense laser. *Phys. Rev. X* **8**, 031004 (2018).
4. Shvets, G. Gamma-rays going cheap. *Nat. Phys.* **7**, 834–835 (2011).
5. Phuoc, K. T. *et al.* All-optical Compton gamma-ray source. *Nat. Photonics* **6**, 308–311 (2012).
6. Ritus, V. I. Quantum effects of the interaction of elementary particles with an intense electromagnetic field. *J. Sov. Laser Res.* **6**, 497–617 (1985).
7. Sauter, F. Über das Verhalten eines Elektrons im homogenen elektrischen Feld nach der relativistischen Theorie Diracs. *Zeitschrift für Physik* **69**, 742–764 (1931).

8. Schwinger, J. On gauge invariance and vacuum polarization. *Phys. Rev.* **82**, 664–679 (1951).
9. Bulanov, S. S., Schroeder, C. B., Esarey, E. & Leemans, W. P. Electromagnetic cascade in high-energy electron, positron, and photon interactions with intense laser pulses. *Phys. Rev. A* **87**, 062110 (2013).
10. Tajima, T. & Dawson, J. M. Laser electron accelerator. *Phys. Rev. Lett.* **43**, 267–270 (1979).
11. Pukhov, A., Sheng, Z.-M. & Meyer-ter-Vehn, J. Particle acceleration in relativistic laser channels. *Phys. Plasmas* **6**, 2847–2854 (1999).
12. Gahn, C. *et al.* Multi-MeV electron beam generation by direct laser acceleration in high-density plasma channels. *Phys. Rev. Lett.* **83**, 4772–4775 (1999).
13. Pukhov, A. Strong field interaction of laser radiation. *Reports on Prog. Phys.* **66**, 47–101 (2002).
14. Shaw, J. L. *et al.* Role of direct laser acceleration in energy gained by electrons in a laser wakefield accelerator with ionization injection. *Plasma Phys. Control. Fusion* **56**, 084006 (2014).
15. Bahk, S.-W. *et al.* Generation and characterization of the highest laser intensities ( $10^{22}$  W/cm<sup>2</sup>). *Opt. Lett.* **29**, 2837 (2004).
16. Yanovsky, V. *et al.* Ultra-high intensity- 300-TW laser at 0.1 Hz repetition rate. *Opt. Express* **16**, 2109 (2008).
17. Pirozhkov, A. S. *et al.* Approaching the diffraction-limited, bandwidth-limited petawatt. *Opt. Express* **25**, 20486–20501 (2017).
18. Yu, C. *et al.* Ultrahigh brilliance quasi-monochromatic MeV  $\gamma$ -rays based on self-synchronized all-optical Compton scattering. *Sci. Reports* **6**, 29518 (2016).
19. Gu, Y.-J., Klimo, O., Bulanov, S. V. & Weber, S. Brilliant gamma-ray beam and electron–positron pair production by enhanced attosecond pulses. *Commun. Phys.* **1**, 93 (2018).
20. Gong, Z. *et al.* Brilliant GeV gamma-ray flash from inverse Compton scattering in the QED regime. *Plasma Phys. Control. Fusion* **60**, 044004 (2018).
21. Gu, Y.-J. & Weber, S. Intense, directional and tunable  $\gamma$ -ray emission via relativistic oscillating plasma mirror. *Opt. Express* **26**, 19932–19939 (2018).
22. Huang, T. W. *et al.* Tabletop laser-driven gamma-ray source with nanostructured double-layer target. *Plasma Phys. Control. Fusion* **60**, 115006 (2018).
23. Huang, T. W. *et al.* Highly efficient laser-driven Compton gamma-ray source. *New J. Phys.* **21**, 013008 (2019).
24. Liu, J. *et al.* Generation of bright  $\gamma$ -ray/hard x-ray flash with intense femtosecond pulses and double-layer targets. *Phys. Plasmas* **26**, 033109 (2019).
25. Long, T. Y. *et al.* All-optical generation of petawatt gamma radiation via inverse Compton scattering from laser interaction with tube target. *Plasma Phys. Control. Fusion* **61**, 085002 (2019).
26. Ong, J. F., Seto, K., Berceanu, A. C., Aogaki, S. & Neagu, L. Feasibility studies of an all-optical and compact gamma-ray blaster using a 1 PW laser pulse. *Plasma Phys. Control. Fusion* **61**, 084009 (2019).
27. Gu, Y.-J., Jirka, M., Klimo, O. & Weber, S. Gamma photons and electron-positron pairs from ultra-intense laser-matter interaction: A comparative study of proposed configurations. *Matter Radiat. at Extrem.* **4**, 064403 (2019).
28. Ridgers, C. *et al.* Modelling gamma-ray photon emission and pair production in high-intensity laser–matter interactions. *J. Comput. Phys.* **260**, 273–285 (2014).
29. Arber, T. D. *et al.* Contemporary particle-in-cell approach to laser-plasma modelling. *Plasma Phys. Control. Fusion* **57**, 113001 (2015).
30. Vshivkov, V. A., Naumova, N. M., Pegoraro, F. & Bulanov, S. V. Nonlinear electrodynamics of the interaction of ultra-intense laser pulses with a thin foil. *Phys. Plasmas* **5**, 2727–2741 (1998).
31. Palaniyappan, S. *et al.* Dynamics of relativistic transparency and optical shuttering in expanding overdense plasmas. *Nat. Phys.* **8**, 763–769 (2012).
32. Wei, W. Q. *et al.* Plasma optical shutter in ultraintense laser-foil interaction. *Phys. Plasmas* **24**, 113111 (2017).
33. Qu, K. & Fisch, N. J. Laser pulse sharpening with electromagnetically induced transparency in plasma. *Phys. Plasmas* **24**, 073108 (2017).
34. Henig, A. *et al.* Enhanced laser-driven ion acceleration in the relativistic transparency regime. *Phys. Rev. Lett.* **103**, 045002 (2009).

35. Ma, W. *et al.* Preparation of self-supporting diamond-like carbon nanofolds with thickness less than 5 nm for laser-driven ion acceleration. *Nucl. Instruments Methods Phys. Res. Sect. A: Accel. Spectrometers, Detect. Assoc. Equip.* **655**, 53–56 (2011).
36. Bell, A. R. & Kirk, J. G. Possibility of prolific pair production with high-power lasers. *Phys. Rev. Lett.* **101**, 200403 (2008).
37. Sun, G.-Z., Ott, E., Lee, Y. C. & Guzdar, P. Self-focusing of short intense pulses in plasmas. *Phys. Fluids* **30**, 526 (1987).
38. Mourou, G. A., Tajima, T. & Bulanov, S. V. Optics in the relativistic regime. *Rev. Mod. Phys.* **78**, 309–371 (2006).
39. Bin, J. H. *et al.* Ion acceleration using relativistic pulse shaping in near-critical-density plasmas. *Phys. Rev. Lett.* **115**, 064801 (2015).
40. Huang, T. W. *et al.* Characteristics of betatron radiation from direct-laser-accelerated electrons. *Phys. Rev. E* **93**, 063203 (2016).
41. Qiao, B., Chang, H. X., Xie, Y., Xu, Z. & He, X. T. Gamma-ray generation from laser-driven electron resonant acceleration: In the non-QED and the QED regimes. *Phys. Plasmas* **24**, 123101 (2017).
42. Ma, W. J. *et al.* Laser acceleration of highly energetic carbon ions using a double-layer target composed of slightly underdense plasma and ultrathin foil. *Phys. Rev. Lett.* **122**, 014803 (2019).
43. Vranic, M., Martins, J. L., Vieira, J., Fonseca, R. A. & Silva, L. O. All-optical radiation reaction at  $10^{21}$  W/cm<sup>2</sup>. *Phys. Rev. Lett.* **113**, 134801 (2014).
44. Feng, J. *et al.* Intense  $\gamma$  ray generated by refocusing laser pulse on wakefield accelerated electrons. *Phys. Plasmas* **24**, 093110 (2017).
45. Ji, L. L., Snyder, J. & Shen, B. F. Single-pulse laser-electron collision within a micro-channel plasma target. *Plasma Phys. Control. Fusion* **61**, 065019 (2019).

## Acknowledgements

This work is supported by the project High Field Initiative (CZ.02.1.01/0.0/0.0/15\_003/0000449) from European Regional Development Fund. The support of Czech Science Foundation project No. 18-09560S is acknowledged. The results of the Project LQ1606 were obtained with the financial support of the Ministry of Education, Youth and Sports as part of targeted support from the National Programme of Sustainability II. The EPOCH code used in this research was developed under UK EPSRC grants EP/G054950/1, EP/G056803/1, EP/G055165/1 and EP/M022463/1. The simulations were performed at the cluster ECLIPSE at ELI Beamlines.

## Author contributions statement

M.J. carried out the simulations, analyzed the results and wrote the bulk of the manuscript. O.K., Y-J.G. and S.W. provided supervision and theoretical support for the interpretation of the results. All authors contributed to the preparation of the manuscript.

## Additional information

**Competing interests:** The authors declare that they have no competing interests.