

# Expanding RIB Capabilities at the Cyclotron Institute: $^3\text{He}$ -LIG production with an Isobar Separator LSTAR

D. Melconian<sup>a,b</sup>, G.P.A. Berg<sup>c</sup>, P.D. Shidling<sup>a</sup>, M. Couder<sup>c</sup>, M. Brodeur<sup>c</sup>, G. Chubarian<sup>a</sup>, V.E. Iacob<sup>a</sup>, J. Klimo<sup>a</sup>, G. Tabacaru<sup>a</sup>

<sup>a</sup>Cyclotron Institute Texas A&M University College Station TX USA 77843-3366

<sup>b</sup>Department of Physics & Astronomy Texas A&M University College Station TX USA 77843-4242

<sup>c</sup>Department of Physics & Astronomy University of Notre Dame Notre Dame IN USA 46556

## Abstract

A new  $^3\text{He}$ -driven IGISOL production station and mass separator have been designed to produce neutron-deficient low-mass isotopes at the Cyclotron Institute for the TAMUTRAP facility. The LSTAR design has a mass resolution  $M/\Delta M \geq 3,000$  to reject contaminants with  $> 95\%$  efficiency.

**Keywords:** High-resolution isobar separator, Light-ion guide, Charged-particle spectrometers

## 1. Introduction

The primary goal of a new facility, TAMUTRAP, at the Cyclotron Institute, Texas A&M University, is to look for physics beyond the standard model by searching for possible scalar or tensor currents contributing to the weak interaction in nuclear  $\beta$  decay [1–3]. In particular, it will enable the measurement of the  $\beta$ - $\nu$  correlation parameter in several  $T = 2$  and  $T = 3/2$  superallowed  $\beta$ -delayed proton emitters initially confined in a novel and unique cylindrical Penning trap [4]. This trap has been designed to be very large (180-mm inner diameter) so that  $\beta$ -delayed protons of up to 4.25 MeV energy are fully contained radially by the 7-T field of the magnet. We have commissioned the TAMUTRAP facility by demonstrating the ability to perform precise mass measurements using offline ion sources. Once the radioactive ion beam (RIB) is successfully produced and transported to TAMUTRAP, we will be uniquely suited to observe the  $\beta$ -delayed proton decays of  $^{20,21}\text{Mg}$ ,  $^{24,25}\text{Si}$ ,  $^{28,29}\text{S}$ ,  $^{32,33}\text{Ar}$  and  $^{36,37}\text{Ca}$  with  $4\pi$  collection of the  $\beta$ s and delayed protons. An overview of the TAMUTRAP facility and scientific program is described in Ref. [5].

Here we describe our plans for producing the proton-rich beams for TAMUTRAP (the “He-LIG” station) and the separator (“LSTAR”) designed to purify and transport the beams to the TAMUTRAP facility.

## 2. RIB Production: $^3\text{He}$ -LIG

The K150 cyclotron has been recommissioned at the Cyclotron Institute (CI) at Texas A&M to produce these radioactive ion beams using the IGISOL (Ion Guide Isotope Separator

On-Line) technique [6]. In this technique the nuclei of interest are produced by a primary beam of protons on a thin target. The low-energy fusion-evaporation reaction products enter a small chamber ( $\sim 1\text{ cm}^3$ ) filled with ultra-high purity helium gas. The products are slowed down in the gas and transported by a gas flow out of the gas cell and injected through a differentially-pumped electrode system to the high-vacuum section of an isotope separator for further acceleration and separation. The IGISOL technique extracts ions very quickly ( $\approx 1\text{ ms}$ ) allowing for the extraction of short-lived nuclei with typically  $\approx 1\%$  efficiency [7].

The current  $p$ -LIG effort at the CI uses up to 40-MeV protons for  $(p, n)$  reactions, charge-breeds the extracted reaction products in a ECRIS before injecting into the CI’s K500 superconducting cyclotron for re-acceleration [8]. In order to produce the neutron-deficient RIBs of interest for TAMUTRAP via  $(p, 2n)$  and  $(p, 3n)$  reactions, adequate production requires using  $(10 - 22)\text{ MeV/u } ^3\text{He}$  as the driver for the LIG station rather than protons; thus we are developing a new “He-LIG” system which will share a gas-cell chamber with the current  $p$ -LIG, but use separate gas-cells and extract RIB in the opposite direction to a new beamline.

We have tested a prototype gas cell, depicted in the top panel of Fig. 1, using a  $^{24}\text{Mg}$  target and observed the three prominent proton branches following the  $\beta$  decay of  $^{25}\text{Si}$  (see the lower panel of Fig. 1). The efficiency of the system was about 1 – 2 orders of magnitude below other LIG systems (e.g. at Jyväskylä), but our updated design addresses many expected deficiencies of the prototype and we expect to reach efficiencies of  $\geq 1\%$ . We have designed a new chamber which will allow for precise alignment of both  $p$ - and He-LIG stations as well as quick and simple changeover procedures between the two systems. Once the new He-LIG system is assembled, we will characterize its efficiency and emittance using the pepper-pot technique.

\*Corresponding author.

Email address: dmelconian@tamu.edu (D. Melconian)

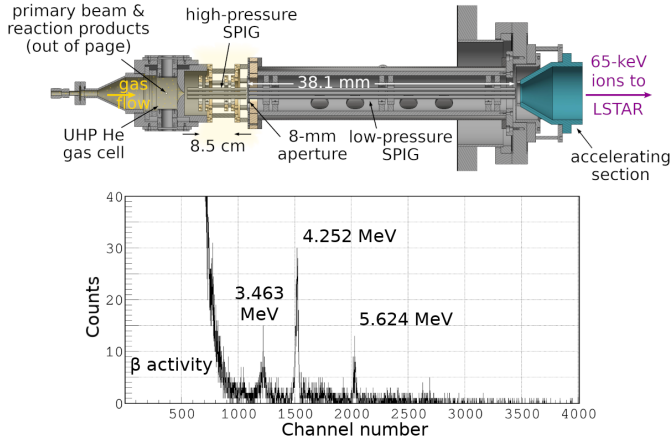


Figure 1: The He-LIG gas cell and SPIG system (top) and observed decay spectrum with our test cell (bottom). The K150  $^3\text{He}$  primary beam reacts with a thin target mounted in front of the gas cell (not shown, out of the page). The reaction products are stopped in the gas cell are quickly transported to the two-stage SPIG transport system by the high flow of helium gas. The low energy part of the decay product spectrum is dominated by  $\beta$ s, but the proton peaks from  $^{25}\text{Si}$  are clearly seen.

### 3. RIB Purification: LSTAR

The isotopes of interest for the TAMUTRAP program are relatively far from stability, so the production rates of nearby contaminants are a concern because too much beam can overload the RFQ cooler and buncher. We therefore require an isobar separator capable of purifying the produced RIB well enough to purify the most difficult case, separating  $^{36}\text{Ca}$  from  $^{36}\text{K}$ . The most significant design requirements for the separator are:

1. A mass resolving power of  $M/\Delta M \geq 3,000$  for  $6 \leq A \leq 50$ ,
2. High acceptance and transmission ( $> 95\%$ ),
3. No energy compensation (meaning no electric dispersive elements),
4. Purely electrostatic focusing elements (so that settings are independent of mass), and
5. The separator must be compact to fit in the existing space available in Cave 5 of the Cyclotron Institute (see Fig. 2) and have the focus be at the entrance to TAMUTRAP's RFQ cooler and buncher.

Our design, the Light-ion guide Separator for Texas A&M's Radioactive ion beams (LSTAR), was inspired by the concept of CARIBU's separator at ANL [9] since it shares many of the design specifications. The elements of our design and how it will couple to the He-LIG are schematically shown in Fig. 2. The primary  $p$  or  $^3\text{He}$  beam from the K150 enters from the left and the RIBs are produced in the dual  $p/\text{He}$ -LIG chamber; when running in He-LIG mode, the RIB will be directed down and turned  $30^\circ$  via a curved sextupole ion guide (SPIG) and then accelerated to 65 keV to the object of LSTAR. After a 1.2 m long drift, the beam is tuned by several electrostatic elements, bent horizontally by two  $62.5^\circ$  dipole magnets  $B_1$  and  $B_2$ , with an electrostatic multipole, M, between the dipoles,

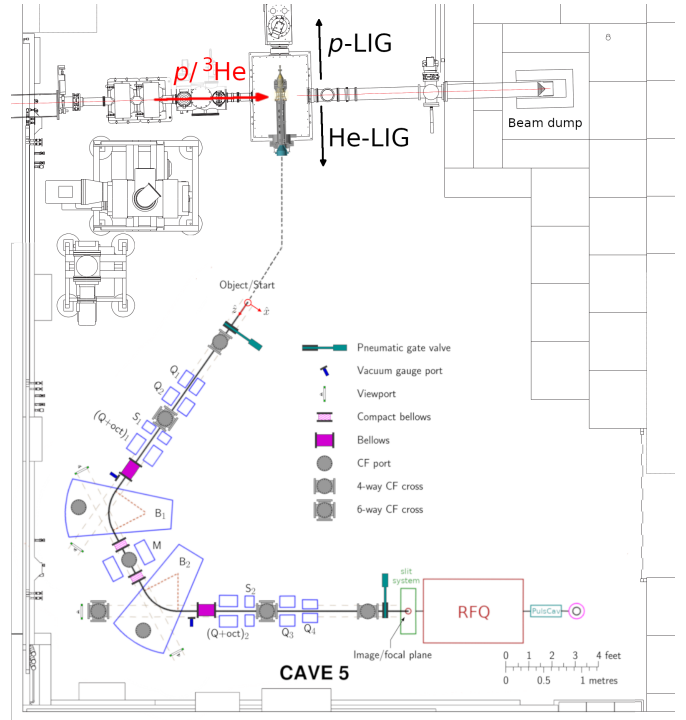


Figure 2: Top view of Cave 5 showing the planned layout of LSTAR. RIB produced in the He-LIG will be transported out of the  $p/\text{He}$ -LIG chamber with SPIGs and accelerated to 65 keV to the object of LSTAR. The RFQ placed at the focal plane of LSTAR will collect the purified RIB, allowing easy transport of cooled, bunched beams to the TAMUTRAP facility.

and focused by several electrostatic quadrupoles onto the focal plane. Two electrostatic hexapoles,  $S_1$  and  $S_2$ , are included in the combined function multipoles  $(Q+\text{oct})_{1,2}$ . The layout is symmetric about the central electrostatic multipole M to reduce higher-order aberrations. This ion optics for this system, shown with sample ray traces in Fig. 3, has been optimized to 3<sup>rd</sup> order and verified to 7<sup>th</sup> order using the program COSY INFINITY [10]. The technical design of LSTAR will be described in detail in a forthcoming publication [11].

We have performed detailed studies of the expected performance of LSTAR based on the ion optics calculated in COSY. We start with the distribution of ion positions and velocities

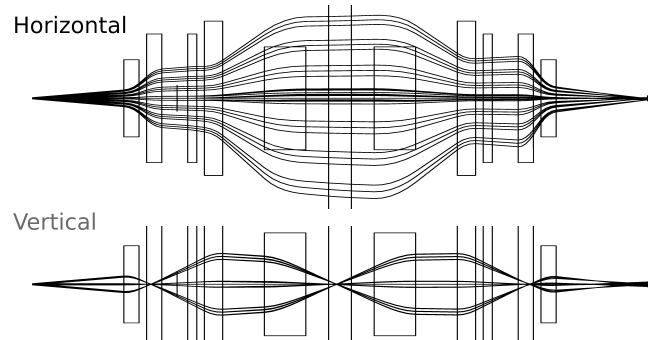


Figure 3: Dispersive (horizontal) and non-dispersive (vertical) ion optics of the LSTAR design.

from the end of the SPIG of the He-LIG system as simulated by SIMION [12]. Using these rays as input, we accelerated the ions to 65 keV and traced them through LSTAR using COSY. The same initial rays but with a mass difference  $\Delta M/M = 3,000$  were also traced to determine how well contaminants will be vetoed. The studies included the  $0.65\pi$  mm mrad emittance and 3.33 eV energy spread predicted by SIMION. Position and angular misalignments of the elements of LSTAR were randomly varied as Gaussians of widths 0.25 mm and 0.25 mrad, respectively, and the results averaged to determine the tolerances required. Figure 4 shows the distribution of ions at the focal plane of LSTAR (top) and how broadened the distributions are if the initial emittance is twice what SIMION predicts (bottom). Similar results are seen when other tolerances ( $\Delta E$  and positions/angles of elements) are similarly broken.

In summary, LSTAR is expected to have a  $\geq 95\%$  efficiency for the ions of interest while completely removing all contaminants if position and angular misalignments are  $\leq 0.25$  mm and  $\leq 0.25$  mrad, respectively, and SIMION estimates of the emittance and energy spread are realistic.

#### 4. Outlook

A new beamline for the production and purification of proton-rich beams, which will enable TAMUTRAP's studies of  $\beta$  decay to test the standard model has been described. Detailed studies of the design indicate the separator will completely remove contaminants with masses  $M/\Delta M \geq 3,000$  with  $> 95\%$  transmission. Longer term future prospects include using TAMUTRAP for astrophysical studies with the Rogachev group, and injecting the cooled, bunched RIB into the K500 after charge-breeding with an EBIT.

#### 5. Acknowledgements

This work was supported by the U.S. Department of Energy, Office of Science, under Award No. DEFG02-93ER40773, and by the Department of Energy, National Nuclear Security Administration under Award No. DE-NA0003841 (CENTAUR). G.P.A.B., M.B., and M.C. acknowledge support of the National Science Foundation under Grant PHY-2011890.

#### References

- [1] J.D. Jackson, S.B. Treiman and H.W. Wyld, Phys. Rev. **106**, 517 (1957).
- [2] A. Falkowski, M. González-Alonso and O. Naviliat-Cuncic, J. High Energy Phys. **2021**, 126 (2021).
- [3] P.D. Shidling, *et al.*, Hyperfine Interact. **240**, 40 (2019).
- [4] M. Mehlman, *et al.*, Nucl. Instr. and Meths. **A712**, 9 (2013).
- [5] P.D. Shidling, *et al.*, Int J. Mass Spect **468**, 116636 (2021).
- [6] I. Moore, P. Dendooven and J. Arje, Hyperfine Interacts **223**, 17 (2014).
- [7] J. Äystö, Nucl. Phys. A **693**, 477 (2001).
- [8] D.P. May, F.P. Abegglen, J. Arje, and G. Tabacaru, "Charge-Breeding of Radioactive Ions at the Texas A&M Cyclotron Institute", in *Proc. ECRIS'18*, Catania, Italy, Sep 2018, pp. 20–23.
- [9] C.N. Davids and D. Peterson, Nucl. Instrum. Meth. in Phys. Res. **B266**, 4449 (2008).
- [10] K. Makino and M. Berz, "COSY INFINITY Version 9," Nucl. Instrum. Meth. in Phys. Res. **A558**, 346715 (2006).
- [11] G.P.A. Berg, *et al.*, in preparation.
- [12] D.A. Dahl, Int. J. Mass. Spectr. **3**, 200 (2000).

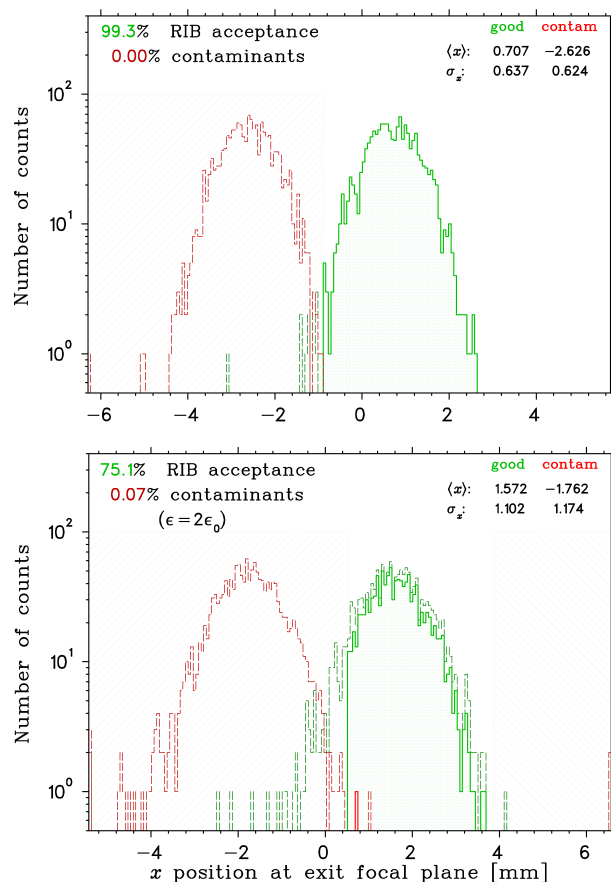


Figure 4: Performance of LSTAR using the initial emittance and energy spread as simulated by SIMION. Top: distribution of good (green) and  $\Delta M/M = 3,000$  contaminant (red) ions at the focal plane of LSTAR. Bottom: same, but with twice the emittance estimated using SIMION. Complete separation of the contaminants is still achievable with 75% acceptance of the species of interest..