

SD

CERN LIBRARIES, GENEVA

E13-95-39



SCAN-9507110

Sw 9529

S.A. Baranov, I.R. Boyko, G.A. Chelkov, M.A. Ignatenko

GAMMA SENSITIVITY  
OF PRESSURIZED DRIFT TUBES

## Introduction

The ATLAS muon detectors /1/ will operate at substantial neutron and gamma background. While the main sources of the neutron background are hadronic and electromagnetic showers in the detector materials caused by secondary particles from primary interaction, the main sources of the gamma background are neutrons themselves. Neutrons produce photons (mainly via the radiation capture  $(n,\gamma)$  reaction) with energies between 10 eV and 10 MeV. The low-energy gammas are absorbed just near the production point by the detector material and the resulting energy spectrum of gammas is harder and looks like the one presented in fig.1 /2/. The simulation of radiation background for ATLAS /3/ and for the analogous detector of the SSC have shown that the gamma-quantum fluence is only  $1.5\div 4$  times lower than the neutron fluence. If the muon detector efficiency for neutrons is one order of magnitude lower than the quantum efficiency, the background rate of detectors would be determined by photons. So the knowledge of the quantum spectral sensitivity of muon detectors is vital for correct estimation of the muon system performance.

The pressurized drift tubes (PDT) are approved as the base detector of the barrel muon system of ATLAS. Recently we have studied the spectral sensitivity of the aluminum PDT for neutrons using a neutron beam from the JINR pulse neutron source IBR-30 /5/. In the present we show the results of measurements of the quantum efficiency of the aluminum PDT in the energy range from 6 keV up to 1.3 MeV.

The first measurements of the spectral quantum efficiency of such type detectors were carried out in 1950 for Geiger-Muller counters using different radioactive isotopes /6/. For the counter with  $0.77\text{ g/cm}^2$  bismuth cathodes filled with Ar (9 cm Hg) and ethyl alcohol (1 cm Hg) mixture it was found that the absorption of the gamma rays in the gas mixture can generally be neglected. The gamma quantum is detected if it is absorbed in the counter wall and ejects an electron into the sensitive volume of the counter. The efficiency essentially depends on where the photon passes through the counter and has two peaks near the both edges of the counter. An average efficiency for infinitely large source distance depends upon photon energy and varies between 0.7 to 2%.

Recently the sensitivity of iron, aluminum and mylar PDT to gammas from  $^{60}\text{Co}$  source was measured in the frame of GEM R&D /2/. The measured efficiencies were approximately 1%, which is in good agreement with GEANT simulation. Some discrepancies were pointed out only for mylar PDT.

## Experimental Set-Up

The PDT efficiency for gamma-rays of different energies was measured by irradiation of the detector with collimated gamma-rays from radioactive sources. The activities of the sources were known within 1%. The schematic description of the experimental set-up is shown in fig.2. The PDT was an aluminum tube 30 cm

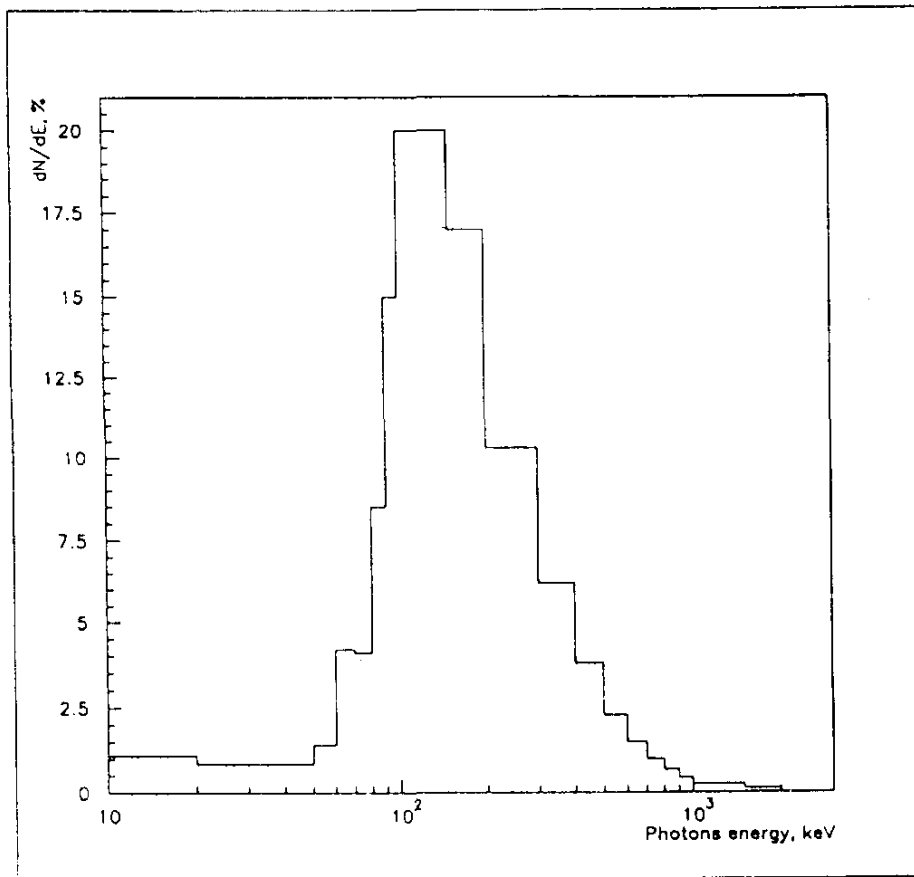


Fig.1 Expected spectrum of background photons

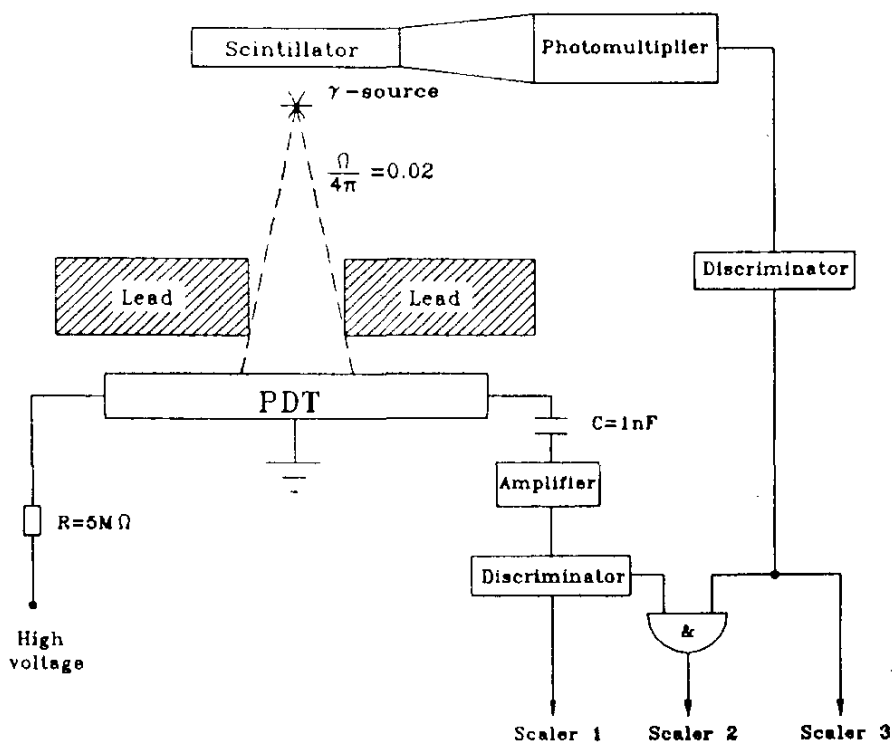


Fig.2 Schematic description of the experimental set-up

long, 30 mm in diameter and of 0.5 mm thick wall. The signal electrode was made of a 100  $\mu\text{m}$  Cu-Be wire. The tube was filled with Ar + 15%CO<sub>2</sub> + 2.5%*i*C<sub>4</sub>H<sub>10</sub> gas mixture at 3 atm.

The photon flux was collimated by lead blocks so that the irradiated area was about 9 cm<sup>2</sup>. The signals from the PDT were amplified and fed into the discriminator. The PDT was operated in the limited streamer mode and the threshold was set to 13.5  $\mu\text{A}$ . The pulse width was 1  $\mu\text{s}$  in order to prevent counting of the afterpulses.

The tube efficiency was calculated as follows:

$$\varepsilon = 4\pi \frac{N - N_{BackGr}}{n \Delta t \Omega A}$$

where  $N$  and  $N_{BackGr}$  are the numbers of PDT counts with and without radioactive source during the  $\Delta t$  measurement time,  $n$  is the effective number of gammas emitted by the source per decay,  $\Omega$  is the solid angle subtended by the PDT,  $A$  is the gamma-source activity.

In order to investigate the possible influence on the results of gammas scattered into the counter by collimator, the count rate versus the collimator width was measured. The results are shown in fig.3. The PDT rate is only proportional to the slit width and the influence of an interaction of the photons in the collimator walls is inessential.

To check our results the PDT efficiency for <sup>60</sup>Co photons was also measured by the  $\gamma - \gamma$  coincidence method. The second photon was detected by a scintillating counter (see fig.2). The scintillator was a polystyrene based 120  $\times$  110  $\times$  8mm<sup>3</sup> rectangular bulk. The results of both methods are in good agreement with each other.

## Efficiency Simulation

For better understanding of the role of different processes causing photon detection by PDT, the calculations in the frame of a simple model were carried out. The contribution of pair production can be neglected because the role of this process is essential when photon energies are more than 10 MeV. In fig.4 the PDT cross-section and the trajectory of a photon passing through PDT at distance  $l$  from its axis are shown. It was supposed that if an electron produced by interaction of a photon with the tube reaches the gas volume, it will be registered with 100% efficiency. It was also supposed that electrons produced within the tube wall move straight and their path length is determined by their initial energy and equal to the mean electron range in aluminum /6/. Then one can calculate the contribution of the photon absorption within the tube wall to the total quantum efficiency as follows:

$$\varepsilon(E_\gamma) = \int_0^R \frac{dl}{R} \int_0^d dx \frac{e^{-\frac{x}{\lambda}}}{\lambda} \int_0^{\frac{\pi}{2}} \frac{d\theta}{\pi/2} \int_0^{2\pi} d\phi \frac{\sin \phi}{2\pi} \frac{d\sigma}{d\Omega} f(\phi, \theta, x, E_e, l),$$

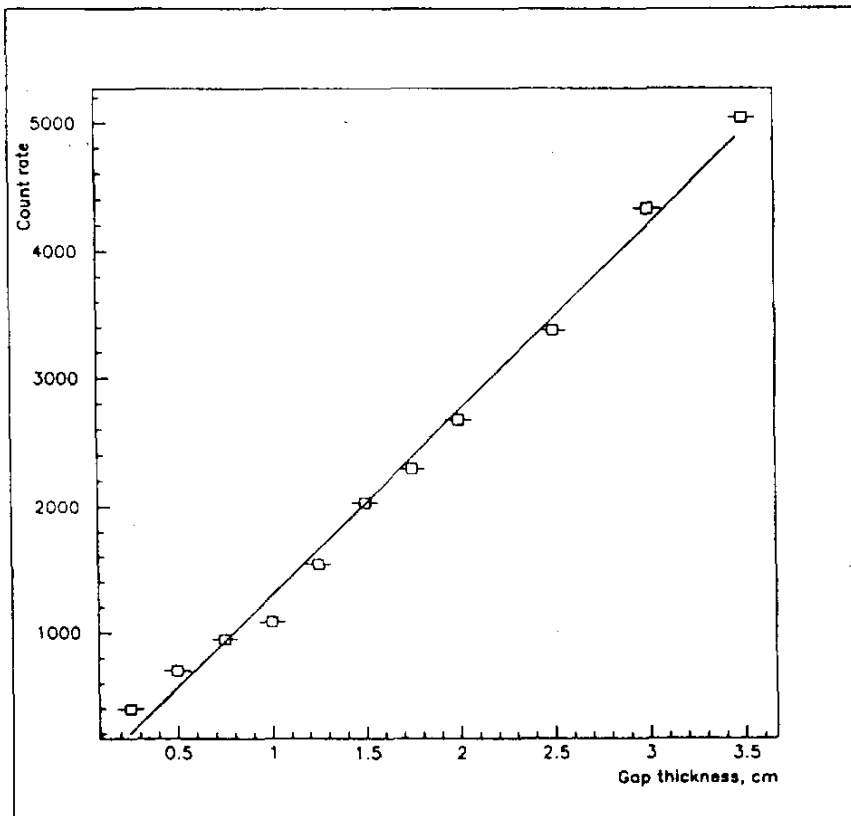


Fig.3 PDT count rate versus collimator width

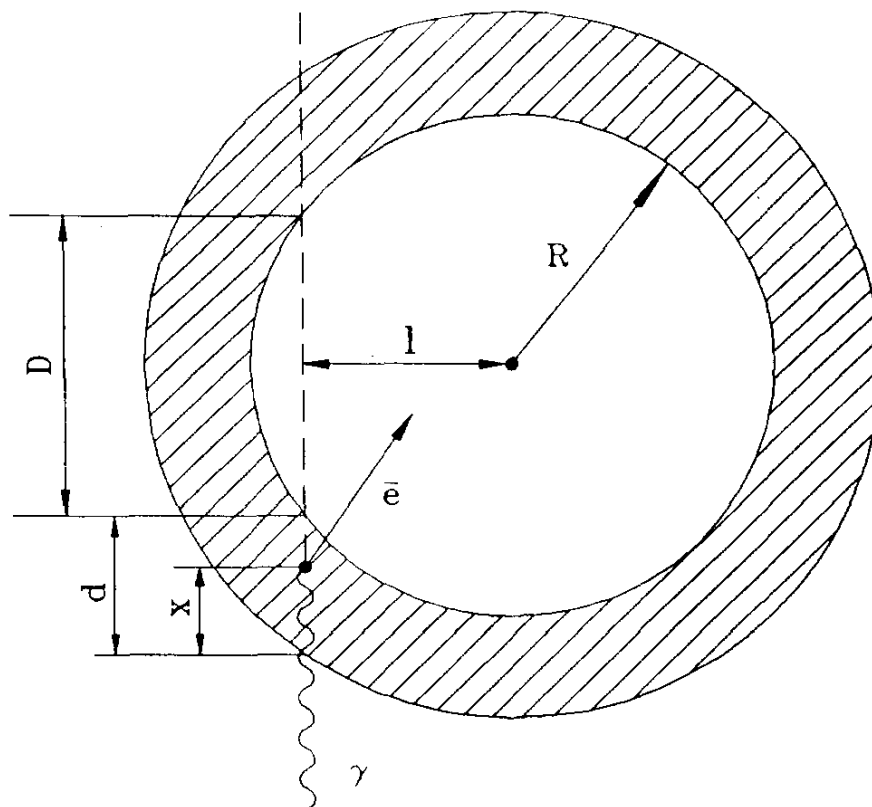


Fig.4 Cross-section of PDT and trajectory of a passing photon

where  $E_\gamma$  is the energy of the incident photon,  $x$  is the distance passed by the photon within the wall before absorption (see fig.4),  $d$  is the wall thickness on the photon way,  $E_e$  is the energy of the produced electron,  $\lambda$  is the mean range of the photon corresponding to Compton scattering or photoeffect cross-sections. The function  $f$  is equal to 1 if the electron emitted at polar  $\theta$  and azimuthal  $\phi$  angles reaches the tube gas volume, and is equal to zero otherwise. The values of the total  $\sigma_{tot}$  and differential  $\frac{d\sigma}{d\Omega}$  cross-sections of photoeffect and Compton scattering were taken from [7.8/].

The contribution of the photon absorption in the gas to the PDT efficiency was calculated as follows:

$$\eta_{gas} = \left[ 1 - \exp\left(-\frac{d}{\lambda_{wall}}\right) \right] \exp\left(-\frac{D}{\lambda_{gas}}\right),$$

where  $D$  is the part of the photon trajectory within the gas volume,  $\lambda_{wall}$  and  $\lambda_{gas}$  are the photon mean ranges in the detector wall and in the gas mixture respectively.

The results of calculations are shown in fig.5 along with the results of GEANT simulation. In GEANT simulation it was also supposed that a photon is detected if an electron is emitted into gas volume. GEANT cuts for minimum electron and photon energies were set at 10 keV. The energy dependence of the PDT quantum efficiency has two features: a narrow peak at 20 keV and a wide maximum near 1 MeV. The tube efficiency near the low energy peak is completely determined by photoabsorption in gas mixture and is proportional to the gas pressure. The efficiency magnitude and the shape of the left slope of the peak are determined by the PDT wall thickness. The right slope of the peak is due to a decrease in the photoeffect cross-section.

For photon energies more than 200 keV the PDT efficiency is mainly defined by Compton scattering in the tube wall. The efficiency increases up to 1.5% at 1 MeV and then slightly decreases. In the low-energy peak range the GEANT results are in good agreement with our model while at higher energies they are lower by a factor of two.

## Results

During the measurements 9 radioactive isotopes were used as sources of gamma-rays. Principal characteristics of these sources are presented in Table 1.

For this measurements only  $^{54}\text{Mn}$ ,  $^{65}\text{Zn}$  and  $^{55}\text{Fe}$  are sources of pure monoenergetic photons. The other isotopes have  $\gamma$ 's with different energies and moreover some isotopes eject charged particles. Therefore in each case it was required to separate contributions of photons of different energies. For example, fig.6 shows the dependence of the PDT count rate on gas pressure for  $^{60}\text{Co}$ ,  $^{241}\text{Am}$  and  $^{133}\text{Ba}$ . In the case of  $^{60}\text{Co}$  the count rate practically does not depend on pressure. It

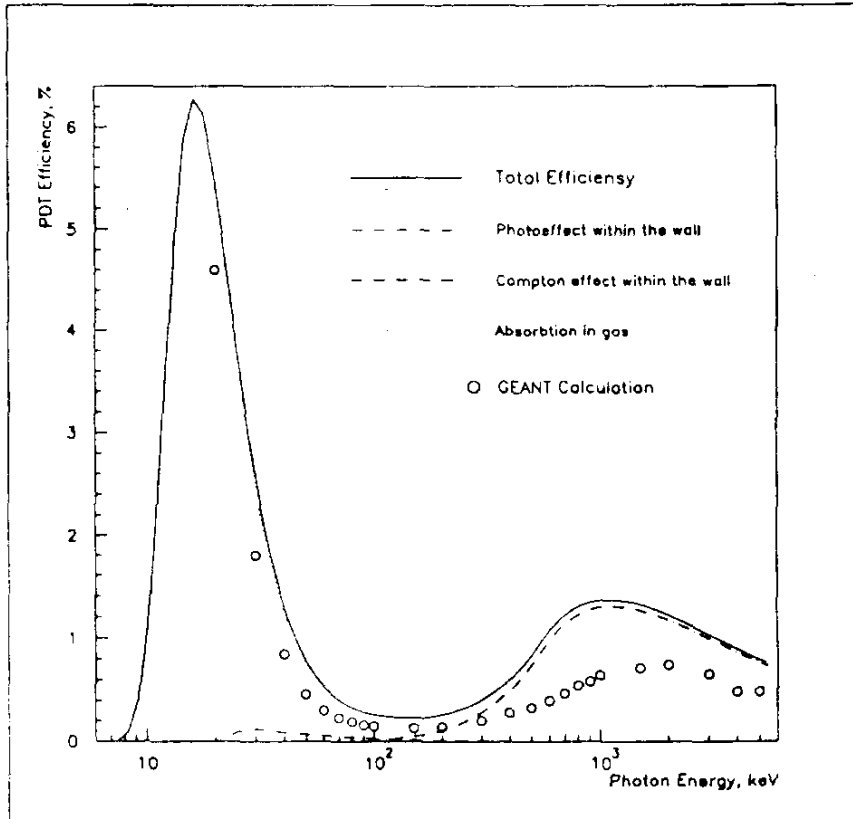


Fig.5 Calculated quantum efficiency of the PDT as a function of photon energy

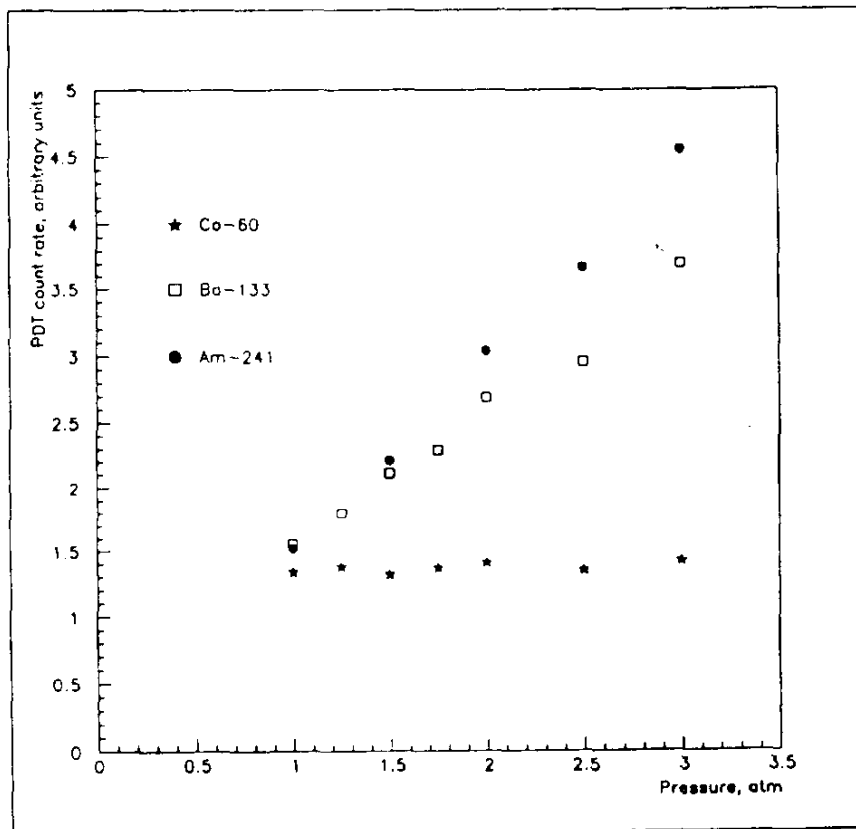


Fig.6 The PDT count rate versus gas pressure

Table 1

Source	$^{60}\text{Co}$	$^{65}\text{Zn}$	$^{54}\text{Mn}$	$^{137}\text{Cs}$	$^{22}\text{Na}$	$^{133}\text{Ba}$	$^{241}\text{Am}$	$^{57}\text{Co}$	$^{55}\text{Fe}$
Energy, keV	1332 1173	1115	834	662	511 1275	280-380 80 33	60 14-20	130 14	5.9
Emission, %	100 100	50.7	100	85	180 100	97 32.8 124	36 39	96.2 9.6	27.7
Max. energy of $e^-$ , keV	310	-	-	514	-	-	-	-	-
Activity, kBq	81.7	4.0	5.7	106	42	81.2	94.5	4.2	$10^6$

means that the PDT efficiency for  $^{60}\text{Co}$  photons is completely due to photon interactions in the tube wall. On the other hand, the efficiency strongly depends on pressure if the PDT is irradiated by  $^{241}\text{Am}$  or  $^{133}\text{Ba}$ . Moreover the extrapolation of these dependencies to the "zero" pressure shows that the efficiency for gammas from  $^{241}\text{Am}$  is only proportional to the gas pressure while in the case of  $^{133}\text{Ba}$  the efficiency contains some constant contribution from photon interaction with tube wall.

$^{60}\text{Co}$  This source emits in one decay two photons with rather close energies. Therefore the measured efficiency was attributed to their mean energy 1253 keV. Electrons emitted by  $^{60}\text{Co}$  have maximal energy 314 keV and cannot reach the PDT sensitive volume because their range in aluminum is only 0.4 mm /6/.

$^{137}\text{Cs}$  Apart from 661.5 keV photons the  $^{137}\text{Cs}$  source also emits electrons with maximal energy of 514 keV, whose range in aluminum is 1 mm. Therefore additional aluminum filters were placed between the tube and the radioactive source. The photon absorption in the filter was taken into account by extrapolating the results of measurements to filter of zero thickness.

$^{22}\text{Na}$  In one decay the  $^{22}\text{Na}$  source ejects two 511 keV photons and one photon with energy 1275 keV, which is very close to average energy of  $^{60}\text{Co}$  photons. This have allowed determination of the efficiency for 511 keV photons using the measured efficiency for  $^{60}\text{Co}$ .

$^{57}\text{Co}$   $^{57}\text{Co}$  emits X-rays with energy of 14.4 keV in addition to 122.1 and 136.5 keV photons. Although the probability of X-rays emission is 10 times less than that of gamma emission, the PDT efficiency for 14 keV X-rays is 25 times higher than that for 130 keV photons (fig.5). The main contribution to the



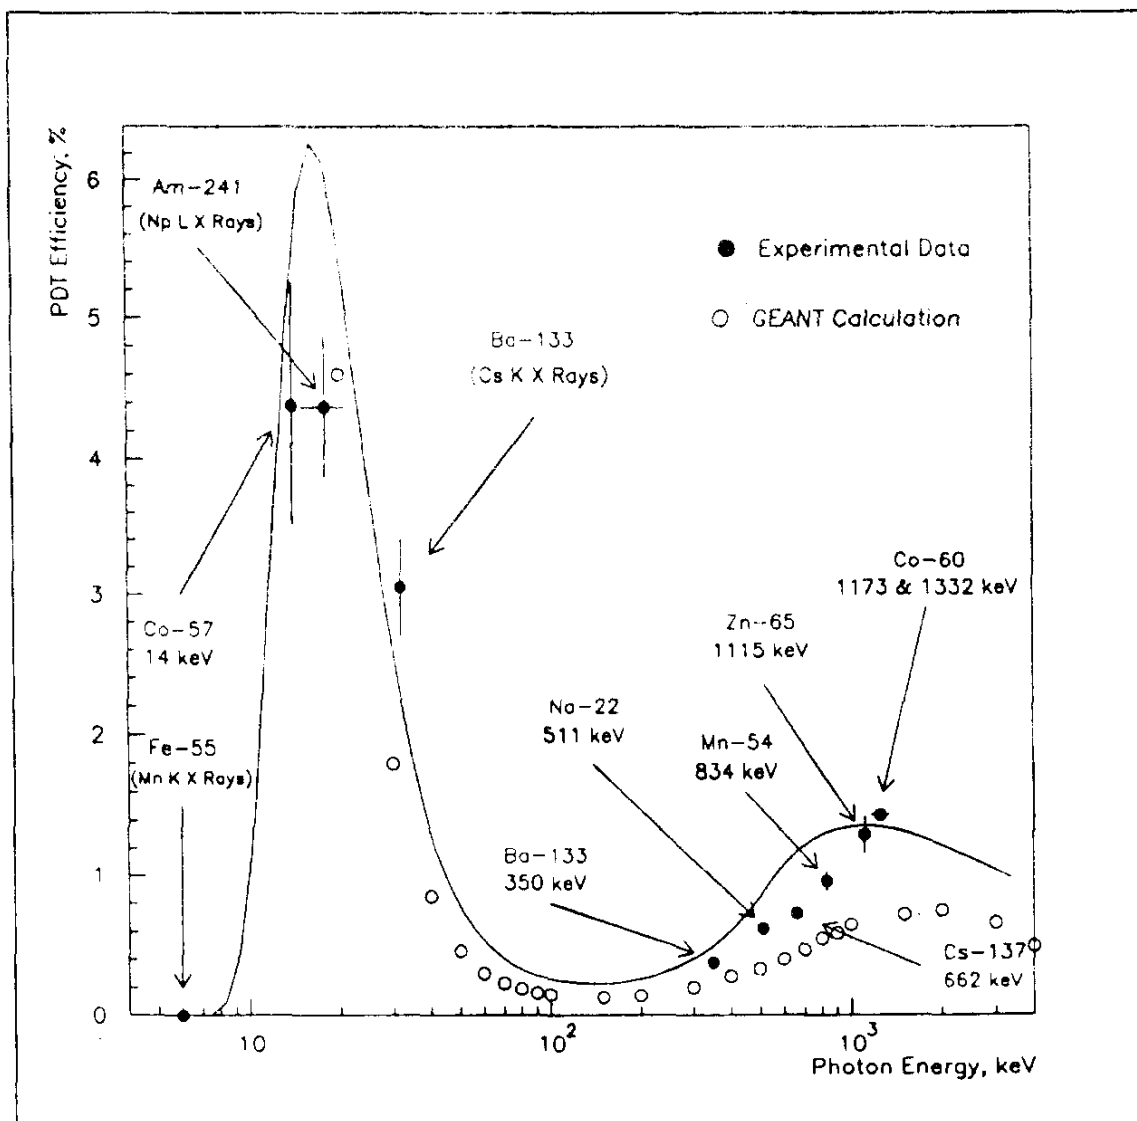


Fig.7 The PDT efficiency versus photon energy

PDT efficiency in this case is given by X-rays. To obtain the correct PDT efficiency at 14 keV the contribution from 130 keV photons was subtracted supposing that efficiency to this photons is equal to the calculated value.

<sup>241</sup>Am As in the case of <sup>57</sup>Co, the main contribution to the PDT efficiency for <sup>241</sup>Am is given by L(Np) X-rays with energy between 14 and 20 keV rather than 60 keV photons. The efficiency value was corrected by subtraction of a calculated contribution of 60 keV photons. <sup>241</sup>Am also emits 5.5 MeV  $\alpha$ -particles, but they cannot influence the results of measurements because of their too short range.

<sup>133</sup>Ba <sup>133</sup>Ba produces the most complicated gamma spectrum. It emits 33 and 80 keV photons whose detection probability is proportional to the gas pressure. Also <sup>133</sup>Ba emits photons with energies in the range of 280÷380 keV where the PDT efficiency does not depend on the gas pressure. The contributions of gammas with different energies were separated using the pressure dependence of tube count rate. The efficiency at 350 keV mean energy was obtained by extrapolating the results of the measurements to "zero" pressure. To find the efficiency at 33 keV the contribution of the 80 keV photons was subtracted as in the cases of <sup>241</sup>Am and <sup>57</sup>Co.

The measured values of the PDT efficiency at different photon energies are presented in fig.7. One can see that in the whole energy range they are in good agreement with the results of our model. At the same time the GEANT results are by a factor of two lower than the experimental values within the 0.3÷1.2 MeV energy range.

## Summary

The sensitivity of aluminum PDT filled with Ar + 15%CO<sub>2</sub> + 2.5%*i*C<sub>4</sub>H<sub>10</sub> gas mixture at 3 atm to gamma-rays have been measured using a set of standard radioactive isotopes whose activities were known with 1% precision. The results were verified for the <sup>60</sup>Co source by the  $\gamma - \gamma$  coincidence method.

In order to elucidate the role of different processes that cause photon detection we have calculated the PDT efficiency in the frames of a model based on assumption that the photon will be detected if it produces an electron reaching the PDT sensitive volume. Results of the calculation are in good agreement with the experimental data. At the same time the results of GEANT simulation agreed with the experimental data only at low energies. At gamma energies  $E_\gamma > 200$  keV GEANT gives systematically lower efficiency values than the experimental data.

At photons energies more than 200 keV the Compton scattering in tube wall gives the main contribution to the PDT quantum efficiency. The role of photoabsorption at this energies is negligible. Below 100 keV the photoabsorption in argon is the main mechanism for gamma detection. The PDT efficiency reaches 6% at

18 keV. The photons with energy below 10 keV cannot pass through the tube wall and the energy of produced electrons is too low to reach the gas volume.

Based on the results for PDT sensitivity to gammas an average PDT efficiency for ATLAS photon background have been calculated. The mean efficiency is determined to be 0.45 %. Comparing the PDT efficiency for photons and for neutrons /5/ one can conclude that the photons contribution to the PDT occupancy is by a factor of two more than that of neutrons.

## References

1. ATLAS, Letter of Intent, CERN/LHCC/92-4 (1992)
2. S.Boyarinov et al. Neutron and Gamma Sensitivity of Gas Detector, GEM TN-93-345 (1993).
3. G.Battistoni, A.Ferrari, P.K.Sala. Background rate simulation and sensitivity of  $\mu$ -chambers. Given in ATLAS plenary meeting, Oct 1 1993
4. GEM, Technical Design Report, GEM-TN-93-262 (1993).
5. Chelkov et al., Investigation of spectral efficiency of PDT for detection of neutrons. ATLAS Internal Note, MUON-NO-031, 1993
6. M.Berger, S.Seltzer. Tables of Energy Losses and Ranges of electrons and positrons. NASA SP-3012, 1964
7. O.R.Frisch (Consulting Editor) The Nuclear Handbook London, George Newnes Limited, 1958
8. W.R.Leo. Techniques for Nuclear and Particle Physics Experiments Springer-Verlag Berlin Heidelberg 1987.

Received by Publishing Department  
on February 2, 1995.

**The Publishing Department  
of the Joint Institute for Nuclear Research  
offers you to acquire the following books:**

Index	Title
E7-93-274	Proceedings of the International School-Seminar on Heavy Ion Physics. Dubna, 1993 (2 volumes, 498 and 590 pp., stiffened cover, in English)
Д14-93-325	Proceedings of the Workshop «Activation Analysis in Environment Protection». Dubna, 1992 (in Russian and English)
Д1,9,13-93-459	Proceedings of the II Workshop on JINR Tau-Charm Factory. Dubna, 1993 (266 p. in Russian and English)
E7-94-19	Proceedings of the International Conference on Dynamical Aspects of Nuclear Fission. Smolenice, 1993 (318 p. in English)
94-55	Proceedings of the International Bogoliubov Memorial Meeting. Dubna, 1993 (216 p. in Russian and English)
E2-94-95	Proceedings of the International Symposium «Dubna Deuteron-93». Dubna, 1993 (390 p. in English)
Д14-94-269	Abstracts of the XXX Conference on Low Temperature Physics. Dubna, 1994 (2 volumes in Russian and English)
E7-94-270	Proceedings of the Workshop on Physical Experiments and First Results on Heavy Ion Storage and Cooler Rings. Smolenice, 1992 (324 p. in English)
E13-94-290	Abstracts of the 17th International Conference «Nuclear Tracks in Solids». Dubna, 1994 (296 p. in English)
E2-94-347	International Workshop «Symmetry Methods in Physics». In Memory of Professor Yu.A.Smorodinsky. Dubna, 1993 (2 volumes, 602 p. in English)
E4-94-370	Proceedings of the IV International Conference on Selected Topics in Nuclear Structure. Dubna, 1994 (412 p. in English)

---

Index	Title
E4-94-386	Proceedings of the VI Trilateral German-Russian-Ukrainian Seminar on High-Temperature Superconductivity. Dubna, 1994 (340 p. in English)

---

Please apply to the Publishing Department of the Joint Institute for Nuclear Research for extra information. Our address is:

Publishing Department  
Joint Institute for Nuclear Research  
Dubna, Moscow Region  
141980 Russia  
E-mail: [publish@pds.jinr.dubna.su](mailto:publish@pds.jinr.dubna.su).

Квантовая эффективность дрейфовых трубок  
высокого давления

При помощи набора стандартных калиброванных радиоактивных источников была измерена эффективность дрейфовых трубок высокого давления к гамма-излучению в области энергий от 5,9 кэВ до 1,3 МэВ. Детекторы были изготовлены из алюминиевых трубок и заполнены смесью Ar, 15% CO<sub>2</sub> и 2,5% iC<sub>4</sub>H<sub>10</sub> при давлении 3 атм. Экспериментальные результаты сравниваются с результатами вычислений в рамках предложенной модели, а также с результатами моделирования по программе GEANT. Результаты наших вычислений хорошо согласуются с экспериментальными данными, тогда как GEANT дает заниженные в два раза значения эффективности в диапазоне энергий 200 кэВ < E<sub>γ</sub> < 1300 кэВ. Значение средней эффективности трубок в условиях гамма-фона детектора ATLAS составляет 0,45%.

Работа выполнена в Лаборатории ядерных проблем ОИЯИ.

Сообщение Объединенного института ядерных исследований. Дубна, 1995

## Gamma Sensitivity of Pressurized Drift Tubes

Using a set of commonly used radioactive sources, the efficiency of pressurized drift tubes for gammas with energy from 5.9 keV up to 1.3 MeV has been measured. The tube was made of aluminium and filled with Ar, 15% CO<sub>2</sub> and 2.5% iC<sub>4</sub>H<sub>10</sub> gas mixture at 3 atm. The measured efficiency is compared with results of calculations in the frame of our simple model as well as with that of the Monte Carlo simulation using GEANT code. The results of our calculations are in agreement with experimental data, while GEANT simulation tends to give lower efficiency in the energy range of 200 keV < E<sub>γ</sub> < 1300 keV. The average efficiency of the tube in the field of ATLAS gamma background is about 0.45%.

The investigation has been performed at the Laboratory of Nuclear Problems, JINR.

Communication of the Joint Institute for Nuclear Research. Dubna, 1995

Макет Т.Е.Попеко

Подписано в печать 24.02.95  
Формат 60×90/16. Офсетная печать. Уч.-изд.листов 0,72  
Тираж 350. Заказ 47993. Цена 432 р.

Издательский отдел Объединенного института ядерных исследований  
Дубна Московской области