

СООБЩЕНИЯ
ОБЪЕДИНЕННОГО
ИНСТИТУТА
ЯДЕРНЫХ
ИССЛЕДОВАНИЙ

Дубна

EE

E9-97-90

P.F.Beloshitsky, V.F.Shevtsov

SPACE CHARGE EFFECTS
IN AXIAL INJECTION LINE
FOR U-400 CYCLOTRON

SCAN-9707080



CERN LIBRARIES, GENEVA

swy729

1997

1 Introduction

The problem of the space charge influence on the beam dynamics in transport lines can be studied by different methods, depending on the goals. The only solution for a uniform density continuous beam is the Kapchinsky-Vladimirsky distribution [1]. Many computer codes have been developed to take into account non-linear space charge fields, various magnetic and electrostatic elements, beam bunching etc. [2, 3, 4, 5, 6, 7, 8]. The space charge influence on the transverse ion beam dynamics in the axial injection line for the U400 cyclotron has been investigated by use of the method of the distribution function moments [9], [10]. No particles are traced in this approach. The information computed concerns averaged values (transverse beam sizes and velocities, cross terms). The method previously had been applied for the calculation of a high intensity beam injection line for the INR Meson Factory (Troitsk) [11]. The program used then has been substantially revised now to extend magnetic elements available for a user, to make it comfortable in the interactive mode and to provide it with the proper graphics.

2 Moment Method Use for Beam Transport Calculation

Let us define second order distribution function moments matrix M

$$M^{ij} = \begin{pmatrix} M_{xx} & M_{xv} \\ M_{xv}^* & M_{vv} \end{pmatrix}, \quad (1)$$

$$M_{xx}^{ij} = \overline{x_i x_j} = \int f x_i x_j d\vec{x} d\vec{v}, \quad M_{xv}^{ij} = \overline{x_i v_j} = \int f x_i v_j d\vec{x} d\vec{v},$$

$$M_{vv}^{ij} = \overline{v_i v_j} = \int f v_i v_j d\vec{x} d\vec{v}, \quad i, j = 1, 2. \quad (2)$$

Here f is the beam distribution function, and x_i, v_j are particle coordinates and velocities. The evolution of the matrix M under beam transportation through a beamline with linear electromagnetic fields is defined by the system of equations [10]

$$\begin{aligned} \frac{dM_{xx}}{ds} &= M_{xv} + M_{xv}^*, \\ \frac{dM_{xv}}{ds} &= M_{vv} + M_{xx}B^* + M_{xv}^*A^*, \\ \frac{dM_{vv}}{ds} &= BM_{xv} + M_{xv}^*B^* + AM_{vv} + M_{vv}A^*, \end{aligned} \quad (3)$$

where $s = v_z t$ and $v_z = \beta c$ are longitudinal coordinate and velocity, the matrix B includes external and space charge forces, matrix A includes external forces only (magnetic field defined by particle transverse motion is neglected), the matrices M^* , A^* , B^* are transposed matrices M , A , B . The matrices A and B for typical magnetic elements are given in Appendix.

Space charge forces in (3) are considered to be linear, that is correct for the beam distribution functions with a particle density constant on 4D ellipse in transverse beam phase space [10], [12]. In this case

$$B^* = \frac{I}{\beta^2 \gamma^2 I_A} \frac{M_{xx}^{-1/2}}{Sp M_{xx}^{1/2}} \quad (4)$$

with Alfvén current $I_A = \beta \gamma A m c^2 / Z e$, γ is relativistic factor, $A m$ and $Z e$ are ion mass and charge. Matrix $M_{xx}^{1/2}$ is defined by conditions $M_{xx}^{1/2} M_{xx}^{1/2} = M_{xx}$, $M_{xx}^{1/2} M_{xx}^{-1/2} = I$, I is the unit matrix. Direct calculation gives for the elements of the matrices $M^{1/2}$ and $M^{-1/2}$

$$M_{11}^{1/2} = \frac{M_{11} + (\det M_{xx})^{1/2}}{[Sp M_{xx} + 2(\det M_{xx})^{1/2}]^{1/2}}, \quad M_{12}^{1/2} = \frac{M_{12}}{[Sp M_{xx} + 2(\det M_{xx})^{1/2}]^{1/2}},$$

$$M_{22}^{1/2} = \frac{M_{22} + (\det M_{xx})^{1/2}}{[Sp M_{xx} + 2(\det M_{xx})^{1/2}]^{1/2}}, \quad M_{21}^{1/2} = M_{12}^{1/2}, \quad (5)$$

$$M_{11}^{-1/2} = \frac{M_{22}^{1/2}}{\det(M^{1/2})}, \quad M_{12}^{-1/2} = -\frac{M_{12}^{1/2}}{\det(M^{1/2})}, \quad M_{21}^{-1/2} = M_{12}^{-1/2}, \quad M_{22}^{-1/2} = \frac{M_{11}^{-1/2}}{\det(M^{1/2})}, \quad (6)$$

where M_{ij} are elements of the matrix M_{xx} .

3 Brief Description of Program

The program is based on solving of 10 differential equations (3) by 4th order Runge-Kutta method. Moments of the first order can be added easily. It has been written for IBM PC, and is used in interactive mode, with graphic presentation of results. File with beam parameters along a beamline is also available.

Along with magnetic elements listed in Appendix, arbitrary solenoidal magnetic field given by user, is accepted also. After the first beam transportation through a beamline program puts in the memory beam parameters at the entrance and exit of every element. For the next variant, user can change parameters in arbitrary element and start from it, keeping envelopes before untouched. The beamline parameters can be optimized in order to fit the M matrix elements.

4 Space Charge Effects in Axial Injection Line for U400 Cyclotron

The following parameters of the beam were used under calculations: both horizontal and vertical sizes are equal to 0.4cm, the emittance is 150π mm-mrad. Two variants of ion mass to charge ratio A/Z equal 5 and 10 have been used under investigation. The beam kinetic energy at the injection line entrance corresponds to the ECR source voltage of 26.5kV and 13kV for these cases respectively. The parameters of the axial injection line from the ECR ion source for the U400 cyclotron are summarized in Table 1.

Element	Magnetic field kGs	Length in	Aperture/Gap cm	Pole face angle degree
Magnetic field of ECR source	from 7.4 to 0	0.44		
Drift space		0.21		
Solenoid	≤ 6.0	0.134	8.5	
Drift space		0.821		
Analysis magnet, 102°	1.4998/1.488 ^o	0.3115	7	33.5
Drift space		1.433		
Vertical bending magnet, 90°	1.3124/1.3024	0.31416	8	26.5
Drift space		1.10		
Axial magnetic field	0.2	0.1		
Drift space		0.25		
Solenoid	≤ 1.7	1.12	21.5	
Cyclotron magnetic field	up to 22.2	2.3875		

Table 1: Parameters of Axial Injection Line for Cyclotron U400

Two values of magnetic fields given for the analysis magnet and for the vertical bending magnet correspond to A/Z equal to 5 and 10 respectively. For the solenoids the maximum magnetic fields are given. It should be noted that second solenoid has three equal sections with independent power supply.

In the beginning of the study, optimized values of the beam sizes at the end of the beamline in the absence of space charge forces have been found. They are $\sigma_x=5.4\text{mm}$, $\sigma_y=3.5\text{ mm}$ for $A/Z=5$ and $\sigma_x=3.7\text{ mm}$, $\sigma_y=6.0\text{ mm}$ for $A/Z=10$. It is necessary to note that the strong axial magnetic field (more than 20 kGs) of the U400 cyclotron at the end of the injection line makes the control of the exit beam parameters to be very difficult. To improve it, the installation of two quadrupoles located after the vertical bending magnet is under consideration.

With taking into account space charge forces (and keeping magnetic fields in solenoids unchanged), the beam sizes at the end of the injection line are increased, as it is shown in Fig.1 and Fig.2. From these figures one concludes that the space charge effects are important when current $I > 500\mu\text{A}$ for $A/Z=5$ and $I > 150\mu\text{A}$ for $A/Z=10$.

The influence of space charge effects on beam envelopes in the injection line for $A/Z=5$ and current $I = 1000\mu\text{A}$ is shown in Fig.3 and 4. For comparison the beam envelopes in the absence of space charge effects ($I=0$) are shown also. The beam sizes at the end of the injection line are increased to $\sigma_x=5.9\text{mm}$ and $\sigma_y=8.8\text{mm}$ compared with $\sigma_x=5.4\text{mm}$ and $\sigma_y=3.5\text{mm}$ for negligible space charge effects. To improve beam envelopes the solenoid strengths have been readjusted. As a result the beam sizes for $I=1000\mu\text{A}$ have been made very close to those for $I = 0$ (Fig.5 and 6). After optimization beam sizes at the end of the injection line are $\sigma_x=5.2\text{mm}$ and $\sigma_y=4.8\text{mm}$.

The beam envelopes in injection line for $A/Z=10$ variant without space charge forces are shown in Fig.7 and 8. The space charge effects in this case are much more stronger in accordance with $\beta\gamma A/Z$ scaling (formula (4)). The beam sizes at the end of injection line are $\sigma_x=13.1\text{mm}$ and $\sigma_y=9.8\text{mm}$. Readjusting of the solenoids strengths is not so effective as in the previous case, but keeps beam sizes tolerable (Fig.9 and 10). The beam sizes at the end of the beamline are $\sigma_x=6.6\text{mm}$, $\sigma_y=7.2\text{mm}$.

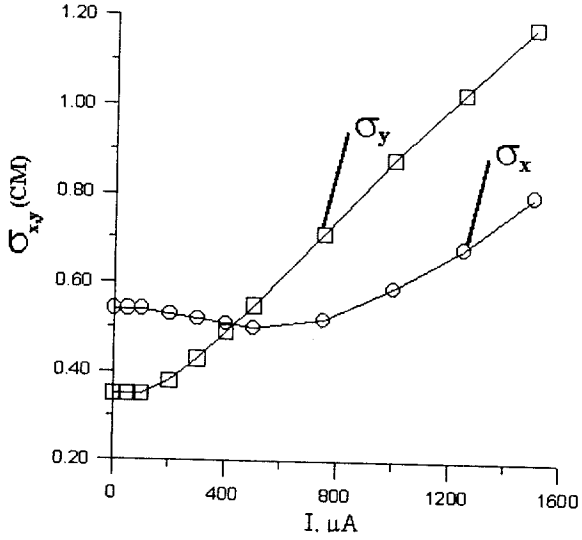


Figure 1: Dependences of the beam sizes at the end of injection line versus current for $A/Z=5$.

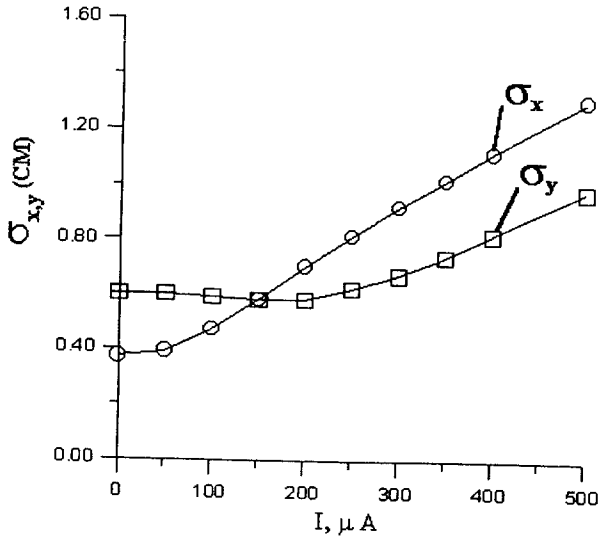


Figure 2: Dependences of the beam sizes at the end of injection line versus current for $A/Z=10$.

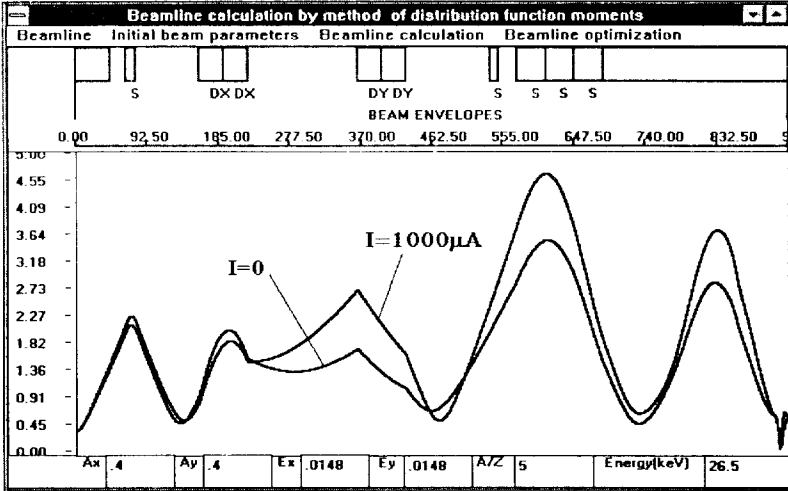


Figure 3: Horizontal beam envelopes for $A/Z=5$, $I=0$ and $I=1000 \mu\text{A}$. No optimization has been made in solenoid strengths.

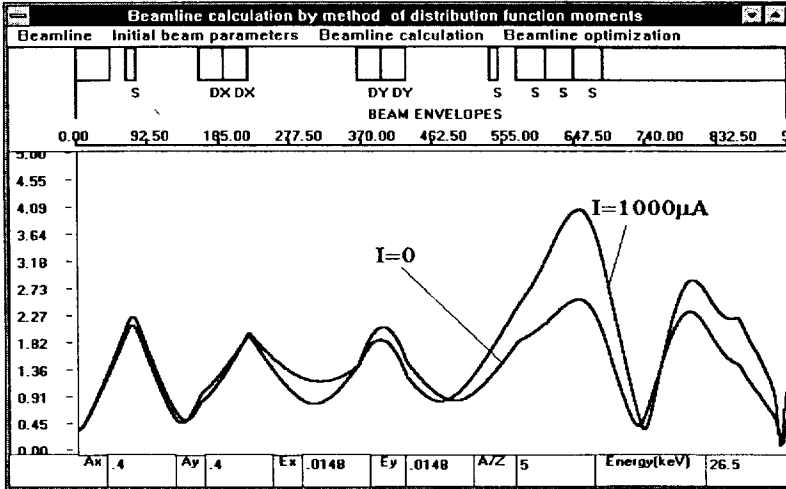


Figure 4: Vertical beam envelopes for $A/Z=5$, $I=0$ and $I=1000 \mu\text{A}$. No optimization has been made in solenoid strengths.

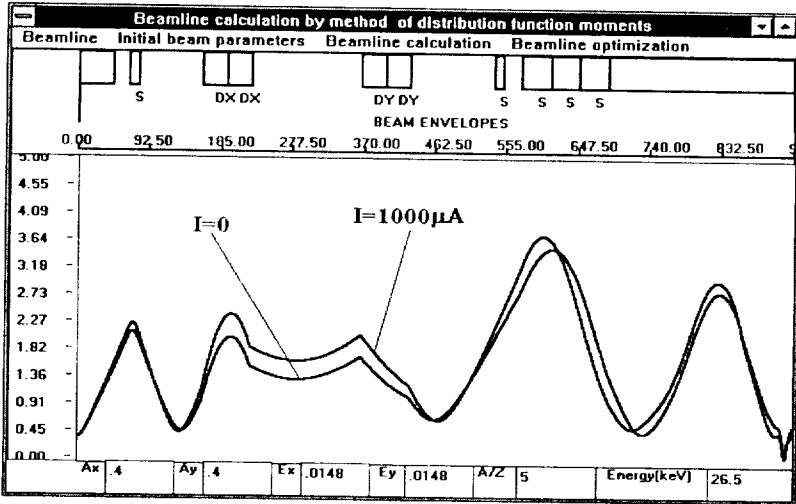


Figure 5: Horizontal beam envelopes for $A/Z=5$ in the absence of space charge effects (curve marked by $I=0$), and for current $I=1000 \mu\text{A}$. For the second case injection line has been optimized.

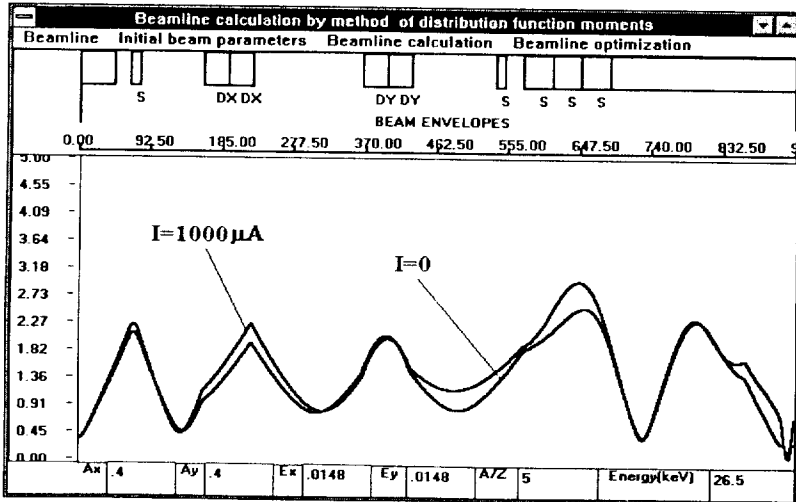


Figure 6: Vertical beam envelopes for $A/Z=5$ in the absence of space charge effects (curve marked by $I=0$), and for current $I=1000 \mu\text{A}$. For the second case injection line has been optimized.

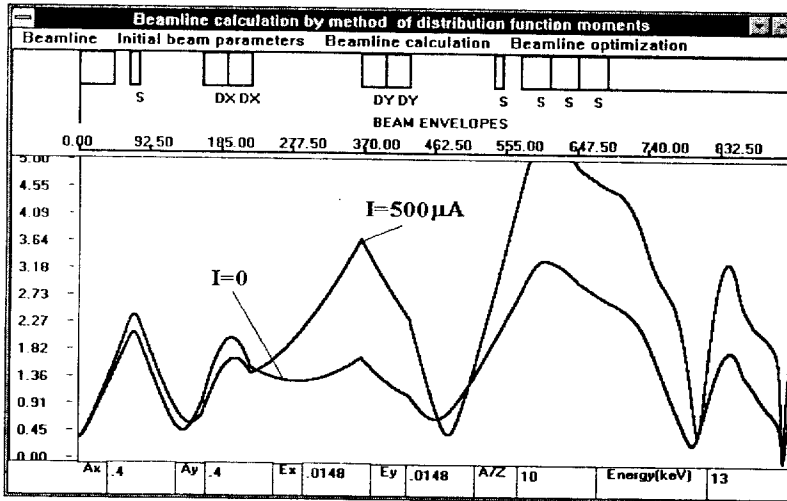


Figure 7: Horizontal beam envelopes for $A/Z=10, I=0$ and $I=500\mu\text{A}$. No optimization has been made in solenoid strengths.

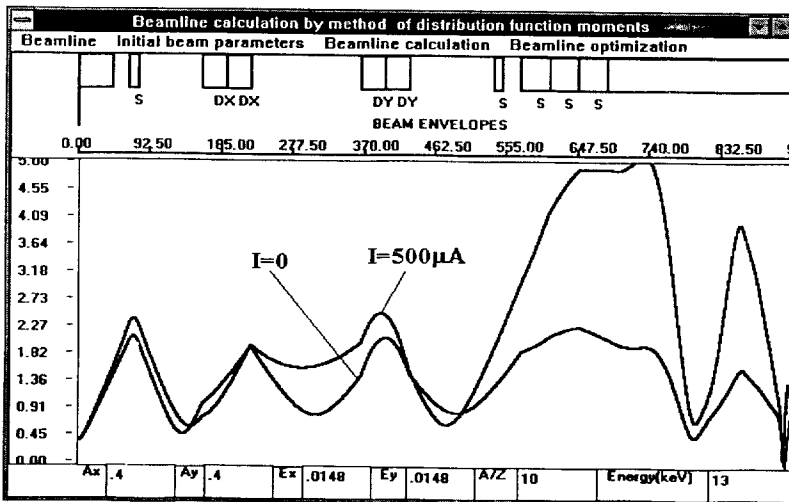


Figure 8: Vertical beam envelopes for $A/Z=10, I=0$ and $I=500\mu\text{A}$. No optimization has been made in solenoid strengths.

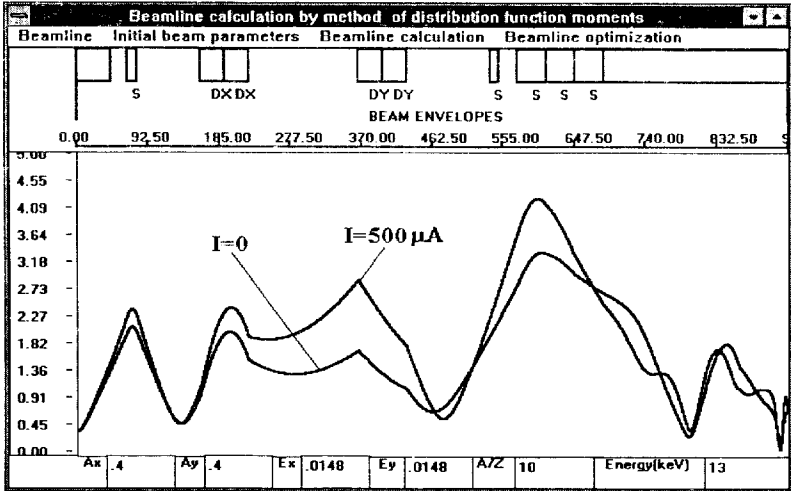


Figure 9: Horizontal beam envelopes for $A/Z=10$ in the absence of space charge effects (curve marked by $I=0$), and for current $I=500 \mu\text{A}$. For the second case injection line has been optimized.

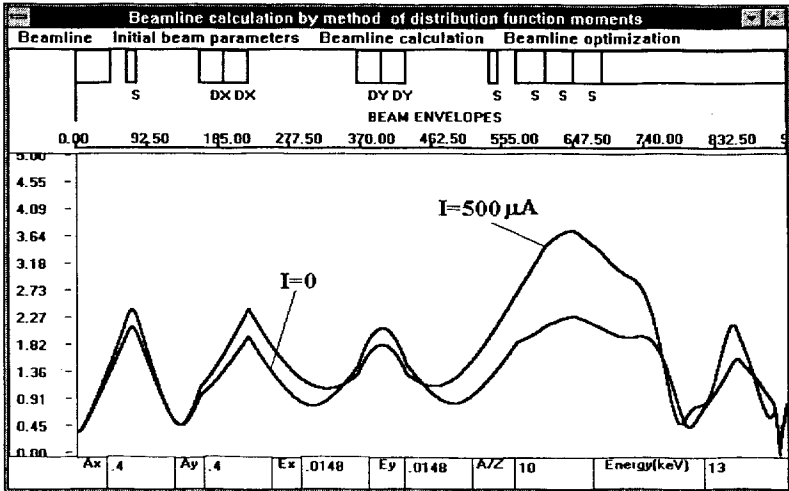


Figure 10: Vertical beam envelopes for $A/Z=10$ in the absence of space charge effects (curve marked by $I=0$), and for current $I=500 \mu\text{A}$. For the second case injection line has been optimized.

Appendix: matrices A and B for magnetic elements

Solenoid with axial magnetic field B_z

$$B^{ext} = \frac{c}{2\beta\gamma mc^2} \frac{\partial B_z(s)}{\partial z} \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix}, \quad A^{ext} = \frac{eB_z(s)}{\beta\gamma mc^2} \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix}, \quad (\text{A.1})$$

quadrupole with gradient G

$$B^{ext} = \frac{eG}{\beta\gamma mc^2} \begin{pmatrix} -1 & 0 \\ 0 & 1 \end{pmatrix}, \quad A^{ext} = 0, \quad (\text{A.2})$$

horizontal bending magnet (sector type)

$$B^{ext} = - \left(\frac{eB_y}{\beta\gamma mc^2} \right)^2 \begin{pmatrix} 1 & 0 \\ 0 & 0 \end{pmatrix}, \quad A^{ext} = 0. \quad (\text{A.3})$$

vertical bending magnet (sector type)

$$B^{ext} = - \left(\frac{eB_x}{\beta\gamma mc^2} \right)^2 \begin{pmatrix} 0 & 0 \\ 0 & 1 \end{pmatrix}, \quad A^{ext} = 0. \quad (\text{A.4})$$

accelerating cavity

$$A^{ext} = \frac{1}{\gamma} \frac{d\gamma}{ds} I. \quad (\text{A.5})$$

To take into account pole face rotation, we use well known formulae for beam coordinates and velocities transformation for a particle passing through edge lens [13]. If pole face rotation angle is α and bending radius is ρ , then new coordinates and velocities are expressed through old ones in a horizontal bending magnets by

$$\begin{pmatrix} x'_1 \\ x'_2 \\ v'_1 \\ v'_2 \end{pmatrix} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ \frac{\tan\alpha}{\rho} & 0 & 1 & 0 \\ 0 & -\frac{\tan\alpha}{\rho} & 0 & 1 \end{pmatrix} \begin{pmatrix} x_1^0 \\ x_2^0 \\ v_1^0 \\ v_2^0 \end{pmatrix} = W \begin{pmatrix} x_1^0 \\ x_2^0 \\ v_1^0 \\ v_2^0 \end{pmatrix}. \quad (\text{A.6})$$

For a vertical bending magnet α is changed to $-\alpha$. Then elements of moment matrix M are transformed accordingly

$$M_{ik} = z'_i z'^*_k = (W z^0)_i (W z^0)^*_k = W z_i^0 (z_k^0)^* W^* = W M W^*, \quad (\text{A.7})$$

where $\vec{z} = (x_1, x_2, v_1, v_2)$ and W^* is transposed matrix W .

5 Conclusion

The results of calculations show, that the space charge influences essentially on the ion beam dynamics in the axial injection line, when the beam current exceeds $500\mu\text{A}$ for $A/Z=5$ and $150\mu\text{A}$ for $A/Z=10$. The space charge effects can be corrected by proper readjusting of solenoid fields for currents up to $1500\mu\text{A}$ ($A/Z=5$) and $500\mu\text{A}$ ($A/Z=10$). The next step to take into account ions with different charges which influence strongly on the ion beam with selected charge through the injection line up to analysis magnet is now under consideration.

6 Acknowledgements

This work has been performed under support of the Flerov Laboratory of Nuclear Reactions. We wish to thank G. G. Gulbekian, B. N. Gisal, S. L. Bogomolov and V. N. Melnikov for the interest to the job, stimulating discussions and valuable comments for making the program convenient for user.

References

- [1] I. Kapchinskij and V. Vladimirsij, "Limitations of proton beam current in a strong focusing linear accelerator associated with the beam space charge", Proceedings of International Conference on High Energy Accelerators, CERN, Geneva, 1959, p.274.
- [2] B. Bru, "GALOPR, a Beam Transport Program, with Space Charge and Bunching", GANIL Report A88-01.
- [3] K. Mittag and D. Sanitz, "Motion- A Versatile Multiparticle Simulation Code", in: Proceedings of the 1981 Linear Accelerator Conference held at Bishop's Lodge, Santa Fe, New Mexico October 19-23, 1981, R. A. Jameson and L. S. Taylor, Eds., LANL Report LA-9234-C, pp.156-158, 1982.
- [4] G. Boicourt and J. Merson, "PARMILA Users and Reference Manual", LANL Report LA-UR-90-127, 1990.
- [5] W. John and C. Kost, "Speam a Computer Program for Space Charge Envelopes", TRIUMF design note TRI-DN-73-11, 1973.
- [6] K. R. Crandall, "TRACE 3-D Documentation", LANL Report LA-11054-MS, 1987.
- [7] M. S. de Jong and E. A. Heighway, "A First Order Space Charge Option for TRAN-SOPTR", IEEE Transactions on Nuclear Science NS-30, 2666-2668, 1983.
- [8] J. Farrell, "PATH-A Lumped Element Beam Transport Simulation Program with Space Charge", in: *Lecture Note in Physics 215: Computing in Accelerator Design and Oper-*

ation, Proceeding of the Europhysics Conference held at the Hahn-Meitner-Institute fur Kernforschung Berlin GmbH, W. Busse and R. Zelazny, Eds. (Springer-Verlag, Berlin, New York, 1984), pp.267-272.

- [9] A. Dymnikov and E. Perelstein, "Moment Method in Dynamics of Charged Particle Beams". NIM. 1978, v. 148, p.567.
- [10] N. Yu. Kazarinov, E. A. Perelstein, V. F. Schevtsov, "Moment Method in Charged Particle Beam Dynamics", Particle Accelerator, 1980, v. 10, p. 1.
- [11] G. N. Vyalov et al., "Calculation of High Intensity Injection Line for INR Meson Factory" (in Russian), JINR Preprint P9-11672, Dubna, 1978.
- [12] F. J. Sacherer, "R.M.S. envelope equations with space charge". IEEE Transactions of Nuclear Science, 1971. NS-18, 3, p.1105.
- [13] K. Steffen, "Basic Course on Accelerator Optics". CAS CERN 85-19, 1985.

Received by Publishing Department
on March 20, 1997.

**SUBJECT CATEGORIES
OF THE JINR PUBLICATIONS**

Index	Subject
1.	High energy experimental physics
2.	High energy theoretical physics
3.	Low energy experimental physics
4.	Low energy theoretical physics
5.	Mathematics
6.	Nuclear spectroscopy and radiochemistry
7.	Heavy ion physics
8.	Cryogenics
9.	Accelerators
10.	Automatization of data processing
11.	Computing mathematics and technique
12.	Chemistry
13.	Experimental techniques and methods
14.	Solid state physics. Liquids
15.	Experimental physics of nuclear reactions at low energies
16.	Health physics. Shieldings
17.	Theory of condensed matter
18.	Applied researches
19.	Biophysics

Белошицкий П.Ф., Шевцов В.Ф.

E9-97-90

Эффекты пространственного заряда

в канале аксиальной инжекции циклотрона У-400

Исследовано влияние пространственного заряда на транспортировку пучка в канале аксиальной инжекции циклотрона У-400. Изучение проведено методом моментов функции распределения. Численное решение системы из 15 уравнений обеспечивает быстрое вычисление моментов первого и второго порядков (среднеквадратичных поперечных размеров и скоростей, недиагональных членов) вдоль канала. Для канала аксиальной инжекции в циклотроне У-400 определена величина тока, при котором эффекты пространственного заряда оказывают заметное влияние на динамику пучка. Показано, что при достаточно больших токах оптимизацией соленоидальных линз можно в значительной степени компенсировать эффект пространственного заряда.

Работа выполнена в Лаборатории ядерных проблем ОИЯИ.

Сообщение Объединенного института ядерных исследований. Дубна, 1997

Beloshitsky P.F., Shevtsov V.F.

E9-97-90

Space Charge Effects in Axial Injection Line
for U-400 Cyclotron

The space charge influence on the beam dynamics in transport line is studied by the method of the distribution function moments. Fifteen equations describing dependence of the first and second order moments (average transverse beam sizes and velocities, cross terms) on longitudinal coordinate are solved numerically. For particular U-400 cyclotron injection line the value of current which produces significant effect on beam dynamics is defined. It is shown that space charge effects can be compensated by proper readjusting of the solenoid strengths.

The investigation has been performed at the Laboratory of Nuclear Problems, JINR.

Communication of the Joint Institute for Nuclear Research. Dubna, 1997

Макет Т.Е.Попеко

Подписано в печать 21.04.97
Формат 60 × 90/16. Офсетная печать. Уч.-изд.листов 1,43
Тираж 295. Заказ 49904. Цена 1716 р.

Издательский отдел Объединенного института ядерных исследований
Дубна Московской области