



1

Document Identifier: DSP2015

2

Date: 2024-06-04

3

Version: 2.2.0

4

Platform Management Communications Infrastructure (PMCI) Architecture White Paper

5

Supersedes: 2.1.0

6

Document Class: Informational

7

Document Status: Published

8

Document Language: en-US

Copyright Notice

Copyright © 2007, 2019, 2022, 2024 DMTF. All rights reserved.

- 9 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems management and interoperability. Members and non-members may reproduce DMTF specifications and documents, provided that correct attribution is given. As DMTF specifications may be revised from time to time, the particular version and release date should always be noted.
- 10 Implementation of certain elements of this standard or proposed standard may be subject to third-party patent rights, including provisional patent rights (herein “patent rights”). DMTF makes no representations to users of the standard as to the existence of such rights, and is not responsible to recognize, disclose, or identify any or all such third-party patent right owners or claimants, nor for any incomplete or inaccurate identification or disclosure of such rights, owners, or claimants. DMTF shall have no liability to any party, in any manner or circumstance, under any legal theory whatsoever, for failure to recognize, disclose, or identify any such third-party patent rights, or for such party’s reliance on the standard or incorporation thereof in its product, protocols, or testing procedures. DMTF shall have no liability to any party implementing such standard, whether such implementation is foreseeable or not, nor to any patent owner or claimant, and shall have no liability or responsibility for costs or losses incurred if a standard is withdrawn or modified after publication, and shall be indemnified and held harmless by any party implementing the standard from any and all claims of infringement by a patent owner for such implementations.
- 11 For information about patents held by third parties which have notified DMTF that, in their opinion, such patents may relate to or impact implementations of DMTF standards, visit <https://www.dmtf.org/about/policies/disclosures>.
- 12 This document’s normative language is English. Translation into other languages is permitted.

CONTENTS

1 Abstract	4
2 Foreword	5
2.1 Acknowledgments	5
3 Introduction	6
3.1 Document conventions	6
4 Scope	7
5 References	8
6 Terms and definitions	11
7 Symbols and abbreviated terms	12
8 Platform Management Subsystem Architecture Overview	15
8.1 Principal Goals	15
8.2 Platform Management Subsystem Components	16
9 PMCI Overview	18
9.1 Standards	18
9.2 PMCI Stack	18
9.2.1 Physical Medium Layer	20
9.2.2 Transport Layer	20
9.2.3 Upper (Data Model) Layer	21
9.2.4 Host Interface	22
10 PMCI Standards Overview	23
10.1 Management Component Transport Protocol (MCTP)	23
10.2 Platform Level Data Model (PLDM)	24
10.2.1 PLDM Messaging types and applications	24
10.3 Network Controller Sideband Interface (NC-SI)	25
10.4 Memory-Mapped BMC Interface (MMBI)	25
11 Conclusion	26
12 ANNEX A (informative) Change Log	27
13 Bibliography	28

14 **1 Abstract**

- 15 The Platform Management Communications Infrastructure (PMCI) Working Group defines standards to address “inside the box” communication interfaces between the components of the platform management subsystem.
- 16 The group develops the Network Controller Sideband Interface (NC-SI), Management Component Transport Protocol (MCTP), and Platform Level Data Model (PLDM) specifications that provide a comprehensive, common architecture for improved communication between management subsystem components. These specifications enable the monitoring and control of systems independent of the OS state, when the OS is running or an OS is not available (for example, when a system is booting, before the OS has loaded, or when the OS is inoperable).
- 17 The PMCI Working Group creates intra-platform manageability standards and technologies, which complement DMTF inter-platform standards such as the Security Protocol and Data Model (SPDM) from the SPDM Working Group, Redfish API from the Redfish Forum, Common Information Model (CIM) profiles, as well as remote access protocols that are defined in the other DMTF groups.

18 2 Foreword

19 The *Platform Management Communications Infrastructure (PMCI) Architecture White Paper* (DSP2015) was prepared by the Platform Management Communications Infrastructure Working Group.

20 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems management and interoperability. For information about DMTF, see <https://www.dmf.org>.

21 2.1 Acknowledgments

22 DMTF acknowledges the following individuals for their contributions to this document:

23 **Editor:**

- Patrick Caporale — Lenovo

24 **Contributors:**

- Richelle Ahlvers — Broadcom Inc.
- Samer El-Haj-Mahmoud — ARM Inc.
- Jeff Hilland — Hewlett Packard Enterprise
- Yuval Itkin — NVIDIA Corporation
- Ira Kalman — Intel Corporation
- Eliel Louzoun — Intel Corporation
- Rob Mapes — Marvell International Ltd
- Balaji Natrajan — Microchip Technology Inc.
- Edward Newman — Hewlett Packard Enterprise
- Scott Phuong — Cisco Systems, Inc.
- Jeffrey Plank — Microchip Technology Inc.
- Bill Scherer — Hewlett Packard Enterprise
- Patrick Schoeller — Hewlett Packard Enterprise, Intel Corporation
- Brett Scrivner — Lenovo
- Hemal Shah — Broadcom Inc.
- Bob Stevens — Dell Technologies
- Supreeth Venkatesh — ARM Inc.

25 **3 Introduction**

26 The Platform Management Communications Infrastructure (PMCI) Working Group defines standards to address “inside the box” communication interfaces between the components of the platform management subsystem.

27 This document lays forth the basic architectural concepts that are driving the specifications being defined by the PMCI Working Group (Note: This architecture is referred as PMCI architecture or PMCI herein). The focus of PMCI architecture is to enable intercommunications between different management components of a platform management subsystem in a standard manner across any implementation of a management component, independent of the operating system state.

28 **3.1 Document conventions**

29 The following typographical conventions are used in this document:

- Document titles are marked in *italics*.

30 **4 Scope**

- 31 This white paper provides an overview of the PMCI working group and its goals, the PMCI architecture, and a high level summary of the primary specifications which it creates.
- 32 The intended target audience for this document is the readers interested in understanding management components intercommunications between the components of platform management subsystems. A platform management subsystem may be contained within servers, desktop systems, mobile systems, thin clients, bladed systems, and other types of devices.
- 33 This white paper is not a replacement for the individual PMCI specifications, but will provide an overview on how the specifications relate to each other within the PMCI stack model.

5 References

35 The following referenced documents are indispensable for the application of this document. For dated or versioned
36 references, only the edition cited (including any corrigenda or DMTF update versions) applies. For references without
37 a date or version, the latest published edition of the referenced document (including any corrigenda or DMTF update
38 versions) applies.

- 36 DMTF DSP0218, *Platform Level Data Model (PLDM) for Redfish Device Enablement 1.1* https://www.dmtf.org/standards/published_documents/DSP0218_1.1.X.pdf
- 37 DMTF DSP0222, *Network Controller Sideband Interface (NC-SI) 1.2* https://www.dmtf.org/standards/published_documents/DSP0222_1.2.X.pdf
- 38 DMTF DSP0233, *Management Component Transport Protocol (MCTP) I3C Transport Binding Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0233_1.0.X.pdf
- 39 DMTF DSP0234, *CXL™ Fabric Manager API over MCTP Binding Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0234_1.0.X.pdf
- 40 DMTF DSP0235, *NVMe™ (NVM Express™) Management Messages over MCTP Binding Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0235_1.0.X.pdf
- 41 DMTF DSP0236, *Management Component Transport Protocol (MCTP) Base Specification 1.3* https://www.dmtf.org/standards/published_documents/DSP0236_1.3.X.pdf
- 42 DMTF DSP0237, *Management Component Transport Protocol (MCTP) SMBus/I2C Transport Binding Specification 1.2* https://www.dmtf.org/standards/published_documents/DSP0237_1.2.X.pdf
- 43 DMTF DSP0238, *Management Component Transport Protocol (MCTP) PCI-e VDM Transport Binding Specification 1.2* https://www.dmtf.org/standards/published_documents/DSP0238_1.2.X.pdf
- 44 DMTF DSP0239, *Management Component Transport Protocol (MCTP) IDs and Codes 1.10* https://www.dmtf.org/standards/published_documents/DSP0239_1.10.X.pdf
- 45 DMTF DSP0240, *Platform Level Data Model (PLDM) Base Specification 1.1* https://www.dmtf.org/standards/published_documents/DSP0240_1.1.X.pdf
- 46 DMTF DSP0241, *PLDM over MCTP Binding Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0241_1.0.X.pdf
- 47 DMTF DSP0242, *Platform Level Data Model (PLDM) for File Transfer Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0242_1.0.X.pdf
- 48 DMTF DSP0245, *Platform Level Data Model (PLDM) IDs and Codes Specification 1.3* https://www.dmtf.org/standards/published_documents/DSP0245_1.3.X.pdf
- 49 DMTF DSP0246, *Platform Level Data Model (PLDM) for SMBIOS Data Transfer Specification 1.0* https://www.dmtf.org/standards/published_documents/DSP0246_1.0.X.pdf
-

- 50 DMTF DSP0247, *Platform Level Data Model (PLDM) for BIOS Control and Configuration Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0247_1.0.X.pdf
- 51 DMTF DSP0248, *Platform Level Data Model (PLDM) for Platform Monitoring and Control Specification* 1.2 https://www.dmtf.org/standards/published_documents/DSP0248_1.2.X.pdf
- 52 DMTF DSP0249, *Platform Level Data Model (PLDM) State Set Specification* 1.1 https://www.dmtf.org/standards/published_documents/DSP0249_1.1.X.pdf
- 53 DMTF DSP0253, *Management Component Transport Protocol (MCTP) Serial Transport Binding* 1.0 https://www.dmtf.org/standards/published_documents/DSP0253_1.0.X.pdf
- 54 DMTF DSP0254, *Management Component Transport Protocol (MCTP) KCS Transport Binding* 1.0 https://www.dmtf.org/standards/published_documents/DSP0254_1.0.X.pdf
- 55 DMTF DSP0256, *Management Component Transport Protocol (MCTP) Host Interface Specification* 2.0 https://www.dmtf.org/standards/published_documents/DSP0256_2.0.X.pdf
- 56 DMTF DSP0257, *Platform Level Data Model (PLDM) for FRU Data Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0257_1.0.X.pdf
- 57 DMTF DSP0261, *NC-SI over MCTP Binding Specification* 1.3 https://www.dmtf.org/standards/published_documents/DSP0261_1.3.X.pdf
- 58 DMTF DSP0267, *Platform Level Data Model (PLDM) for Firmware Update* 1.3 https://www.dmtf.org/standards/published_documents/DSP0267_1.3.X.pdf
- 59 DMTF DSP0275, *Security Protocol and Data Model (SPDM) over MCTP Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0275_1.0.X.pdf
- 60 DMTF DSP0276, *Secured Messages using SPDM over MCTP Binding Specification* 1.1 https://www.dmtf.org/standards/published_documents/DSP0276_1.1.X.pdf
- 61 DMTF DSP0280, *PMCI Test Tools Interface and Design Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0280_1.0.X.pdf
- 62 DMTF DSP0281, *CXL™ Type 3 Device Component Command Interface over MCTP Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0281_1.0.X.pdf
- 63 DMTF DSP0282, *Memory-Mapped BMC Interface (MMBI) Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0282_1.0.X.pdf
- 64 DMTF DSP0283, *MCTP over USB Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0283_1.0.X.pdf
- 65 DMTF DSP0284, *Management Component Transport Protocol (MCTP) Memory-Mapped BMC Interface (MMBI) Transport Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0284_1.0.X.pdf
- 66 DMTF DSP0291, *PCIe Management Interface (PCIe-MI) over MCTP Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0291_1.0.X.pdf
- 67 DMTF DSP0292, *Management Component Transport Protocol (MCTP) Platform Communications Channel (PCC) Transport Binding Specification* 1.0 https://www.dmtf.org/standards/published_documents/DSP0292_1.0.X.pdf

- 68 DMTF DSP2016, *Management Component Transport Protocol (MCTP) Overview White Paper* 1.0 https://www.dmtf.org/standards/published_documents/DSP2016_1.0.X.pdf
- 69 DMTF DSP2037, *MCTP Packets and NC-SI over MCTP Overview* 1.0 https://www.dmtf.org/standards/published_documents/DSP2037_1.0.X.pdf
- 70 DMTF DSP2054, *PLDM NIC Modeling* 1.0 https://www.dmtf.org/standards/published_documents/DSP2054_1.0.X.pdf
- 71 DMTF DSP2061, *Platform Level Data Model (PLDM) Accelerator Modeling* 1.0 https://www.dmtf.org/standards/published_documents/DSP2061_1.0.X.pdf
- 72 DMTF DSP2067, *PLDM CXL Memory Modeling* 1.0 https://www.dmtf.org/standards/published_documents/DSP2067_1.0.X.pdf

73 **6 Terms and definitions**

74 For the purposes of this document, the following terms and definitions apply:

75 **Managed Device**

76 A device that is typically implemented using a microcontroller and accessed through a messaging protocol and is used for accessing one or more management parameters. Management parameter access provided by a managed device is typically accomplished using an abstracted interface and data model rather than through direct “register level” accesses. A managed device responds to management requests, but does not initiate or aggregate management operations except in conjunction with a management controller (that is, it is a satellite device that is subsidiary to one or more management controllers).

77 **Management Controller**

78 An intelligent entity composed of hardware/firmware/software that resides within a platform and is responsible for some or all of the management functions associated with the platform; also known as BMC and Service Processor.

79 **Management Parameter**

80 A particular datum representing a characteristic, capability, status, or control point associated with a managed entity. Example management parameters include temperature, speed, voltage, on/off, link state, uncorrectable error count, device power state, and so on.

81 **Network Controller**

82 A managed device within a system that is responsible for providing connectivity to an external network world.

83 **Network Controller Sideband Interface**

84 The interface of the Network Controller that provides network pass-through and/or a control path to a Management Controller; also shown as Sideband Interface or NC-SI as appropriate in the context.

85 **Platform Management Communications Infrastructure**

86 The Platform Management Communications Infrastructure (PMCI) Working Group defines standards to address “inside the box” communication interfaces between the components of the platform management subsystem.

87 **7 Symbols and abbreviated terms**

88 The following abbreviations are used in this document.

89 **API**

90 Application Programming Interface

91 **BIOS**

92 Basic Input/Output System

93 **BMC**

94 Baseboard Management Controller

95 **CCI**

96 Component Command Interface

97 **CIM**

98 Common Information Model

99 **CXL™**

100 Compute Express Link

101 **FRU**

102 Field Replaceable Unit

103 **I²C**

104 Inter-Integrated Circuit

105 **I³C**

106 Improved Inter-Integrated Circuit

107 **IID**

108 Instance ID

109 **KCS**

110 Keyboard Controller Style

111 **MC**

112 Management Controller

113 **MCTP**

114 Management Component Transport Protocol

115 **MD**

116	Managed Device
117	MMBI
118	Memory-Mapped BMC Interface
119	NC
120	Network Controller
121	NC-SI
122	Network Controller Sideband Interface
123	NVMe-MI™
124	NVM Express® Management Interface
125	OS
126	Operating System
127	PC
128	Personal Computer
129	PCIe®
130	Peripheral Component Interconnect Express
131	PLDM
132	Platform Level Data Model
133	PMCI
134	Platform Management Communications Infrastructure
135	RBT
136	RMII-Based Transport
137	RDE
138	Redfish Device Enablement
139	RMII
140	Reduced Media Independent Interface
141	SMBus
142	System Management Bus
143	SPDM
144	Security Protocol and Data Model
145	UEFI
146	Unified Extensible Firmware Interface

- 147 **USB**
- 148 Universal Serial Bus
- 149 **VDM**
- 150 Vendor Defined Message

151 **8 Platform Management Subsystem Architecture Overview**

152 A Platform Management Subsystem in a modern enterprise computing platforms is comprised of a set of components which communicate to perform management functions within the platform. In many cases, these communications and interfaces are specialized and adapted to each individual platform, installation and component in the environment.

153 A platform management subsystem provides hardware management services such as:

- Platform environmental monitoring functions (for example, temperature probing, voltage monitoring, fan speeds, hardware error status, etc.)
- Control functions (for example, platform power-on/off, reset, watchdog timer, etc.)
- Device firmware update and device functional management

154 The platform management subsystem frequently includes one or more intelligent controllers (microcontrollers) that support access to the management monitoring and control functions, which provide monitoring and control services for access by other management controllers in the subsystem. The platform management subsystem can be represented externally via the management controller through outward bound standards provided by other working groups or forums within DMTF. One example is the Redfish API that can be implemented as a service provider contained within the management controller which will enable a full end to end management approach. The use of the Redfish API standard for external connectivity, and a combination of MCTP, PLDM, NC-SI, and MMBI standards for internal communication provides for complete DMTF standards management of a Platform Management Subsystem.

155 PMCI supports a suite of specifications (MCTP, PLDM, NC-SI, and MMBI) which include architectural semantics, industry standard protocols, and platform level data models to standardize the management related intercommunications between the components of platform management subsystem independent of component implementation, platform state, and platform management subsystem implementation.


156 **8.1 Principal Goals**

157 One goal of PMCI is to enable intercommunications between different types of platform components using a set of standards protocols, interfaces, and platform level data models. An example of the platform management subsystem is provided in the [Figure 1](#) to illustrate different types of components and intercommunications within a platform.

158 Another goal of PMCI is to enable the same semantics, protocols, and interfaces to work across a full range of platforms — traditional servers, desktop systems, mobile, laptop, bladed PCs as well as “thin clients”.

159 8.2 Platform Management Subsystem Components

160

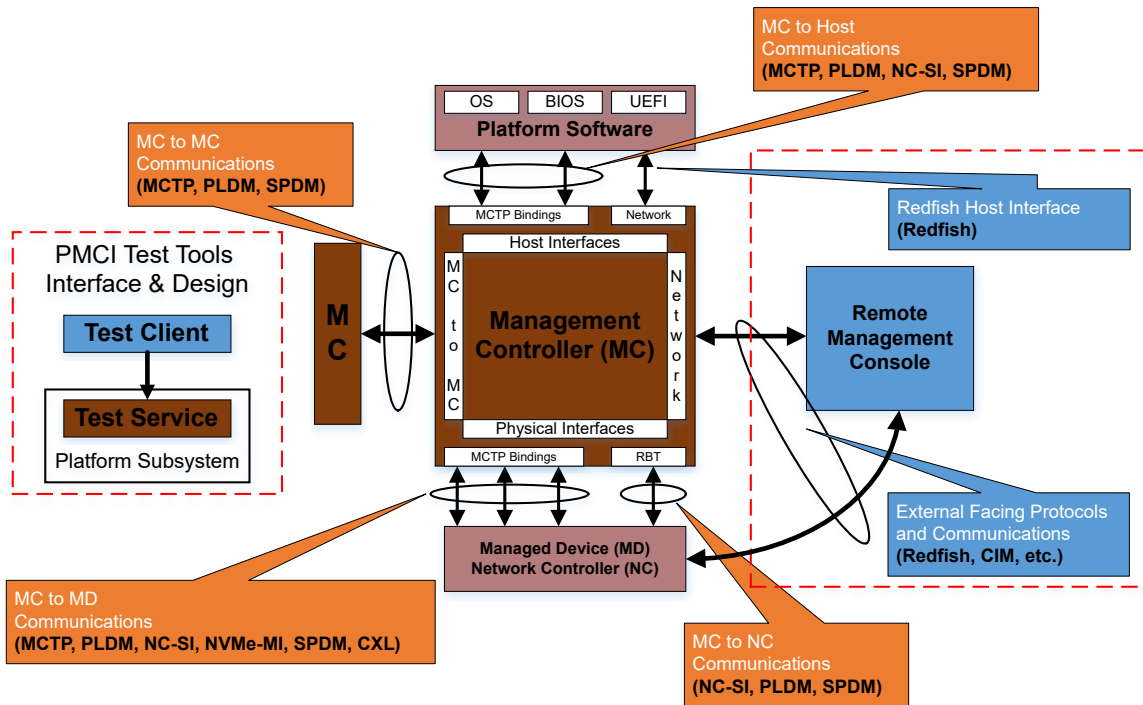

161

Figure 1 — Platform Management Subsystem

162 **Figure 1** shows the different components within a platform management subsystem. The components can be divided into the following four categories:

1. Management Controller (MC): A microcontroller or processor that aggregates Management Parameters from one or more Managed Devices and Network Controllers and makes access to those parameters to local or remote software, or to other Management Controllers, via one or more management data models.
2. Platform Software: The software running on the host CPUs that communicates with a management controller for performing a set of management functions. The examples of the platform software may include BIOS, OS, UEFI firmware, etc.
3. Managed Device (MD) or Network Controller (NC): A Managed Device responds to management requests from the Management Controller, and can also initiate asynchronous messages, such as events, if enabled to by a Management Controller. A Network Controller is a managed device that additionally supports the NC-SI standard. A Network Controller may also provide connectivity to an external network.
4. Remote Management Console: is a function that enables communications with the management

controller through one of more DMTF standards (for example the Redfish API or CIM). The remote console may initiate management queries or actions by sending requests to the MC which can use PMCI standards to communicate to Managed Devices or Network Controllers. The remote management console can also be located within the Platform Software and use MCTP Host Interface to communicate with the MC. Other DMTF standards such as Redfish Host Interface could also be used in the connectivity between the host and the MC.

- 163 PMCI covers all four types of intercommunications between the above components.
1. Management Controller and Host (platform software)
 2. Management Controller and Managed Devices
 3. Management Controller and Network Controller
 4. Management Controller and another Management Controller or similar device
- 164 Other DMTF standards such as the Redfish API or CIM provide the external facing intercommunications between a management controller and a remote console or client.

165 **9 PMCI Overview**

166 **9.1 Standards**

167 The PMCI Working Group produces standards for four primary intercommunication interfaces/data models.

168 1) A family of specifications for a transport protocol known as Management Component Transport Protocol (MCTP). This protocol can be used to send messages between components of the platform management subsystem. Additional binding specifications are available for MCTP that permit the transport to operate over different physical mediums, which can support MCTP messages.

169 2) A family of specifications known as Platform Level Data Model (PLDM). These specifications define how individual management functions such as inventory, [monitoring & control](#), eventing, [firmware update](#), and Redfish device enablement ([RDE](#)) are abstracted and accessed by an MC.


170 3) The Network Controller Sideband Interface (NC-SI) specification defines how an MC can communicate to an NC for management functions such as inventory, external Ethernet pass-through to the MC, events, configuration, and statistics collection.

171 4) A Memory Mapped BMC Interface (MMBI) specification defines a shared memory concept to permit packet exchanges between host software and a BMC.

172 **9.2 PMCI Stack**

173 Platform Management Communications Infrastructure (PMCI) Working Group is defining a set of standards that can be used for communications between the platform components. A simplified view of the PMCI stack is show below as it organizes the standards into three primary groupings (upper layers, transport layer, and physical layer). This figure does not show the relationship or binding between each layer.

174

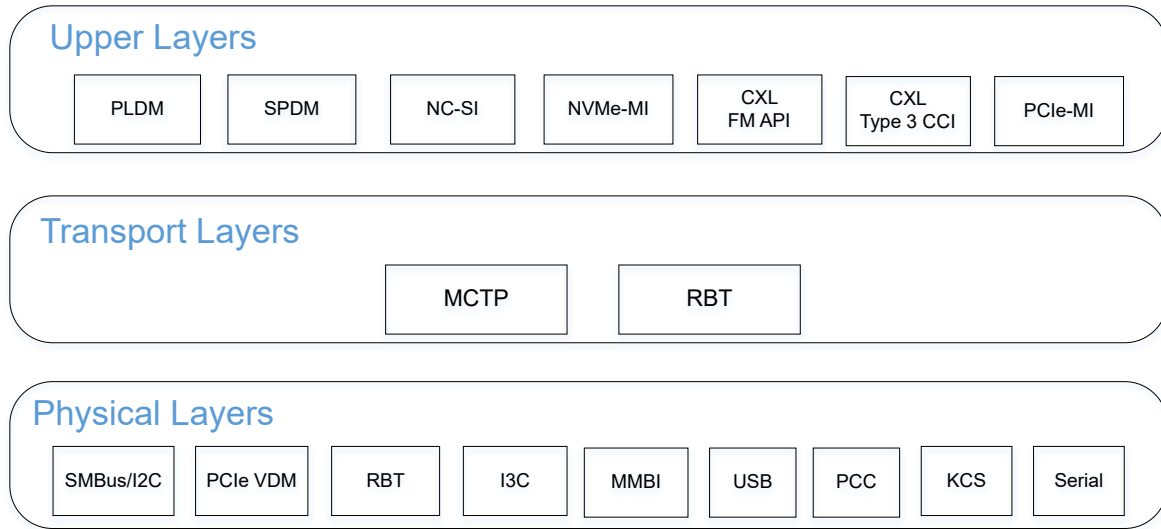


175

Figure 2 — Simplified view of the PMCI Stack

176

The following figure shows the full view of a PMCI stack, which includes the binding details.

177

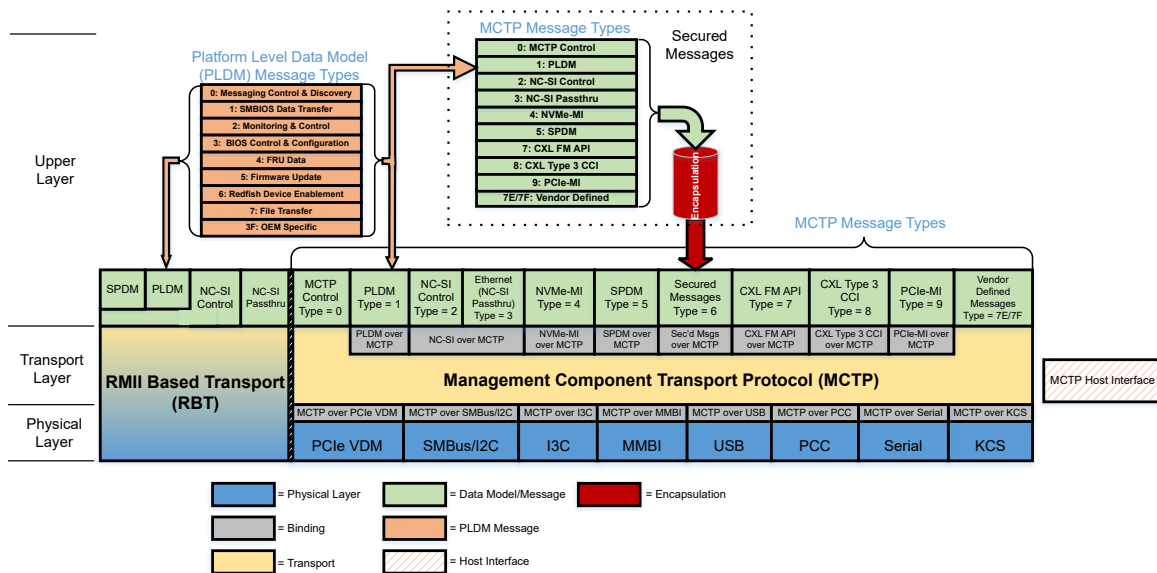

178

Figure 3 — Full PMCI Stack


179

In order to understand the full PMCI stack, each layer of the stack will be described in further detail in the next sections.

180 9.2.1 Physical Medium Layer

181 All of the PMCI standards and protocols are architected to be implemented on a physical medium. The diagram below represents the lowest portion of the PMCI stack and shows all the physical mediums that are currently supported. PMCI continues to expand the list of supported physical mediums, and additional binding specifications may be available in the future.

182



183 **Figure 4 — Physical Medium Layer**


184 The RMII-Based Transport (RBT) physical medium is the foundation for the NC-SI specification and is derived from the RMII specification. The electrical and timing requirements for an RBT interface is fully described within the NC-SI specification, and as its name implies also includes the transport details for sending and receiving messages. The RBT interface therefore is special within the PMCI stack as it is both a physical layer medium, and a transport layer combined.

185 The remainder of physical mediums shown in the figure above, represent available interconnects that the MCTP specification can be used with.

186 9.2.2 Transport Layer

187 There are two transports available from the PMCI Working Group, RBT and MCTP. Each of these transports define a message passing protocol though there are differences between these two PMCI transports.

188

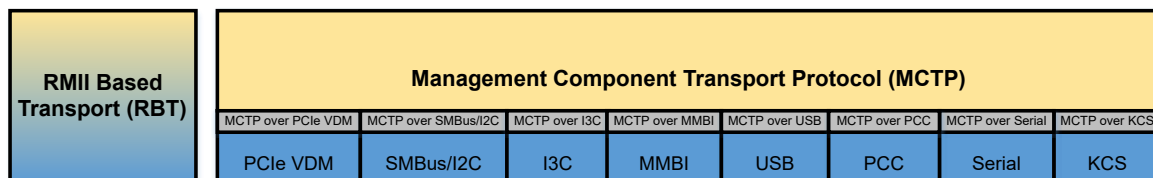

189 **Figure 5 — Transport Layer**

190 The RBT transport is a simple protocol used to track pass-through traffic and the reliable reception of command packets. Pass-through traffic consists of packets that are transferred between the external network interface and the Management Controller using the RBT interface. The transport protocol is based upon a command/response paradigm and involves the use of unique Instance IDs (IIDs) in the packet headers to allow responses received to be matched to previously transmitted commands. The Management Controller is the generator of command packets sent to the Sideband Interface of one or more Network Controllers in the system, and it receives response packets from them. Most but not all request messages sent over the RBT transport have a corresponding response message.

An asynchronous event notification is one example of a packet sent by the Network Controller without a corresponding response message.

191 The MCTP transport can support both acknowledged (typically request/response) and unacknowledged messages (asynchronous). MCTP specifications include a grouping of documents known as binding specifications, which define the necessary header and timing requirements for the transport to be used on the applicable physical mediums. Separate specifications are available for bindings to different physical media, such as MCTP over PCIe VDM Binding and MCTP over SMBus/I2C Binding. MCTP can also uniquely attach to interfaces used to communicate to/from a host system and its software (OS, UEFI, BIOS, etc.).

192 9.2.3 Upper (Data Model) Layer

193 Sitting on top of the two PMCI transports are multiple choices for message definition and data models. MCTP provides a base control set of messages - and through additional binding specifications; PLDM, NC-SI, NVMe-MI, SPDM, CXL FM API, and CXL Type 3 CCI messages.

194

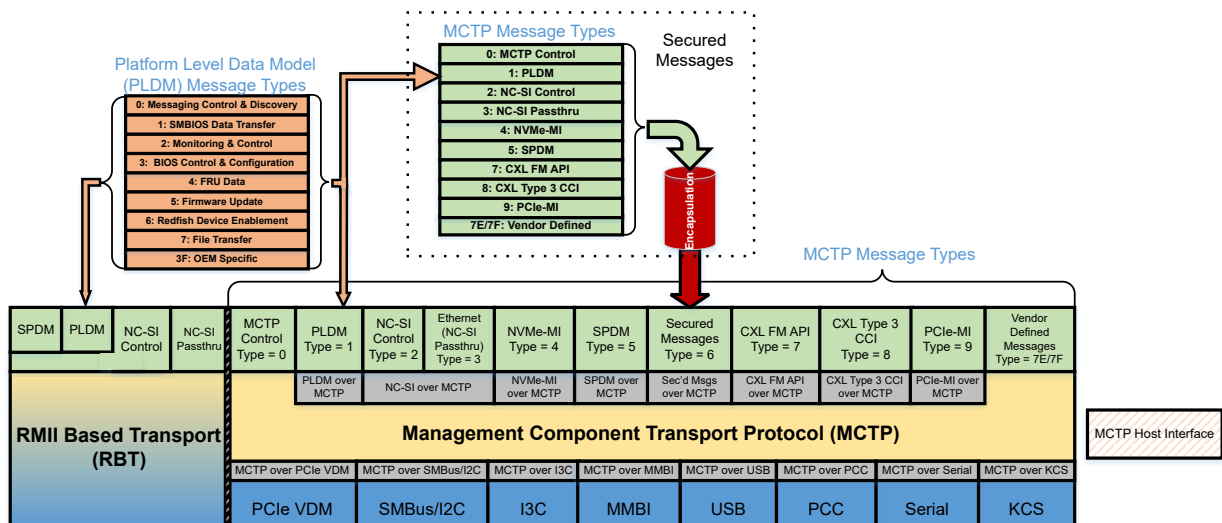


Figure 6 — Data Model Layer

195 The layers above MCTP define different communication and data models mapped over MCTP. The MCTP Control Protocol is used to set up and initialize managed devices within an MCTP network.

197 Platform Level Data Model (PLDM) provides efficient access to low-level platform monitoring, control, and data transfer functions such as temperature, fan, voltage, inventory data, event data transfer, and boot control. PLDM over MCTP defines data representations and commands that abstract the platform management hardware. More recent PLDM specifications have defined methods to perform a firmware update and support Redfish enablement on managed devices.


198 NC-SI defines a pass-through model of Ethernet communications between a management controller and a network controller.

199 SPDM defines a set of commands for authentication, firmware measurements, and certificate management.

200 9.2.4 Host Interface

201 MCTP provides a method for the host to communicate to the management controller through a physical layer host accessible interface. Initially, [DSP0256](#) version 1.0 only supported Serial and KCS binding specifications, however with the updated 2.0 version of the Host Interface Specification, the entire set of physical interfaces could now be used to permit host to management controller communications. This includes the original PCI VDM, I2C/SMBus bindings as well as the newer USB, MMBI, and PCC Transport bindings. This provides a wide choice of options to a given management controller where it can optionally support one or more of the binding methods for host-based traffic.

202

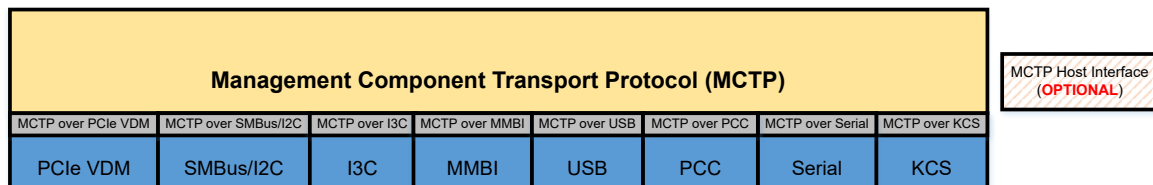

203

Figure 7 — MCTP Host Interface

204 **10 PMCI Standards Overview**

205 The PMCI standards are composed of technologies defined in a suite of standard specifications. These standards include the Management Component Transport Protocol (MCTP) related specifications, the Platform Level Data Model (PLDM) related specifications, the Network Controller Sideband Interface (NC-SI) specification, and the Security Protocols and Data Models (SPDM) specifications.

206 **10.1 Management Component Transport Protocol (MCTP)**

207 The Management Component Transport Protocol (MCTP) is a protocol for intercommunications among intelligent devices within a platform management subsystem. This protocol is independent of the underlying physical bus properties, as well as the “data-link” layer messaging used on the bus.

208 The physical and data-link layer methods for MCTP communication across a given medium are defined by companion “transport binding” specifications, such as MCTP over PCIe® Vendor Defined Messaging and MCTP over SMBus/I2C. This approach enables future transport bindings to be defined to support additional buses without affecting the base MCTP specification.

209 The MCTP communication model includes a message format, transport description, message exchange patterns, and operational Endpoint characteristics. MCTP uses logical addressing based on Endpoint IDs that enables static/dynamic endpoint ID assignments as well as bridging/routing support. MCTP defines simple message fragmentation/reassembly mechanism that allows large data transfers using MCTP packetization.

210 MCTP Control Protocol is used to setup/initialize MCTP control communications within an MCTP network. MCTP Control Protocol supports request/response, broadcast, and one-way communications.

211 The following specifications are available for MCTP:

- MCTP Base Specification — [DSP0236](#)
- MCTP PCIe VDM Transport Binding Specification — [DSP0238](#)
- MCTP SMBus/I2C Transport Binding Specification — [DSP0237](#)
- MCTP Serial Transport Binding Specification — [DSP0253](#)
- MCTP KCS Transport Binding Specification — [DSP0254](#)
- MCTP I3C Transport Binding Specification — [DSP0233](#)
- MCTP USB Transport Binding Specification — [DSP0283](#)
- MCTP PCC Transport Binding Specification — [DSP0292](#)
- MCTP Host Interface Specification — [DSP0256](#)
- MCTP ID & Codes — [DSP0239](#)
- NVMe Management Messages over MCTP Binding Specification — [DSP0235](#)
- SPDM over MCTP Binding Specification — [DSP0275](#)
- Secured Messages over MCTP Binding Specification — [DSP0276](#)
- CXL Fabric Manager API over MCTP Binding Specification — [DSP0234](#)

- CXL Type 3 Device CCI over MCTP Binding Specification — [DSP0281](#)
- PCIe-MI over MCTP Binding Specification — [DSP0291](#)
- MCTP Overview White Paper — [DSP2016](#)

212 **10.2 Platform Level Data Model (PLDM)**

213 PLDM defines a method to provide efficient access to low-level inventory, monitoring, control, eventing, and data/parameters transfer functions such as temperature, fan, voltage, event logging, and boot control. Recent PLDM extensions enable device firmware updates as well as device management consistent with the DMTF Redfish standard.

214 **10.2.1 PLDM Messaging types and applications**

215 PLDM has defined data representations and commands that abstract the platform management hardware. Extensions of the core PLDM specification work includes:

- Messages and data model for SMBIOS data transfer within the platform.
- Messages and data structures for Field Replaceable Unit (FRU), asset information, and firmware inventory data transfer.
- Messages and data structures for monitoring processors, caches, memory, sensors, fans, power state monitoring, time stamp clock monitoring, etc.
- Control messages/data structures for sensors, fans, power state management, boot control, real time stamp, and watchdog timer.
- Low level data models and messages to represent and transfer opaque data, BIOS data, and event data.
- Messages to transfer text console redirection and media redirection related messages.
- Data models and messages to facilitate device firmware management.
- Messages and data models that enable management controllers to effectively interact with targeted devices using an encapsulated Redfish based JSON format.
- Enablement of sending PLDM messages over the RBT transport which allows for managed devices with only the sideband RBT interface to communicate to an MC using PLDM.

216 The following specifications are available for PLDM:

- PLDM Base Specification — [DSP0240](#)
- PLDM over MCTP Binding Specification — [DSP0241](#)
- PLDM ID & Codes Specification — [DSP0245](#)
- PLDM State Set Specification — [DSP0249](#)
- PLDM for FRU Data Specification — [DSP0257](#)
- PLDM for SMBIOS Transfer Specification — [DSP0246](#)
- PLDM for BIOS Control and Configuration Specification — [DSP0247](#)
- PLDM for Platform Monitoring and Control Specification — [DSP0248](#)
- PLDM for Firmware Update Specification — [DSP0267](#)

- PLDM for Redfish Device Enablement Specification (RDE) — [DSP0218](#)
- PLDM for File Transfer — [DSP0242](#)
- PLDM NIC Modeling — [DSP2054](#)
- PLDM Accelerator Modeling — [DSP2061](#)
- PLDM CXL Memory Modeling — [DSP2067](#)

217 **10.3 Network Controller Sideband Interface (NC-SI)**

218 The Network Controller Sideband Interface (NC-SI) specifies a sideband interface that uses RBT for both the transport and physical medium. In addition, NC-SI can be supported with MCTP as the transport. NC-SI defines the formats for communicating network traffic, control commands, responses, and asynchronous event notifications between a management controller and a network controller. NC-SI can support multiple Network Controllers through the use of hardware or command-based arbitration.

219 The following specifications are available for NC-SI:

- NC-SI Specification — [DSP0222](#)
- NC-SI over MCTP Binding Specification — [DSP0261](#)

220 **10.4 Memory-Mapped BMC Interface (MMBI)**

221 The Memory-Mapped BMC Interface specifies a shared memory concept that allows packet exchanges between host software and BMC. The described memory mapping makes it possible for both boot code (such as UEFI firmware), as well as OS-level software (such as OS kernel or drivers) to establish efficient communication with BMC at bandwidth and latency limited by the underlying memory mapping mechanisms. The following specifications are available for MMBI:

- Memory-Mapped BMC Interface (MMBI) Specification — [DSP0282](#)
- Management Component Transport Protocol (MCTP) Memory-Mapped BMC Interface (MMBI) Transport Binding Specification — [DSP0284](#)

222 **11 Conclusion**

223 PMCI supports a suite of specifications, which include architectural semantics, industry standard protocols, and platform level data models to standardize the management related intercommunications between the components of platform management subsystem independent of component implementation, platform state, and platform management subsystem implementation.

224 When used in conjunction with other DMTF standards for external facing communications, a complete end-to-end platform management subsystem can be developed for all management operations.

12 ANNEX A (informative) Change Log

Version	Date	Description
1.0.0	2007-07-23	Initial Release
2.0.0	2019-08-06	Updates to describe the latest architecture model available from PMCI.
2.1.0	2022-02-15	Updates to include the latest specifications & stack diagrams for PMCI architecture
2.2.0	2024-04-09	Updates to include the 2.0 MCTP Host Interface, PLDM File Transfer, and new MCTP bindings (MMBI, USB, PCIe-MI, and PCC)

226

13 Bibliography

227 DMTF DSP4014, *DMTF Process for Working Bodies 2.6*, https://www.dmtf.org/sites/default/files/standards/documents/DSP4014_2.6.X.pdf