


# DPDK Vhost/Virtio Performance Report

## Release 22.07

---

**Test Date:** September 2, 2022

**Author:** Intel DPDK Validation Team



## Revision History

---

Date	Revision	Comment
September 2 2022	1.0	Initial document for release



# Contents

---

Audience and Purpose.....	4
Test setup.....	4
Intel® Xeon® Processor Platinum 8380 (60M Cache, 2.30 GHz) .....	6
Hardware & Software Ingredients.....	6
Test Case 1 – RFC2544 0.001% packet loss test for Split ring Vhost/Virtio PVP Mergeable...	7
Test Case 2 – RFC2544 0.001% packet loss test for Packed ring Vhost/Virtio PVP Mergeable	9

## Audience and Purpose

---

The primary audience for this test report is architects and engineers implementing the Data Plane Development Kit (DPDK). This report provides information on packet processing performance testing for the specified DPDK release on Intel® architecture. The initial report may be viewed as the baseline for future releases and provides system configuration and test cases based on DPDK examples.

The purpose of reporting these tests is not to imply a single “correct” approach, but rather to provide a baseline of well-tested configurations and procedures with reproducible results. This will help guide architects and engineers who are evaluating and implementing DPDK solutions on Intel® architecture and can assist in achieving optimal system performance.

## Test setup

---

The device under test (DUT) consists of a system with an Intel® architecture motherboard populated with the following;

- A single or dual processor and PCH chip, except for System on Chip (SoC) cases
- DRAM memory size and frequency (normally single DIMM per channel)
- Specific Intel Network Interface Cards (NICs)
- BIOS settings noting those that updated from the basic settings
- DPDK build configuration settings, and commands used for tests

Connected to the DUT is an IXIA\*, a hardware test and simulation platform to generate packet traffic to the DUT ports and determine the throughput at the tester side. The IXIA is used to implement RFC2544 on the DUT.

Benchmarking a DPDK system requires knowledge of networking technologies including knowledge of network protocols and hands-on experience with relevant open-source software, such as Linux\*, and the DPDK. Engineers also need benchmarking and debugging skills, as well as a good understanding of the device-under-test (DUT) across compute and networking domains.

**DPDK Testpmd Test Case:** Documentation may be found at [http://www.dpdk.org/doc/guides/testpmd\\_app Ug/index.html](http://www.dpdk.org/doc/guides/testpmd_app Ug/index.html).

The testpmd application can be used to test the DPDK in a packet forwarding mode and also to access NIC hardware features. Note in the Testpmd example if the `-i` argument is used, the first core is used for the command language interface (CLI).

**RFC2544 Zero packet loss test case:** Used to determine the DUT throughput as defined in RFC1242(<https://www.ietf.org/rfc/rfc1242.txt>). Note RFC6201 <https://www.ietf.org/rfc/rfc6201.txt> has updated RFC2544 and RFC1242. Please check the link for more details. In this report, RFC2544 test uses DPDK testpmd as test application.

Procedure: Send a specific number of frames at a specific rate through the DUT and then count the frames that are transmitted by the DUT. If the count of offered frames is not equal to the count of

---

received frames, the rate of the offered stream is reduced and the test is rerun. The throughput is the fastest rate at which the count of test frames transmitted by the DUT is equal to the number of test frames sent to it by the test equipment.

**DPDK Phy-VM-Phy(PVP) RFC2544 test case:**

This test setup is shown in Figure1. The traffic is generated by Ixia running RFC2544(IxNetwork\* 9.0 with 0.001% packet loss, and the duration for each round is 60 seconds). The flow is one fixed flow. In this test setup, one port(100G) of Intel® Ethernet Network Adapter E810-2CQDA2 is used to inject traffic to Vhost/virtio. The case is to measure Vhost/virtio system forwarding throughput, and the theoretical system forwarding throughput is 100 Gbps. Both Vhost and Virtio is DPDK polling mode driver. The flow is as below: IXIA→NIC port0→Vhost-user0→Virtio→Vhost-user0→NIC port0→IXIA.

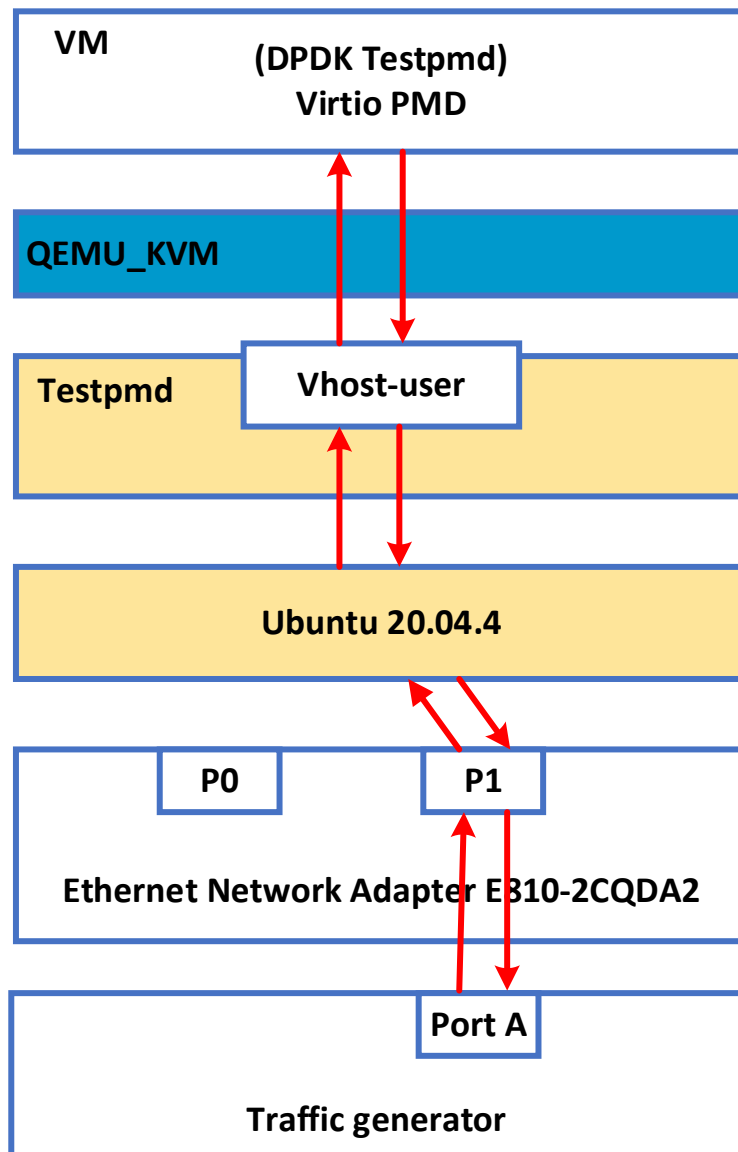


Figure1. DPDK PVP test setup



# Intel® Xeon® Processor Platinum 8380 (60M Cache, 2.30 GHz)

## Hardware & Software Ingredients

Item	Description
Server Platform	Supermicro® Server Board SYS-730A-I
CPU	Intel® Xeon® Platinum 8380 CPU @ 2.30GHz 40 CPU cores * 2 NUMA nodes
Memory	128GB: 32GB x 2 DIMMs x 2 NUMA nodes @ 3200MHz
PCIe	PCIe 3.0/4.0 x16
NICs	1x Intel® Ethernet Network Adapter E810-2CQDA2
BIOS	1.1a
Microcode version	0xd000363
Host Operating System	Ubuntu 20.04.4 LTS QEMU emulator version 7.0.0
Host Linux kernel version	5.13.0-41-generic
Host GCC version	gcc (Ubuntu 9.4.0-1ubuntu1~20.04.1) 9.4.0
Host DPDK version	22.07
Guest Operating System	Ubuntu 20.04 LTS
Guest GCC version	gcc (Ubuntu 9.4.0-1ubuntu1~20.04.1) 9.4.0
Guest DPDK version	22.07
Guest Linux kernel version	5.13.0-41-generic

### Boot and BIOS settings

Item	Description
Host Boot Settings	hugepagesz=1G hugepages=120 default_hugepagesz=1G isolcpus=1-15 intel_iommu=on iommu=pt intel_pstate=disable numa_balancing=disable nmi_watchdog=0 mitigations=off  <b>Note: nohz_full and rcu_nocbs is to disable Linux* kernel interrupts, and it's important for zero-packet loss test. Generally, 1G huge pages are used for performance test.</b>
VM Boot Settings	hugepagesz=2M hugepages=512 isolcpus=1-2 nohz_full=1-2 rcu_nocbs=1-2
BIOS	CPU Power and Performance Policy <Performance> CPU C-state Disabled CPU P-state Disabled Enhanced Intel® Speedstep® Tech Disabled Turbo Boost Disabled
Host Real Time Settings	echo -1 > /proc/sys/kernel/sched_rt_period_us echo -1 > /proc/sys/kernel/sched_rt_runtime_us echo 10 > /proc/sys/vm/stat_interval echo 0 > /proc/sys/kernel/watchdog_thresh
VM Real Time Settings	echo 0 > /proc/sys/kernel/watchdog echo 0 > /proc/sys/kernel/nmi_watchdog echo -1 > /proc/sys/kernel/sched_rt_period_us echo -1 > /proc/sys/kernel/sched_rt_runtime us




## Test Case 1 – RFC2544 0.001% packet loss test for Split ring Vhost/Virtio PVP Mergeable

Item	Description
Test Case	RFC2544 0.001% packet loss test for Split ring Vhost/Virtio PVP Mergeable
NIC	1x Intel® Ethernet Network Adapter E810-2CQDA2(2x100G)
Driver	ice DPDK PMD
Test Configuration	<p>Test tool: IxNetwork 9.00.1915.16</p> <p><b>Qemu Version: 7.0.0</b></p> <p><b>Vring size: 1024</b>, the max Vring size Qemu support</p> <p>Hugepage size: 1G</p> <p>Virtio Mergeable: On</p> <p>Forward Mode: testpmd mac forward</p> <p><b>Vhost: 1 queue 1 logic core</b></p> <p><b>Virtio: 1 queue 1 logic core</b></p> <p><b>Totally 2 logic cores from 2 physical cores are used.</b></p>
Flow Configuration	1 Flow with fixed source and destination IP.
Test Step	<ol style="list-style-type: none"> <li>1. Bind one 100G NIC port to vfio-pci</li> <li>2. Launch vhost: <pre>chrt -f 95 ./x86_64-native-linuxapp-gcc/app/testpmd -l 9-10 -n 4 -v --file-prefix=vhost\ --vdev 'eth_vhost0,iface=vhost-net,queues=1' -- -i --txd=1024 --rx=1024 --nb-cores=1 testpmd&gt;set fwd mac testpmd&gt;start</pre> </li> <li>3. Launch VM : <pre>taskset -c 11,12,13 qemu-system-x86_64 \ -name us-vhost-vm1 -cpu host -enable-kvm -m 2048 \ -object memory-backend-file,id=mem,size=2048M,mem-path=/mnt/huge,share=on \ -numa node,memdev=mem -mem-prealloc \ -smp cores=2,sockets=1 -drive file=/home/osimg/ubuntu20-04.img \ -chardev socket,id=char0,path=./vhost-net \ -monitor unix:/tmp/vm2_monitor.sock,server,nowait -device e1000,netdev=ntts1 -netdev user,id=ntts1,hostfwd=tcp:127.0.0.1:6013-:22 \ -netdev type=vhost-user,id=mynet1,chardev=char0,vhostforce \ -device virtio-net-pci,mac=52:54:00:00:00:01,netdev=mynet1,mrg_rxbuf=on,rx_queue_size=1024,tx_queue_size=1024 -vnc :10 --monitor stdio</pre> </li> <li>4. Use monitor to bind vcpu with physical cpu on host machine: <pre>qemu monitor: info cpus #check pid taskset -cp 12 xxx #xxx is the pid number taskset -cp 13 xxx</pre> </li> </ol>

	<p>5. Enter vm and bind port to vfio-pci:  <code>modprobe vfio-pci</code>  <code>echo 1 &gt; /sys/module/vfio/parameters/enable_unsafe_noiommu_mode</code></p> <p>6. Launch virtio in VM:  <code>./x86_64-native-linuxapp-gcc/app/testpmd -c 0x3 -n 4 -- -i --txd=1024 --rx=1024</code>  <code>testpmd&gt;set fwd mac</code>  <code>testpmd&gt;start</code></p>
--	---

**Test Result:**

Packet Size (Bytes)	Throughput (Mpps)	Line Rate[100G] (Mpps)
64	8.67	148.81
128	8.03	84.46
256	7.04	45.29
512	4.68	23.50
1024	3.31	11.97
1280	2.92	9.62
1518	2.64	8.13

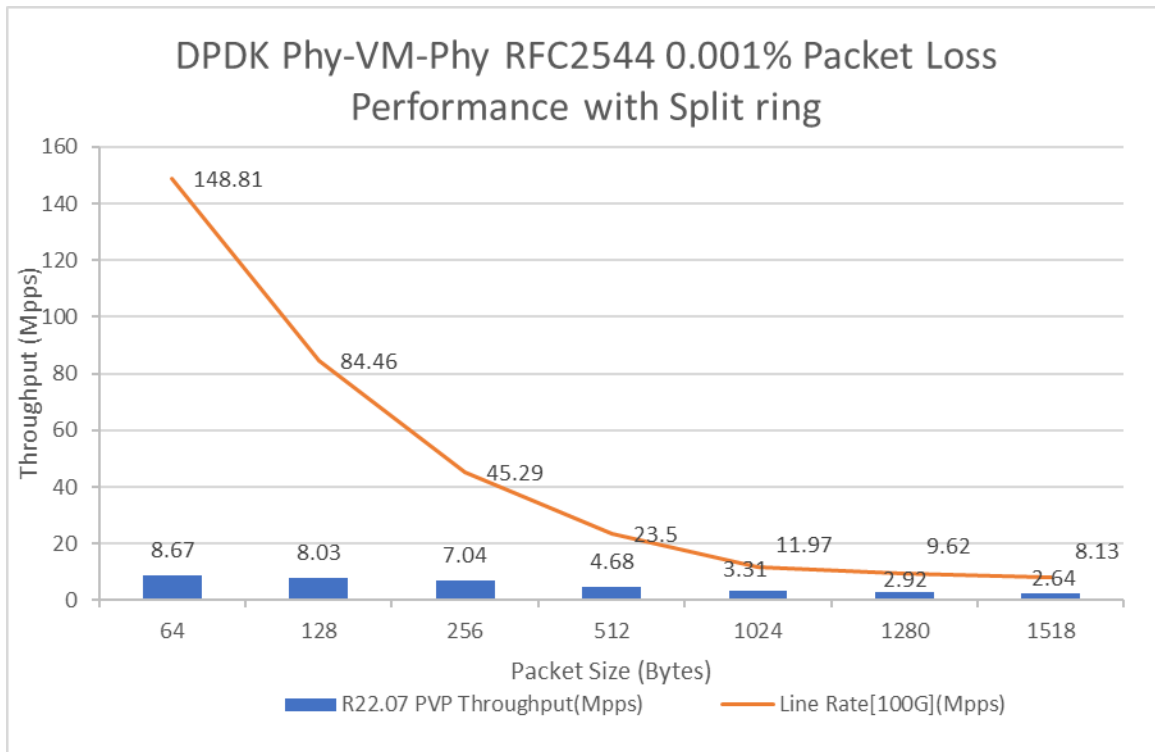





## Test Case 2 – RFC2544 0.001% packet loss test for Packed ring Vhost/Virtio PVP Mergeable

Item	Description
Test Case	RFC2544 0.001% packet loss test for Packed ring Vhost/Virtio PVP Mergeable
NIC	1x Intel® Ethernet Network Adapter E810-2CQDA2(2x100G)
Driver	ice DPDK PMD
Test Configuration	<p>Test tool: IxNetwork 9.00.1915.16</p> <p><b>Qemu Version: qemu-7.0.0</b></p> <p><b>Vring size: 1024</b>, the max Vring size Qemu support</p> <p>Hugepage size: 1G</p> <p>Virtio Mergeable: On</p> <p>Forward Mode: testpmd mac forward</p> <p><b>Vhost: 1 queue 1 logic core</b></p> <p><b>Virtio: 1 queue 1 logic core</b></p> <p><b>Totally 2 logic cores from 2 physical cores are used.</b></p>
Flow Configuration	1 Flow with fixed source and destination IP.
Test Step	<ol style="list-style-type: none"> <li>1. Bind one 100G NIC port to vfio-pci</li> <li>2. Launch vhost: <pre>chrt -f 95 ./x86_64-native-linuxapp-gcc/app/testpmd -l 9-10 -n 4 -v --file-prefix=vhost\ --vdev 'eth_vhost0,iface=vhost-net,queues=1' -- -i --txd=1024 --rx=1024 --nb-cores=1 testpmd&gt;set fwd mac testpmd&gt;start</pre> </li> <li>3. Launch VM : <pre>taskset -c 11,12,13 qemu-system-x86_64 \ -name us-vhost-vm1 -cpu host -enable-kvm -m 2048 \ -object memory-backend-file,id=mem,size=2048M,mem-path=/mnt/huge,share=on \ -numa node,memdev=mem -mem-prealloc \ -smp cores=2,sockets=1 -drive file=/home/osimg/ubuntu20-04.img \ -chardev socket,id=char0,path=./vhost-net \ -monitor unix:/tmp/vm2_monitor.sock,server,nowait -device e1000,netdev=nttsip1 -netdev user,id=nttsip1,hostfwd=tcp:127.0.0.1:6013-:22 \ -netdev type=vhost-user,id=mynet1,chardev=char0,vhostforce \ -device virtio-net-pci,mac=52:54:00:00:00:01,netdev=mynet1,mrg_rxbuf=on,rx_queue_size=1024,tx_queue_size=1024,packed=on -vnc :10 --monitor stdio</pre> </li> <li>4. Use monitor to bind vcpu with physical cpu on host machine: <pre>qemu monitor: info cpus #check pid taskset -cp 12 xxx #xxx is the pid number</pre> </li> </ol>

```


taskset -cp 13 xxx

5. Enter vm and bind port to vfio-pci:
modprobe vfio-pci
echo 1 > /sys/module/vfio/parameters/enable_unsafe_noiommu_mode

6. Launch virtio in VM:
./x86_64-native-linuxapp-gcc/app/testpmd -c 0x3 -n 4 -- -i --txd=1024 --
rx=1024
testpmd>set fwd mac
testpmd>start
    
```

**Test Result:**

Packet Size (Bytes)	Throughput (Mpps)	Line Rate[100G] (Mpps)
64	9.88	148.81
128	9.34	84.46
256	8.33	45.29
512	5.96	23.50
1024	3.96	11.97
1280	3.55	9.62
1518	3.13	8.13

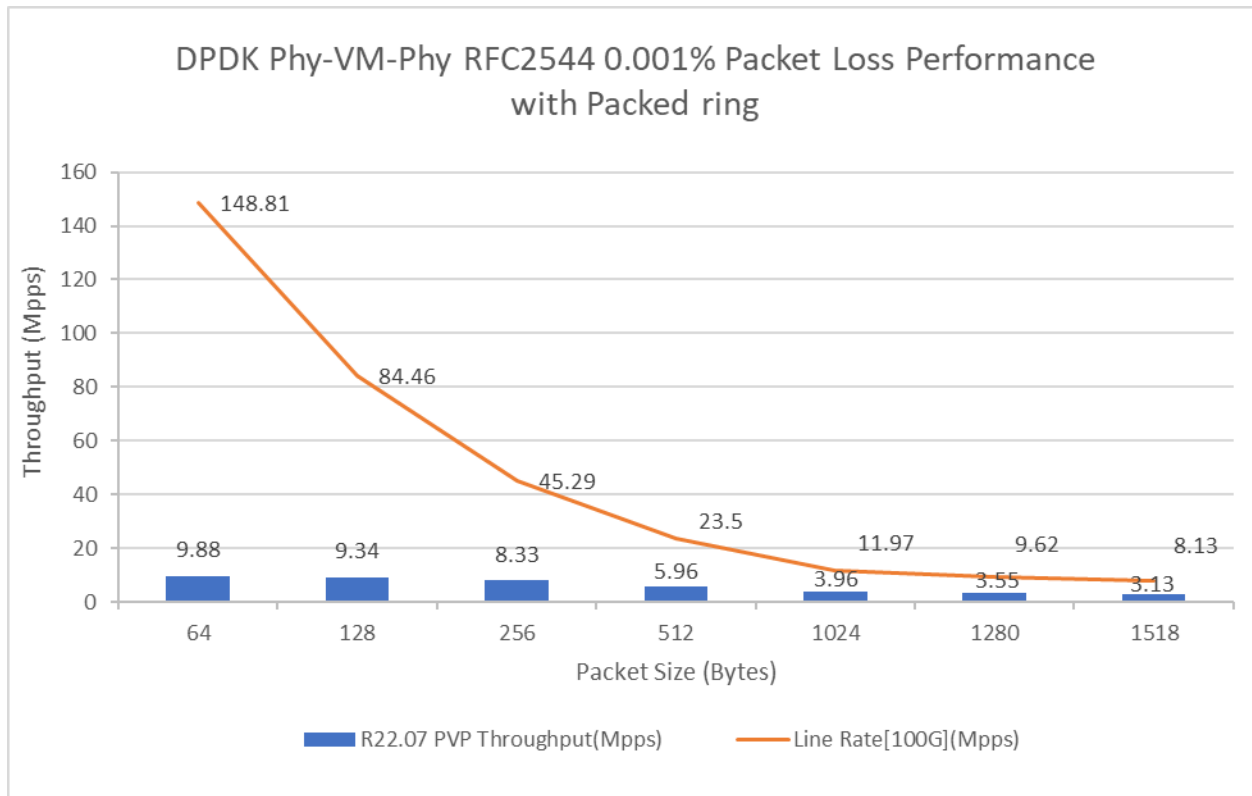

There are some new features in 22.07 that have impacts on performance, for example, code refactor for supporting asynchronous dequeue. There is around 2~5% drop. Packed ring and split ring have different data path implementations, so the impact could be different.



## DISCLAIMERS

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein.

Tests document performance of components on a particular test, in specific systems. Differences in hardware, software, or configuration will affect actual performance. Consult other sources of information to evaluate performance as you consider your purchase. For more complete information about performance and benchmark results, visit [www.intel.com/benchmarks](http://www.intel.com/benchmarks).

Software and workloads used in performance tests may have been optimized for performance only on Intel microprocessors. Performance tests, such as SYSmark and MobileMark, are measured using specific computer systems, components, software, operations and functions. Any change to any of those factors may cause the results to vary. You should consult other information and performance tests to assist you in fully evaluating your contemplated purchases, including the performance of that product when combined with other products.

Performance results are based on testing as of September 2 2022 and may not reflect all publicly available security updates. See configuration disclosure for details. No product can be absolutely secure.

For more information go to <http://www.intel.com/performance>

Intel® AES-NI requires a computer system with an AES-NI enabled processor, as well as non-Intel software to execute the instructions in the correct sequence. AES-NI is available on select Intel® processors. For availability, consult your reseller or system manufacturer. **For more information, see <http://software.intel.com/en-us/articles/intel-advanced-encryption-standard-instructions-aes-ni/>**

Copyright © 2022 Intel Corporation. All rights reserved.