

THE ANL 50 MeV H⁺ INJECTOR - 35 YEAR ANNIVERSARY

V. Stipp, F. Brumwell, and G. McMichael
IPNS Division, Argonne National Laboratory, Argonne IL, USA 60439

Abstract

The H⁺ Injector at ANL consists of a 750 keV Cockcroft-Walton preaccelerator and a Alvarez type 50 MeV Linac. The accelerator was originally constructed as the source of protons for the Zero Gradient Synchrotron (ZGS). The first proton beam was extracted from the preaccelerator in 1961. The accelerator is presently used as the injector for the Intense Pulsed Neutron Source (IPNS), a 500 MeV rapid cycling synchrotron with a spallation-neutron target. During most of the time since turn-on over 15 years ago, the IPNS facility availability has rarely dropped below 90% and has averaged 95% over the last ten years. During the same period, the 50 MeV injector availability has averaged 99%. Performance and improvements over the 35 year period is discussed.

Introduction

The ANL 50 MeV Injector has proven itself to be a very versatile and reliable machine. The linac has been used as a source of protons, H⁺ ions, polarized protons, polarized deuterons, and neutral particle beams during its many years of operation. Ground was broken for the injector in June 1959. The first 750 keV proton beam was obtained in December 1961. The first 50 MeV protons were accelerated in the linac ten months later in October 1962. The injector was used as the proton source for the ZGS 12.5 GeV synchrotron until 1976 when the ZGS became the first accelerator to utilize direct injection of H⁺ ions as a normal mode of operation. The last two years before the ZGS was shut down in October 1979, were dedicated to the acceleration of polarized protons. A Rapid Cycling Synchrotron (RCS)[1] was developed and constructed in the mid 1970's as a proposed booster for the ZGS. Due to the scheduled shutdown of the ZGS the booster concept was abandoned. However, the RCS evolved into the 500 MeV accelerator for injecting protons to the IPNS spallation-neutron target. The linac has now supplied H⁺ ions at a 30Hz rate to the RCS for over 15 years. We expect to inject the 5 billionth pulse into the RCS in late November of this year.

Injector General Description

The layout of the IPNS accelerator system including linac, RCS, and the spallation target is shown in Figure 1. The preaccelerator houses the 750 kV Cockcroft-Walton power supply, the H⁺ ion source, and the high gradient accelerating column. The H⁺ ion source is a magnetron type[2] in which negative ions are extracted directly from the hydrogen plasma on the surface of the cathode. The extractor electrode and

magnet poles are at terminal ground and the source, including the pulsed arc supply, pulsed hydrogen supply, and cesium supply are pulsed to a negative 20 kV potential. After extraction, the beam is bent 90° by a magnetic dipole, focussed by three quadrupole magnets, and injected into the high gradient column. The 750 keV beam is transported 6 m to the linac in a beamline containing two quadrupole triplets for beam focussing, a vertical and horizontal steering magnet, one 200 MHz buncher, and a fast beam chopper for beam shaping. The linac cavity is a copper clad structure 0.94 m in diameter and 33.5 m long operating at 200.070 MHz. It was constructed in eleven sections, which are bolted together. The linac contains 124 drift tubes, each containing a dc quadrupole magnet. Rf power is supplied to the linac via a rectangular waveguide to a single feedloop in the center of the cavity. A 50 MeV beam line transports the H⁺ beam 38 m to the RCS accelerator. Beam steering and focussing is provided by a total of eight horizontal and two vertical dipole magnets and sixteen quadrupole magnets.

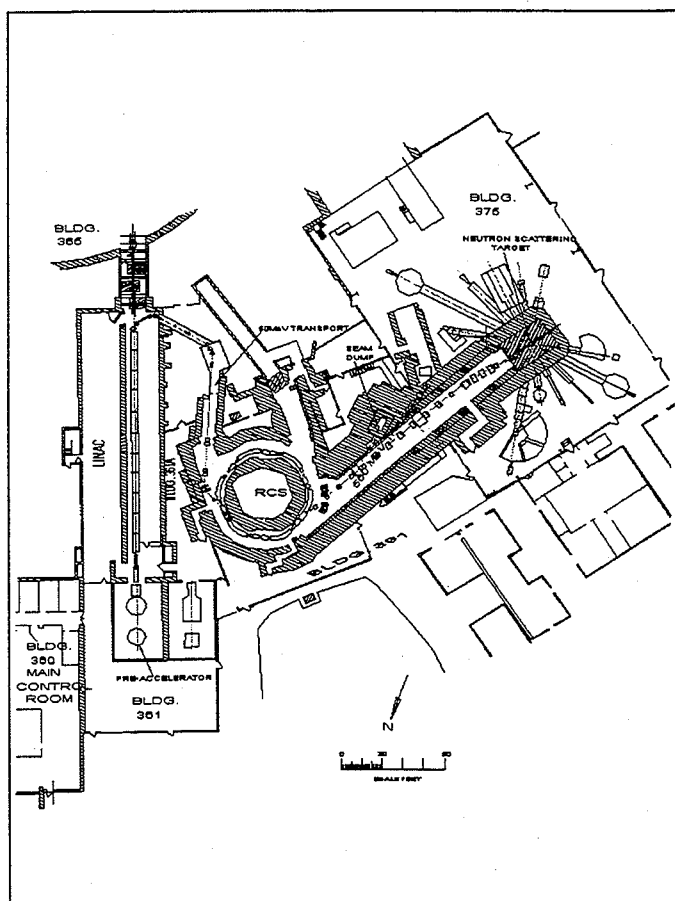


Figure 1. Layout of the IPNS accelerator.

