


# The sensitivity to $\phi_s$ and $\Delta\Gamma_s$ at LHCb

**Jeroen van Hunen**

(for the LHCb collaboration)



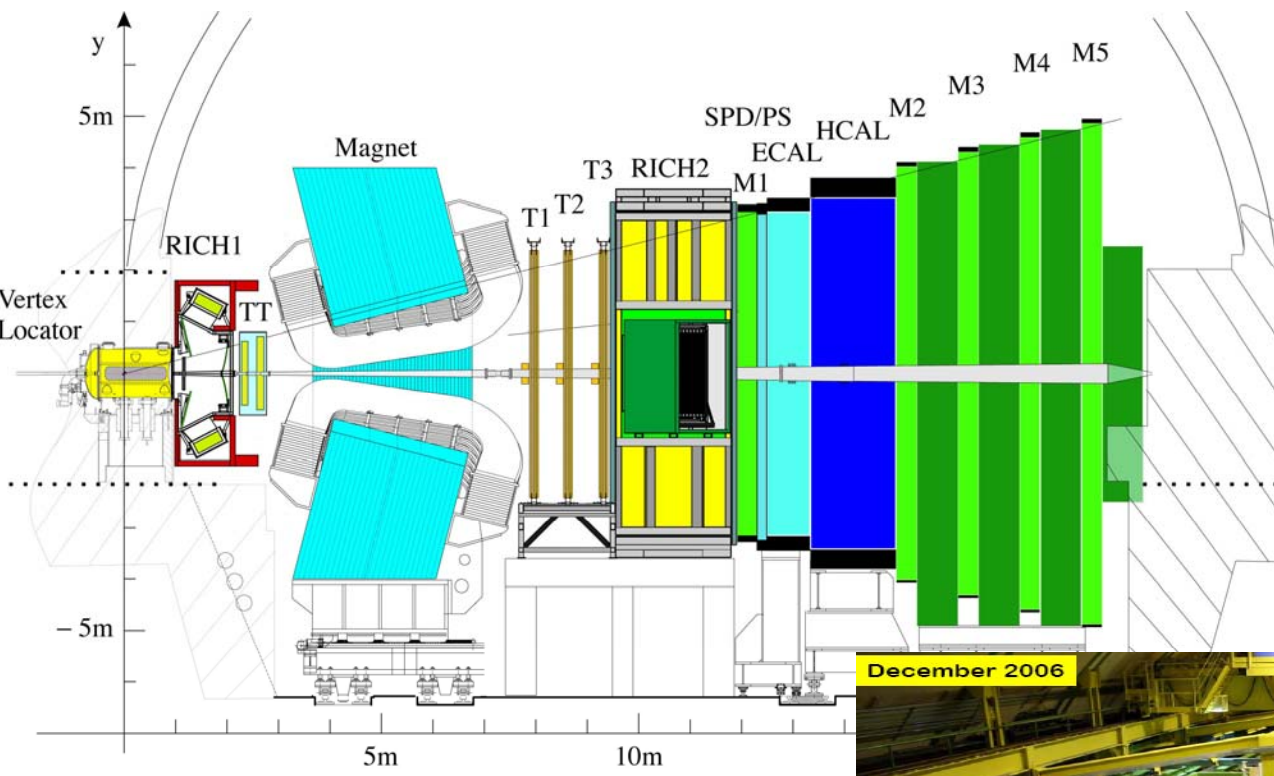


LHCb


Single arm spectrometer with :

- good vertexing/tracking for reconstruction of the primary and B-decay vertices.
- good mass resolution and particle identification

December 2006

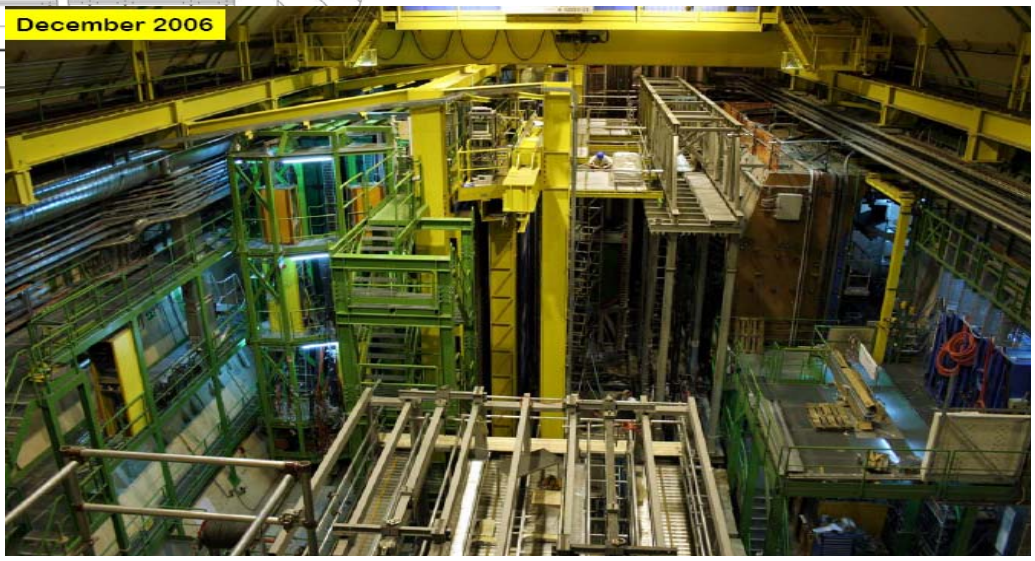

LHCb under construction. It's real! →

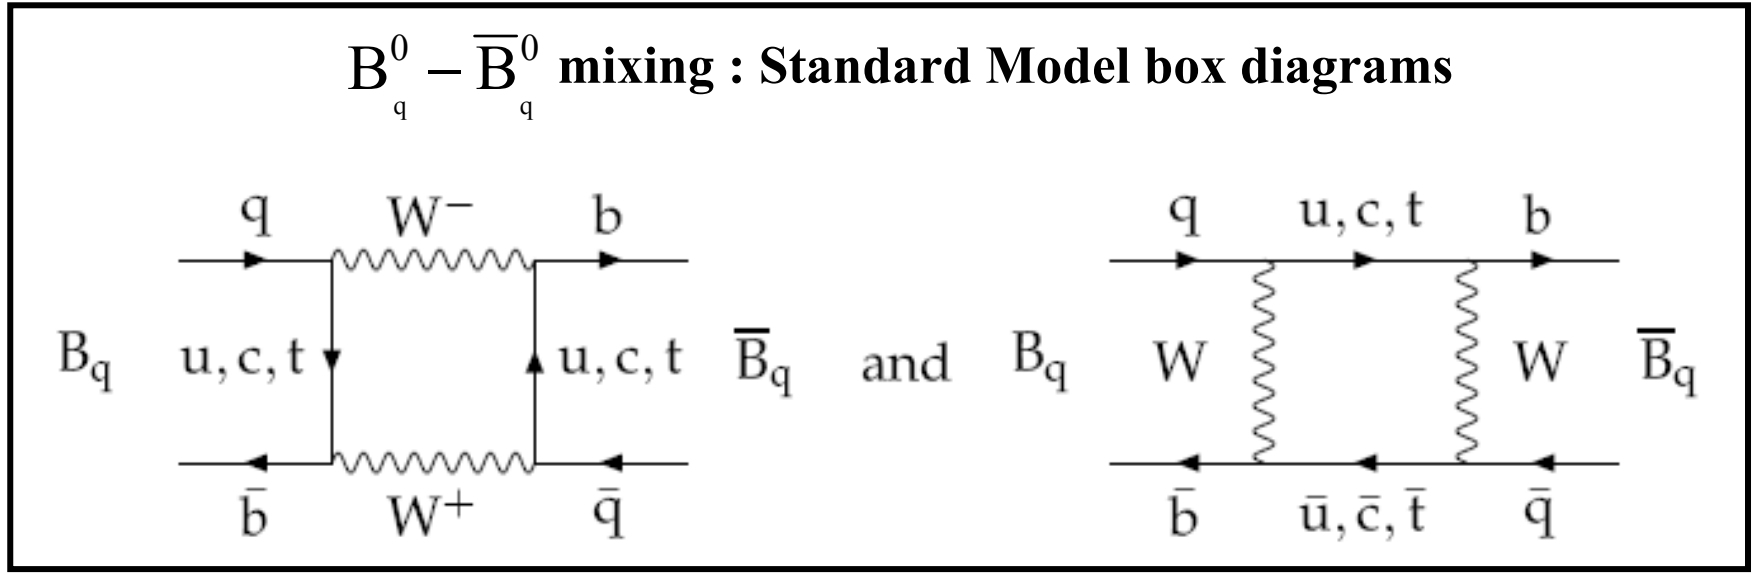

$B_q^0$  mixing phase  $\equiv \phi_q = 2\arg[V_{tq}^* V_{tb}] \implies \begin{cases} \phi_d = 2\beta \\ \phi_s = -2\chi \end{cases}$

If only SM box diagrams

If NP contributions in  $B_s$  mixing  $\implies \phi_s = \phi_s^{SM\text{box}} + \phi_s^{NP}$  and  $\phi_s \neq -2\chi$


Thus : measure the  $B_s$  mixing phase  $\phi_s$  and see if it agrees with SM expectation from the box diagrams (check if  $\phi_s \leftrightarrow -2\chi = -2\lambda^2\eta \cong -0.04$ )

These  $B_s$ -decays have been used to determine the LHCb sensitivity to  $\phi_s$  :

$B_s \rightarrow J/\psi(\mu^-\mu^+)\phi(K^+K^-)$	CP-odd and CP-even eigenstates
$B_s \rightarrow \eta_c(h^-h^+h^-h^+)\phi(K^+K^-)$	CP-even eigenstate
$B_s \rightarrow J/\psi(\mu^-\mu^+)\eta(\gamma\gamma)$	CP-even eigenstate
$B_s \rightarrow J/\psi(\mu^-\mu^+)\eta(\pi^+\pi^-\pi^0(\gamma\gamma))$	CP-even eigenstate
$B_s \rightarrow D_s(K^+K^-\pi^-)D_s(K^+K^-\pi^+)$	CP-even eigenstate
$B_s \rightarrow D_s^-(K^+K^-\pi^-)\pi^+$	Flavour-specific decay (control channel needed for determination of $\Delta M_s$ and the wrong tag fraction)

$$A_{CP}(t) = \frac{\Gamma[\bar{B}_s(t) \rightarrow f] - \Gamma[B_s(t) \rightarrow f]}{\Gamma[\bar{B}_s(t) \rightarrow f] + \Gamma[B_s(t) \rightarrow f]}$$


- CP eigenstates with eigenvalues:  $\eta_f = \pm 1$
- $\cancel{CP}$  : interference in mixing and decay (no direct  $\cancel{CP}$ )
- $\bar{b} \rightarrow \bar{c}c\bar{s}$  is dominated by a single weak phase

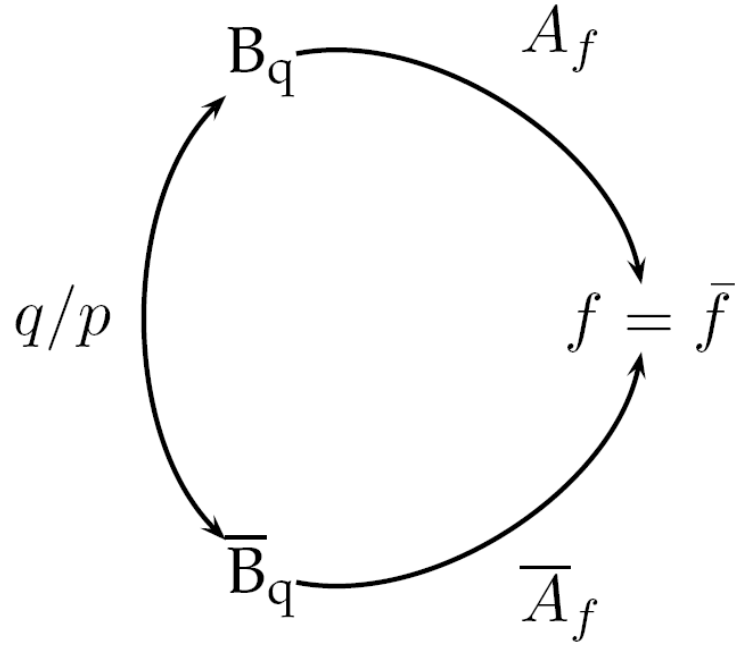

$$A_{CP}^{\text{mix-ind}}(t) = -\frac{\eta_f \sin \phi_s \sin(\Delta M_s t)}{\cosh(\Delta \Gamma_s t/2) - \eta_f \cos \phi_s \sinh(\Delta \Gamma_s t/2)}$$

**The time-dependent CP asymmetry allows us to measure  $\phi_s$  and  $\Delta \Gamma_s$**   
 (but also untagged events give a sensitivity to  $\phi_s \Rightarrow \cos(\phi_s)$  term)

Complication for  $B_s \rightarrow J/\psi(\rightarrow \ell^+\ell^-) \phi(\rightarrow K^+K^-)$

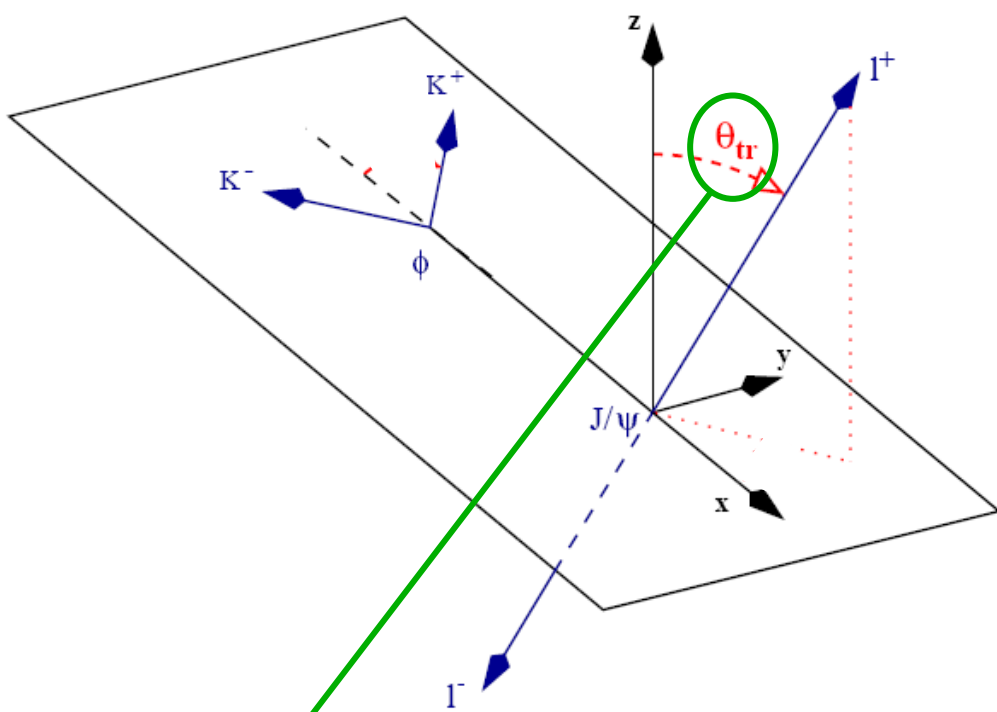

$$R_T \equiv \frac{|A_{\perp}(0)|^2}{\sum_{f=0,\parallel,\perp} |A_f(0)|^2}$$

$R_T = 0 \rightarrow$  CP even

$R_T = 0.5 \rightarrow$  maximum dilution  
(but still sensitivity to  $\phi_s$  since odd and even contributions have different  $\theta_{tr}$  distribution)

Measurements (Tevatron)  $\rightarrow$   
 $R_T \cong 0.2$

(full angular analysis, i.e. with 3 angles, started)

$$\frac{d\Gamma[B_s(t) \rightarrow f]}{d \cos \theta} \propto (|A_0(t)|^2 + |A_{\parallel}(t)|^2) \frac{3}{8} (1 + \cos^2 \theta) + |A_{\perp}(t)|^2 \frac{3}{4} \sin^2 \theta$$



Geant Monte Carlo simulation with :

- A detailed and realistic detector and material description
- Realistic detector inefficiencies, noise hits, and effects of events from the previous bunch crossings
- Full trigger simulation, pattern recognition, and offline event selection

Decay Channel	Yield (evts/2fb <sup>-1</sup> )	B/S	$\langle\delta_\tau\rangle$ (fs)	$\sigma_{\text{mass}}$ (MeV/c <sup>2</sup> )	$W_{\text{tag}}$ (%)	$\epsilon_{\text{tag}}$ (%)
$B_s \rightarrow J/\psi(\mu^-\mu^+)\phi(K^+K^-)$	<b>131k</b>	<b>0.12</b>	<b>36</b>	<b>14</b>	<b>33</b>	<b>57</b>
$B_s \rightarrow \eta_c(h^-h^+h^-h^+)\phi(K^+K^-)$	<b>3.0k</b>	<b>0.6</b>	<b>30</b>	<b>12</b>	<b>31</b>	<b>66</b>
$B_s \rightarrow J/\psi(\mu^-\mu^+)\eta(\pi^+\pi^-\pi^0(\gamma\gamma))$	<b>3.0k</b>	<b>3.0</b>	<b>34</b>	<b>20</b>	<b>30</b>	<b>62</b>
$B_s \rightarrow J/\psi(\mu^-\mu^+)\eta(\gamma\gamma)$	<b>8.5k</b>	<b>2.0</b>	<b>37</b>	<b>34</b>	<b>35</b>	<b>63</b>
$B_s \rightarrow D_s(K^+K^-\pi^-)D_s(K^+K^-\pi^+)$	<b>4.0k</b>	<b>0.3</b>	<b>56</b>	<b>6</b>	<b>34</b>	<b>57</b>
$B_s \rightarrow D_s(K^+K^-\pi^-)\pi^+$	<b>120k</b>	<b>0.4</b>	<b>40</b>	<b>14</b>	<b>31</b>	<b>63</b>

In summary (important for the sensitivity to  $\phi_s$ ) :




$B_s \rightarrow J/\psi\phi$  : Large yield, but mixture of CP-odd and CP-even eigenstates

$B_s \rightarrow J/\psi\eta, B_s \rightarrow \eta_c\phi$  : Low yield, high background, but CP-even

$B_s \rightarrow D_s D_s$  : Low yield, worse proper time resolution, but CP-even



Proper time error distribution for the different decays

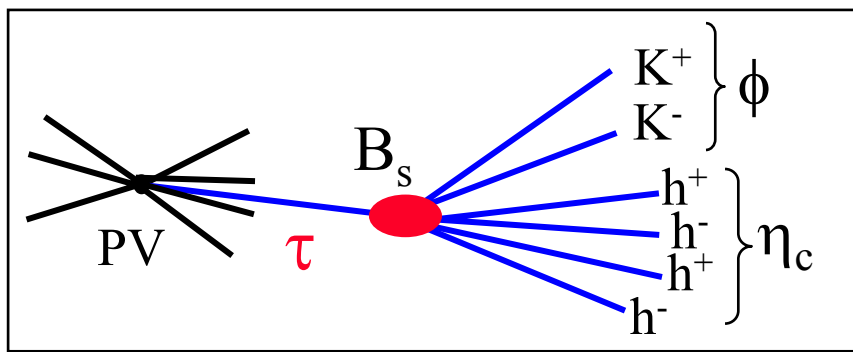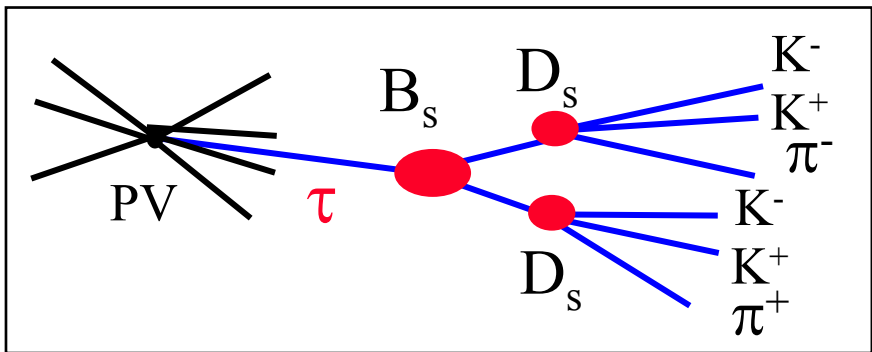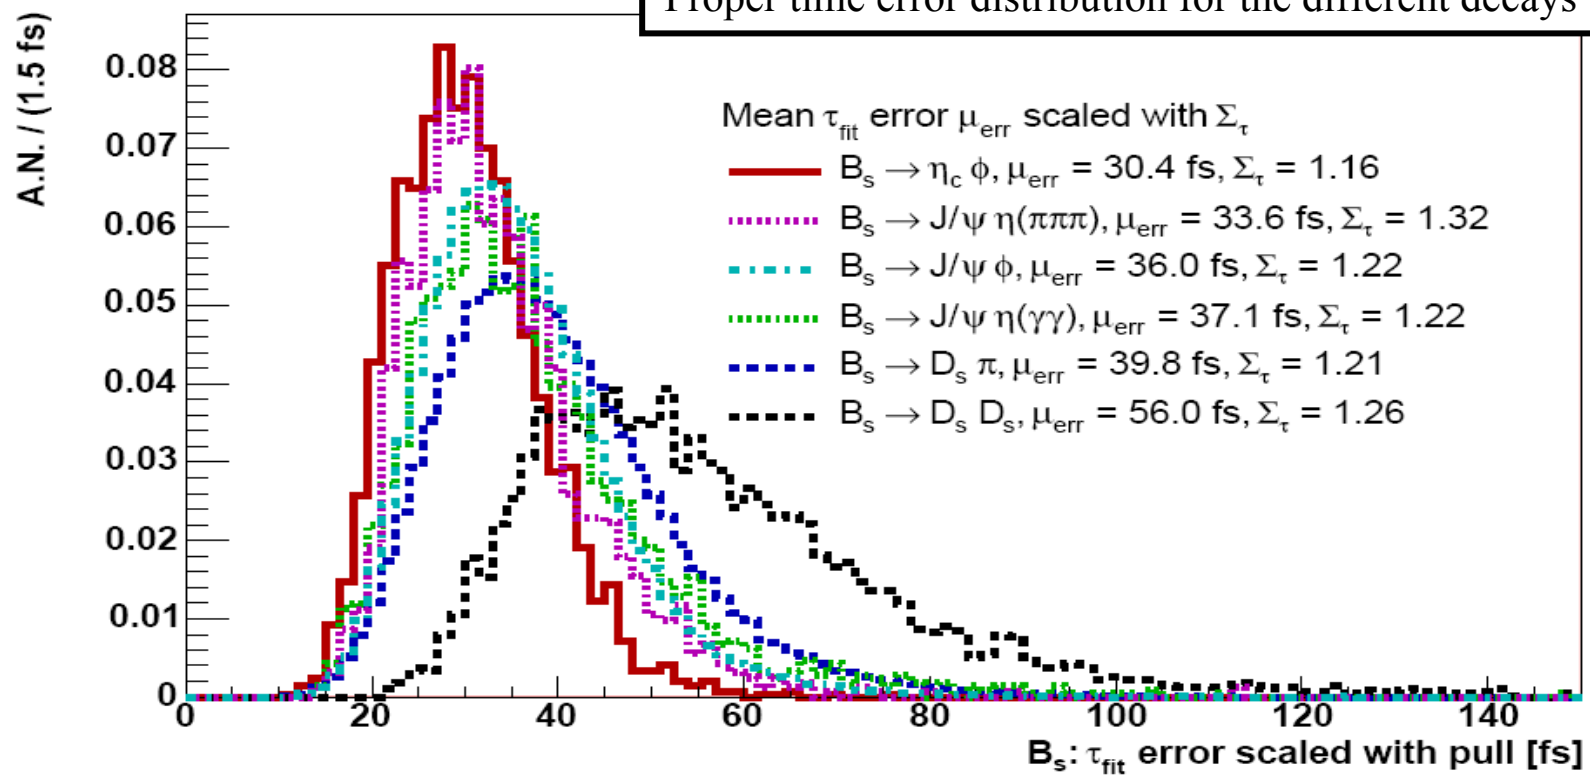

The sensitivities for  $\phi_s$  and  $\Delta\Gamma_s$  are determined by making use of a fast parameterized MC. The results on the event selections from the full LHCb MC are used as input.


The CP parameters are extracted by performing a likelihood fit to the mass and the tagged and untagged proper-time distributions (and for  $B_s \rightarrow J/\psi\phi$  to the transversity angle,  $\theta_{tr}$ ).

The likelihood for the signal  $\bar{b} \rightarrow \bar{c}\bar{c}\bar{s}$  transitions is simultaneously maximized with the control sample ( $B_s \rightarrow D_s\pi$ ). The wrong tag fraction ( $w_{tag}$ ) is assumed to be the same for the control and signal sample.

- $m_{B_s} = 5369.6 \text{ MeV}/c^2$ ;
- $\Delta M_s = 17.5 \text{ ps}^{-1}$ ;
- $\phi_s = -0.04 \text{ rad}$ ;
- $\Delta\Gamma_s/\Gamma_s = 0.15$ ;
- $1/\Gamma_s = 1.45 \text{ ps}$ ;
- $R_T = 0.2$ , for  $B_s \rightarrow J/\psi\phi$


Performed  $\sim 200$  toy experiments, where each experiment represents  $2\text{fb}^{-1}$  ( $10^7$  seconds at  $2 \times 10^{32} \text{cm}^2 \text{s}^{-1}$ ). The RMS of the  $\phi_s$  distribution is given as the sensitivity.

Standard model values are used as input

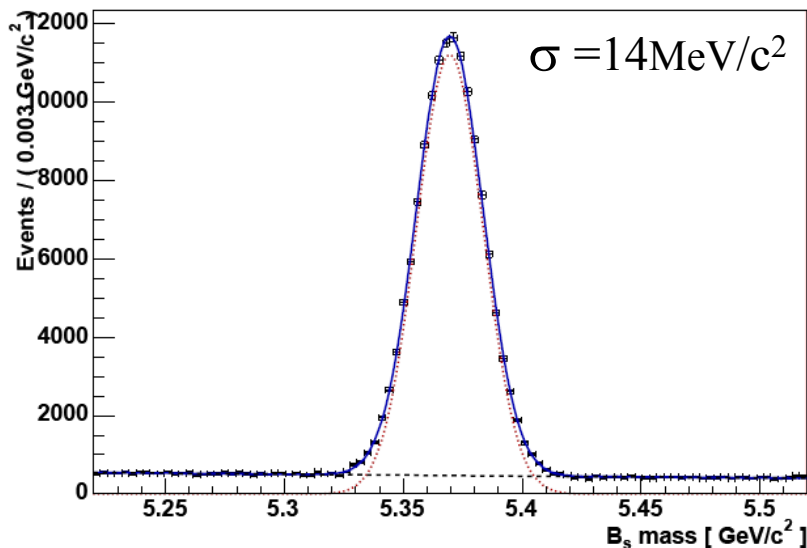

Projection of the likelihood on mass distribution for  $B_s \rightarrow J/\psi\phi$ .

The mass peak is modeled by an exponential (background) and a Gaussian (signal).

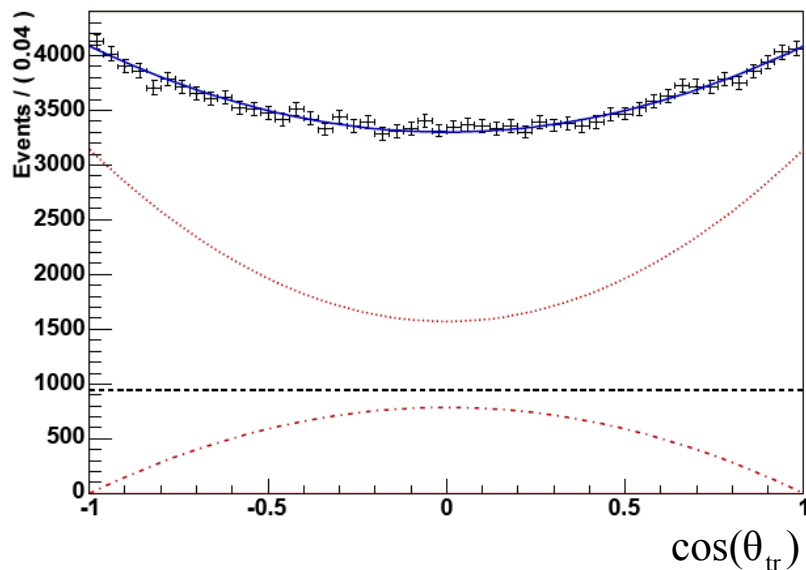

Projection of the likelihood on the transversity angle distribution for  $B_s \rightarrow J/\psi\phi$ .


Blue=total, red dotted = CP-even, red dashed = CP-odd, black=background (is assumed to be independent of  $\cos(\theta_{tr})$ ).

$$R_f(t_i^{\text{true}}, q_i; \omega_{\text{tag}}, \vec{\alpha}) \propto e^{-\Gamma_s t_i^{\text{true}}} \left\{ \cosh \frac{\Delta\Gamma_s t_i^{\text{true}}}{2} - \eta_f \cos \phi_s \sinh \frac{\Delta\Gamma_s t_i^{\text{true}}}{2} + \eta_f q_i D \sin \phi_s \sin(\Delta M_s t_i^{\text{true}}) \right\}$$

$\bar{b} \rightarrow \bar{c}c\bar{s}$  (CP-even)

$\phi_s = 5 \times \text{SM value}$

Rates with resolution and acceptance

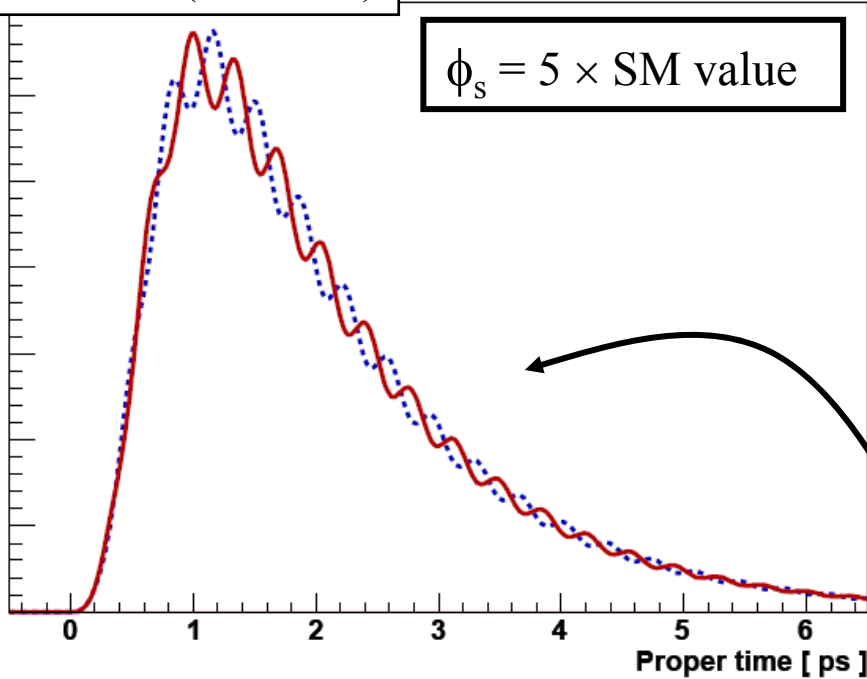

- **Red solid line** : tagged as initially  $B_s^0$
- **Blue dashed** : tagged as initially  $\bar{B}_s^0$


(Wrong tag fraction is included)

- Sensitivity to  $\phi_s$  depends on  $D$  (tagging dilution) =  $1 - 2w_{\text{tag}}$

But  $\Rightarrow$  also sensitivity to  $\phi_s$  with untagged events ( $w_{\text{tag}}=0.5, D=0$ ) from the  $\cos(\phi_s)$  term, especially if  $\phi_s$  is large.

Include:

- Trigger and Selection bias on  $\tau$
- Proper time resolution

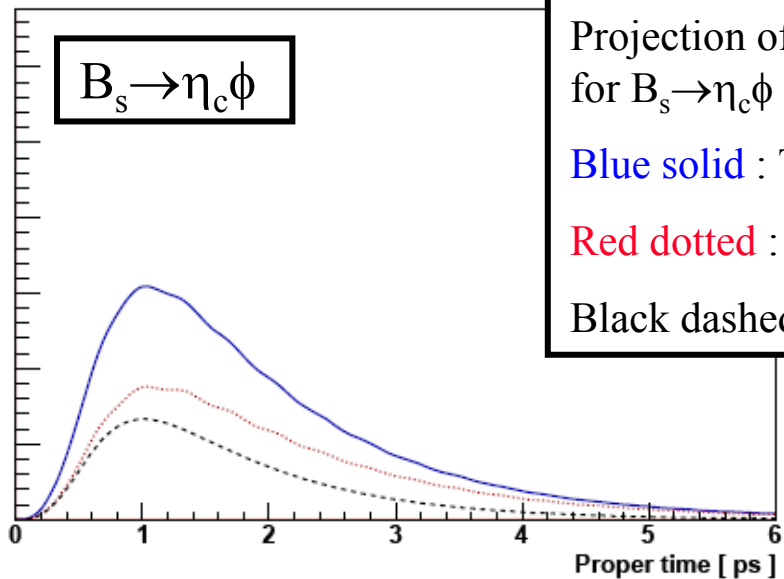

Projection of the likelihood on the proper time distribution for  $B_s \rightarrow \eta_c \phi$  and  $B_s \rightarrow J/\psi \eta$  (now with SM parameters)


Blue solid : Total

Red dotted : Signal

Black dashed : Background

$B_s \rightarrow \eta_c \phi$  : good proper time resolution  $\Rightarrow$  wiggles in the signal are visible

$B_s \rightarrow J/\psi \eta$  : larger background, worse proper time resolution  $\Rightarrow$  flattens the wiggles

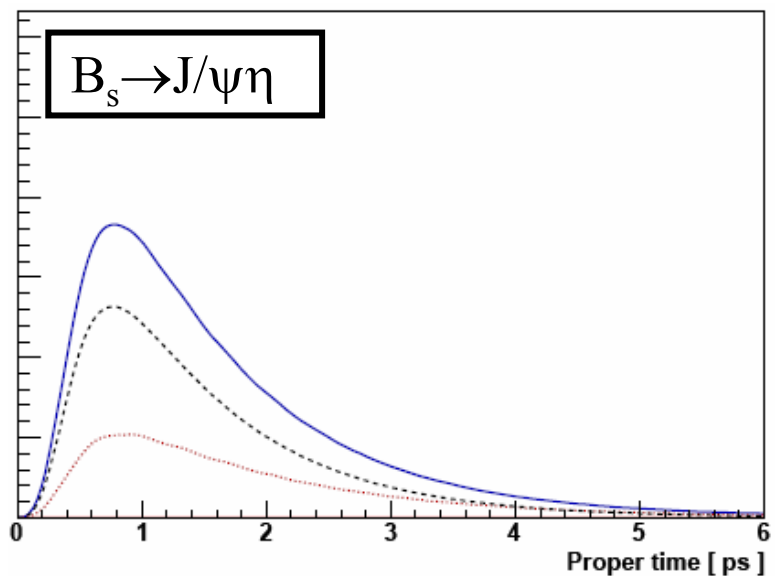

Likelihood for the proper time distribution includes (from full MC) :

- acceptance function
- per-event-error for the decay time
- tagging performance
- exponential background function

Channels (sensitivity to $\phi_s$ with $2 \text{ fb}^{-1}$ )	$\sigma(\Phi_s)[rad]$	Weight $\left(\frac{\sigma}{\sigma_i}\right)^2$ [%]
$B_S \rightarrow D_S(K^+K^-\pi)D_S(K^+K^-\pi^+)$	0.133	2.6
$B_S \rightarrow J/\Psi(\mu^+\mu^-)\eta(\pi^+\pi^-\pi^0(\gamma\gamma))$	0.142	2.8
$B_S \rightarrow J/\Psi(\mu^+\mu^-)\eta(\gamma\gamma)$	0.109	3.9
$B_S \rightarrow \eta_c(h^-h^+h^-h^+)\Phi(K^+K^-)$	0.108	3.9
Combined sensitivity for pure CP eigenstates	0.059	13.2
$B_S \rightarrow J/\Psi(\mu^+\mu^-)\Phi(K^+K^-)$	0.023	86.8
Combined sensitivity for all CP eigenstates	0.021	100.0

Total LHCb sensitivity with  $10 \text{ fb}^{-1}$  :  $0.01 \text{ rad} \cong 0.6 \text{ degrees}$   
(but statistical uncertainty only)

Additional studies ongoing :  $B_S \rightarrow J/\Psi \eta'(\pi^+\pi^-\eta(\gamma\gamma))$       $B_S^0 \rightarrow J/\Psi(\mu^+\mu^-)\eta'(\rho^0(\pi^+\pi^-)\gamma)$

Parameter	Sensitivity with $2 \text{ fb}^{-1}$	Channels
$\phi_s$	<b>0.021 rad</b>	$B_s \rightarrow J/\psi\phi, B_s \rightarrow \eta_c\phi, B_s \rightarrow J/\psi\eta, B_s \rightarrow D_s D_s$
$\Delta\Gamma_s/\Gamma_s$	<b>0.0092</b>	$B_s \rightarrow J/\psi\phi$
$R_T$	<b>0.00040</b>	$B_s \rightarrow J/\psi\phi$
$\Delta m_s$	<b>0.007 ps<sup>-1</sup></b>	$B_s \rightarrow D_s\pi^+$
$W_{\text{tag}}$	<b>0.0036</b>	$B_s \rightarrow D_s\pi^+$

- $m_{B_s} = 5369.6 \text{ MeV}/c^2$ ;
- $\Delta M_s = 17.5 \text{ ps}^{-1}$ ;
- $\phi_s = -0.04 \text{ rad}$ ;
- $\Delta\Gamma_s/\Gamma_s = 0.15$ ;
- $1/\Gamma_s = 1.45 \text{ ps}$ ;
- $R_T = 0.2$ , for  $B_s \rightarrow J/\psi\phi$

Input to the likelihood fit

Control channel only



The effect on the sensitivity of a degraded ( $\Sigma_\tau + 10\%$ ) or improved ( $\Sigma_\tau - 10\%$ ) proper time resolution.


And the effect of a larger B/S




Scan	$\sigma(\phi_s)$ [ rad ]	
	$B_s \rightarrow J/\psi \phi$	$B_s \rightarrow \eta_c \phi$
Nominal	0.023	0.108
$\Sigma_\tau + 10\%$	0.025	0.108
$\Sigma_\tau - 10\%$	0.023	0.103
$B/S \times 2$	0.025	0.118

Dependence of the  $\phi_s$  sensitivity on  $\phi_s$



(It has been checked that the sensitivity does not depend on the sign of  $\phi_s$ )

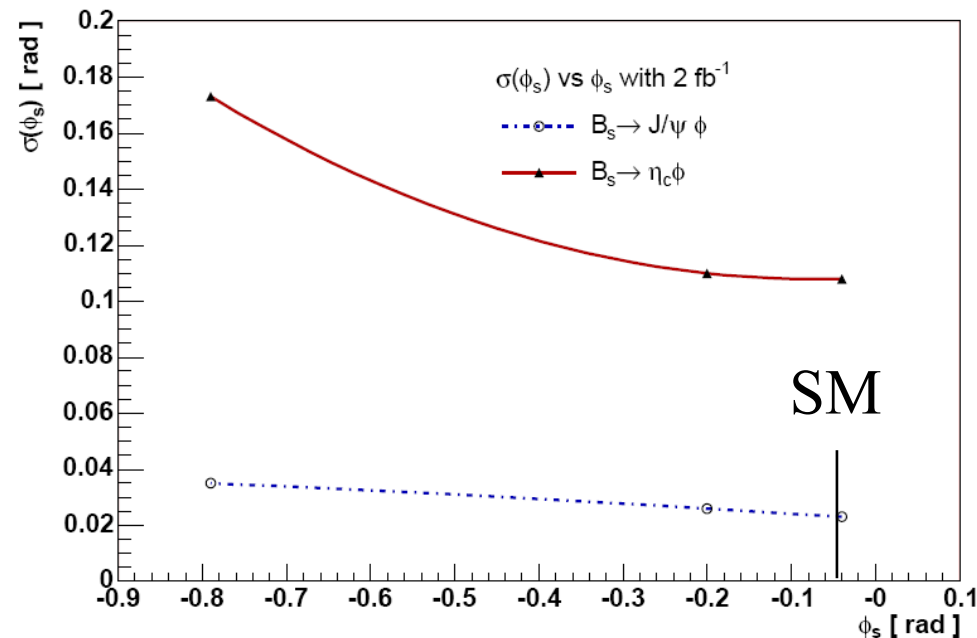

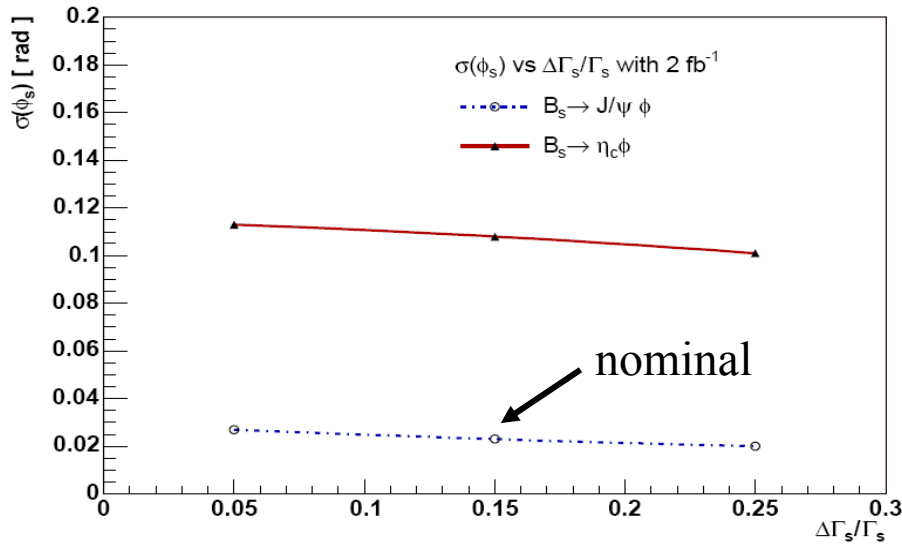

Dependence of the  $\phi_s$  sensitivity on  $\Delta\Gamma_s/\Gamma_s$ .

$\Rightarrow$  Not very sensitive to  $\Delta\Gamma_s/\Gamma_s$ .

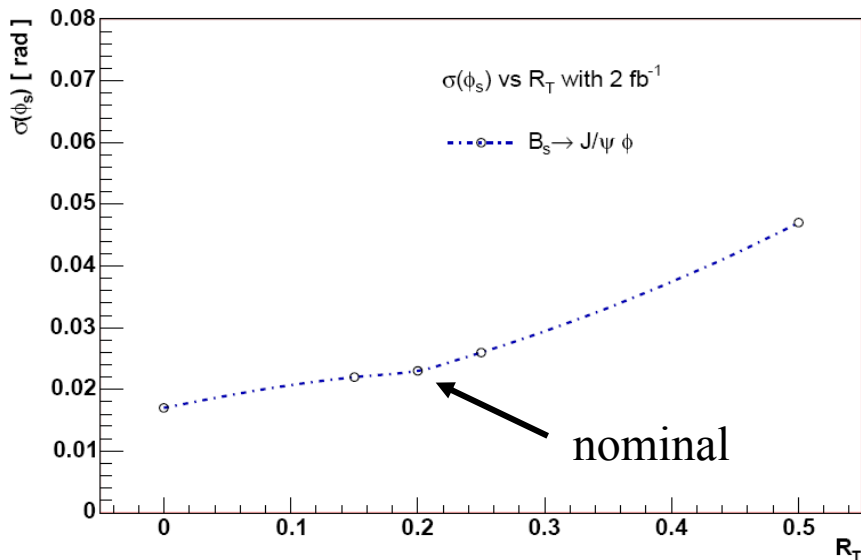

Dependence of the  $\phi_s$  sensitivity on the CP-odd fraction ( $R_T$ ).

$\Rightarrow$  Sensitive to  $R_T$ , but we still have a reasonable sensitivity if maximum dilution, i.e.  $R_T=0.5$ .




(full angular analysis will reduce dependence)

- Include the  $J/\psi \rightarrow e^+e^-$  events :  $\sim 20\%$  increase of event yields
- Full angular analysis for  $B_s \rightarrow J/\psi \phi$
- Include additional  $B_s$  decays ( $J/\Psi \eta'(\pi^+\pi^-\eta(\gamma\gamma))$ ,  $J/\Psi(\mu^+\mu^-\eta'(\rho^0(\pi^+\pi^-\gamma)))$ )
- Perform a combined fit with all signal channels
- Study the systematic uncertainty
- Optimize the use of the control sample ( $B_s \rightarrow D_s \pi$ ) for the determination of the tagging performance of the signal samples ( $B_s \rightarrow J/\psi \phi$ , etc.) by defining sub-samples with similar tagging performance.
- ...

The value of  $\phi_s$  is not known precisely

- The LHCb sensitivity for  $\phi_s$  is 0.02 rad ( $\sim 1.2$  degrees) for  $2 \text{ fb}^{-1}$
- Small dependence of the sensitivity on  $\Delta\Gamma_s/\Gamma_s$  and  $\phi_s$
- After a few years of data LHCb will be able to measure also a SM  $\phi_s$
- Already with a small data sample ( $0.2 \text{ fb}^{-1}$ ) we have interesting results on  $\phi_s$

We aim for a  $\phi_s$  result in 2008!

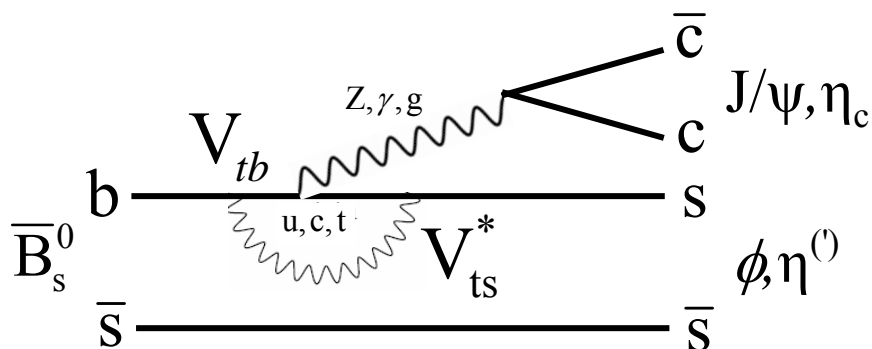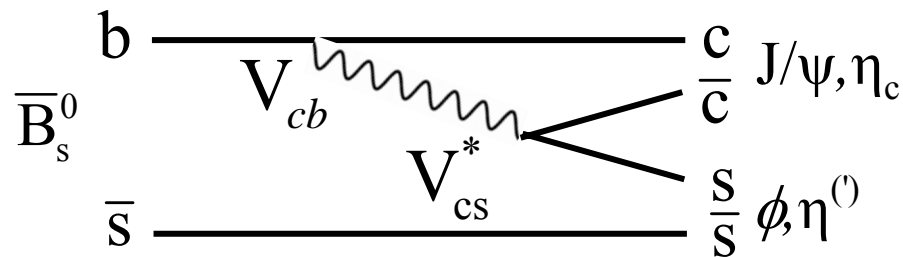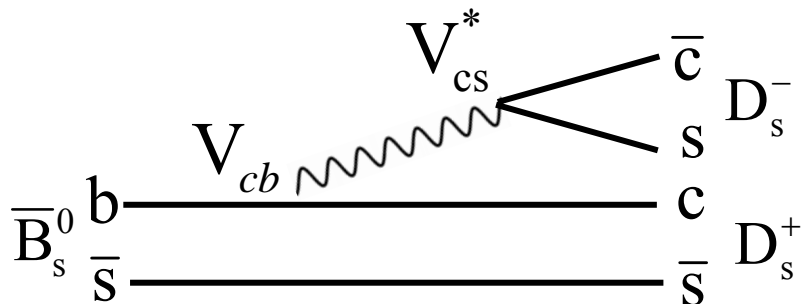

The  $\bar{b} \rightarrow \bar{c}c\bar{s}$  transitions are dominated by a single weak phase :  $V_{cs} V_{cb}^*$

$$A(\bar{b} \rightarrow \bar{c}c\bar{s}) = V_{cs} V_{cb}^* (A_T + P_c) + V_{us} V_{ub}^* P_u + V_{ts} V_{tb}^* P_t$$

$$A(\bar{b} \rightarrow \bar{c}c\bar{s}) = V_{cs} V_{cb}^* (A_T + P_c - P_t) + V_{us} V_{ub}^* (P_u - P_t)$$

$$V_{ts} V_{tb}^* = -V_{us} V_{ub}^* - V_{cs} V_{cb}^*$$

$$\sim A\lambda^2(1 - \lambda^2/2)$$

$$\sim A\lambda^4(\rho + i\eta)$$