



iPad Pro 12.9-inch (2nd generation) Wi-Fi

iPad Pro 12.9-inch (2nd generation) Wi-Fi + Cellular

Apple Recycler Guide

July 2023

Contents

3	About This Guide
4	Identification
5	Directive 2012/19/EU Annex VII Components
6	Safety Considerations
8	Recommended Tools
9	Disassembly Instructions
26	Material Categorization of Output Fractions

About This Guide

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the material composition to help recyclers direct fractions to the appropriate material recycler.

To conserve important resources, we work to reduce the materials we use and aim to one day source only recycled or renewable materials in our products. A key path to reaching that goal is resource recovery from end-of-life electronics.

Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include but are not limited to laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste and laws in place to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email contactesci@apple.com.

Note: This guide may show images from other similar models, but the procedures are the same.

Identification

You can find the model number on the back of the iPad.



*Model numbers:
Wi-Fi: A1670
Wi-Fi + Cellular: A1671, A1821*

Directive 2012/19/EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components.

Substance/Component	Apple Part Name	Removal Instructions
Printed circuit board if the surface is greater than 10 square centimeters	Main logic board, display logic board, power supply logic board	Follow steps 1–17
External electric cables	Power adapter	Follow step 1
Battery	Lithium-ion polymer batteries	Follow steps 1–5
Cover glass and liquid crystal display (LCD) cell if the surface is greater than 100 square centimeters	LCD cell	Follow steps 1–4
No further substances or components as listed in Annex VII		

Safety Considerations

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

Personal Protective Equipment

Personal protective equipment should be worn during the entire recycling process.



Wear hand protection



Wear protective clothing



Wear eye protection



Wear foot protection

Battery Safety

This product uses a lithium-ion polymer battery. Before beginning any disassembly work, ensure that a safe working procedure for handling lithium-ion batteries has been established, which could include discharging the batteries so that they can be more safely managed. The following considerations may also be included:

- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself or the logic board.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Don't use tools that are sharp or conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on one side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery or a device containing one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- You hear hissing or popping sounds.

Don't use water or an ABC/CO₂ fire extinguisher on a thermal runaway battery or a device containing one. Water and ABC/CO₂ fire extinguishers will not stop the reaction.

Do smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

Do leave the room for 30 minutes if the thermal runaway causes any irritation.

Do wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a touchless thermometer to measure the battery temperature. Only touch the battery when the event has finished.

Do dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

Hazard Warnings



Broken glass hazard




Rechargeable battery hazard




Chemical exposure hazard

Recommended Tools


Miniature plastic pry bar

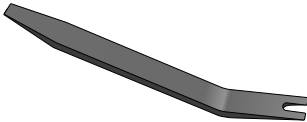


Miniature pry bar

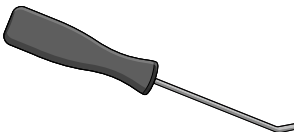

Nail-pulling screwdriver

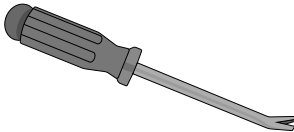

Screwdriver-handle pry bar

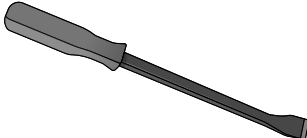


Disassembly Instructions

1. Remove the power adapter and the charge cable.

» *Ensure that the iPad is turned off.*



» *Unplug the power adapter. Disconnect both ends of the charge cable.*

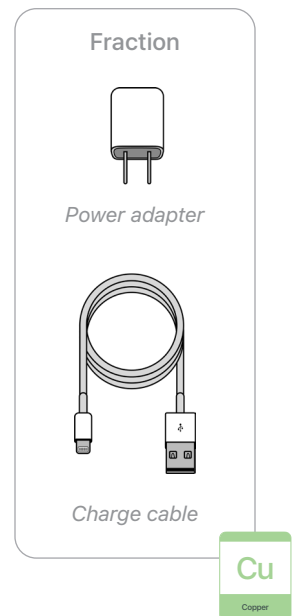

2. Remove the display.




Broken glass hazard




Chemical exposure hazard

Tools Used




- » *Hold the iPad at the edge of a counter with the display facing up.*
- » *Insert the tool tip into the Home button/Touch ID sensor. Push the handle down to pry the display from the enclosure.*
- » *Remove the display by hand. Set the enclosure aside.*

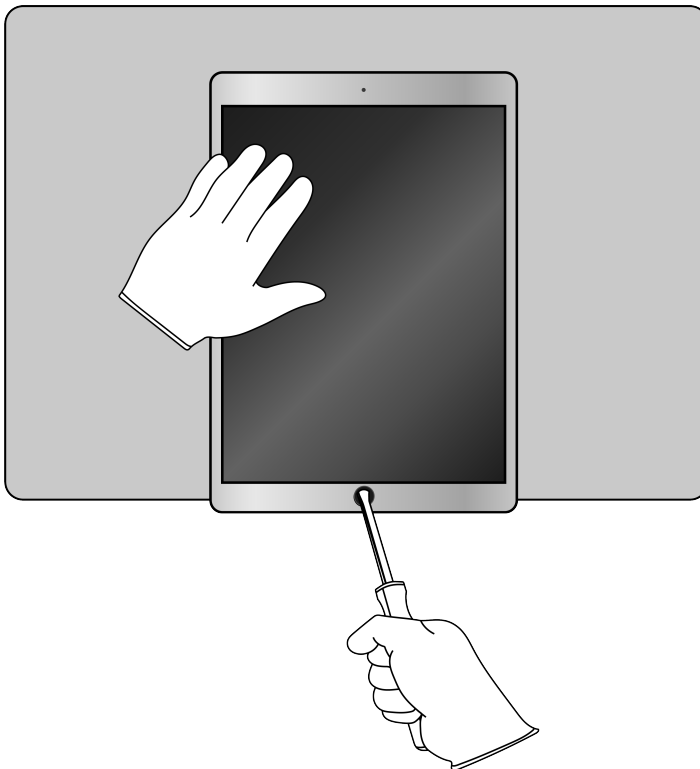



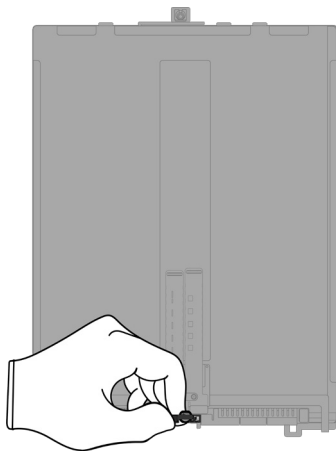

- 3.** With the display facing down, pull off the Home button/Touch ID sensor.




Fraction




Home button/
Touch ID sensor



4. Pry off the display logic board.

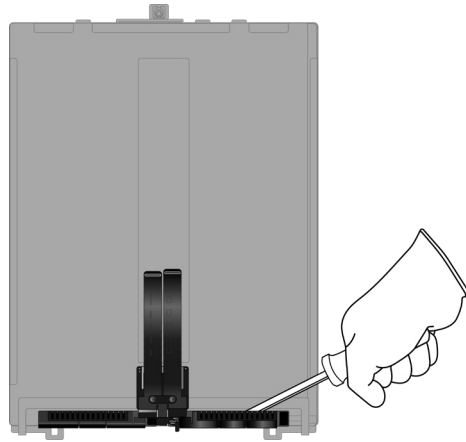

Tools Used



Fraction



Display logic board

PMs
Precious Metals

Fraction



LCD cell


GL
Glass

5. From the enclosure, carefully remove the four lithium-ion polymer batteries.




Rechargeable battery hazard

- » *Using tweezers, gently peel one of the black battery adhesive tabs away from the battery.*
- » *Twist the tab around the tweezers until white adhesive appears. Continue twisting until the entire adhesive strip is removed.*
- » *Repeat this process for any remaining battery tabs. Continue with the miniature plastic pry bar if needed.*

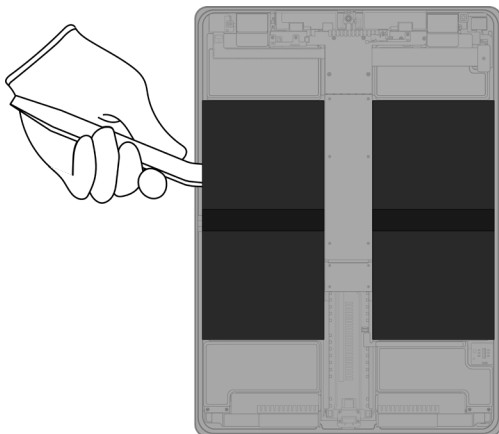

Tools Used



Fraction




Lithium-ion polymer batteries


BT

Battery


6. Pry off the upper left speaker.

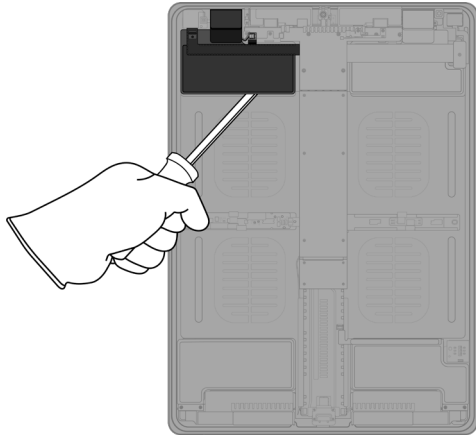

Tools Used



Fraction




Upper left speaker


REE

Rare Earth
Elements

7. Pry off the headphone jack.

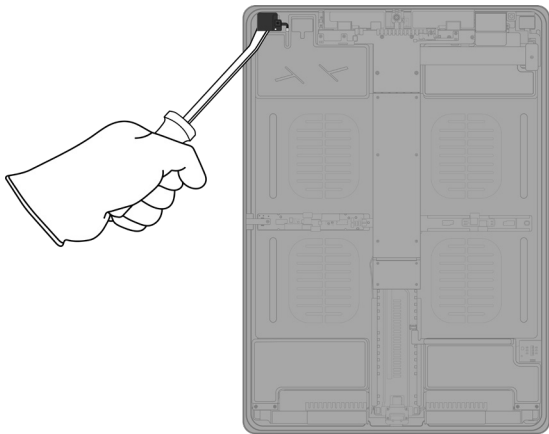

Tools Used



Fraction




Headphone jack


Cu

Copper


8. Pry off the thermal shield.

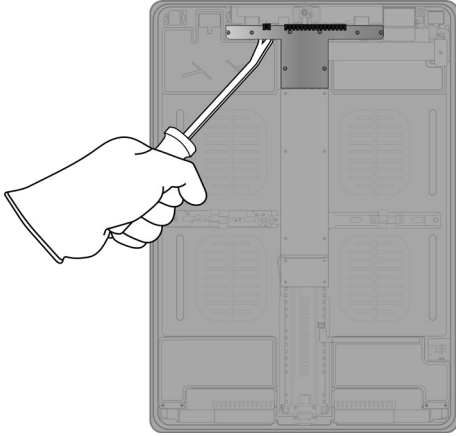

Tools Used



Fraction




Thermal shield

Fe

Ferrous

9. Pry off the left antenna.

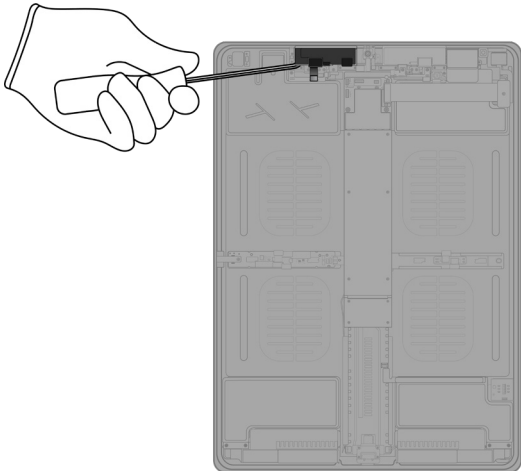

Tools Used



Fraction




Left antenna

Cu

Copper


10. Pry off the front camera.

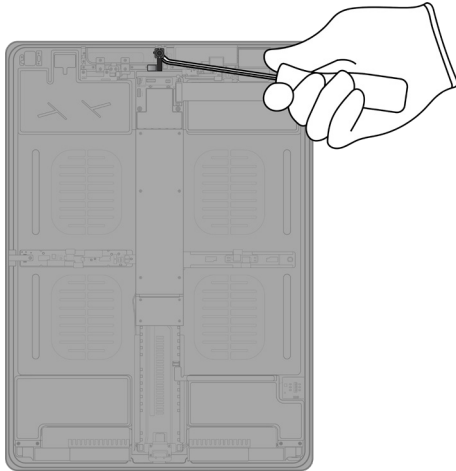

Tools Used




Fraction



Front camera

PMs
Precious
Metals

11. Pry off the microphone.

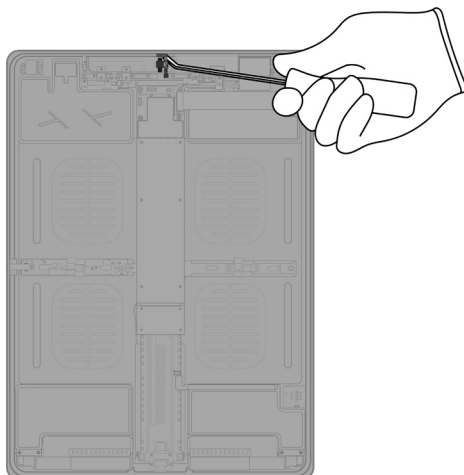

Tools Used




Fraction



Microphone

Cu
Copper

12. Pry off the right antenna.

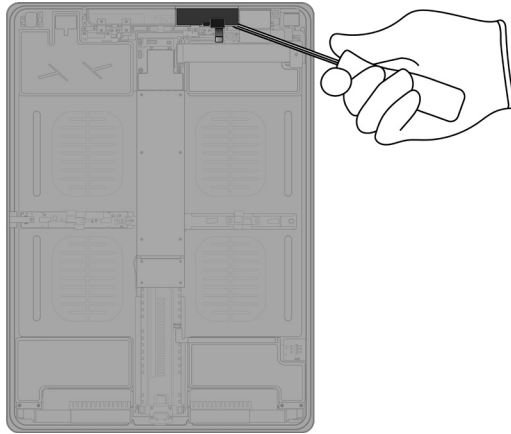

Tools Used




Fraction




Right antenna

Cu
Copper

13. Pry off the upper right speaker.

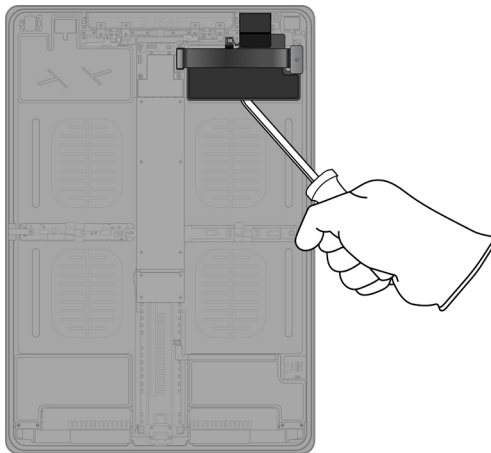

Tools Used




Fraction



Upper right speaker

REE
Rare Earth
Elements

14. Pry off the rear camera.

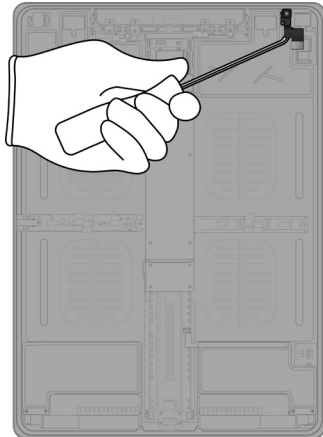

Tools Used




Fraction



Rear camera

PMs
Precious Metals

15. Pry off the strobe.

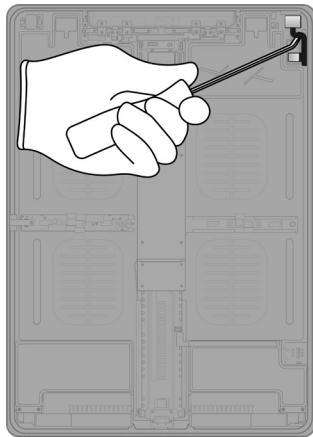

Tools Used




Fraction




Strobe

Cu
Copper

16. Pry off the main logic board.

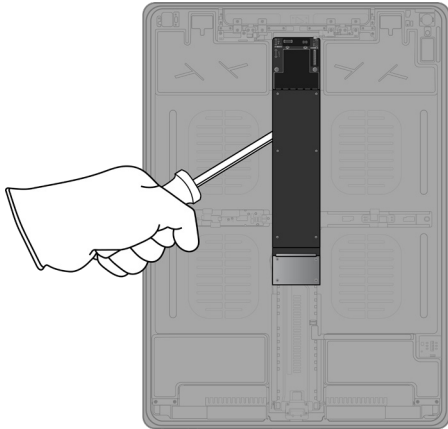

Tools Used




Fraction




Main logic board



17. Pry off the power supply logic board.

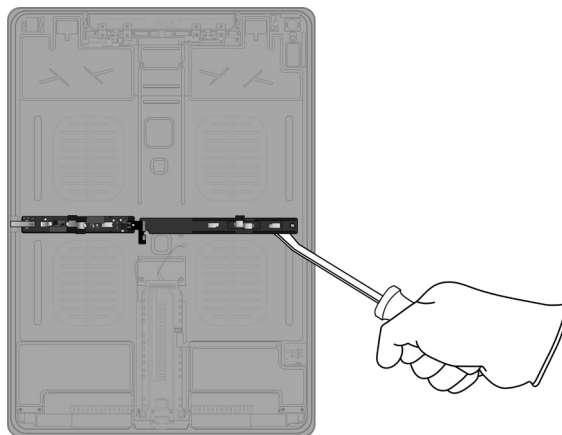

Tools Used




Fraction




Power supply logic board




18. Pry off the lower left speaker.

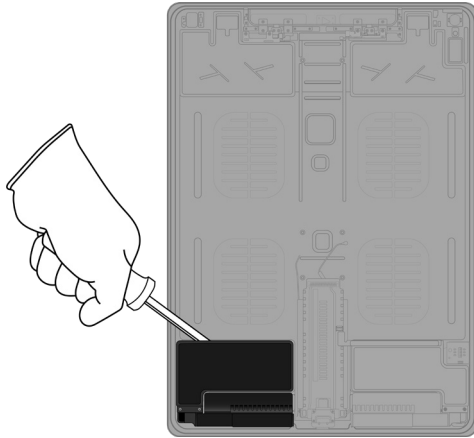

Tools Used



Fraction




Lower left speaker


REE

Rare Earth
Elements


19. Pry off the lower right speaker.

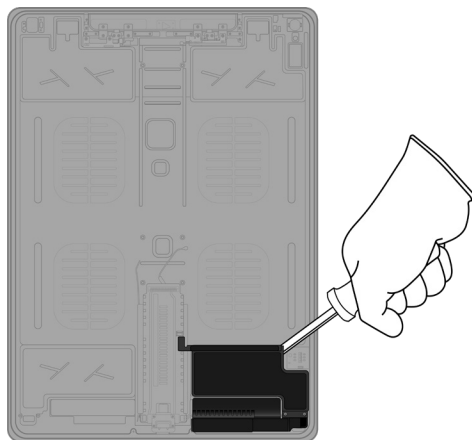

Tools Used



Fraction




Lower right speaker


REE

Rare Earth
Elements

20. (Wi-Fi + Cellular models only) Pry off the SIM reader.

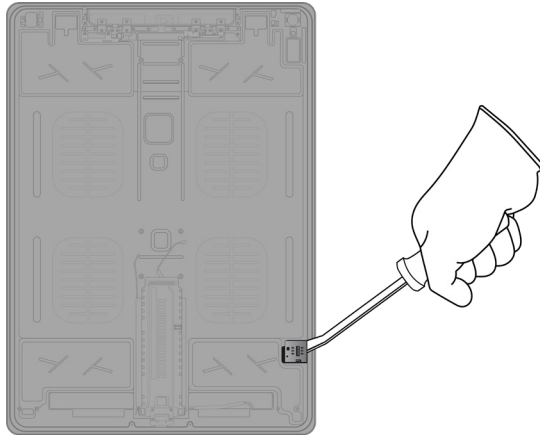

Tools Used







Fraction




SIM reader




- 21.** (Wi-Fi + Cellular models only) Remove the SIM tray. Separate the SIM card from the SIM tray.

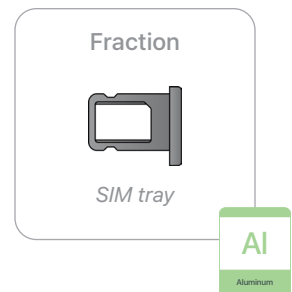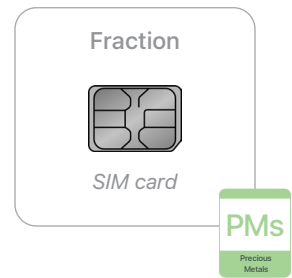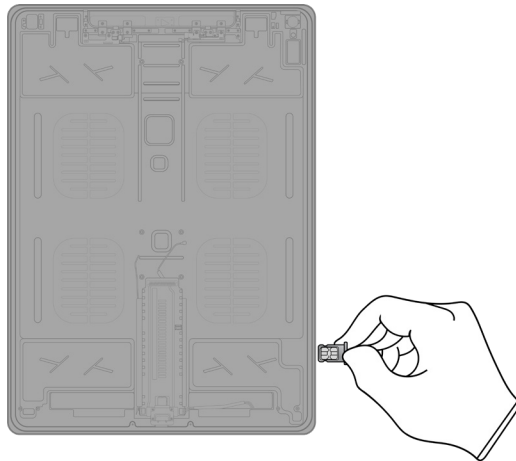

22. Pry off the Lightning connector.

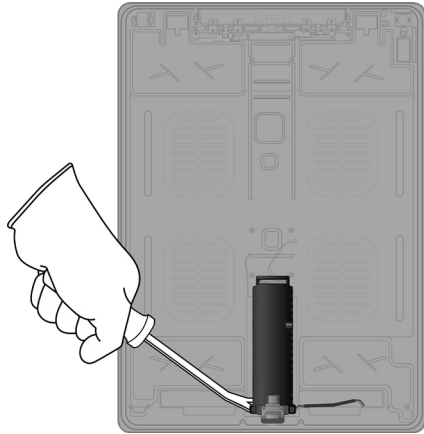

Tools Used



Fraction




Lightning connector

Cu

Copper

23. Pull off the wires.

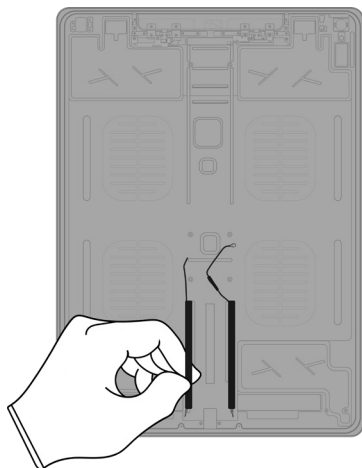

Fraction




Wires

Cu

Copper

24. Pry off the ribbon cables.

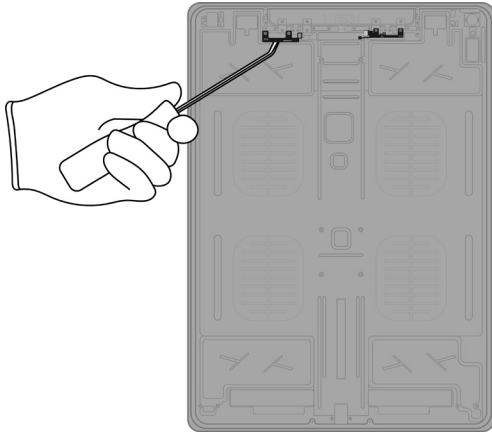

Tools Used




Fraction



Ribbon cables



25. Pry the 37 magnets off the enclosure.

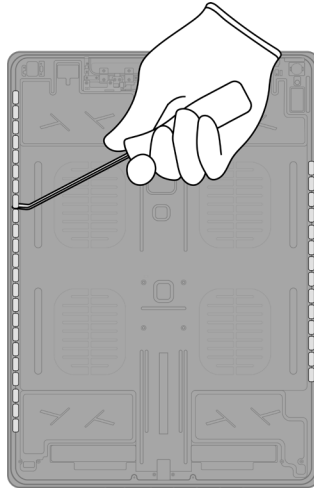

Tools Used



Fraction



Magnets (x37)

REE

Rare Earth
Elements

Fraction








Enclosure



Al

Aluminum

Material Categorization of Output Fractions

All outputs from this process must be managed, handled, and disposed of in accordance with applicable waste laws and regulations, including but not limited to the Waste Framework Directive and its national enactments in Europe.


Fraction	Downstream Processing
<p data-bbox="435 554 570 579">Aluminum</p>  <p data-bbox="461 722 544 743"><i>SIM tray</i></p>  <p data-bbox="451 1050 550 1071"><i>Enclosure</i></p>	<p data-bbox="964 554 1276 579">Primary Target Material</p>  <p data-bbox="925 781 1315 806">Potential Additional Materials</p>  

<p data-bbox="440 1169 565 1194">Batteries</p>  <p data-bbox="358 1417 643 1438"><i>Lithium-ion polymer batteries</i></p>	<p data-bbox="964 1169 1276 1194">Primary Target Material</p> 
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------

Fraction

Downstream Processing

Ferrous



Thermal shield

Primary Target Material



Glass



LCD cell

Primary Target Material



Potential Additional Materials




Fraction

Downstream Processing

Logic Boards



Display logic board



Front camera



Rear camera



Main logic board



Power supply logic board



SIM card

Primary Target Material




Potential Additional Materials



Fraction

Downstream Processing

Mixed Electronics



Charge cable



Power adapter



Home button/Touch ID sensor



Headphone jack



Left antenna



Microphone

Primary Target Material



Potential Additional Materials



Mixed Electronics (cont.)



Right antenna



Strobe



SIM reader



Lightning connector



Wires




Ribbon cables


Fraction

Downstream Processing


Rare Earth Magnets




Upper left speaker



Upper right speaker



Lower left speaker



Lower right speaker



Magnets (x37)

Primary Target Material



Potential Additional Materials

