


# Quick Install Guide

**verizon**<sup>✓</sup>

One Talk<sup>SM</sup>  
T49G IP Desk Phone, Executive Video

[www.verizonwireless.com/Support/One-Talk](http://www.verizonwireless.com/Support/One-Talk)

# Packaging contents

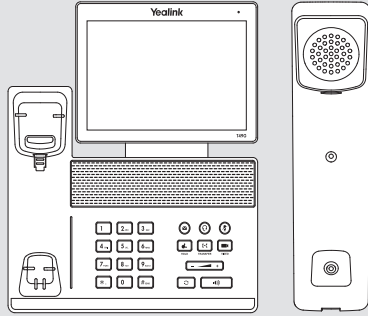

T49 Desk Phone

T49 Handset




Stand



Camera



Quick Install Guide  
Quick Reference Guide




Handset Cord



Ethernet Cable



T49 Adapter

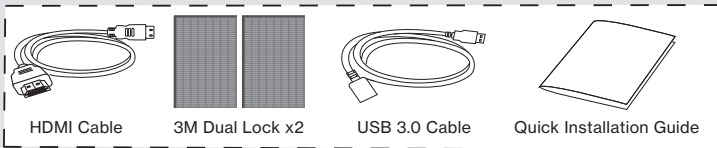

HDMI Cable

3M Dual Lock x2

USB 3.0 Cable


Quick Installation Guide

ED10 (Optional)


Note: The Extended Display Accessories ED10 helps you display the video image captured from the camera (both near site and far site) on the external monitor during a video call. We recommend that you use the accessories provided or approved by Yealink. The use of unapproved third-party accessories may result in reduced performance.

# Assembling the phone

## 1. Attach the stand, as shown below:

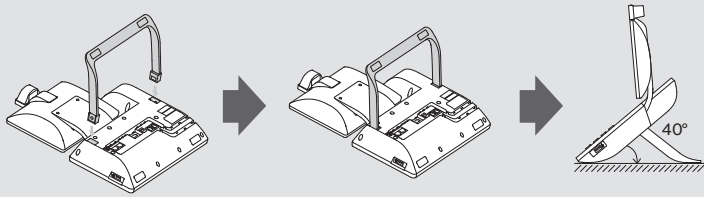


## 2. Insert the camera, as shown below:

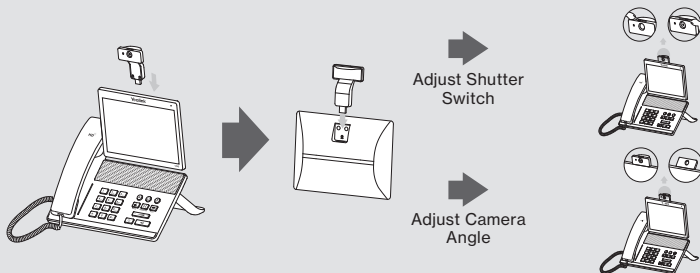


## 3. Connect the handset and optional headset, as shown below:

Insert the handset cord with the longer straight end into the back of the phone and affix into the channel.

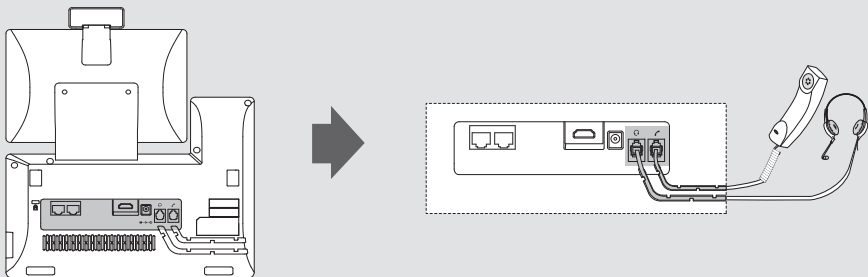


Note: The headset may be purchased separately.

**4. Connect the optional USB flash drive, as shown below:**

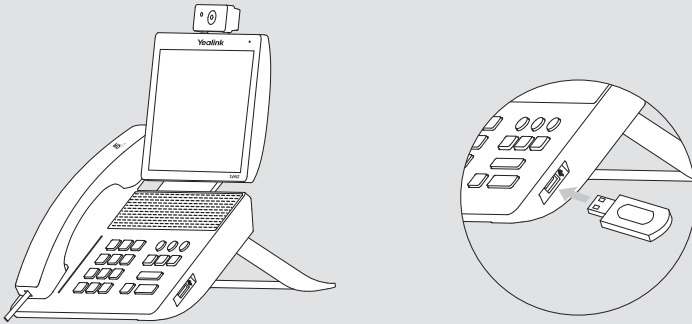

**5. Connect the AC power, as shown below:**

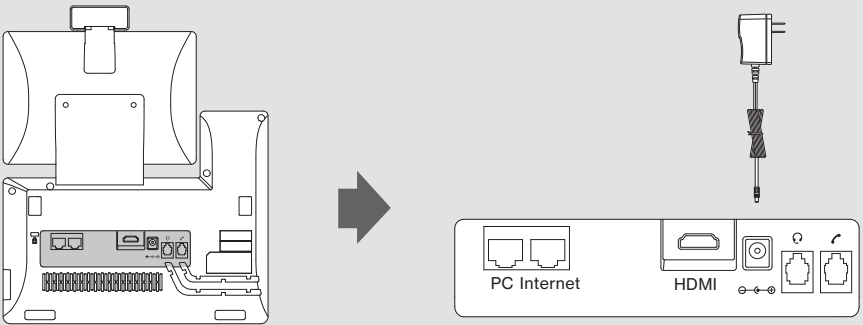


Note: The IP phone should be used with Yealink original power adapter (12V/2A) only. The use of a third-party power adapter may cause damage to the phone.

## 6. Connect to the broadband, as shown below:

You have two options for broadband connection. Select one of them based on the current office environment.


- a) Connect Ethernet connection to broadband.

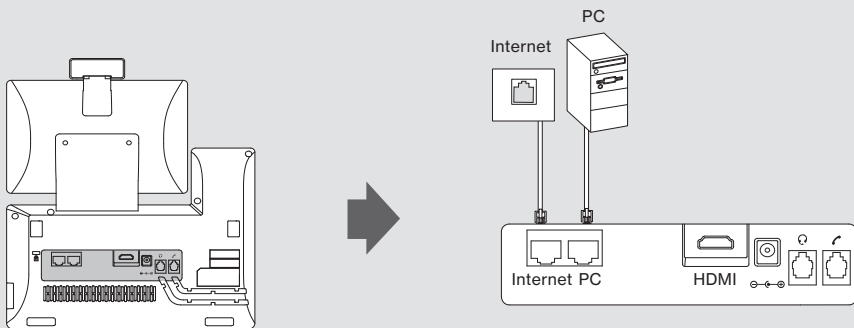

- b) Connect wireless connection to broadband.

1. Press **Menu** -> **Basic** -> **Wi-Fi**.
2. Press the **On** radio box in the **Wi-Fi** field.  
The phone will automatically search for available wireless networks in your area.
3. Select an available wireless network from the list of networks.
4. If the network is secure, enter its password in the **PIN** field.
5. Tap **OK** to connect to the wireless network.

# Hardware components

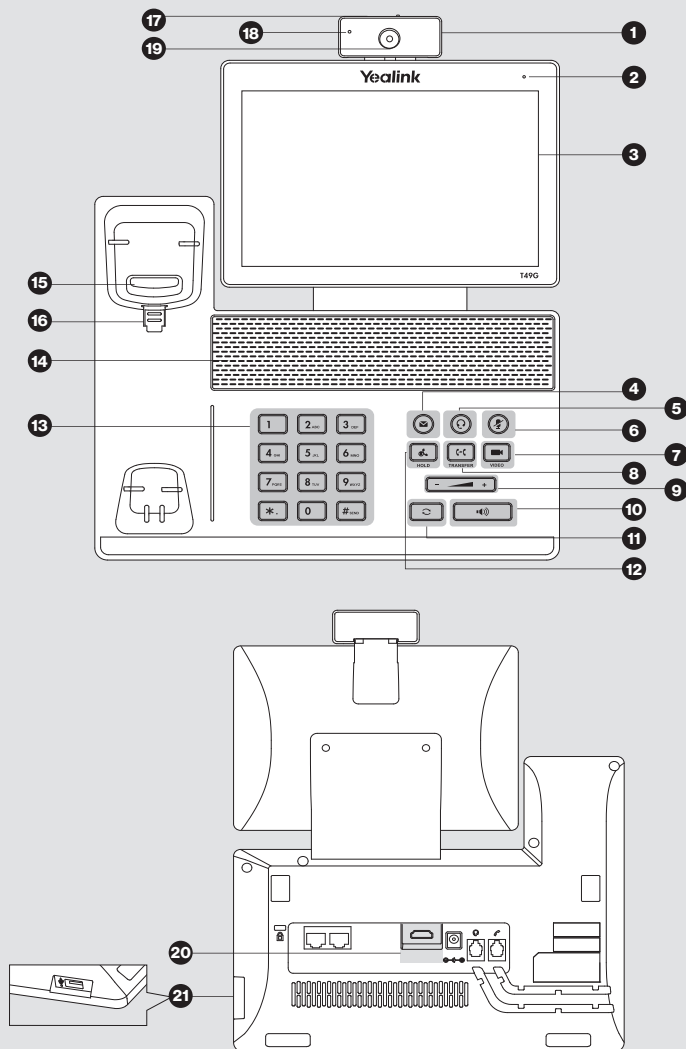


Item	Item	Item
1 Camera	8 Transfer Key	15 Hookswitch
2 Power Indicator LED	9 Volume Key	16 Hookswitch Tab
3 Touch Screen	10 Speakerphone Key	17 Shutter Switch
4 Message Key	11 Redial Key	18 Camera Indicator LED
5 Headset Key	12 Hold Key	19 Camera Lens
6 Mute Key	13 Keypad	20 HDMI port
7 Video Key	14 Speaker	21 USB 2.0 port

# Startup

After your One Talk phone is connected to the network and supplied with power, the initialization process automatically begins. After startup, and confirming the 911 address, the phone is ready to use.

During initialization:

The Power light will start as a steady red light, will then blink, and then turn off when initialization is complete.

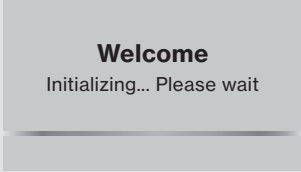

**Welcome**  
Initializing... Please wait

