


## Default Value

When you see an octopus, turn red.  
Otherwise turn blue.




*situation* → DO **action1 value**

*otherwise* → DO **action1 default-value**

## Default Value

Turn red when you see an octopus; turn blue otherwise.

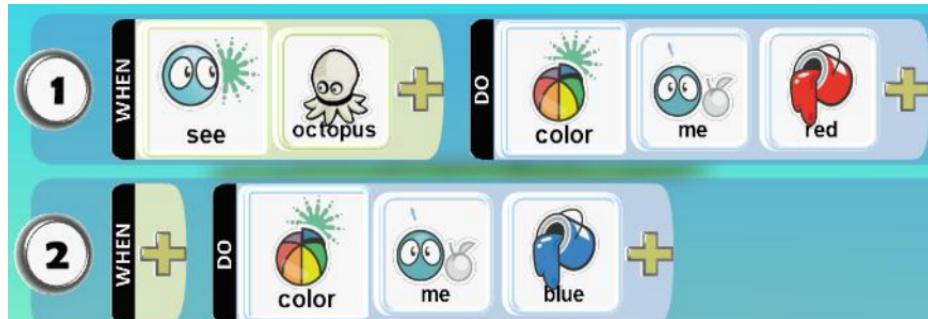

General Form:

WHEN *situation* DO **action1 value**

WHEN DO **action1 default-value**

The default case must come *after* the specific case. The action must be the same in both rules; only the value is different. For different actions, use the If-Then-Else idiom.