

Active Learning


Maria-Florina Balcan

10/02/2016


Classic Fully Supervised Learning Paradigm Insufficient Nowadays

Modern applications: **massive amounts** of raw data.

Only **a tiny fraction** can be annotated by human experts.

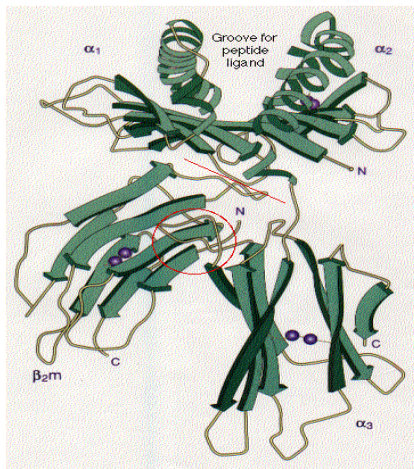

Protein sequences

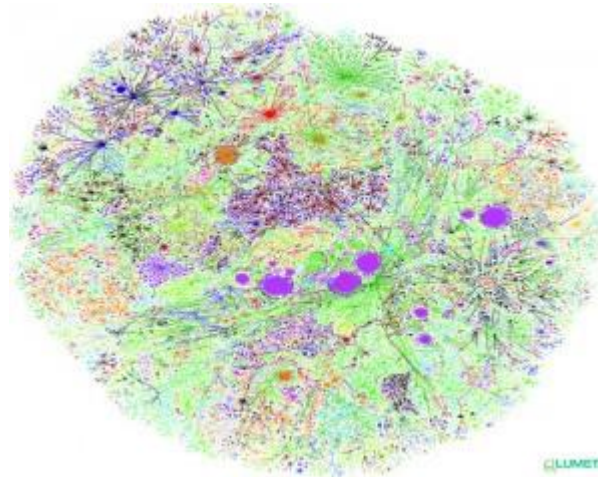

Billions of webpages




Images

Modern ML: New Learning Approaches

Modern applications: **massive amounts** of raw data.

Active learning: techniques that best utilize data,
minimizing need for expert/human intervention.




Active Learning

Additional resources:


- Two faces of active learning. Sanjoy Dasgupta. 2011.
- Active Learning. Bur Settles. 2012.
- Active Learning. Balcan-Urner. Encyclopedia of Algorithms. 2015

Batch Active Learning

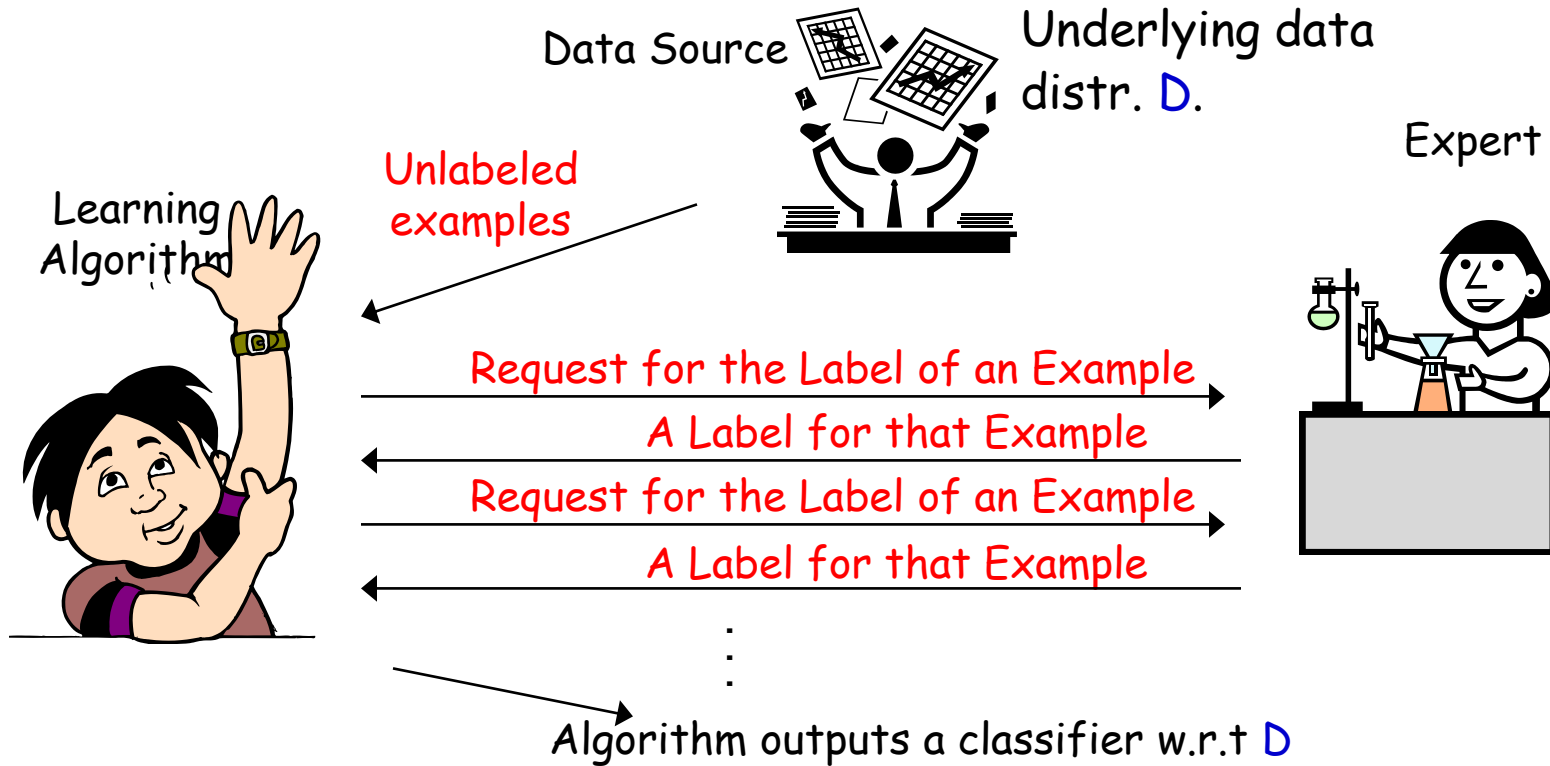

- Learner can choose specific examples to be labeled.
- Goal: use fewer labeled examples [pick **informative** examples to be labeled].

Selective Sampling Active Learning

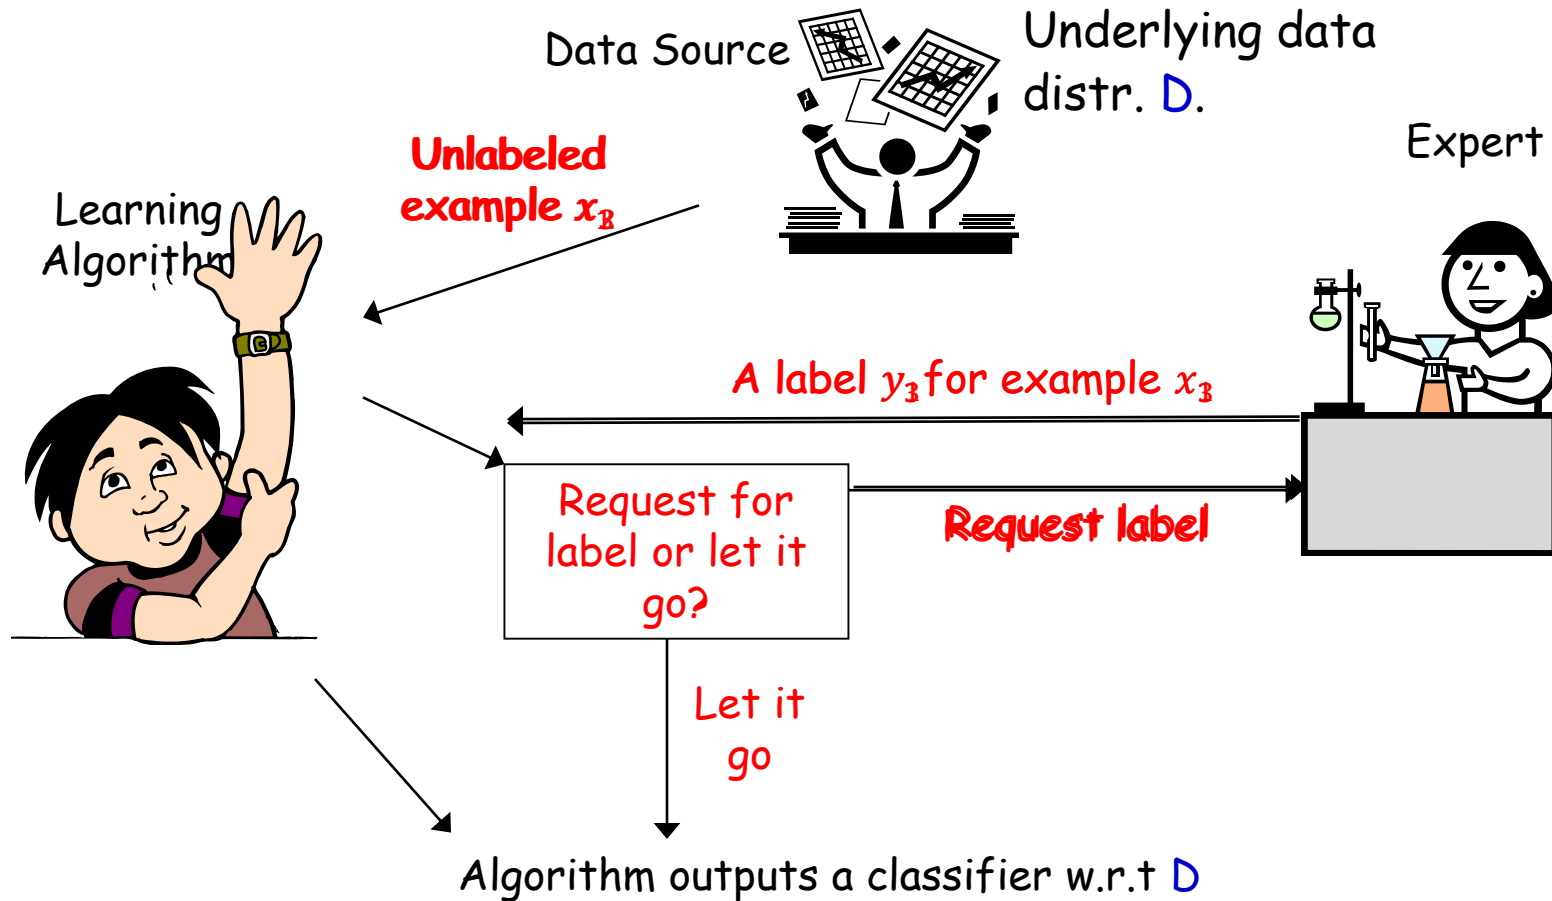

- **Selective sampling AL (Online AL)**: stream of unlabeled examples, when each arrives make a decision to ask for label or not.
- **Goal**: use fewer labeled examples [pick **informative** examples to be labeled].

What Makes a Good Active Learning Algorithm?


- Guaranteed to output a relatively good classifier for most learning problems.
- Doesn't make too many label requests.
Hopefully a lot less than passive learning and SSL.
- Need to choose the label requests carefully, to get **informative** labels.

Can adaptive querying really do better than passive/random sampling?

- YES! (sometimes)
- We often need far fewer labels for active learning than for passive.
- This is predicted by theory and has been observed in practice.

Can adaptive querying help? [CAL92, Dasgupta04]

- Threshold fns on the real line: $h_w(x) = 1(x \geq w)$, $C = \{h_w: w \in \mathbb{R}\}$

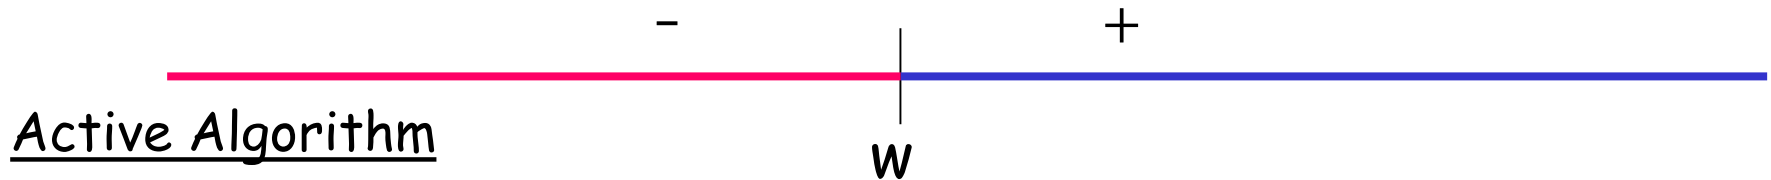

Active Algorithm

- Get N unlabeled examples
- How can we recover the correct labels with $\ll N$ queries?
- Do binary search! Just need $O(\log N)$ labels!



- Output a classifier consistent with the N inferred labels.

- $N = O(1/\epsilon)$ we are guaranteed to get a classifier of error $\leq \epsilon$.

Passive supervised: $\Omega(1/\epsilon)$ labels to find an ϵ -accurate threshold.

Active: only $O(\log 1/\epsilon)$ labels. Exponential improvement.



Common Technique in Practice

Uncertainty sampling in SVMs common and quite useful in practice. E.g., [Tong & Koller, ICML 2000; Jain, Vijayanarasimhan & Grauman, NIPS 2010; Schohn Cohn, ICML 2000]

Active SVM Algorithm

- At any time during the alg., we have a “current guess” w_t of the separator: the max-margin separator of all labeled points so far.
- Request the label of the example closest to the current separator.

Common Technique in Practice

Active SVM seems to be quite useful in practice.

[Tong & Koller, ICML 2000; Jain, Vijayanarasimhan & Grauman, NIPS 2010]

Algorithm (batch version)


Input $S_u = \{x_1, \dots, x_{m_u}\}$ drawn i.i.d from the underlying source D

Start: query for the labels of a few random x_i s.

For $t = 1, \dots,$

- Find w_t the max-margin separator of all labeled points so far.
- Request the label of the example closest to the current separator: minimizing $|x_i \cdot w_t|$.

(highest uncertainty)

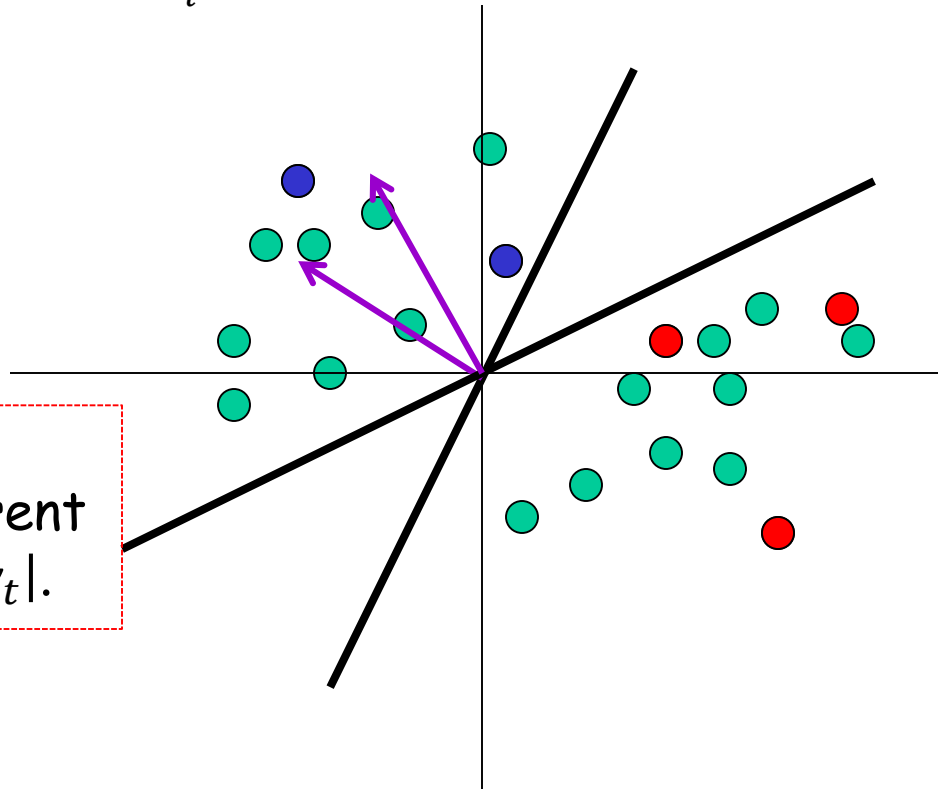


Common Technique in Practice

Active SVM seems to be quite useful in practice.

E.g., Jain, Vijayanarasimhan & Grauman, NIPS 2010

Newsgroups dataset (20.000 documents from 20 categories)

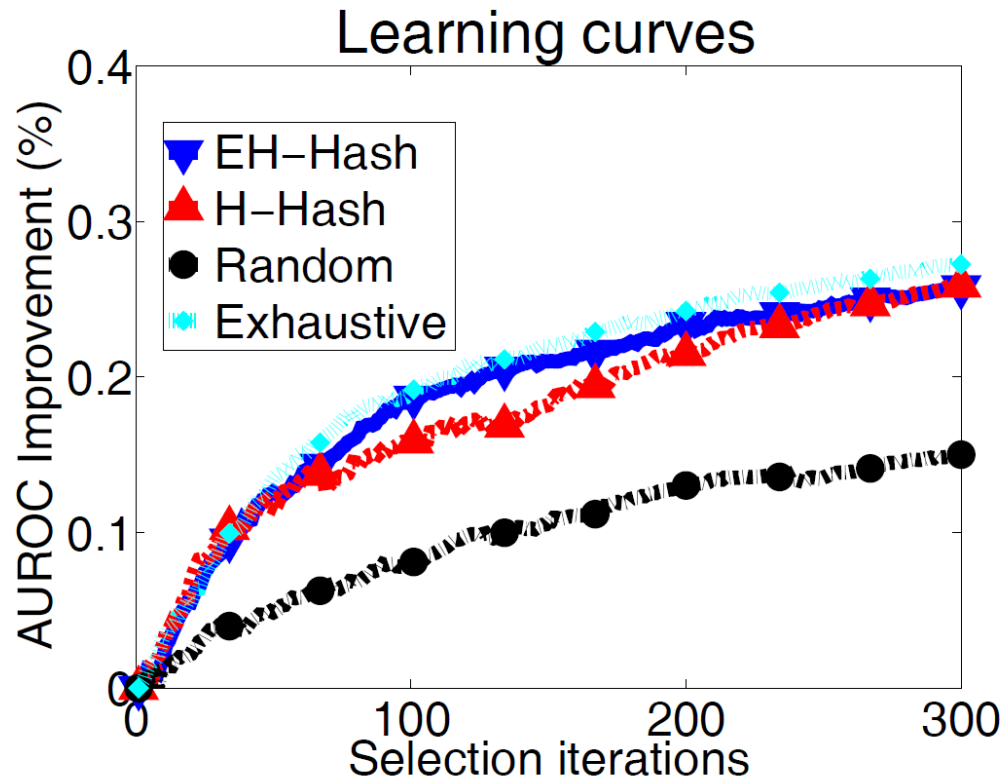


Common Technique in Practice

Active SVM seems to be quite useful in practice.


E.g., Jain, Vijayanarasimhan & Grauman, NIPS 2010

CIFAR-10 image dataset (60.000 images from 10 categories)

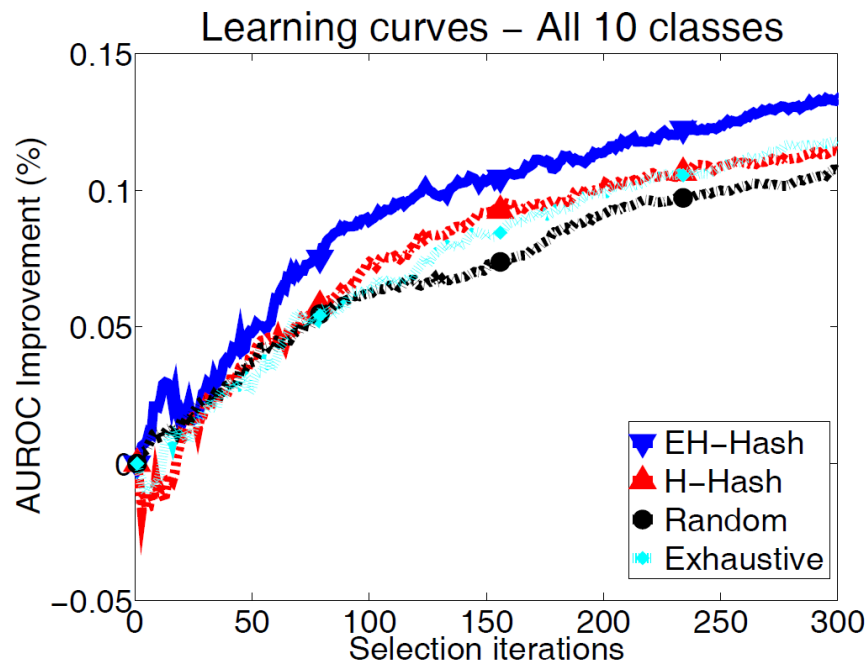


Active SVM/Uncertainty Sampling

- Works sometimes....
- However, we need to be very very very careful!!!
 - Myopic, greedy technique can suffer from **sampling bias**.
 - A bias created because of the querying strategy; as time goes on the sample is less and less representative of the true data source.

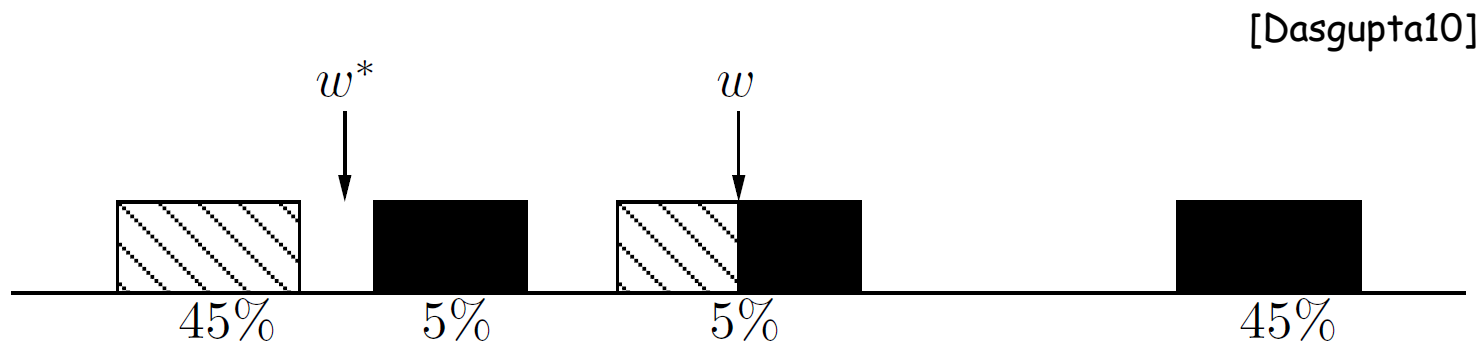


Active SVM/Uncertainty Sampling

- Works sometimes....
- However, we need to be very very careful!!!

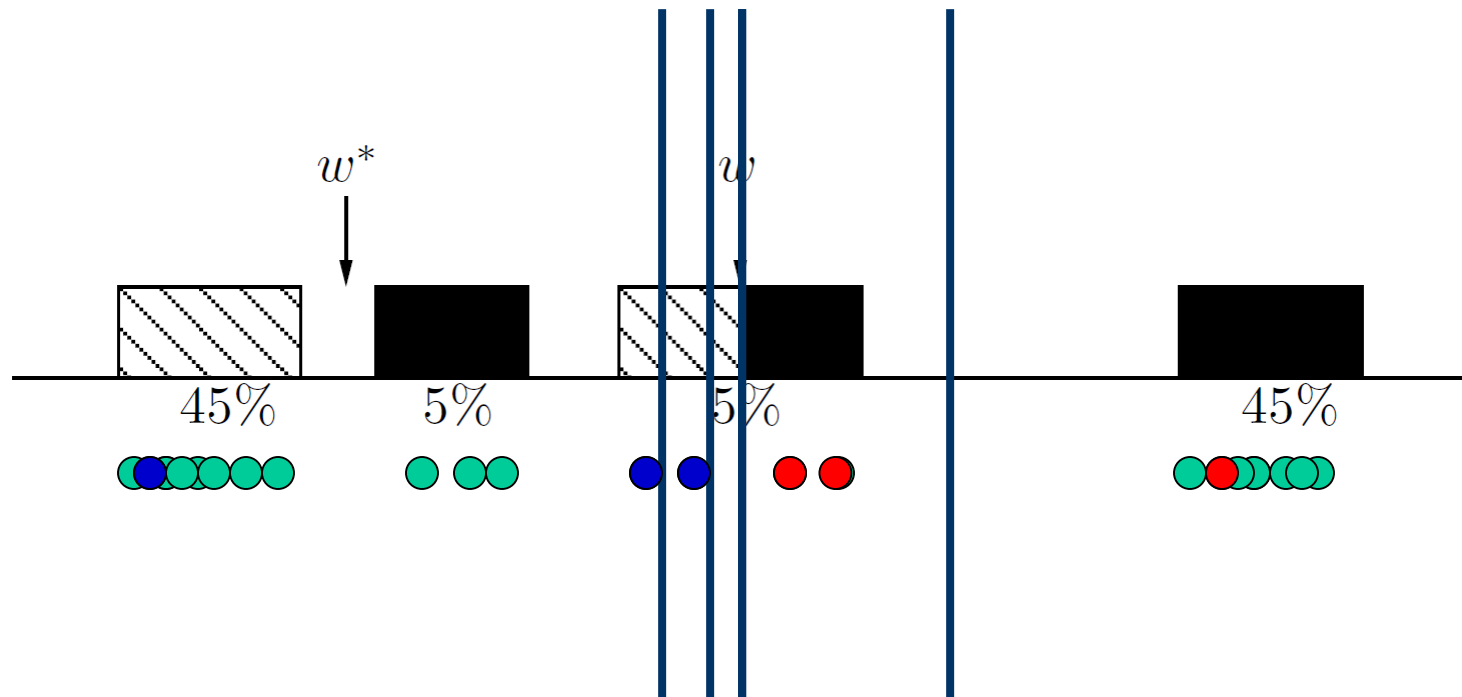

Active SVM/Uncertainty Sampling

- Works sometimes....
- **However, we need to be very very careful!!!**
 - Myopic, greedy technique can suffer from **sampling bias**.
 - Bias created because of the querying strategy; as time goes on the sample is less and less representative of the true source.
 - Observed in practice too!!!!
- **Main tension:** want to choose informative points, but also want to guarantee that the classifier we output does well on true random examples from the underlying distribution.

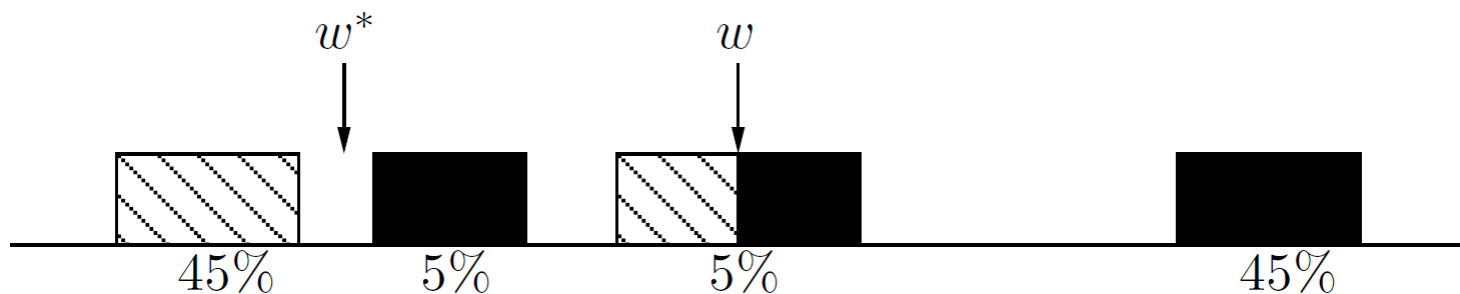

Safe Active Learning Schemes

Disagreement Based Active Learning

Hypothesis Space Search

[CAL92] [BBL06]

[Hanneke'07, DHM'07, Wang'09, Fridman'09, Kolt10, BHW'08, BHLZ'10, H'10, Ailon'12, ...]

Version Spaces

- X - feature/instance space; distr. D over X ; c^* target fnc
- Fix hypothesis space H .

Definition (Mitchell'82) Assume realizable case: $c^* \in H$.

Given a set of labeled examples $(x_1, y_1), \dots, (x_{m_1}, y_{m_1}), y_i = c^*(x_i)$

Version space of H : part of H consistent with labels so far.

I.e., $h \in VS(H)$ iff $h(x_i) = c^*(x_i) \forall i \in \{1, \dots, m_1\}$.

Version Spaces

- X - feature/instance space; distr. D over X ; c^* target fnc
- Fix hypothesis space H .


Definition (Mitchell'82) Assume realizable case: $c^* \in H$.

Given a set of labeled examples $(x_1, y_1), \dots, (x_{m_1}, y_{m_1}), y_i = c^*(x_i)$

Version space of H : part of H consistent with labels so far.

current version space

E.g.: data lies on circle in $\mathbb{R}^2$, H = homogeneous linear seps.

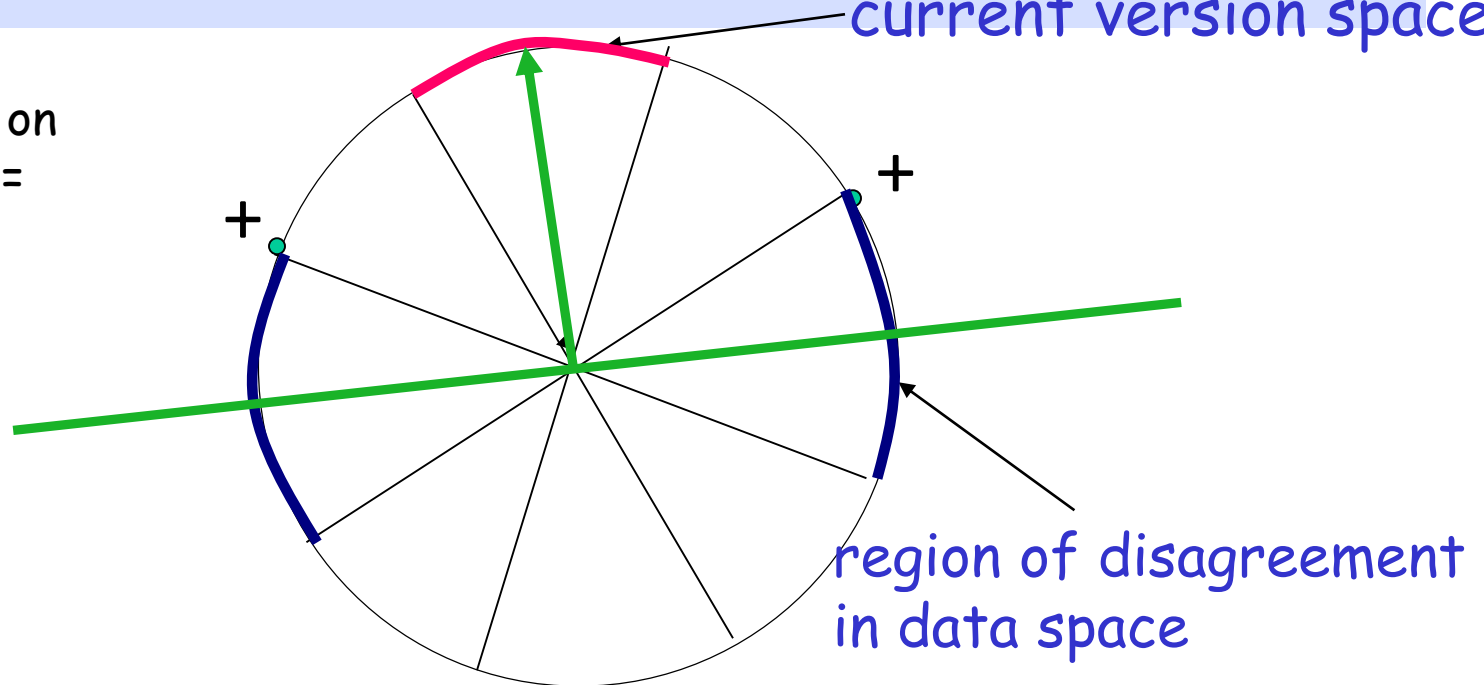

Version Spaces. Region of Disagreement


Definition (CAL'92)

Version space: part of H consistent with labels so far.


Region of disagreement = part of data space about which there is still some uncertainty (i.e. disagreement within version space)

$x \in X, x \in \text{DIS}(\text{VS}(H))$ iff $\exists h_1, h_2 \in \text{VS}(H), h_1(x) \neq h_2(x)$

E.g.: data lies on circle in $\mathbb{R}^2$, H = homogeneous linear sep.

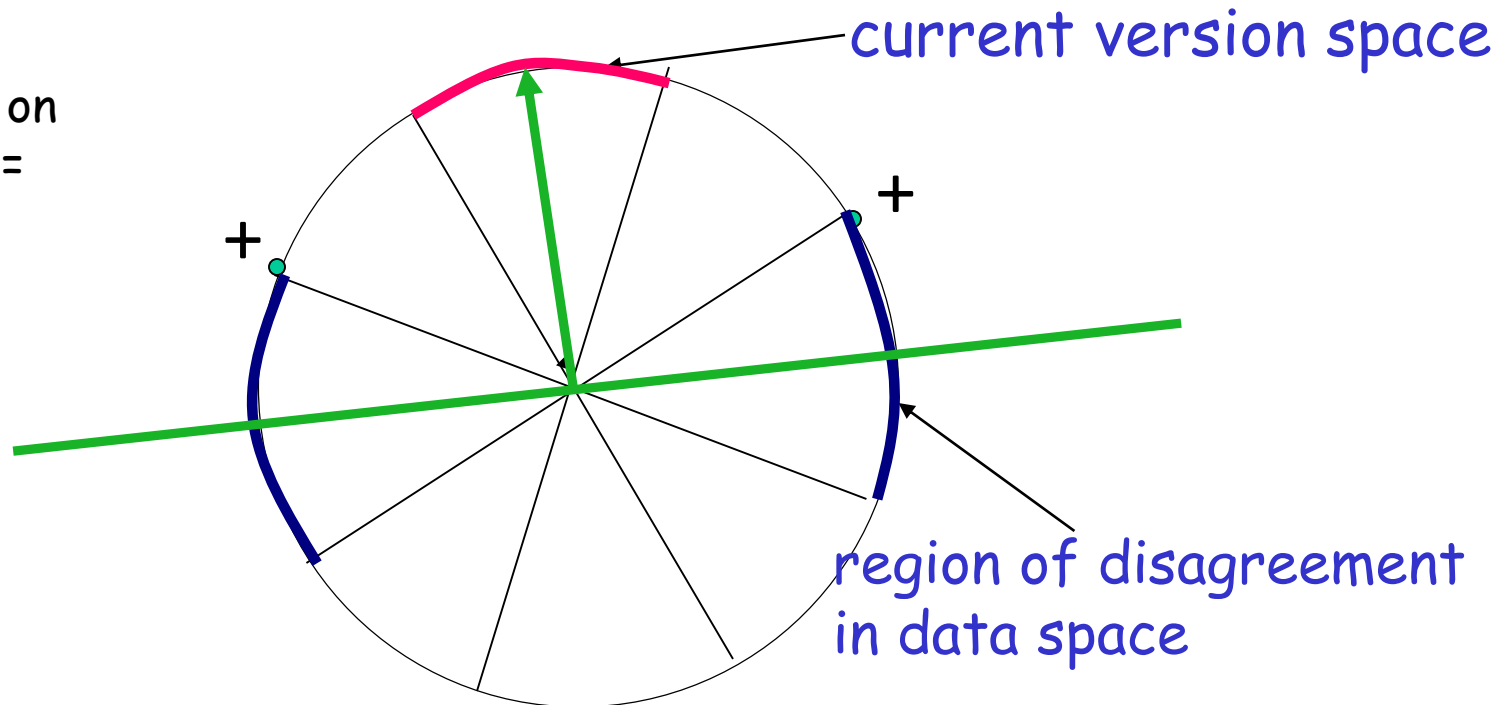

Disagreement Based Active Learning [CAL92]

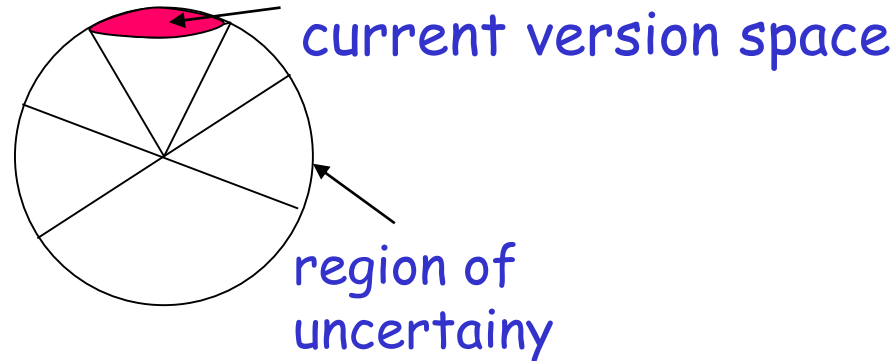


Algorithm:

Pick a few points at random from the current region of uncertainty and query their labels.

Stop when region of uncertainty is small.

Note: it is active since we do not waste labels by querying in regions of space we are certain about the labels.

Disagreement Based Active Learning [CAL92]

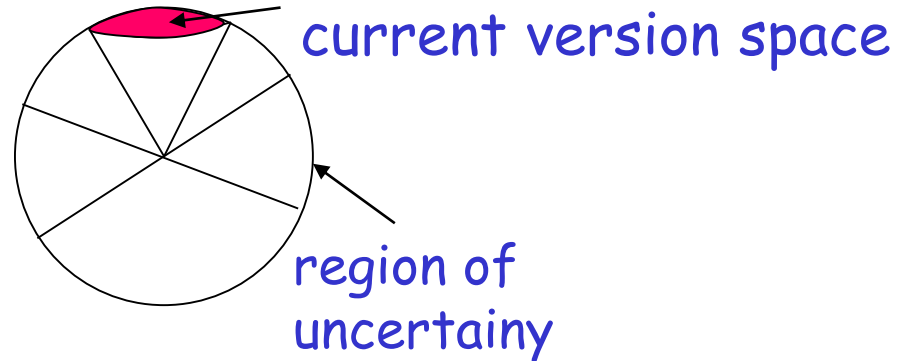

Algorithm:

Query for the labels of a few random x_i s.

Let H_1 be the current version space.


For $t = 1, \dots,$

Pick a few points at random from the current region of disagreement $\text{DIS}(H_t)$ and query their labels.

Let H_{t+1} be the new version space.


Region of uncertainty [CAL92]

- Current **version space**: part of C consistent with labels so far.
- "**Region of uncertainty**" = part of data space about which there is still some uncertainty (i.e. disagreement within version space)

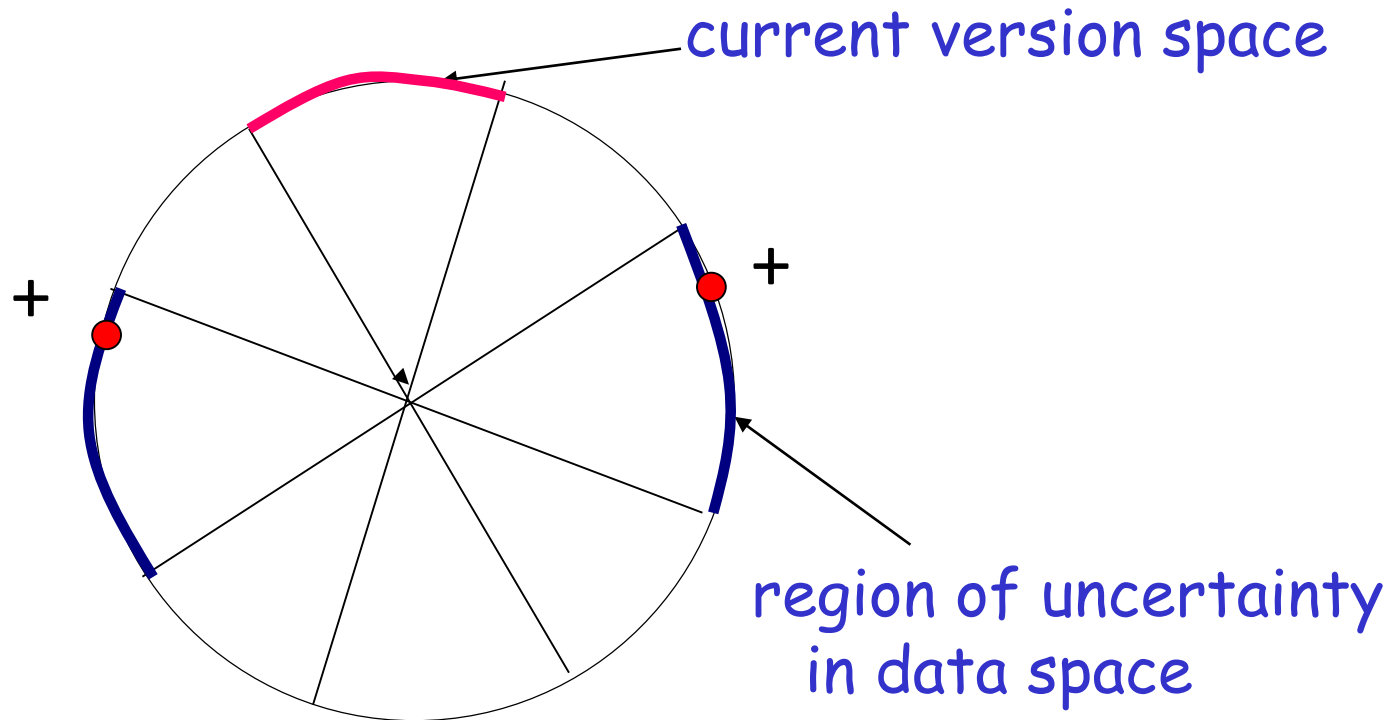

Region of uncertainty [CAL92]


- Current **version space**: part of C consistent with labels so far.
- "**Region of uncertainty**" = part of data space about which there is still some uncertainty (i.e. disagreement within version space)

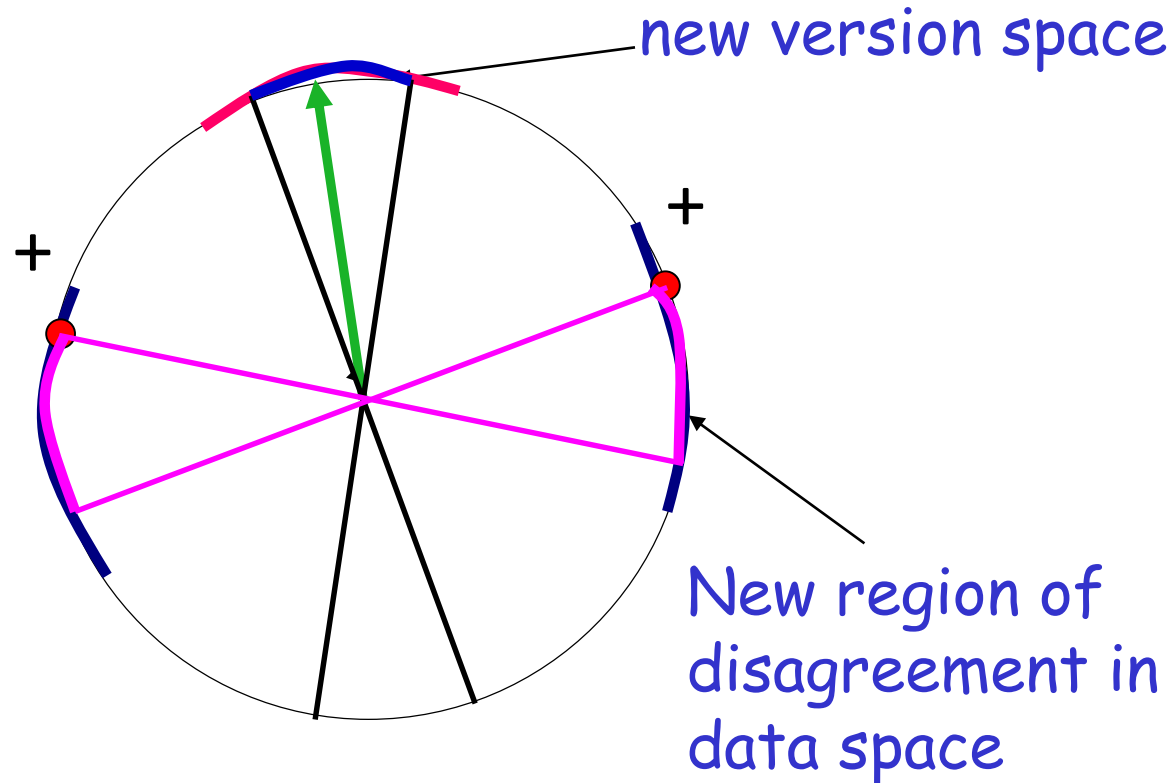



How about the agnostic case
where the target might not
belong the H ?

A^2 Agnostic Active Learner [BBL'06]

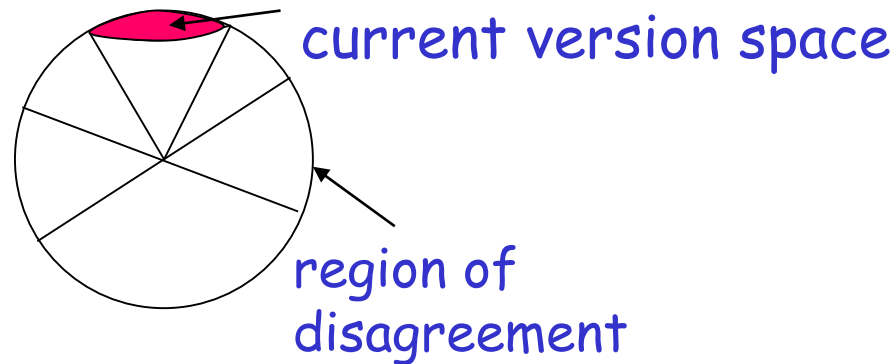

Algorithm:

Let $H_1 = H$.

For $t = 1, \dots,$

- Pick a few points at random from the current region of disagreement $\text{DIS}(H_t)$ and query their labels.
- Throw out hypothesis if you are statistically confident they are suboptimal.

Careful use of generalization bounds;
Avoid the sampling bias!!!!

Formal General Guarantees for Agnostic AL


A^2 the first algorithm which is robust to noise.

[Balcan, Beygelzimer, Langford, ICML'06] [Balcan, Beygelzimer, Langford, JCSS'08]

"Region of disagreement" style: Pick a few points at random from the current region of disagreement, query their labels, throw out hypothesis if you are statistically confident they are suboptimal.

Guarantees for A^2 [BBL'06,'08]:

- It is **safe** (never worse than passive learning) & exponential improvements.
- C - thresholds, low noise, exponential improvement.
- C - homogeneous linear separators in $\mathbb{R}^d$,
 D - uniform, low noise, only $d^2 \log(1/\epsilon)$ labels.

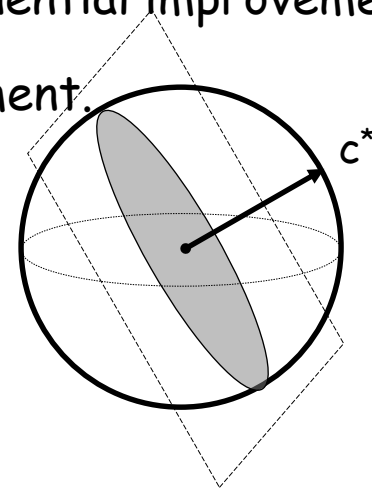

A lot of subsequent work.

[Hanneke'07, DHM'07, Wang'09, Fridman'09, Kolt10, BHW'08, BHLZ'10, H'10, Ailon'12, ...]

General guarantees for A^2 Agnostic Active Learner

"Disagreement based": Pick a few points at random from the current region of uncertainty, query their labels, throw out hypothesis if you are **statistically confident** they are suboptimal. [BBL'06]

How quickly the region of disagreement collapses as we get closer and closer to optimal classifier

Guarantees for A^2 [Hanneke'07]:

Disagreement coefficient $\theta_{c^*} = \sup_{r \geq \eta + \epsilon} \frac{\Pr(DIS(B(c^*, r)))}{r}$


Theorem

$$m = \left(1 + \frac{\eta^2}{\epsilon^2}\right) VCdim(C) \theta_{c^*}^2 \log\left(\frac{1}{\epsilon}\right)$$

labels are sufficient s.t. with prob. $\geq 1 - \delta$ output h with $err(h) \leq \eta + \epsilon$.

Realizable case: $m = VCdim(C) \theta_{c^*} \log\left(\frac{1}{\epsilon}\right)$

Linear Separators, uniform distr.: $\theta_{c^*} = \sqrt{d}$



Disagreement Based Active Learning

"Disagreement based " algos: query points from current region of disagreement, throw out hypotheses when statistically confident they are suboptimal.

- Generic (any class), adversarial label noise.
- Computationally efficient for classes of small VC-dimension


Still, could be suboptimal in label complex & computationally inefficient in general.

Lots of subsequent work trying to make is more efficient computationally and more aggressive too: [Hanneke07, DasguptaHsuMontleoni'07, Wang'09 , Fridman'09, Koltchinskii10, BHW'08, BeygelzimerHsuLangfordZhang'10, Hsu'10, Ailon'12, ...]

Other Interesting AL Techniques used in Practice


Interesting open question to analyze
under what conditions they are successful.

Density-Based Sampling

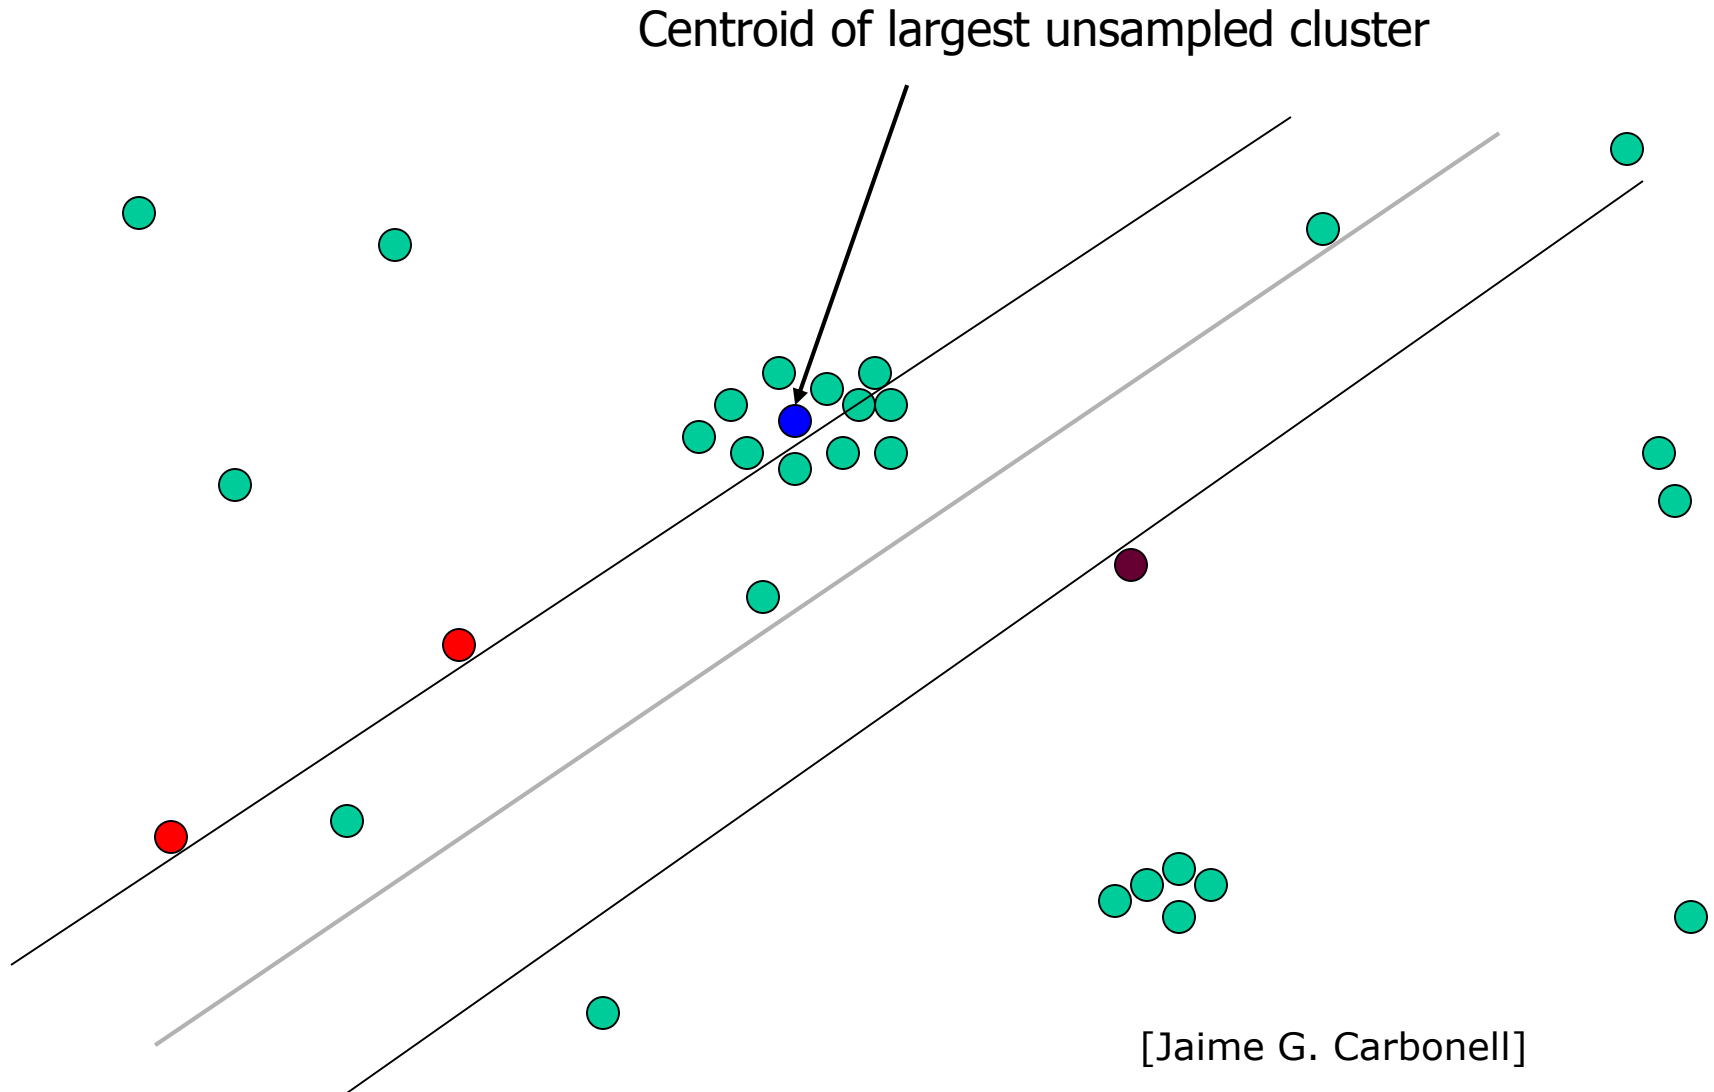


Uncertainty Sampling

Closest to decision boundary (Active SVM)

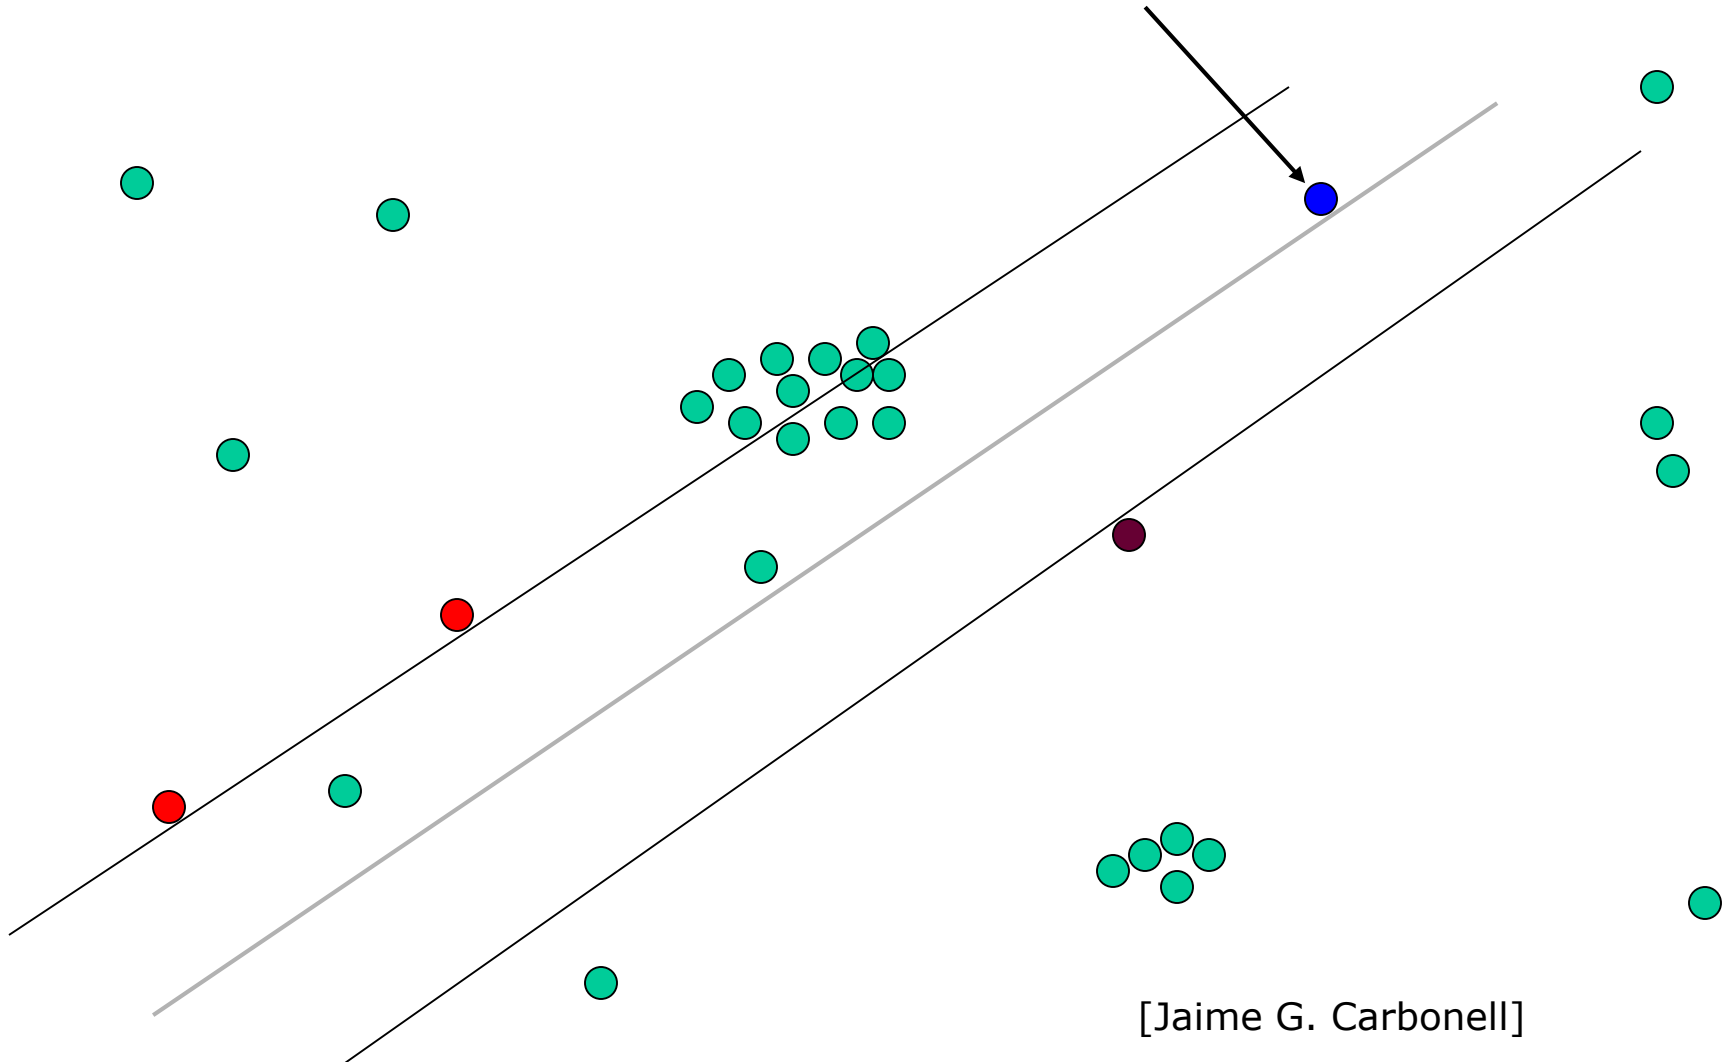


[Jaime G. Carbonell]

Maximal Diversity Sampling

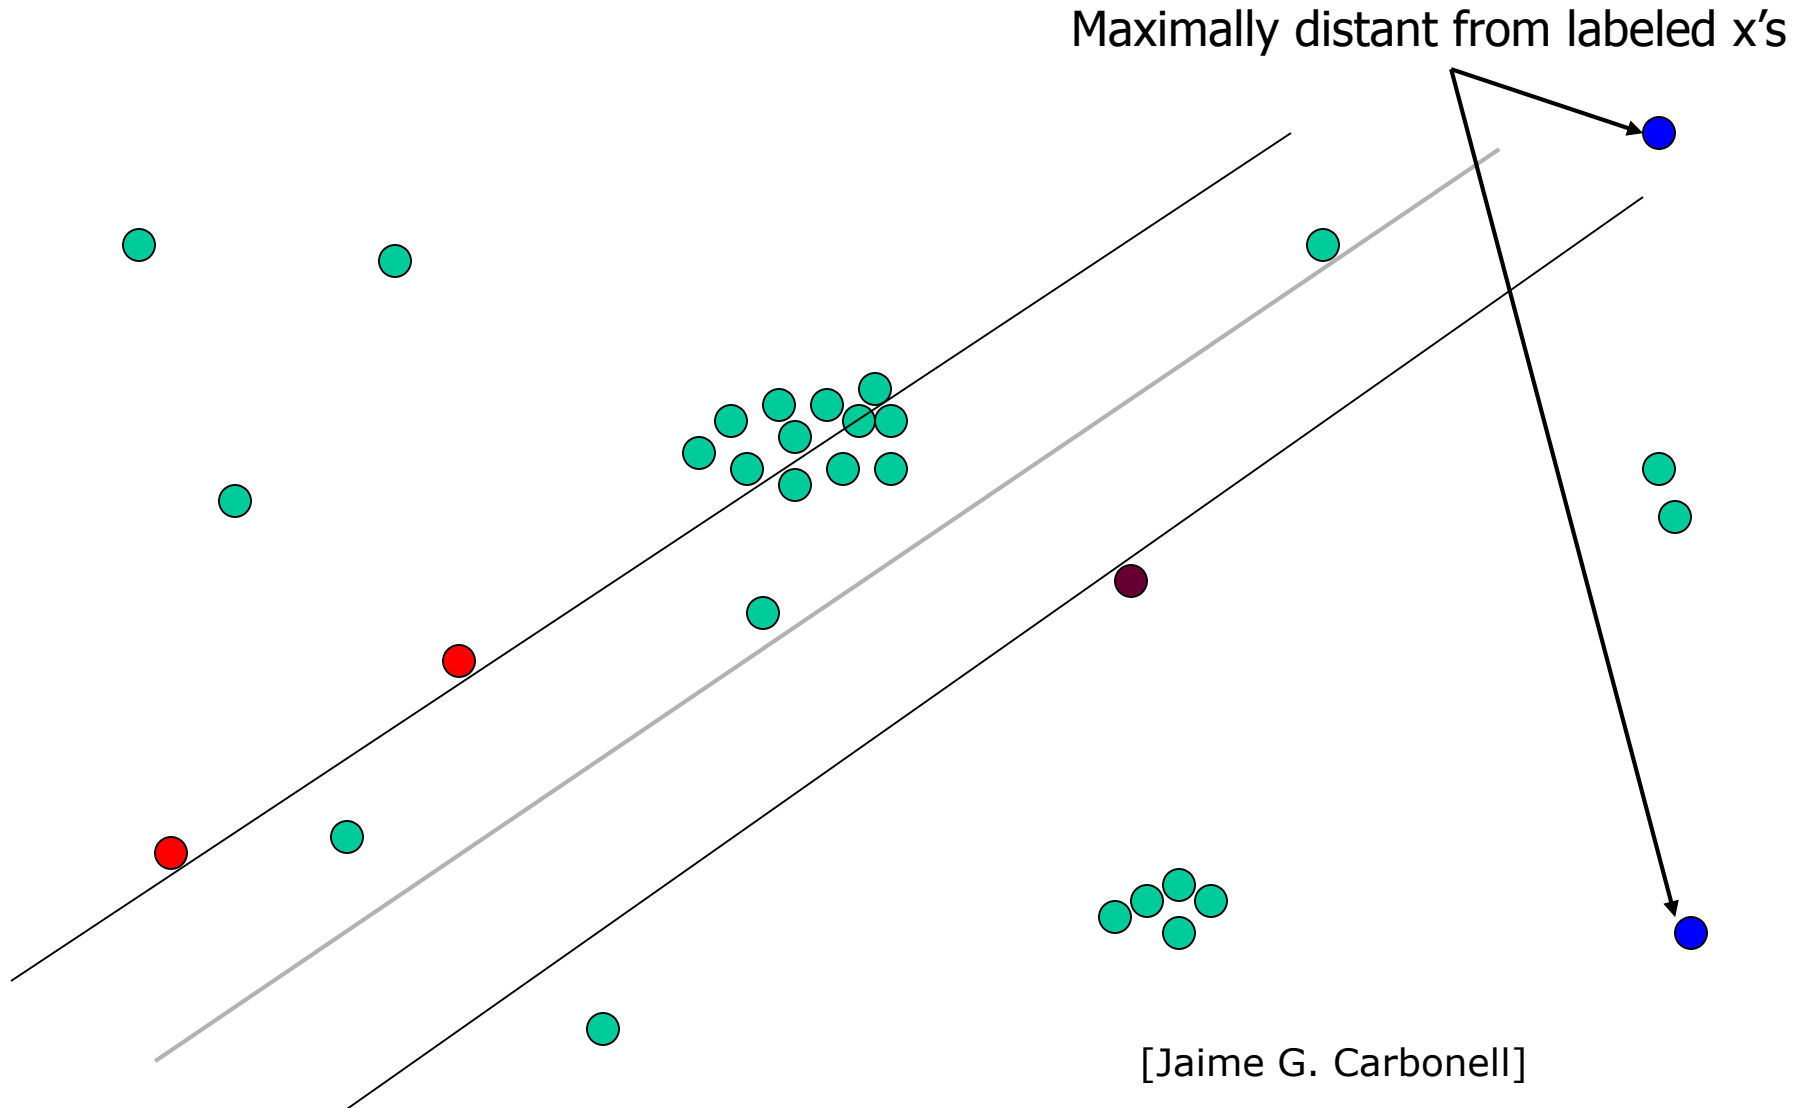

Ensemble-Based Possibilities

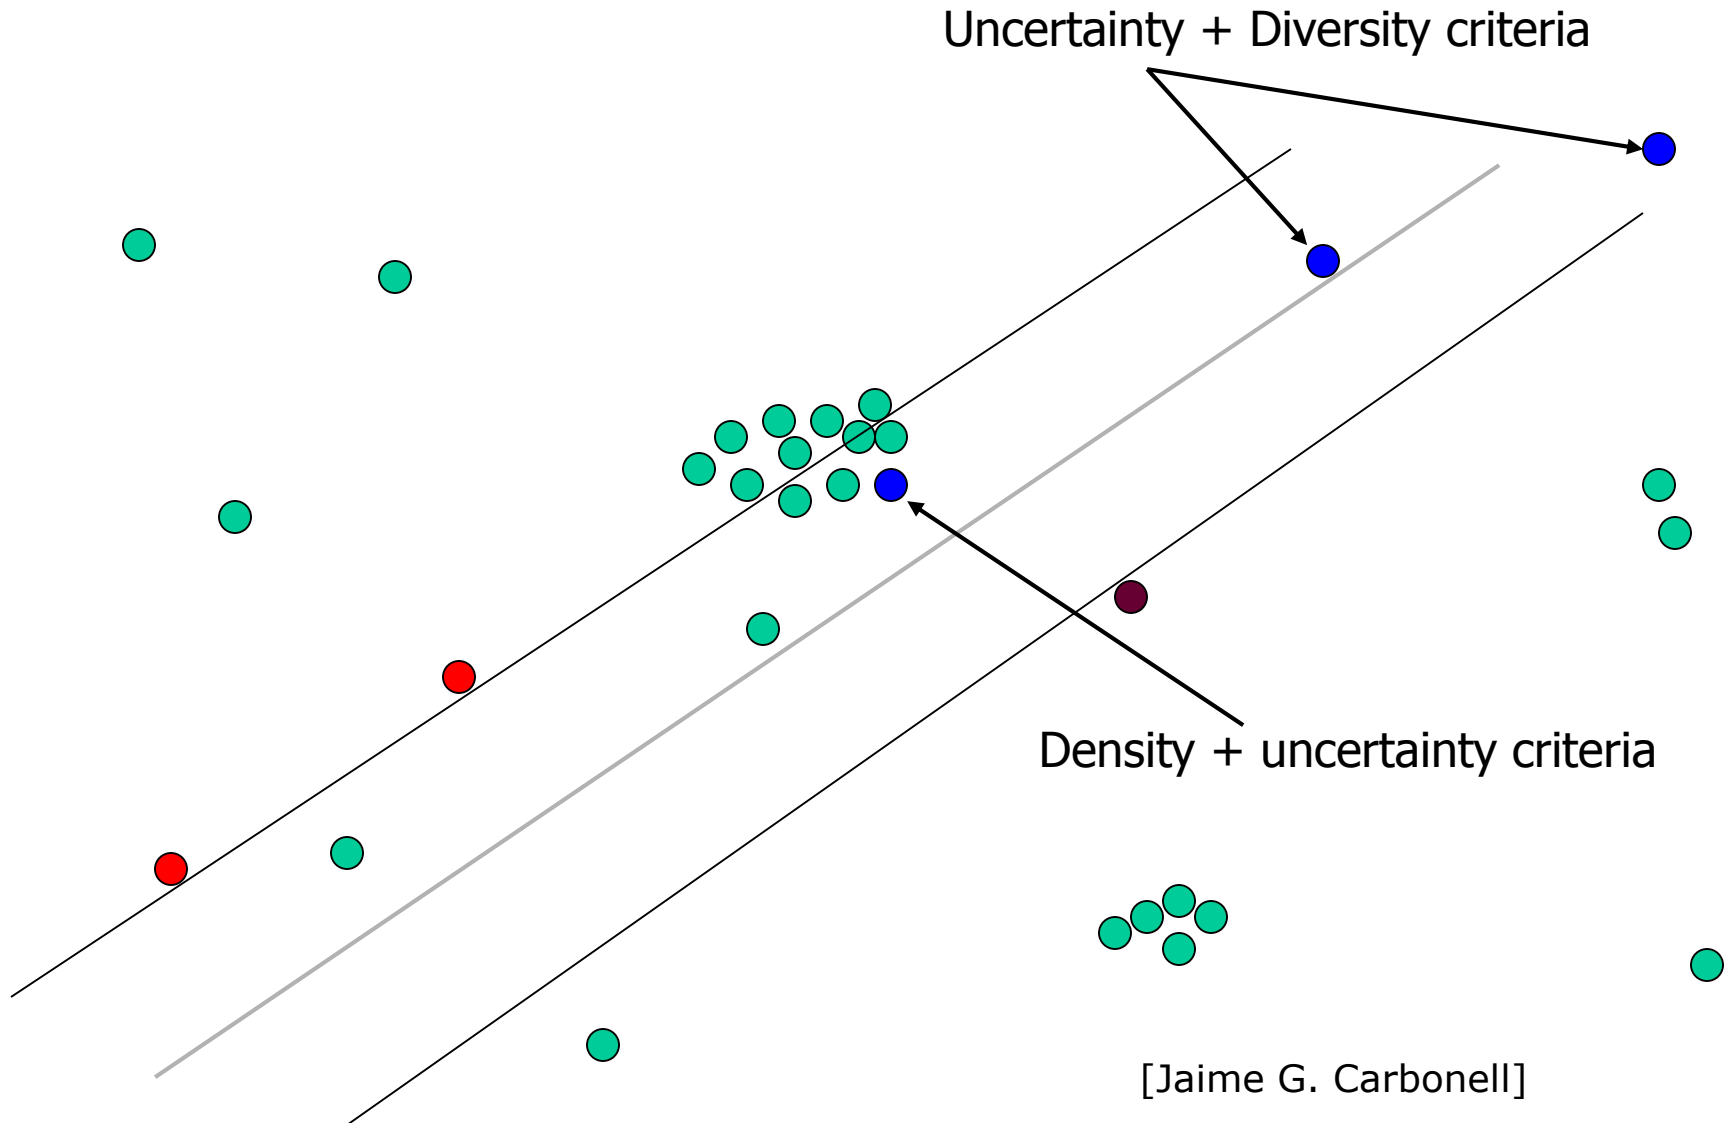

[Jaime G. Carbonell]

What You Should Know

- Active learning could be really helpful, could provide exponential improvements in label complexity (both theoretically and practically)!
- Common heuristics (e.g., those based on uncertainty sampling). Need to be very careful due to sampling bias.
- Safe Disagreement Based Active Learning Schemes.
 - Understand how they operate precisely in the realizable case (noise free scenarios).