

Element Level Differential Privacy: The Right Granularity of Privacy

Hilal Asi^{1*} John C. Duchi^{1,2} Omid Javidi²
asi@stanford.edu jduchi@stanford.edu omid.j@apple.com

¹Stanford University ²Apple

Abstract

Differential Privacy (DP) provides strong guarantees on the risk of compromising a users data in statistical learning applications, though these strong protections make learning challenging and may be too stringent for some use cases. To address this, we propose element level differential privacy, which extends differential privacy to provide protection against leaking information about any particular “element” a user has, allowing better utility and more robust results than classical DP. By carefully choosing these “elements,” it is possible to provide privacy protections at a desired granularity. We provide definitions, associated privacy guarantees, and analysis to identify the tradeoffs with the new definition; we also develop several private estimation and learning methodologies, providing careful examples for item frequency and M-estimation (empirical risk minimization) with concomitant privacy and utility analysis. We complement our theoretical and methodological advances with several real-world applications, estimating histograms and fitting several large-scale prediction models, including deep networks.

1 Introduction

The substantial growth in data collection across many domains has led to commensurate attention to and work on privacy risks in both academic [28, 25] and industrial settings [30, 3, 11]. Dwork, McSherry, Nissim, and Smith’s *differential privacy* [28] and its variants [27, 12, 40, 18]—where a randomized algorithm returns similar outputs for similar input samples—is now the standard privacy methodology, as it gives provable protection against strong adversarial attacks on privacy. Indeed, given the output of a differentially private analysis on a sample $S = \{X_1, \dots, X_n\}$, it is challenging to identify whether a particular individual x belongs to S even for an attacker knowing the entire sample except for a single observation. These strong guarantees motivate work on private data analyses, including in statistical estimation [46, 23], machine learning [14], game theory [39], and networks and graphs [33, 34].

Yet developing private algorithms that achieve reasonable utility is challenging, as the strong protections differential privacy provides necessarily degrade statistical utility. On the theoretical side, the relative sample size necessary for private algorithms to achieve similar utility to that of non-private algorithms grows with problem dimension and inversely with the privacy parameter ϵ [8, 47, 23, 20]. On a practical level, this challenge may lead privacy applications to instantiate a large privacy parameter ϵ to obtain acceptable statistical performance—for example, Abadi et al. [1] remarkably are able to fit neural networks with differential privacy at all, though they require a value of $\epsilon = 8$ even for a weaker form of “event level” privacy to achieve performance approaching non-private algorithms—but privacy guarantees for large values are unclear [25].

We argue that standard differential privacy’s strong protections are not always necessary to provide sufficient protection for a system’s users. For example, an individual phone user sends multiple text messages, or takes several cell-phone photos, each a single datum. In such cases, it may be satisfying from a privacy perspective not to protect whether a user participates in

*Part of this work performed while in a summer internship at Apple. Partially supported by the Office of Naval Research award YIP N00014-19-2288.

a dataset—versions of differential privacy protect against discovering this participation, though whether one has a phone is likely not very sensitive—but to protect so that no one knows any particular *thing* a user has done, e.g., whether the user has *ever* typed a given word or taken a photo of a mountain. Concretely, consider estimating the frequency of different word use in email messages. Differential privacy prevents an attacker from (accurately) distinguishing a user who sends hundreds of emails daily from one who has never typed a word in his or her lifetime, a protection that may be too strong. More nuanced tradeoffs can arise if we wish to prevent an attacker from knowing, for example, whether a user has ever typed a given word.

To address these challenges, we propose *element-level differential privacy*, which aims to provide protection for what we—at the risk of some hubristic excess—might term reasonable attacks. The motivation for our definition is that in many statistical estimation and learning problems, an individual may contribute many datapoints; in a problem of learning from mobile devices, a typical cell-phone contains many individual photos and hundreds of distinct text messages, for example, and it is these data that are private. The key to differential privacy and its descendant definitions is the notion of *neighboring datasets* [25] or samples, where privacy guarantees certify that an adversary given the output of a private mechanism M cannot reliably distinguish between its applications $M(x)$ and $M(x')$ on neighboring samples x and x' . In differential privacy, two samples are neighboring if they differ in at most a single observation. As Chatzikokolakis et al. [13] note, it is thus natural to quantify a distance between users or samples x, x' to redefine neighboring, and mechanisms then provide privacy for nearby users under this distance [13, 2, 8].

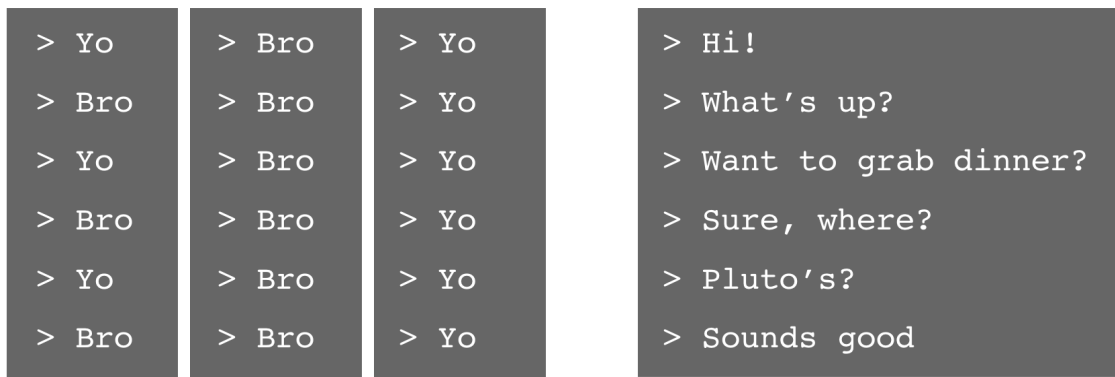


Figure 1. Example histories of four different users’ text messages (each column represents a user’s conversation). The left three columns reflect a conversation of the first author with his friends. The rightmost is a conversation between the second and third authors. In the standard differential privacy definition, each user is distance 1 from each other user. In contrast, element-level privacy (with the histogram distance function described in the introduction) identifies the three left transcripts as neighboring—at distance 2—irrespective of the number of times each uses the word *yo* or *bro*, while the right conversation is distant.

Element-level privacy takes this idea and defines distances based on the *elements*, which we describe in the sequel, that an individual user’s data x contains; here, two users are neighboring if they differ in one or fewer elements. Consider estimating frequency of word use in text (SMS) messages. Then a possible distance function between two users is the *number* of words that have different counts per user, i.e., we represent each user as a vector $x \in \mathbb{N}^d$ of per-word counts (how many times the user used each word in a dictionary of size d), and the distance between users is the Hamming distance $d(x, x') = \sum_{j=1}^d 1\{x_j \neq x'_j\}$ between their histograms (see Figure 1). Element-level differential privacy then makes it challenging for an attacker to discover any particular word a user utters. In Section 2.2 and throughout our applications, we present more concrete examples to compare and contrast element-level and classical differential privacy.

As we note above, there is substantial work on privacy broadly, with a line of work investigating appropriate notions of distance and what distinctions between individuals and data should be protected. We highlight a few works in this direction here. Andrés et al. [2] develop distance-based notions of privacy to release information to geo-location services, where privacy protections may degrade with distance to a user (e.g., it is acceptable to release that a user is in Paris, but perhaps not at 28 Rue Vieille du Temple). Kasiviswanathan et al. [33] discuss protecting privacy at the level of node differences in graphs, where two graphs are neighboring if a single node is removed or added to the graph (with arbitrarily many edges to other nodes), which is distinct from providing privacy only on edge appearances. In the context of large-scale web or mobile applications, there are differences between *event-level* privacy [29, 30, 1], which protects each individual action a user takes, though a user contributing multiple data items (e.g. sending multiple text messages) suffers linear degradation in privacy guarantees, and *user-level* privacy [38], where all users are neighboring, no matter how many data contributions they make or how diverse their data. The former (event-level) provides limited privacy guarantees, while the latter (user-level) may be too strong for practical use. In this context, *element-level* privacy attempts to provide privacy at the right granularity for the application at hand: in a way we formalize shortly, one identifies the elements to be protected, then guarantees that no matter how much data corresponding to a particular element a user contributes, the output of the privacy mechanism changes little.

In the remainder of the paper, we carefully define element-level differential privacy (Section 2), using standard tools to show that it inherits many of the desiderata important for satisfactory privacy definitions (composition, group privacy, privacy to post-processing, side-information resilience, and amplification by subsampling) in Section 2.3. As one of our major goals is to provide practicable procedures for estimation and learning with privacy protections, we devote Section 3 to several methodological contributions. In particular, we demonstrate histogram estimators and tools for estimation of frequent elements, highlighting the advantages element-level privacy can provide, and we show how to apply element-level privacy to fit large scale machine learning models and compute M-estimators (Section 3.3) using stochastic-gradient-type methods. Along the way, we demonstrate a new asymptotic normality result for stochastic approximation procedures applied to fixed finite datasets, which may be of interest beyond privacy. We complement these with experimental evidence on several real-world machine-learning tasks in Section 4.

2 Element-level privacy

As we allude in the introduction, our main goal in this paper is to provide a new definition of privacy, simultaneously developing its properties while demonstrating new procedures that obey its strictures. To that end, we begin by defining element-level privacy, contrasting it with prior notions. The basic notion of privacy is Dwork et al.’s *differential privacy* (DP), while other definitions of privacy, of which we recapitulate a few, include approximate differential privacy [27], Rényi differential privacy [40] and concentrated differential privacy [26, 12], and *f*-differential privacy [18].

2.1 Privacy definitions

The key to each of these definitions of privacy is a *distance* on the space of samples. In particular, let $d_{\text{sample}} : \mathcal{X}^n \times \mathcal{X}^n \rightarrow \mathbb{R}_+$ be a distance on \mathcal{X}^n , and let \mathbf{M} be a randomized mapping from \mathcal{X}^n to some (measurable) space \mathcal{Z} . In standard differential privacy, this distance is the (order-invariant) Hamming metric: letting Π_n be the collection of all permutations of n elements, for

samples $S = (x_1, \dots, x_n), S' = (x'_1, \dots, x'_n) \in \mathcal{X}^n$ we have

$$d_{\text{sample}}(S, S') = d_{\text{Hamming}}(S, S') := \min_{\pi \in \Pi_n} \sum_{i=1}^n 1\{x_i \neq x'_{\pi(i)}\}.$$

As Chatzikokolakis et al. [13] note, focusing on the case of differential privacy, we may take any distance on the samples to provide analogues of differential privacy; such alternative distances are important, for example, for graph-based notions of differential privacy [33], location services [2], or event-level streams [29, 30].

We thus make the following definitions, which generalize those in prior work by treating distance between two samples as a first-class object.

Definition 2.1 (Dwork et al. [28, 27]). *Let $\varepsilon, \delta \geq 0$. The randomized mechanism $M : \mathcal{X}^n \rightarrow \mathcal{Z}$ is (ε, δ) -differentially private for the distance d_{sample} if for any pair of samples S, S' with $d_{\text{sample}}(S, S') \leq 1$ and any measurable subset $A \subset \mathcal{Z}$,*

$$\mathbb{P}(M(S) \in A) \leq e^\varepsilon \mathbb{P}(M(S') \in A) + \delta,$$

where the probability is taken over only the randomness in M (treating S, S' as fixed).

We can abstract away from other definitions of privacy as well.

Definition 2.2 (Mironov [40]). *Let $\varepsilon \geq 0, \alpha \geq 1$. The mechanism $M : \mathcal{X}^n \rightarrow \mathcal{Z}$ is (ε, α) -Rényi differentially private for the distance d_{sample} if for any pair of samples S, S' with $d_{\text{sample}}(S, S') \leq 1$,*

$$D_\alpha(M(S) \| M(S')) \leq \varepsilon.$$

Mironov [40] shows that any (ε, α) -Rényi private mechanism is also $(\varepsilon + \frac{\log \frac{1}{\delta}}{\alpha - 1}, \delta)$ -differential private for all $\delta \in [0, 1]$. As a consequence, if we wish to compute and release $f(S)$ for some $S \in \mathcal{X}^n$, and $\|f(S) - f(S')\|_2 \leq \rho$ for any neighboring samples S, S' , then the Gaussian mechanism

$$M(S) := f(S) + \mathbf{N}\left(0, \rho^2 \left(\frac{1\{\varepsilon > 1\}}{\varepsilon} + \frac{2 \log(1/\delta)}{\varepsilon^2}\right) I\right) \quad (1)$$

provides (ε, δ) -differential privacy for all $\varepsilon > 0$. For $\varepsilon \leq 1$, the $1/\varepsilon$ term in the normal variance is unnecessary [27]. (See Appendix A for this calculation.)

Rather than exhaustively discussing alternative privacy definitions, we note that each variant of differential privacy (f -differential privacy [18] or concentrated differential privacy [26, 12]) similarly rely on sample distances, saying that a mechanism $M(\cdot)$ is private if its output distribution changes little (under an appropriate metric) when its input sample changes.

2.2 Element-level privacy definition

The standard distance in each privacy definition is the Hamming distance between samples S, S' ; this is satisfying, as it limits any inferences that can be made about an individual [28, 24]. In some scenarios, this definition makes learning challenging (or, depending on the task and desired privacy guarantee, essentially impossible) [23, 20]. It is thus natural to consider more fine-grained distance notions to allow utility while providing sufficient privacy. For our purposes, it is useful to consider a scenario frequent in large-scale learning applications, such as federated learning (e.g. [1]), where individual users contribute multiple data items rather than a single item. In such cases, we protect a user so that no one knows any particular *thing* the user has done. For example, a student with a

phone sends many text messages, but may wish that his parents and teachers never know whether he has ever sent a curse word, irrespective of the number of times he may or may not have sent one.

To formalize this, we introduce *element-level privacy*. A sample or dataset S consists of n user’s data (or data units) $S = \{x^{(u)}\}_{u=1}^n$, while each user u maintains local data of size $m(u)$, where the size may depend on the user $x^{(u)} = \{x_1^{(u)}, \dots, x_{m(u)}^{(u)}\}$. For example, individual u ’s data may consist of the $m(u)$ photos she has taken. External to the users are K clusters $\{c_1, \dots, c_K\}$ partitioning \mathcal{X} , where we view the cluster centroids as the *elements* to be made private, and each datapoint $x_i^{(u)}$ belongs to precisely one cluster c_k (i.e. has a nearest element); we denote this by $x_i^{(u)} \in c_k$. The distance between two users’ local data $x = \{x_1, \dots, x_n\}$ and $x' = \{x'_1, \dots, x'_m\}$ is then the number of clusters c_1, \dots, c_K with different memberships for the two users’ data, that is,

$$\begin{aligned} d_{\text{user}}(x, x') &= d_{\text{user}}(\{x_1, \dots, x_n\}, \{x'_1, \dots, x'_m\}) \\ &:= \sum_{k=1}^K 1 \{ \{x_i : x_i \in c_k\} \neq \{x'_i : x'_i \in c_k\} \}, \end{aligned} \tag{2}$$

where $\{x_i : x_i \in c_k\}$ are implicitly multi-sets. Then two users’ data x, x' are *element-neighbors* if $d_{\text{user}}(x, x') \leq 1$; this is equivalent to allowing users to differ arbitrarily on one element of their data. With this distance definition, we can then define the element-level sample distance by

$$d_{\text{element}}(S, S') := \min_{\pi \in \Pi_n} \sum_{u=1}^n d_{\text{user}}(x^{(u)}, x'^{(\pi(u))}). \tag{3}$$

Two samples S, S' of size n are *element-neighbors* if each of the units within the sample is identical except for (at most) one unit $x \in S, x' \in S'$, where $d_{\text{user}}(x, x') \leq 1$. The definition of element level privacy is now immediate: we take the sample distance d_{sample} in any privacy definition (e.g. 2.1 or 2.2) to be d_{element} .

Definition 2.3. *A mechanism M satisfies element-level differential privacy or Rényi-differential privacy if it satisfies Definition 2.1 or 2.2, (respectively) with distance $d_{\text{sample}} = d_{\text{element}}$.*

Element-level differential privacy guarantees that the releases of a mechanism trained on users’ sensitive data does not leak any particular “element” the user has, that is, whether a user has data belonging to any one of the clusters c_1, \dots, c_K , no matter how many data point belong to one of the clusters. It is useful to compare this definition to two frequent definitions of privacy for large-scale learning systems. The first is *event-level privacy* [30], which applies privacy commensurate with each individual *event* a user performs, for example, whenever a user visits any website. This definition may be too weak: consider a user who sends 50 text-messages consisting of the phrase “Hello!” Then event-level privacy (say with Def. 2.1) guarantees a likelihood ratio bound of $e^{50\epsilon}$ versus an otherwise identical user who never uses the phrase “Hello!” In the case of element-level privacy, however, the distance between these users is at most 1 regardless of how many times either says “Hello!” The second common definition is *user-level privacy*, which corresponds to the standard definitions with Hamming distance; by taking a single cluster $c_1 = \mathcal{X}$ in the definitions (2)–(3) of element level distances, one recovers user-level privacy, but as we shall see, the additional flexibility of element-level privacy allows more utility.

To get a feel for Definition 2.3, it is instructive to consider two (somewhat stylized) examples.

Example 1 (Word frequency estimation): Consider the problem of estimating frequent words used in text (SMS) messages. Ignoring punctuation, we treat each word as a cluster, so that for a

dictionary of size d , a user u 's data $x^{(u)} = \{x_1^{(u)}, \dots, x_d^{(u)}\}$ consists of the counts $x_j^{(u)} \in \mathbb{N}$ of the times user u typed word j , a histogram of word counts. In Figure 1, for example, the leftmost column has histogram with count 3 for the word “yo,” 3 for “bro,” and 0 for all other words. The distance between two user data x, x' is then $d_{\text{user}}(x, x') = \sum_{j=1}^d \mathbf{1}\{x_j \neq x'_j\}$, the number of distinct counts. In this case, two users are neighboring when their word use is identical except that one may use a word j arbitrarily more or less than the other. \diamond

Example 2 (Website visit counts): Consider estimating the frequency of popular websites (URLs) that users visit. In this case, a natural set of elements are domains (the first part of a website name), while specific URLs belong to a single domain. For example, https://en.wikipedia.org/wiki/Apple_Inc and <https://en.wikipedia.org/wiki/NeXT> belong to the domain (cluster) `wikipedia.org`, while <http://web.stanford.edu/~jduchi/> and <http://web.stanford.edu/~asi/> belong to `stanford.edu`. Then a user's data consists of all URLs he or she visits, while the distance between users is the number of domains in which they visit distinct URLs. The intuition here is that any mechanism satisfying Definition 2.3 limits release of whether a user ever even visits a website in a particular domain, for example, `wikipedia.org`, `stanford.edu`, or `youtube.com`. In contrast, standard differential privacy would protect whether a user has ever used the internet. \diamond

As these examples attempt to clarify, the important facet of element-level DP is that it protects a data provider from anyone ever knowing any particular thing they have done, regardless of how many times they have done it: visiting a domain, using a word, or other desired protected element.

2.3 Properties of element-level differential privacy

By replacing the standard Hamming distance in the different definitions of differential privacy with the element-based distance (3), any element-level differentially private mechanism inherits the typical properties private mechanisms enjoy, including privacy to post-processing, group privacy, composition, and amplification of privacy by (anonymous) subsampling (see the book [25] for a discussion of these desiderata). Almost all of these inheritances are immediate, but to give a flavor of these results we present several for the (ε, δ) -element-level differentially private case.

Corollary 2.1 (Post-Processing). *Let $M : \mathcal{X}^n \rightarrow \mathcal{Z}$ be an (ε, δ) -element-level private mechanism. For any (potentially randomized) function on \mathcal{Z} , the mechanism $f \circ M$ is (ε, δ) -element-level private.*

Corollary 2.2 (Group Privacy). *Let $M : \mathcal{X}^n \rightarrow \mathcal{Z}$ be an (ε, δ) -element-level private mechanism. Let $S = \{x^{(u)}\}_{u=1}^n$ and $S' = \{x'^{(u)}\}_{u=1}^n \in \mathcal{X}^n$ be two samples. Then for any measurable set A ,*

$$\mathbb{P}(M(S) \in A) \leq e^{d_{\text{element}}(S, S')\varepsilon} \mathbb{P}(M(S') \in A) + d_{\text{element}}(S, S')e^{(d_{\text{element}}(S, S')-1)\varepsilon} \delta.$$

See, for example, Dwork and Roth [25, Prop. 2.1, Thm. 2.2]. We also immediately have composition for element-level DP. In this case, we consider adaptive composition of k mechanisms, where for each i , we assume the output space \mathcal{Z}_i is a measurable space and

$$M_i : \mathcal{X}^n \times \mathcal{Z}_1 \times \dots \times \mathcal{Z}_{i-1} \rightarrow \mathcal{Z}_i$$

is $(\varepsilon_i, \delta_i)$ -element-level differentially private, meaning that for fixed z_1^{i-1} , $M_i(\cdot, z_1^{i-1})$ is private. The k -fold composition $M_k \circ \dots \circ M_1$ then has recursive definition $Z_i = M_i(S, Z_1^{i-1})$. We have the following corollary (for the proof of differentially private version, see [25, Thm. 3.20 and Appendix B] and [19, Corollary 6.26], and for the Rényi version, see [40, Prop. 1]).

Corollary 2.3 (Composition). *Let $k \in \mathbb{N}$, \mathcal{Z}_i be measurable spaces, and $M_i : \mathcal{X}^n \times \mathcal{Z}_1^{i-1} \rightarrow \mathcal{Z}_i$ be $(\varepsilon_i, \delta_i)$ -element-level DP. Then their k -fold composition is $(\sum_{i=1}^k \varepsilon_i, \sum_{i=1}^k \delta_i)$ -element-level DP. Additionally, for any $\delta_0 > 0$, the composition is*

$$\left(\frac{3}{2} \sum_{i=1}^k \varepsilon_i^2 + \sqrt{6 \sum_{i=1}^k \varepsilon_i^2 \log \frac{1}{\delta_0}}, \delta_0 + \sum_{i=1}^k \frac{\delta_i}{1 + e^{\varepsilon_i}} \right)$$

element-level DP. If instead the mechanisms are (ε_i, α) -element-level Rényi private, the composition is $(\sum_{i=1}^k \varepsilon_i, \alpha)$ -element-level Rényi private.

We also obtain that subsampling amplifies the privacy of our mechanisms (see [7, Thms. 8 & 9]). We consider the two most natural subsampling mechanisms. The first, which we denote Π_q , takes a sample S and returns a subsample $S' \subset S$ where each element $x^{(u)} \in S$ is included with a fixed probability $q \in (0, 1)$. The second, Π_m^{wo} , samples m elements without replacement from S .

Corollary 2.4 (Amplification by subsampling). *Let M be an (ε, δ) -element differentially private mechanism that acts on samples of arbitrary size. Then*

- (i) *For any $q \in (0, 1)$, the subsampled mechanism $M \circ \Pi_q$ is $(\log(1 + q(e^\varepsilon - 1)), q\delta)$ -element-level differentially private.*
- (ii) *For any $m \leq n \in \mathbb{N}$, the subsampled mechanism $M \circ \Pi_m^{\text{wo}}$ applied to samples of size $|S| = n$ is $(\log(1 + \frac{m}{n}(e^\varepsilon - 1)), \frac{m}{n}\delta)$ -element-level differentially private.*

Finally, we discuss amplification of Rényi element-level differential privacy by subsampling using a particular Gaussian mechanism that will form the basis for our stochastic approximation results in the sequel. In this case, we build off of [Abadi et al.](#)'s *moments accountant* [1], whose primitive is to release a sum of vectors. Consider samples of the form $S = \{x^{(1)}, \dots, x^{(n)}\}$, where each $x^{(u)}$ consists of a collection $x^{(u)} = \{x_k^{(u)}\}_{k=1}^K$ of K vectors, where each $x_k^{(u)}$ corresponds to a desired statistics for element/cluster k and each individual vector satisfies $\|x_k^{(u)}\|_2 \leq \rho$ for some $\rho < \infty$. The goal is to release a sum of the entire sample, $\sum_{u=1}^n \sum_{k=1}^K x_k^{(u)}$, but instead we consider subsampling by users. In particular, for $q \in [0, 1]$ and $\sigma \geq 0$, let $B_u \in \{0, 1\}$ be either i.i.d. Bernoulli(q) or uniform on $\sum_u B_u = qn$, let $W \sim \mathcal{N}(0, I)$, and consider the mechanism

$$M(S) := \sum_{u=1}^n B_u \left(\sum_{k=1}^K x_k^{(u)} \right) + \rho\sigma W. \quad (4)$$

Taking $d_{\text{user}}(x, x')$ as the user distance (2), we have the following corollary, with minor extension to handle the variants of subsampling (i.i.d. or fixed size without replacement).

Corollary 2.5 (Moments accountant, [1] Lemma 3). *Let $\alpha \geq 1$ and P_t be the $\mathcal{N}(t, \sigma^2)$ distribution. The mechanism (4) is $(\varepsilon_\alpha, \alpha)$ -element-level Rényi differentially private with*

$$\varepsilon_\alpha(q, \sigma) := \max \{ D_\alpha(qP_1 + (1-q)P_0 \| qP_{-1} + (1-q)P_0), D_\alpha(qP_{-1} + (1-q)P_0 \| qP_1 + (1-q)P_0) \}.$$

It is possible to numerically evaluate the Rényi divergences in the corollary, making them effective in applications, though they are unavailable analytically. As a consequence of the corollary, if we compose the mechanism (4) adaptively T times, composition for Rényi privacy immediately

guarantees the entire mechanism is $(T\varepsilon_\alpha(q, \sigma), \alpha)$ -Rényi element-level private. As a consequence, recalling [Mironov's](#) transformation from Rényi to approximate differential privacy [\[40\]](#), for any $\delta > 0$ the same composition is also (ε, δ) -element-level DP for $\varepsilon = \inf_{\alpha \geq 1} T\varepsilon_\alpha(q, \sigma) + \frac{\log \frac{1}{\delta}}{\alpha - 1}$. To give a sense of the level of privacy maintained, we consider the bound of [\[1, Lemma 3\]](#); a slight variant of its proof yields

$$\varepsilon_\alpha(q, \sigma) \leq \frac{q^2 \alpha}{1 - q} \frac{1}{\sigma^2} + O(q^3 / \sigma^3)$$

for $\alpha \leq \sigma^2 \log \frac{1}{q\sigma}$ and $\sigma \geq 2$. Thus, for numerical constants c_0, c_1 , this composition is (ε, δ) -element level private for $\varepsilon \leq c_0 q^2 T$ and $\sigma^2 \geq c_1 \frac{q^2 T}{\varepsilon^2} \log \frac{1}{\delta}$.

We remark in passing and without proof that each of the preceding corollaries has an analog in [Dong et al.'s](#) f -differential privacy [\[18\]](#).

3 Element-level private methods

One of our major goals is to demonstrate the methodological possibilities of mechanisms satisfying element-level privacy, both to give some sense of the way to design mechanisms satisfying the definition and to understand the potential utility benefits—in terms of more accurate estimation—element-level privacy allows over user-level notions of privacy. To that end, we present three examples in this section of increasing sophistication: discovering most frequent elements or heavy hitters ([Sec. 3.1](#)), estimating multinomial frequencies ([Sec. 3.2](#)), and finally, stochastic optimization and statistical learning ([Sec. 3.3](#)).

We begin by attempting to give a somewhat general picture, connecting to the classical Laplace mechanisms and sensitivity analyses of [Dwork et al. \[28\]](#); we specialize in the coming sections. Suppose each user contributes a batch $x = (x_1, \dots, x_m)$ of data, and we wish to compute the average $\frac{1}{n} \sum_{u=1}^n f(x^{(u)})$ of a function $f : \mathcal{X}^m \rightarrow \mathbb{R}$ on $S = \{x^{(u)}\}_{u=1}^n$. Standard mechanisms add noise that scales with the *global sensitivity* of the function f , that is, $\mathbf{gs}(f) := \sup_{x \in \mathcal{X}^m, x' \in \mathcal{X}^m} |f(x) - f(x')|$, and the Laplace (respectively Gaussian) mechanisms for ε - or (ε, δ) -differentially private release are

$$\mathbf{M}(S) := \frac{1}{n} \sum_{u=1}^n f(x^{(u)}) + \frac{\mathbf{gs}(f)}{\varepsilon} \cdot \text{Lap}(1) \quad \text{and} \quad \mathbf{M}(S) := \frac{1}{n} \sum_{u=1}^n f(x^{(u)}) + \mathbf{gs}(f) \cdot \mathbf{N} \left(0, \frac{1 \{ \varepsilon > 1 \}}{\varepsilon} + \frac{2 \log \frac{1}{\delta}}{\varepsilon^2} \right).$$

In contrast, given a partition $\{c_1, \dots, c_K\}$ of \mathcal{X} and corresponding user distance d_{user} (recall [Eq. \(2\)](#)), the analogous recipe here is to add noise scaling with the *element sensitivity* of f ,

$$\mathbf{es}(f) := \sup_{x \in \mathcal{X}^m, x' \in \mathcal{X}^m} \{ |f(x) - f(x')| \text{ s.t. } d_{\text{user}}(x, x') \leq 1 \}, \quad (5)$$

which satisfies $\mathbf{es}(f) \leq \mathbf{gs}(f)$. Then the standard Laplace and Gaussian mechanisms become

$$\mathbf{M}(S) := \frac{1}{n} \sum_{u=1}^n f(x^{(u)}) + \mathbf{es}(f) \cdot \begin{cases} \text{Lap}(1/\varepsilon) & \text{Laplace mechanism} \\ \mathbf{N} \left(0, \frac{1 \{ \varepsilon > 1 \}}{\varepsilon} + \frac{2 \log(1/\delta)}{\varepsilon^2} \right) & \text{Gaussian mechanism} \end{cases} \quad (6)$$

and guarantee ε - or (ε, δ) -element-level differential privacy. We see utility gains whenever $\mathbf{es}(f) \ll \mathbf{gs}(f)$, which we expect when the number K of elements is large, providing finer granularity privacy.

3.1 Discovering heavy hitters

The first two examples we consider are to estimate properties of a multinomial. We consider a sampling scheme where each of n users generates a vector $X^{(u)} \in \mathbb{N}^d$, $X^{(u)} \stackrel{\text{iid}}{\sim} \text{Multinomial}(m, p)$, where $p = (p_1, \dots, p_d) \in \mathbb{R}_+^d$ is an unknown vector of probabilities, $p^T \mathbf{1} = 1$, and $m \in \mathbb{N}$ is the number of trials. The goal is to estimate different properties of the vector p , where $X_j^{(u)} \in \{0, \dots, m\}$ indicates the count of appearances of item j for user u . For example, if these multinomials indicate purchases users make in a grocery store, we may be interested in the items the most users purchase. Bhaskar et al. [10] provide a sophisticated analysis of private algorithms for finding multisets of frequent items in item stream; we consider a much simpler scenario than theirs (we care only about individual items/elements, and wish to release an ordering of all elements rather than a top few, the latter adding significant complexity to the problem), as we treat this more as an illustrative example. While stylized, it is illustrative of the approaches possible with element-level privacy.

We assume that each item $j \in \{1, \dots, d\}$ is an element, so that the user distance $d_{\text{user}}(x, x') = \sum_{j=1}^d 1\{x_j \neq x'_j\}$. Then we consider the mechanism

$$\mathbf{1}(x) := [1\{x_j > 0\}]_{j=1}^d, \quad \hat{H} := \mathbf{M}(S) := \sum_{u=1}^n \mathbf{1}(X^{(u)}) + \mathbf{N}(0, \sigma^2 I_d) \quad (7)$$

for some $\sigma \geq 0$ to be chosen depending on the desired privacy. Following our discussion to begin Sec. 3, the element sensitivity (5) of $\mathbf{1}(\cdot)$ is $\text{es}(\mathbf{1}(\cdot)) = \sup\{\|\mathbf{1}(x) - \mathbf{1}(x')\|_2 : d_{\text{user}}(x, x') \leq 1\} = 1$, so the following is immediate by Definition 2.2 and the Gaussian mechanism (1).

Lemma 3.1. *Let $\varepsilon \geq 0$ and assume that each observation $X^{(u)}$ satisfies $\sum_j X_j^{(u)} = m$ as above. The mechanism (7) provides the following privacy guarantees.*

(i) *Let $\alpha \geq 1$ and take $\sigma^2 = \frac{\alpha}{\varepsilon}$. Then \mathbf{M} is (ε, α) -element level Rényi private.*

(ii) *Let $\delta \in (0, 1)$ and $\sigma^2 = \frac{1\{\varepsilon > 1\}}{\varepsilon} + \frac{2 \log \frac{1}{\delta}}{\varepsilon^2}$. Then \mathbf{M} is (ε, δ) -element level differentially private.*

In contrast to the element-level noise scaling above, the global sensitivity of the indicator vector $\mathbf{1}(\cdot)$ is $\text{gs}(\mathbf{1}(\cdot)) = \sup\{\|\mathbf{1}(x) - \mathbf{1}(x')\|_2 : \|x\|_1 \leq m, \|x'\|_1 \leq m\} = \sqrt{2m}$, so that noise addition mechanisms for standard differential privacy (e.g. the Gaussian mechanism (1)) add noise whose variance on each coordinate scales as

$$\sigma_{\text{std}}^2 := m \cdot \left(\frac{1\{\varepsilon > 1\}}{\varepsilon} + \frac{2 \log \frac{1}{\delta}}{\varepsilon^2} \right)$$

to achieve (ε, δ) -differential privacy.

Rather than attempting to recover the actual frequencies of appearance, we consider a loss measuring the number of mis-ordered pairs of elements, an estimate suffers loss if it mis-orders a pair of indices (i, j) where $p_i \geq p_j + \gamma$ for some threshold γ . We assume w.l.o.g. that $p_1 \geq p_2 \geq \dots \geq p_d$, and define

$$L_{\text{order}}(\hat{H}) := \mathbb{E} \left[\sum_{j=1}^{d-1} \sum_{l=j+1}^d 1\{p_j - p_l \geq \gamma\} 1\{\hat{H}_j > \hat{H}_l\} \right]. \quad (8)$$

We then have the following proposition, whose proof we provide in Appendix B.

Proposition 1. Assume that $p_1 = \max_j p_j \leq \frac{1}{2m}$. Let $0 \leq t \leq d$ and \hat{H} denote the mechanism (7) with Gaussian noise. Then $L_{\text{order}}(\hat{H}) \leq t^2$ whenever

$$\gamma \geq \max \left\{ \frac{32}{nm} \log \frac{d}{t}, \frac{4\sqrt{2}\sigma}{nm} \sqrt{\log \frac{d}{t}}, \frac{12\sqrt{2}}{\sqrt{5}} \cdot \frac{\sqrt{p_1}}{m\sqrt{n}} \sqrt{\log \frac{d}{t}} \right\}.$$

We provide a bit of commentary on this result. First, we consider the scaling to achieve a fixed error $L_{\text{order}}(\hat{H}) \leq t^2$, where the dominant terms are the second two in the maximum of Proposition 1. Let γ_{el} denote the separation threshold at which we obtain small loss for element-level privacy and γ_{std} that for the mechanism providing standard (ε, δ) -differential privacy (i.e. mechanism (7) with variance σ_{std}^2). Then ignoring logarithmic factors, we require

$$\gamma_{\text{el}} \gtrsim \frac{1}{\varepsilon} \frac{1}{nm} \vee \frac{\sqrt{p_1}}{m\sqrt{n}} \quad \text{while} \quad \gamma_{\text{std}} \gtrsim \frac{1}{\varepsilon n \sqrt{m}} \vee \frac{\sqrt{p_1}}{m\sqrt{n}}.$$

Thus, in high dimensional situations where we expect that p_1 is small enough that $p_1 \ll \sqrt{m/n}$, the element-level private mechanism can provide substantially fewer ordering errors than a mechanism providing user-level privacy.

3.2 Histogram estimation

We now turn to the problem of estimating item frequencies—histogram estimation—one of the original motivations for differential privacy [28, Ex. 3]. We are in an identical setting to Sec. 3.1, where $X^{(u)} \stackrel{\text{iid}}{\sim} \text{Multinomial}(m, p)$ for some $m \in \mathbb{N}$ and $p \in \mathbb{R}_+^d$ with $p^T \mathbf{1} = 1$. We elaborate this setting somewhat to allow more substantial elements, as in Example 2, by assuming there are K clusters $\{c_1, \dots, c_K\}$ partitioning $[d]$. For shorthand, for $v \in \mathbb{R}^d$ we let $v_{c_k} = [v_j]_{j \in c_k} \in \mathbb{R}^{|c_k|}$, and we denote the probability of an item in c_k by $P(c_k) = \mathbf{1}^T p_{c_k} = \sum_{j \in c_k} p_j$.

We consider a normal noise addition mechanism (6), but our first step is to design a function insensitive to changes within the partition $\{c_1, \dots, c_K\}$ of $[d]$, reducing the element sensitivity. To that end, we consider a mechanism that first projects each cluster c_k of counts into an ℓ_2 -ball, then adds Gaussian noise. For $v \in \mathbb{R}^d$, we define the projection

$$\pi_{\rho, \{c_k\}}(v) := \operatorname{argmin}_{x \in \mathbb{R}^d} \left\{ \|x - v\|_2^2 : \|x_{c_k}\|_2 \leq \rho \right\} = [v_{c_k} \cdot \min\{1, \rho/\|v_{c_k}\|_2\}]_{k=1}^K$$

(with the obvious re-ordering in the second equality). The mechanism is then

$$\mathbf{M}(S, \rho, \{c_k\}) := \frac{1}{n} \sum_{u=1}^n \pi_{\rho, \{c_k\}}(X^{(u)}) + \mathbf{N}\left(0, \frac{\rho^2 \sigma^2}{n^2} I_d\right). \quad (9)$$

As with Lemma 3.1, we then immediately obtain the privacy of the mechanism (9).

Lemma 3.2. Let $\varepsilon \geq 0$ and assume that each observation $X^{(u)}$ satisfies $\sum_j X_j^{(u)} = m$ as above. The mechanism (9) provides the following privacy guarantees.

(i) Let $\alpha \geq 1$ and take $\sigma^2 = \frac{\alpha}{\varepsilon}$. Then \mathbf{M} is (ε, α) -element-level Rényi private.

(ii) Let $\delta \in (0, 1)$ and $\sigma^2 = \frac{1\{\varepsilon > 1\}}{\varepsilon} + \frac{2 \log \frac{1}{\delta}}{\varepsilon^2}$. Then \mathbf{M} is (ε, δ) -element-level differentially private.

We now turn to an investigation of the error of the mechanism (9), providing the following proposition (whose proof we give in Appendix C).

Proposition 2. Let $m \geq 3, t \geq 0$, and assume that for cluster probabilities $P(c) = \sum_{j \in c} p_j$ we have $\rho \geq \min\{3mP(c) + 3 \log m + t, m\}$ for each $c \in \{c_k\}$. Then there exists $q \in \mathbb{R}_+^d$ with $\mathbf{1}^T q_c \leq P(c)$ for each $c \in \{c_k\}$ and a numerical constant $C > 0$ such that for each $j \in [d]$,

$$\mathbb{P}(|M_j(S, \rho, \{c_k\}) - mp_j| \geq 2^{2-t}q_j + u) \leq \exp\left(-C \min\left\{\frac{nu^2}{mp_j}, \frac{n^2u^2}{\sigma^2\rho^2}, \frac{nu}{\rho}\right\}\right)$$

for all $u \geq 0$. In addition, for numerical constants $C_0 \leq C_1 < \infty$,

$$C_0 \left[\frac{mp_j}{n} + \frac{\sigma^2\rho^2}{n^2} \right] \leq \mathbb{E}[|M_j(S, \rho, \{c_k\}) - mp_j|^2] \leq C_1 \left[2^{-2t}q_j^2 + \frac{mp_j}{n} + \frac{\sigma^2\rho^2}{n^2} \right].$$

If $\rho \geq m$, the preceding inequalities hold with $t = \infty$.

Let us compare standard mechanism's errors with the element-level mechanism's errors, focusing on the squared error. For the user-level case, we have global sensitivity $\rho = m$, and the proposition shows that the mean-squared error for each coordinate scales as $\max\{\frac{mp_j}{n}, \frac{\sigma^2 m^2}{n^2}\}$. For element-level privacy, if we take $t = \log n$ in the definition of ρ , we obtain mean-squared error scaling as

$$\mathbb{E}[(M_j(S, \rho, \{c_k\}) - mp_j)^2] \leq O(1) \cdot \max_{c \in \{c_k\}} \max\left\{\frac{mp_j}{n}, \frac{\sigma^2}{n^2} [m^2 P(c)^2 + \log^2 m + \log^2 n]\right\}.$$

Thus, whenever the individual contribution sizes m are large while probabilities of elements $P(c)$ are small, element-level mechanisms allow much more accurate estimation of frequencies than standard private noise addition. Of course, the best choice of the projection threshold ρ for element-level privacy requires some knowledge of the rough probabilities of each cluster, as otherwise, it is impossible to choose ρ appropriately; a two-stage estimator (to give rough upper bounds on the element probabilities $P(c)$) makes this feasible.

3.3 Statistical learning, risk minimization, and M-estimation

Our final application is a fairly careful investigation of statistical learning problems in the context of element-level differential privacy and realistic federated learning problems, where individuals contribute more than a single data point (e.g. because they send many text messages). The typical statistical learning or generic M-estimation problem [31, 49] is as follows: for a sample space \mathcal{X} and parameter space Θ , we have a loss $\ell : \Theta \times \mathcal{X} \rightarrow \mathbb{R}_+$, where $\ell(\theta; x)$ measures the loss of a parameter θ on observation x , and we wish to minimize the average loss over a population P . In standard empirical risk minimization or M-estimation, one receives $X^{(u)} \stackrel{\text{iid}}{\sim} P$, then chooses $\hat{\theta}_n$ to minimize the empirical average $\frac{1}{n} \sum_{u=1}^n \ell(\theta; X^{(u)})$.

In our context of element privacy, we modify this slightly. Individuals (users) contribute batches of data $x \subset \mathcal{X}$, where the users are drawn from an underlying population P . Recalling Section 2.2, we assume that there is a prespecified partition $\{c_1, \dots, c_K\}$ of \mathcal{X} , so that the element of protection is whether a user with data $x = \{x_1, \dots, x_m\}$ has any individual datum $x_i \in c_k$. Then the *element-level loss* for a data batch $x \in 2^{\mathcal{X}}$ averages losses within each element,

$$\ell_{\text{el}}(\theta; x) := \sum_{k=1}^K \mathbf{1}\{x \cap c_k \neq \emptyset\} \frac{1}{\text{card}\{x_i \in c_k\}} \sum_{x_i \in c_k} \ell(\theta; x_i), \quad (10)$$

that is, the sum of average losses in the non-empty elements in x . The idea of the averaging (10) is to make the loss insensitive to modification of data belonging to any single c_k . For an underlying

population distribution P , we then wish to solve the risk minimization problem

$$\underset{\theta \in \Theta}{\text{minimize}} L_{\text{el}}(\theta) := \mathbb{E}[\ell_{\text{el}}(\theta; X)] = \int \ell_{\text{el}}(\theta; x) dP(x). \quad (11)$$

Given a sample $S = \{X^{(u)}\}_{u=1}^n \sim P$, we approximate the risk (11) with

$$L_{\text{el}}^n(\theta) := \frac{1}{n} \sum_{u=1}^n \ell_{\text{el}}(\theta; X^{(u)}),$$

which we attempt to minimize as a proxy for (11). To describe our algorithms and their properties, however, we require a brief digression to provide a general analysis of stochastic approximation procedures under noise, giving an asymptotic convergence result that may be interesting independent of its privacy implications.

3.3.1 A digression to general stochastic optimization

Consider a generic population risk minimization problem

$$\underset{\theta \in \Theta}{\text{minimize}} L(\theta) := \mathbb{E}[\ell(\theta; X)] = \int \ell(\theta; x) dP(x), \quad (12)$$

where $\ell : \Theta \times \mathcal{X} \rightarrow \mathbb{R}$ is a loss. We have a sample of size n from the population P , and we instead consider applying a stochastic approximation algorithm on the empirical risk

$$L_n(\theta) := \frac{1}{n} \sum_{i=1}^n \ell(\theta; X_i) \quad (13)$$

for $X_i \stackrel{\text{iid}}{\sim} P$. We consider stochastic projected gradient methods for the problem (13). In our proofs in Appendix D, we generalize this to [Asi and Duchi](#)'s general APROX (approximate proximal point) family [5], though its full treatment somewhat obscures the privacy issues at hand.

In standard applications of stochastic gradient methods [45, 44, 41] to the population risk problem (12), one receives an i.i.d. sequence X_k and updates

$$\theta_{k+1} = \text{proj}_{\Theta}(\theta_k - \alpha_k \nabla \ell(\theta_k; X_k)),$$

where $\text{proj}_{\Theta}(v) = \underset{\theta \in \Theta}{\text{argmin}} \{\|\theta - v\|_2\}$ denotes the Euclidean projection onto Θ . We consider a variant of the projected stochastic gradient method as it applies to triangular arrays, letting the sample size n vary in the stochastic gradient update applied to the empirical risk (13). Focusing on the case when the losses ℓ are smooth and convex, we show that as the number of iterations and the sample size jointly increase, the projected stochastic gradient method on the empirical risk (13) gives asymptotically normal iterates. To that end, consider problems indexed by sample size n , with a triangular array of samples $S_n := \{X_i^n\}_{i=1}^n$ for $X_i^n \stackrel{\text{iid}}{\sim} P$. Let $\sigma_n \geq 0$ be a fixed variance, and let Z_i be an i.i.d. sequence of random vectors with $\mathbb{E}[Z_i] = 0$ and $\text{Cov}(Z_i) = \Sigma_z$. (We allow $\sigma_n > 0$ because we will use the coming iteration in a private setting, where noise is essential.) For each $k \in \mathbb{N}$, let $\text{ri}(k)$ be an index chosen uniformly at random from $\{1, \dots, n\}$, and for $k = 1, 2, \dots$, and $n \in \mathbb{N}$, consider the noisy stochastic projected gradient iteration

$$\begin{aligned} \mathfrak{g}_k^n &:= \frac{1}{\alpha_k} \left[\theta_k^n - \text{proj}_{\Theta} \left(\theta_k^n - \alpha_k \nabla \ell(\theta_k^n; X_{\text{ri}(k)}^n) \right) \right] \\ \theta_{k+1}^n &:= \theta_k^n - \alpha_k (\mathfrak{g}_k^n + \sigma_n Z_k). \end{aligned} \quad (14)$$

Under a few simplifying assumptions on the problem (12) reminiscent of the typical classical conditions for M-estimation [49, Ch. 5.3], we can prove that the iterates θ_k^n enjoy asymptotic optimality properties as $n, k \rightarrow \infty$.

Assumption A1. *The domain $\Theta \subset \mathbb{R}^d$ is compact convex, and there exists $L_0 : \mathcal{X} \rightarrow \mathbb{R}_+$ such that $\ell(\cdot; x)$ is $L_0(x)$ -Lipschitz over Θ . The minimizer $\theta^* := \operatorname{argmin}_{\theta \in \Theta} L(\theta)$ is unique with $\theta^* \in \operatorname{int} \Theta$, and L is \mathcal{C}^2 in a neighborhood of θ^* , with $\nabla^2 L(\theta^*) \succ 0$. In addition, there exists an $\epsilon > 0$ and $L_1, L_2 : \mathcal{X} \rightarrow \mathbb{R}_+$ such that $\ell(\cdot; x)$ has $L_1(x)$ -Lipschitz gradient and $L_2(x)$ -Lipschitz Hessian on the neighborhood $\theta^* + \epsilon \mathbb{B} \subset \operatorname{int} \Theta$. Finally, $\mathbb{E}[L_a^2(X)] < \infty$ for $a \in \{0, 1, 2\}$.*

In the projected stochastic gradient iteration (14), we assume that we run the algorithm (on random subsamples) for $k = k(n)$ iterations, where the total k depends on the sample size. We usually expect that $k = \gamma n$ for some $\gamma \geq 1$, though in some cases we may wish to take $k/n \rightarrow \infty$. We also (typically) assume the variance σ_n , which we add for privacy, is decreasing.

We have the following theorem, whose proof we provide in Appendix D.

Theorem 1. *Let Assumption A1 hold. Define $\bar{\theta}_k^n = \frac{1}{k} \sum_{i=1}^k \theta_i^n$ and assume that $\alpha_k = \alpha_0 k^{-\beta}$ for some $\beta \in (\frac{1}{2}, 1)$. Define $\Sigma_\ell = \operatorname{Cov}(\nabla \ell(\theta^*; X))$ and $\Sigma_z = \operatorname{Cov}(Z)$. Assume that the iteration count $k = k(n)$ satisfies $\lim_{n \rightarrow \infty} \frac{k(n)}{n} = \gamma > 0$, and that $\lim_{n \rightarrow \infty} \sigma_n = \sigma \geq 0$. Then as $n \rightarrow \infty$,*

$$\sqrt{n}(\bar{\theta}_k^n - \theta^*) \xrightarrow{d} \mathbf{N} \left(0, \nabla^2 L(\theta^*)^{-1} \left(\Sigma_\ell + \frac{1}{\gamma} (\Sigma_\ell + \sigma^2 \Sigma_z) \right) \nabla^2 L(\theta^*)^{-1} \right).$$

We provide a bit of commentary. First, the optimal covariance possible (by the local asymptotic minimax theorem for stochastic optimization [22]) for any estimator of θ^* given n observations is $\nabla^2 L(\theta^*)^{-1} \Sigma_\ell \nabla^2 L(\theta^*)^{-1}$. Thus, if $\gamma = \lim \frac{k}{n}$ is large, we have limited asymptotic efficiency loss; moreover, if the limiting variance $\sigma_n^2 \rightarrow \sigma^2$ is zero, then the efficiency loss is precisely the factor $1 + 1/\gamma$. In our privacy application, there is a tradeoff between k , the number of iterations, and the scale σ_n of the necessary noise given a sample of size n .

3.3.2 A private stochastic gradient method

We now turn to the appropriate variant of the projected gradient method (14) for privacy. The key from an element-level privacy perspective is to apply a projected gradient update on each of a user's elements, then average them together. Algorithm 1 captures this.

Algorithm 1 Element-level projected gradient update $\operatorname{sgd}\text{-el}_{\alpha, \rho}^\ell(\theta_0, x)$

Require: Projection parameter ρ , stepsize α , initial model θ_0 , partition of \mathcal{X} into $\mathcal{C} = \{c_1, \dots, c_K\}$, and user data $x = \{x_1, \dots, x_m\}$

for each $k \in \{1, \dots, K\}$ such that $x \cap c_k \neq \emptyset$

 Set $\mathcal{B} = \{x_i : x_i \in c_k\}$

$\theta_k^+ \leftarrow \operatorname{proj}_\Theta(\theta_0 - \alpha \frac{1}{|\mathcal{B}|} \sum_{x \in \mathcal{B}} \nabla \ell(\theta_0; x))$

$\Delta_k \leftarrow (\theta_k^+ - \theta_0) / \alpha$ and $[\Delta_k]_\rho \leftarrow \Delta_k \min\{1, \frac{\rho}{\|\Delta_k\|_2}\}$

return $\sum_k [\Delta_k]_\rho$

Because Algorithm 1 divides its updates into the clusters c_k before computing projections (clipping them to a particular radius) and updates, its combination with appropriate noise immediately yields several privacy properties. The most important result for us is to apply Alg. 1 in a stochastic-gradient-type scheme, which allows us to both leverage the moments-accountant

(recall Corollary 2.5) and convergence guarantees of stochastic gradient-type methods. Following the subsampling (4), for $q \in (0, 1)$ let $B_u \stackrel{\text{iid}}{\sim} \text{Bernoulli}(q)$ or B_u be uniform on $\sum_u B_u = qn$, and for a sample $S = \{x^{(u)}\}_{u=1}^n$ define the subsampled mechanism

$$M_{\sigma, \rho, \alpha, q}(S; \theta_0) := \left(\sum_{u=1}^n B_u \cdot \text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, x^{(u)}) \right) + \mathbf{N}(0, \rho^2 \sigma^2 I).$$

For any sequence of stepsizes, we may define the *private stochastic approximation method*

$$\theta_{k+1} := \theta_k - \alpha_k \frac{1}{qn} M_{\sigma, \rho, \alpha_k, q}(S; \theta_k). \quad (15)$$

We consider the privacy of the iteration (15) both in the standard (user-level) private scenario and under element-level privacy. It is immediate that the update $\text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, \cdot)$ in Alg. 1 has element sensitivity at most 2ρ , where neighboring data x, x' guarantee $\|\text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, x) - \text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, x')\|_2 \leq 2\rho$. For standard privacy, we consider the global sensitivity of the update: assuming the upper bound $\text{card}(x) \leq M$ on the cardinality of user data, we have $\|\text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, x) - \text{sgd-el}_{\alpha, \rho}^{\ell}(\theta_0, x')\|_2 \leq 2(K \wedge M)\rho$ for any two sets $x, x' \subset \mathcal{X}$. We immediately obtain the following two corollaries on the privacy of the private stochastic gradient update (15).

Corollary 3.1. *Let $\theta_{1:T} := \{\theta_1, \dots, \theta_T\}$ be the outputs of the iteration (15) and $\varepsilon_{\alpha}(q, \sigma)$ be as in Corollary 2.5. Then $\theta_{1:T}$ is $(T\varepsilon_{\alpha}(q, \sigma), \alpha)$ -element-level Rényi private, and for any $\delta > 0$, is $(\inf_{\alpha \geq 1} \{T\varepsilon_{\alpha}(q, \sigma) + \frac{\log \delta^{-1}}{\alpha-1}\}, \delta)$ -element-level differentially private.*

Corollary 3.2. *Let the conditions of Corollary 3.1 hold. Let $\sigma_{\text{std}} = \sigma/(K \wedge M)$. Then $\theta_{1:T}$ is $(T\varepsilon_{\alpha}(q, \sigma_{\text{std}}), \alpha)$ -Rényi differentially private, and for any $\delta > 0$, is $(\inf_{\alpha \geq 1} \{T\varepsilon_{\alpha}(q, \sigma_{\text{std}}) + \frac{\log \delta^{-1}}{\alpha-1}\}, \delta)$ -element-level differentially private.*

Pursuing the discussion following Corollary 2.5, let us assume we subsample a constant fraction $q = m/n$ of the data in the iteration (15), where m is fixed and does not grow with n . Then for $0 < \delta < 1$, the entire collection $\theta_{1:T}$ is $(O(1)\varepsilon, \delta)$ -element-level differentially private, where

$$\varepsilon \leq \inf_{\alpha \in [0, \sigma^2 \log \frac{n}{m}]} \left\{ \frac{Tq^2}{\sigma^2} + \frac{Tq^2\alpha}{\sigma^2} + \frac{\log \delta^{-1}}{\alpha} \right\} = \frac{Tm^2}{n^2\sigma^2} + O(1) \cdot \max \left\{ \sqrt{\frac{Tm^2}{n^2\sigma^2} \log \frac{1}{\delta}}, \frac{\log \delta^{-1}}{\sigma^2 \log \frac{n}{m}} \right\}. \quad (16)$$

3.3.3 Applications of element-level private stochastic approximation

While the updates (15) provide privacy no matter the loss, their utility comes in conjunction with our analysis in Theorem 1. To that end, we now provide a generic convergence result with a brief application to generalized linear model estimation; our coming experiments evidence the utility of our definitions and mechanisms. We first recall the element-level population risk (11), which averages a standard loss ℓ into the element-level loss ℓ_{el} . We make a few additional assumptions on the standard loss ℓ over our data \mathcal{X} paralleling Assumption A1.

Assumption A2. *There exists $L_0 < \infty$ such that $\theta \mapsto \ell(\theta; x)$ is L_0 -Lipschitz over Θ for each $x \in \mathcal{X}$. The minimizer $\theta^* := \arg\min_{\theta \in \Theta} L_{\text{el}}(\theta)$ is unique with $\theta^* \in \text{int } \Theta$, and L_{el} is C^2 on an ε -neighborhood of θ^* with $\nabla^2 L_{\text{el}}(\theta^*) \succ 0$. There are $L_1, L_2 : \mathcal{X} \rightarrow \mathbb{R}_+$ such that $\ell(\cdot; x)$ has $L_1(x)$ -Lipschitz gradient and $L_2(x)$ -Lipschitz Hessian on $\theta^* + \varepsilon\mathbb{B} \subset \Theta$, where $\mathbb{E}[L_a^2(X)] < \infty$ for $a \in \{1, 2\}$.*

The key consequence of the first Lipschitz condition in Assumption A2 is that no projection is necessary in Alg. 1 to guarantee that $\text{sgd-el}_{\alpha,\rho}^{\ell}(\theta, \cdot)$ has bounded element sensitivity, so that the private iteration (15) is an instance of the stochastic approximation iteration (14). Indeed, the Lipschitz condition is equivalent to $\|\partial\ell(\theta; x)\|_2 \leq L_0$ for all $\theta \in \Theta$, and in turn, the definition (14) guarantees that $\|\mathbf{g}_k^n\|_2 \leq \|\nabla\ell(\theta_k^n; X_{r_i(k)}^n)\|_2 \leq L_0$ (cf. [21]). As a consequence, the element-level update of Algorithm 1 performs no projection in the definition $[\Delta_k]_{\rho}$ whenever $\rho \geq L_0$.

Now, recall the asymptotic normality result of Theorem 1. For each n we let $\{X^{(u)}\}_{u=1}^n \stackrel{\text{iid}}{\sim} P$ and θ_i^n be generated by the iteration (15) for the given sample $\{X^{(u)}\}_{u=1}^n$ and assume the projection level $\rho \geq L_0$. Let the stepsizes $\alpha_k = \alpha_0 k^{-\beta}$ for some $\beta \in (\frac{1}{2}, 1)$ and subsampling rate $q = m/n$ for a fixed m . Combining Theorem 1 with Corollaries 3.1 and 3.2 and the discussion immediately following (16), we have the following proposition, which shows that the private stochastic iteration guarantees both asymptotic normality, and privacy.

Proposition 3. *Let Assumption A2 hold, and define $\bar{\theta}_k^n = \frac{1}{k} \sum_{i=1}^k \theta_i^n$, where the number of iterations $k = k(n)$ satisfies $\lim_n k(n)/n = \gamma$. Let $\Sigma_{\text{el}} = \text{Cov}(\nabla\ell_{\text{el}}(\theta^*; X))$. Then*

$$\sqrt{n}(\bar{\theta}_k^n - \theta^*) \xrightarrow{d} \mathbf{N}\left(0, \nabla^2 L_{\text{el}}(\theta^*)^{-1} \left(\Sigma_{\text{el}} + \frac{1}{\gamma} \left(\frac{1}{m} \Sigma_{\text{el}} + \frac{\rho^2 \sigma^2}{m^2} I \right) \nabla^2 L_{\text{el}}(\theta^*)^{-1} \right)\right).$$

Fix $\delta > 0$ and let $\varepsilon(\tau) = \inf_{\alpha} \left\{ \frac{\gamma m^2}{n \tau^2} + \frac{\gamma m^2}{n \tau^2} \alpha + \frac{\log \delta^{-1}}{\alpha} \mid \alpha \leq \tau^2 \log \frac{n}{m} \right\}$ for shorthand. Then

- (i) If $\sigma^2 \geq 2$, then the collection $\{\theta_i^n\}_{i=1}^k$ is $(O(1) \cdot \varepsilon(\sigma), \delta)$ -element-level differentially private.
- (ii) Assume that each user data x has cardinality at most $\text{card}(x) \leq M$. If $\sigma^2 \geq (K \wedge M)^2 \tau^2$, where $\tau^2 \geq 2$, then the collection $\{\theta_i^n\}_{i=1}^k$ is $(O(1) \cdot \varepsilon(\tau), \delta)$ -differentially private.

As in the preceding examples, we see roughly the same tradeoffs between user-level (standard) and element-level privacy: for a given level ε , it is possible to provide the less-stringent element-level privacy with noise a factor $K \wedge M$ less than that for user-level privacy.

In general, the partitioning that the element-level loss (10) and risk (11) in the data space may change the resulting estimated parameters from more standard sampling schemes. However, any normalization of user's data (as some users contribute many data points, some contribute few) in any application engenders changes in the "optimal" parameter θ^* , so we believe this of limited impact. To give a somewhat concrete example, consider generalized linear models (GLMs) [36]:

Example 3 (Generalized linear models): In a GLM, for an individual data point $x \in \mathbb{R}^d$ we have Y with density (or p.m.f.)

$$p_{\theta}(y | x) = \exp(T(y)\theta^T x - A(\theta; x))h(y),$$

where h is a base measure, $A(\theta; x)$ is the log-partition function $A(\theta; x) = \log \int e^{T(y)\theta^T x} h(y) dy$, and T the sufficient statistic. In this case for loss $\ell(\theta; x, y) = -\log p_{\theta}(y | x)$, any partition of \mathcal{X} into elements guarantees that $\theta^* = \text{argmin}_{\theta} L_{\text{el}}(\theta)$ remains fixed. The Fisher information may change, of course: given a partition of \mathcal{X} into clusters $\{c_k\}_{k=1}^K$, defining $p_k = \mathbb{P}(X^{(u)} \cap c_k \neq \emptyset)$, we have $L_{\text{el}}(\theta) = \sum_{k=1}^K p_k \mathbb{E}[\ell(\theta; X, Y) \mid X \in c_k]$, so that modifying the partition c_k changes $\nabla^2 L_{\text{el}}(\theta^*)$ and Σ_{el} ; in some situations, this can decrease the asymptotic variance, while in others, it may increase, depending on the degree of stratification and relative probabilities. \diamond

4 Experiments

To demonstrate the behavior of element-level private mechanisms, we present a series of experimental results in crowdsourced (federated) learning and stochastic optimization. We perform both simulations, where we may control all aspects of the experiments, and real-world experiments. Our theoretical results and intuition suggest that as the number of elements we consider grows—meaning that the elements provide a finer partition of the input space \mathcal{X} —we should observe performance improvements. In large-scale estimation, such as federated learning [37], user data is rarely i.i.d. For example, some users take many photos of their children, others of dogs, others of hikes with friends; thus, a user may provide data only relating to a few elements. Motivated by this potential variability, for datasets with no pre-existing users, we diversify our experiments by constructing pseudo-users and assigning them varying numbers of elements.

In the remainder of the section, we present results for histogram estimation (Sec. 4.1), a simulated logistic regression experiment (Sec. 4.2), and then two experiments on fitting large image classification models, the first on tuning a model to a new dataset based on Flickr images (Sec. 4.3), and the second an investigation on training a full neural network (Sec. 4.4). An essential part of each experiment is to describe how we choose the elements to protect—this decision is more of a policy decision than a purely mathematical one, and consequently deserves care and thought, especially in real-world applications. In each experiment, we provide user-level or element-level (ε, δ) -differential privacy, where $\delta = n^{-1.1}$, where n is the total number of users.

4.1 Histogram estimation

We consider the problem of estimating frequent words on a dataset consisting of Reddit comments [9], where unique usernames identify users. Proposition 2 predicts that element-level privacy with appropriate parameter settings in the mechanism (9) should reduce squared error by a factor of roughly $\max_{c \in \{c_k\}} P(c)^2$, so that increasing cluster counts should yield further improvements.

In the experiment, we consider the first $n = 2000$ users with the largest number of tokens (words), using as our dictionary those words in the vocabulary of GloVe (Global Vectors for Word Representation) [43], yielding dictionary of size $d = 400000$, where we choose a random subsample of each user’s words to obtain $m = 4000$ words per individual. Additionally, we remove the 100 most frequent stopwords (e.g. “the”, “and”, “a”). GloVe embeds words into \mathbb{R}^{100} , and using these embedded vectors, we cluster the $d = 4 \cdot 10^5$ -sized vocabulary into $K = 10, 100, 1000, 10000$, and 400000 clusters (elements); assuming the embedding is “semantically meaningful” as claimed [43], these elements should naturally demarcate themes and conversation foci. Within each experiment, we calculate the histogram to be estimated by first randomly dividing users into two disjoint sets S_0 and S_1 and defining the “true” histogram $H_0 = \frac{1}{m|S_0|} \sum_{u \in S_0} X^{(u)}$. We then estimate H_0 using the sample S_1 via the mechanism (9), $\hat{H} = \frac{1}{m} M(S_1, \rho, \{c_k\})$. In each individual experiment—that is, for each choice of privacy level ε and total number of clusters—we use a validation set to choose the truncation threshold $\rho \in \{1, 2, \dots, 10\} \cup \{15, 20, \dots, 50\} \cup \{70, 100, 150, 200\}$ minimizing the mean-squared error, so that our results reflect the best behavior for each method.

We estimate the baseline mean squared error to be $\|H_0 - H_1\|_2^2$. In Figure 2, we plot the ratio $\|\hat{H} - H_0\|_2^2 / \|H_1 - H_0\|_2^2$ of squared error for the private estimation algorithm over the baseline mean squared error against the privacy parameter ε . The results broadly are as expected: increasingly fine partitions yield better estimators. Moreover, for a given privacy level ε , the separation between the mean-squared error is roughly linear on a logarithmic scale, which is what we expect from reductions scaling as $\max_{c \in \{c_k\}} P(c)^2$.

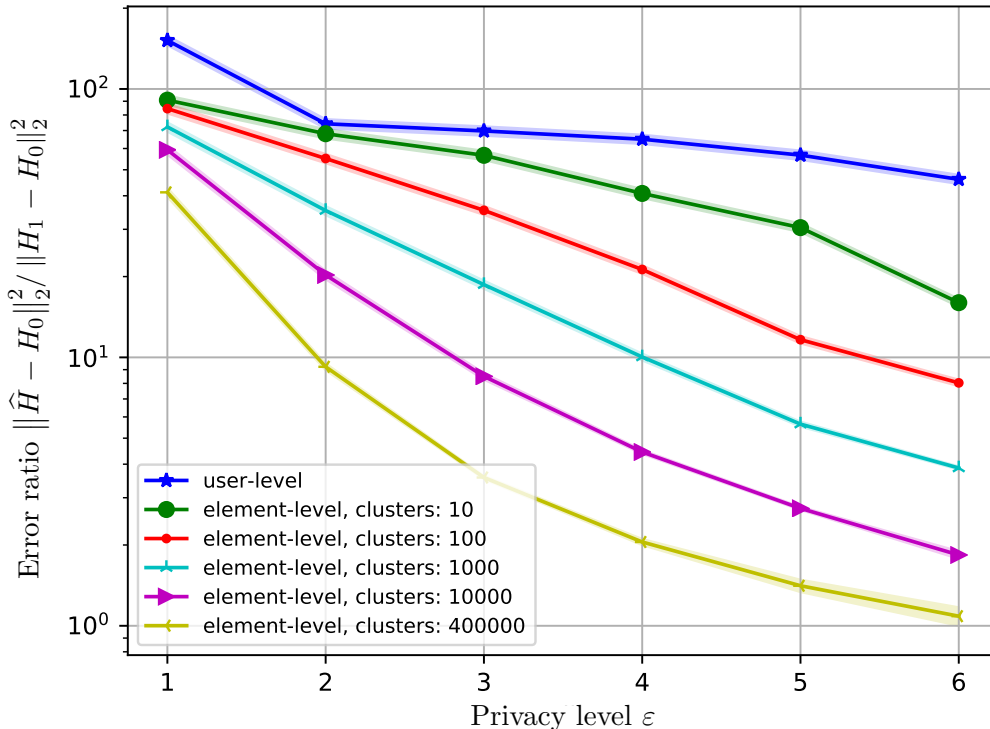


Figure 2. Mean-squared error ratio $\|\hat{H} - H_0\|_2^2 / \|H_1 - H_0\|_2^2$ of private error over baseline error for word frequency estimation on a dataset of Reddit comments, plotted versus privacy level ϵ . Confidence intervals are ± 1.64 standard errors. Each line corresponds to a partition of the space of words into 1 (user-level) or more clusters c_k .

4.2 Simulated logistic regression

The remainder of our experiments consider M-estimation and statistical risk minimization, as in Section 3.3. We begin with a simulation study to more precisely control the hypotheses and experiments, focusing on logistic regression. For each experiment, we generate data via the following hierarchical model: first, we draw $K = 10$ element centers $c_1, \dots, c_K \stackrel{\text{iid}}{\sim} \text{Uni}(\mathbb{S}^{d-1})$ and $\theta^* \sim \text{Uni}(\mathbb{S}^{d-1})$. Then we generate pairs $(X_i, Y_i) \in \mathbb{R}^d \times \{\pm 1\}$ according to the logistic model

$$p_{\theta}(y | x) = \frac{1}{1 + \exp(-y\langle x, \theta^* \rangle)}, \quad C_i \sim \text{Uni}(\{c_k\}_{k=1}^K) \text{ and } X_i = C_i + \text{Uni}(\mathbb{S}^{d-1}),$$

so each datum X_i belongs to the cluster around element C_i . Following the model that users provide several data points, we generate data for $n = 1000$ users, each consisting of $m = 50$ pairs (x_i, y_i) .

Given a collection of users, we apply the private stochastic gradient method (15) with the element-level update $\text{sgd-el}_{\alpha, \rho}^{\ell}(\theta, (x, y))$ of Alg. 1. We vary the diversity of data users provide, so that in different experiments users provide data from $k = 2, 5, 8$ of the $K = 10$ clusters; we expect that the more diverse the data the users provide (i.e. coverage of clusters), the more element-level privacy should improve over standard (user-level) private mechanisms.

We calculate the privacy parameter ϵ for both user- and element-level privacy using Abadi et al.’s moments accountant (Corollary 2.5 and [1]). We perform $T = 200$ private updates (15), choosing stepsize $\alpha_k = \alpha_0 / \sqrt{k}$. In any real-world deployment, one chooses hyperparameters to

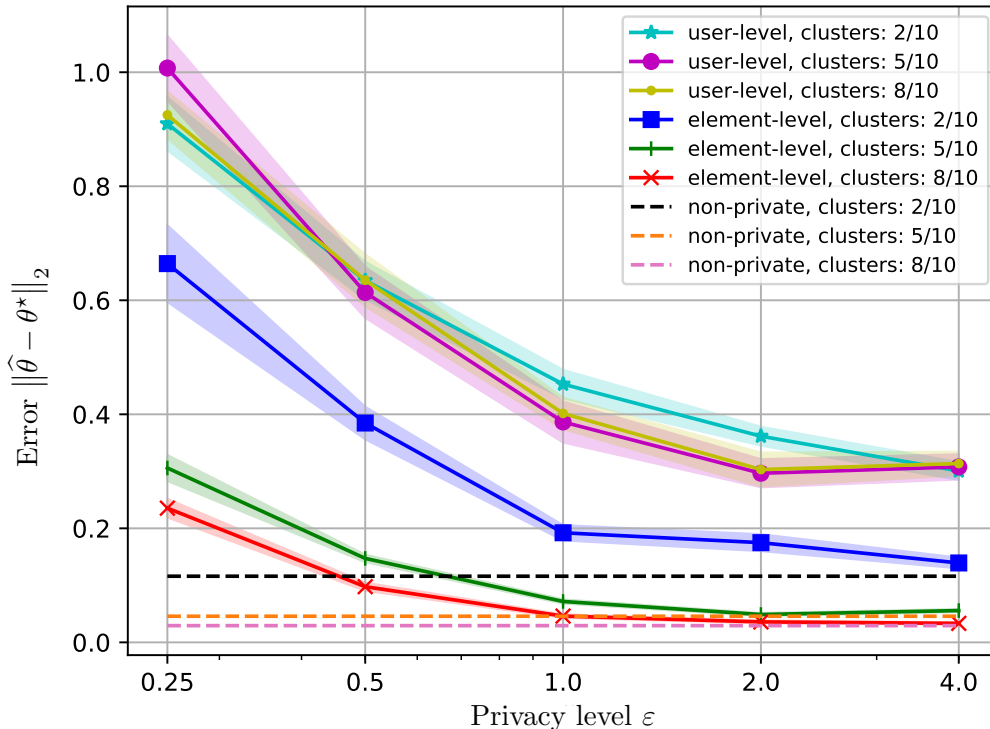


Figure 3. Logistic regression simulation with user sample size $n = 1000$, each user providing $m = 50$ datapoints, in dimension $d = 10$. The horizontal axis indexes privacy parameter ϵ while the vertical axis indexes error $\|\hat{\theta} - \theta^*\|_2$ after $T = 200$ stochastic gradient updates (15). Confidence intervals are ± 1.64 standard errors. The legend label “clusters: $k/10$ ” represent the number of clusters (elements) a user has (k_u) over the total possible number of distinct clusters (10).

maximize a method’s performance, so for each fixed privacy level ϵ , we (experimentally) find a subsampling rate q and initial stepsize α_0 to yield the best performance for each method.

We show results in Figure 3, where we plot the error $\|\hat{\theta} - \theta^*\|_2$ for the final estimated $\hat{\theta}$ of the private stochastic gradient iteration against the provided privacy level ϵ . Broadly, the results are as expected: as we increase the diversity of elements for which each user has data, the estimation error decreases for a given element privacy level ϵ , while user-level private mechanisms exhibit little change on this axis. Of note, however, is the baseline error: the more clusters (i.e. more stratified the data per user), the better a *non-private* stochastic gradient scheme estimates θ^* . We believe this occurs because the stratification of data within users improves problem conditioning. Even with this difference, however, the convergence of the error of the private stochastic gradient method to that of the non-private error is faster for scenarios with more clusters.

4.3 Large-scale multiclass image classification: the Flickr dataset

Following our simulated logistic regression results, we investigate element-level privacy in the context of model fitting for a large image classification task, following our methodology in Section 3.3. In this experiment, we vary several parameters: the privacy level $\epsilon \in \{1, 3, \infty\}$, the number of distinct clusters into which we partition the input space ($K = 50, 500$), and, as we discuss in the introduction to the experiments, we also vary the diversity of images of individual users, so that we provide nominal “users” with data from 5, 30, or 100 distinct clusters/elements. As in the previous

experiments, we expect the following: as the number of clusters K increases, element-level private methods should improve relative to the user-level private method, and similarly, as the diversity of individual users’ images increases (the number of distinct elements), we expect to see further relative improvement. This is natural: in Algorithm 1 and the update (15), the magnitude of noise addition relative to the scale of a user’s contribution decreases linearly in the number of distinct elements a user provides.

To this end, we perform a model tuning experiment on the Flickr dataset [48] using a ResNet50 network [32] pre-trained on ImageNet [17], with reference implementation [42]. This tuning means we fit only the *last layer* of the network, that is, we fit a multiclass logistic regression on input features $x \in \mathbb{R}^d$, $d = 2048$, defined by the outputs of the second-to-last ResNet50 layer. We use the 100 most popular Flickr image tags as labels, which represent 89% of the chosen data, and used an “unknown” label for anything remaining, resulting in a 101 class multiclass problem. To construct the elements into which we partition the images, we chose a uniformly random subset of 100,000 Flickr images, then used KMeans++ [4] to cluster them into $K = 50$ and 500 clusters. Then a given image representation x simply belongs to the nearest cluster centroid. To fit the resulting model, we use the stochastic gradient method in Algorithm 1 as applied in the update (15). We construct a nominal collection of $n = 8000$ users, assigning each $m = 100$ labeled images (x, y) . We vary the image allocations, so that (depending on the experiment) each user has images from on average $k = 5, 30, 100$ distinct elements. We perform $T = 40,000$ updates (15) in each experiment.

We present results in Figure 4, plotting the maximum top-5 accuracy achieved (i.e. there is no loss if the correct label belongs to the five highest-scoring predicted labels for an example x) versus iteration for many parameter settings. In the figure, we simultaneously present results for different privacy levels ε , number K of clusters, and diversity of clusters per user. We highlight a few of the most salient points. First, user-level privacy with $\varepsilon = 1$ is substantially worse than any other method. Second, we see roughly what we expect, in that the element-level private algorithms achieve higher accuracy as the number of clusters and per-user diversity increase. Given that true internet-scale datasets are several times larger than the 400,000 image dataset we construct, this suggests the element-level private mechanisms can provide strong utility with satisfactory privacy.

4.4 Fully training a neural network: image classification on CIFAR10

We present our final experimental results for a classification problem on the CIFAR10 dataset [35], showing that it is possible to privately train a neural network while providing element-level privacy. We use the relatively simple convolutional neural network model architecture in the PyTorch tutorial [42]. To construct the cluster centroids (elements), we mimic the method we propose for Flickr: we upsample the CIFAR image (using PyTorch), pass the resulting image through the pre-trained ResNet50 network above, and then cluster the resulting 2048-dimensional vectors using KMeans++ [4] to construct $K = 100$ centroids that partition the CIFAR dataset.

We again perform a federated learning experiment over $T = 40,000$ steps (Alg. 1 and update (15)). Similar to our experiment with Flickr—except that we train a full neural network—we considered $n \in \{2, 8\} \cdot 10^3$ users, each assigned $m = 100$ images from $k = 5$ or 30 of the $K = 100$ elements we cluster. Users may have repeat data. In Figure 5, we plot the difference in top-1 accuracy between a private method and the fully-trained (non-private) tutorial convolutional neural network [42] against iteration, varying the privacy parameter ε and cluster diversity. As expected, we see two effects: first, as the sample size n grows, the accuracy improves; second, as the diversity of elements per user decreases, performance degrades as expected. All user-level private instantiations have accuracy more at least 15%-worse than the non-private accuracy. Conversely, the element-level-private algorithm with $\varepsilon = 3$, $n = 8000$, and high element diversity per-user (30/100

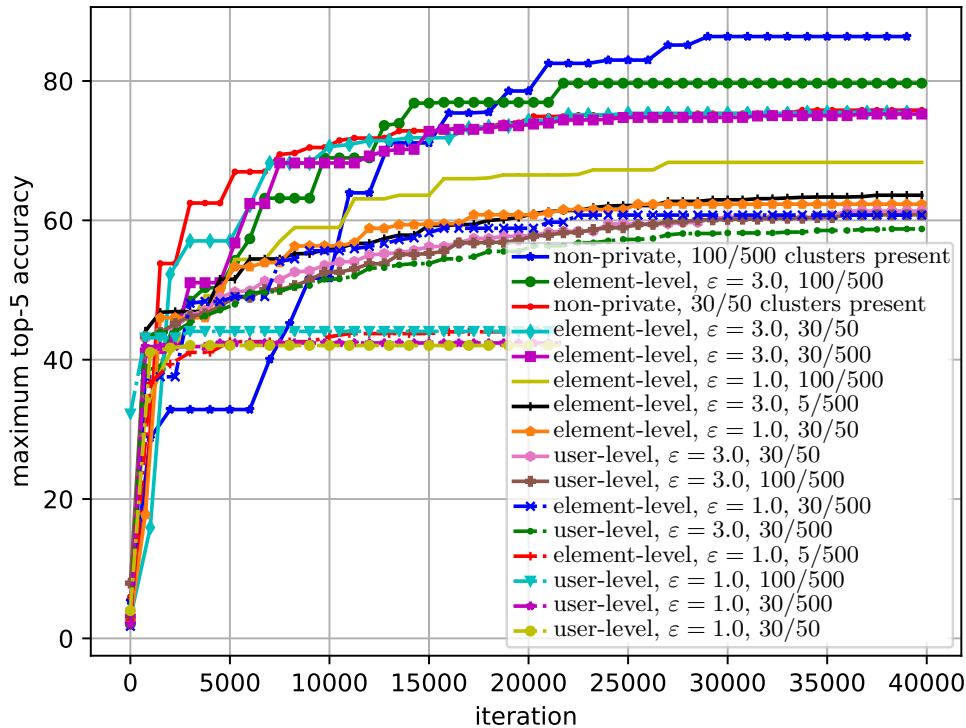


Figure 4. Training curves for the private element-level stochastic gradient method, Alg. 1 coupled with update (15), over $T = 40,000$ updates on the Flickr dataset. Each line displays the best top-5 prediction accuracy achieved before iteration t . The legend ratio k/K represent the number of clusters (elements) a user has (k_u) over the total possible number of distinct clusters (K).

data clusters present) achieves top-1 accuracy nearly equal to non-private training.

5 Discussion

We conclude with a brief discussion. Element-level differential privacy allows one to choose the granularity at which to provide privacy protections. As we see both in the theoretical results and experiments, this can allow substantially improved utility over standard private algorithms. This additional flexibility, however, comes with a challenge: one must carefully choose the elements (partition of the data space \mathcal{X}) to provide sufficient privacy, as increasing the number of clusters allows improved statistical accuracy while decreasing the number improves privacy. This apparent tradeoff requires a per-application policy decision, where one balances privacy—in the coarseness of the partitioning into elements—against utility; as in standard privacy, where the choice of ϵ is a policy decision that must trade privacy against utility, care is likely necessary here.

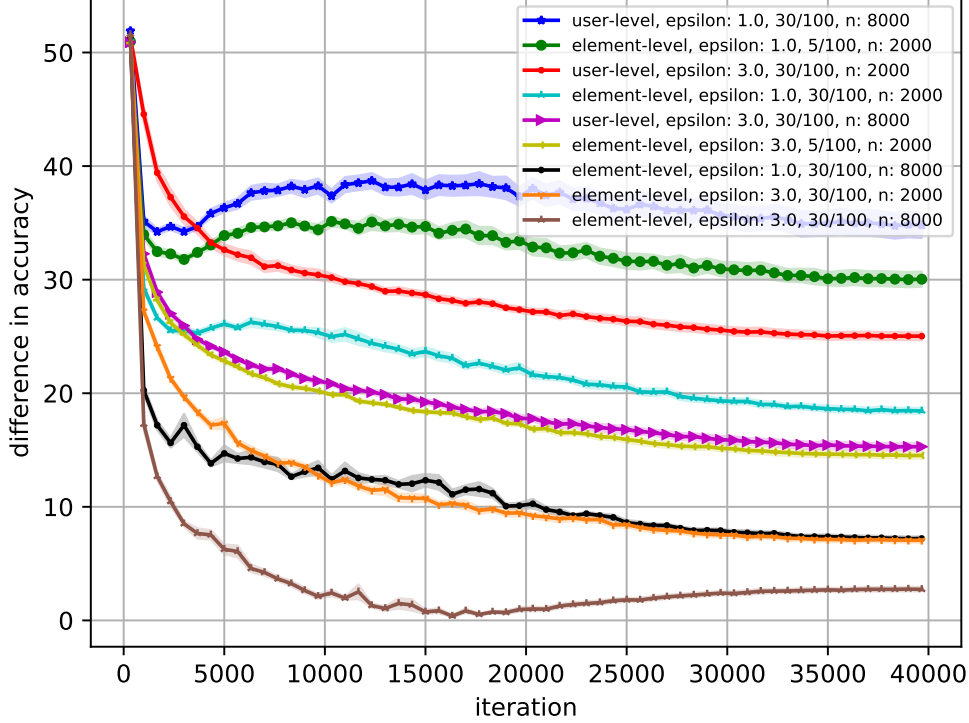


Figure 5. Difference in accuracy of a convolutional neural network model on the CIFAR10 dataset trained with privacy and without. Each line corresponds to given privacy type (element- or user-level), privacy level ϵ , effective number of users $n \in \{2000, 8000\}$, and diversity of elements each user provides ($k = 5$ (5/100) or $k = 30$ (30/100)). Confidence interval are ± 1.64 standard errors.

A Sufficiency of mechanism (1)

The Rényi divergence between Gaussian distributions $P_i = \mathcal{N}(\mu_i, \sigma^2 I)$ is $D_\alpha(P_0 \| P_1) = \frac{\alpha \|\mu_0 - \mu_1\|^2}{2\sigma^2}$. Thus for any mechanism defined by $M(S) = f(S) + \mathcal{N}(0, \rho^2 \sigma^2)$, we have $D_\alpha(M(S) \| M(S')) \leq \frac{\alpha}{2\sigma^2}$, so that Mironov’s results [40] guarantee the mechanism is $(\frac{\alpha}{2\sigma^2} + \frac{\log(1/\delta)}{\alpha-1}, \delta)$ -differentially private. Setting $\alpha = 1 + \frac{2 \log(1/\delta)}{\epsilon}$ and $\sigma^2 = (1 + 2\epsilon^{-1} \log \frac{1}{\delta})/\epsilon$ gives the result.

B Proof of Proposition 1

We begin by presenting two lemmas that give us the tools to prove the proposition.

Lemma B.1. *Let $q_j = 1 - (1 - p_j)^m$, $q_{jl} = 1 - (1 - p_l - p_j)^m$, $X \sim \text{Multinomial}(m, p)$, and $Y = \mathbf{1}(X)$. Then $\mathbb{E}[Y_j] = q_j$, $\mathbb{E}[Y_j^2] = q_j$, $\mathbb{E}[Y_j Y_l] = q_j + q_l - q_{jl}$, and $\text{Var}(Y_j - Y_l) \leq q_j + q_l$.*

Proof The first and second claims are immediate. For the third, we have

$$\begin{aligned} \mathbb{E}[Y_j Y_l] &= \mathbb{P}(X_j > 0, X_l > 0) \\ &= 1 - \mathbb{P}(X_j = 0, X_l = 0) - \mathbb{P}(X_j > 0, X_l = 0) - \mathbb{P}(X_j = 0, X_l > 0). \end{aligned}$$

As $X_j \mid (X_l = 0) \sim \text{Binomial}(m, \frac{p_j}{1-p_l})$, we have

$$\begin{aligned} \mathbb{P}(X_j > 0, X_l = 0) &= \mathbb{P}(X_j > 0 \mid X_l = 0)\mathbb{P}(X_l = 0) \\ &= \left[1 - \left(1 - \frac{p_j}{1-p_l}\right)^m\right] (1-p_l)^m = q_{jl} - q_l, \end{aligned}$$

and we similarly obtain that $\mathbb{P}(X_j = 0, X_l = 0) = 1 - q_{jl}$. Algebraic manipulations then give $\mathbb{E}[Y_j Y_l] = q_j + q_l - q_{jl}$.

Finally, $\text{Var}(Y_j - Y_l) \leq \mathbb{E}[Y_j^2 + Y_l^2] \leq q_j + q_l$, as desired. \square

Next, we prove the upper-bound on the probability that the private mechanism \widehat{H} mis-orders the two bins i and $j > i$.

Lemma B.2. *Let $i < j$, so that $q_i = 1 - (1 - p_i)^m \geq q_j = 1 - (1 - p_j)^m$. Then*

$$\mathbb{P}\left(\widehat{H}_i < \widehat{H}_j\right) \leq \exp\left(-\min\left\{\frac{5n(q_i - q_j)^2}{12v_{ij} + 20\frac{\sigma^2}{n}}, \frac{n(q_i - q_j)}{8}\right\}\right).$$

See Section B.1 for a proof.

By a binomial expansion, we see that if $p_i + p_j \leq \frac{1}{m}$, then

$$\begin{aligned} q_i - q_j &= (1 - p_j)^m - (1 - p_i)^m \geq m(p_i - p_j) - \frac{m^2}{2}(p_i^2 - p_j^2) \geq \frac{m}{2}(p_i - p_j) \\ q_i + q_j &= 2 - (1 - p_j)^m - (1 - p_i)^m \leq m(p_i + p_j) + \frac{m^2}{2}(p_i^2 + p_j^2) \leq 3mp_i, \end{aligned}$$

so Lemma B.2 implies

$$\begin{aligned} \mathbb{E}[1\{p_i - p_j \geq \gamma\} 1\{\widehat{H}_j > \widehat{H}_i\}] &\leq \max\left\{\exp\left(-\frac{5nm^2(p_i - p_j)^2}{48v_{ij} + 80\frac{\sigma^2}{n}}\right), \exp\left(-\frac{nm(p_i - p_j)}{16}\right)\right\} \\ &\leq \max\left\{\exp\left(-\frac{5nm^2\gamma^2}{144p_i}\right), \exp\left(-\frac{n^2m^2\gamma^2}{16\sigma^2}\right), \exp\left(-\frac{nm\gamma}{16}\right)\right\}, \end{aligned}$$

where the second inequality used the variance bound $v_{ij} \leq q_i + q_j \leq 3mp_i$ of Lemma B.1.

Setting γ as in the statement of the proposition and summing over all $i < j$ in the loss L_{order} of Eq. (8) gives the result.

B.1 Proof of Lemma B.2

Let $i < j$ so that $q_i \geq q_j$, as $p_i \geq p_j$ by assumption. Define the zero-mean random variable $\Delta_{ij}^{(u)} = Y_i^{(u)} - Y_j^{(u)} - (q_i - q_j)$. Then we have

$$\mathbb{P}(\widehat{H}_i \leq \widehat{H}_j) = \mathbb{P}\left(\sum_{u=1}^n \Delta_{ij}^{(u)} + \mathbf{N}(0, 2\sigma^2) \leq -n(q_i - q_j)\right).$$

Using that $|\Delta_{ij}^{(u)}| \leq 2$ and $v_{ij} := \text{Var}(Y_i - Y_j) \leq q_i + q_j$ by Lemma B.1, for $|\lambda| \leq \frac{1}{4}$ standard sub-exponential bounds [51, Ch. 2] give that $\mathbb{E}[\exp(\lambda\Delta_{ij})] \leq \exp(\frac{3\lambda^2 v_{ij}}{5})$ for $|\lambda| \leq \frac{1}{4}$. The Chernoff bound technique then yields

$$\mathbb{P}\left(\sum_{u=1}^n \Delta_{ij}^{(u)} + \mathbf{N}(0, \sigma^2) \leq -t\right) \leq \exp\left(\frac{3\lambda^2 v_{ij} n}{5} + \lambda^2 \sigma^2 - \lambda t\right) \text{ for } |\lambda| \leq \frac{1}{4}.$$

Optimizing by setting $\lambda = \min\{\frac{1}{4}, \frac{5t}{6nv_{ij}+10\sigma^2}\}$ gives

$$\mathbb{P}\left(\sum_{u=1}^n \Delta_{ij}^{(u)} + \mathbf{N}(0, \sigma^2) \leq -t\right) \leq \exp\left(-\min\left\{\frac{5t^2}{12nv_{ij} + 20\sigma^2}, \frac{t}{8}\right\}\right).$$

Substituting $t = n(q_i - q_j)$ gives the lemma.

C Proof of Proposition 2

For shorthand, let $\widehat{p}(\rho) = \frac{1}{n} \sum_{u=1}^n \pi_{\rho, \{c_k\}}(X^{(u)})$ be the non-privatized projection vector. We compute the bias and bounds on the moment generating function of each coordinate of the vector.

Bias of the projected vector We control the bias for each element cluster. Fix $c \in \{c_1, \dots, c_k\}$. Defining $Y = \sum_{j \in c} X_j$, we evidently have that $X_c = \pi_{\rho, \{c_k\}}(X)_c$ if $Y \leq \rho$, that is, the coordinate is unprojected. Thus we obtain

$$\begin{aligned} \|\mathbb{E}[\widehat{p}_c(\rho) - mp_c]\|_1 &= \|\mathbb{E}[(X_c - mp_c)1\{Y \leq \rho\}] + \mathbb{E}[(\pi_{\rho, \{c_k\}}(X)_c - mp_c)1\{Y > \rho\}]\|_1 \\ &\leq \|\mathbb{E}[X_c - mp_c]\|_1 + \|\mathbb{E}[(\pi_{\rho, \{c_k\}}(X)_c - mX_c)1\{Y > \rho\}]\|_1 \\ &\leq \mathbb{E}\left[\|\pi_{\rho, \{c_k\}}(X)_c - X_c\|_1 1\{Y > \rho\}\right]. \end{aligned} \quad (17)$$

To bound the remaining term in inequality (17), we present two lemmas, whose proofs we defer to Sections C.1 and C.2, respectively.

Lemma C.1. *Let $X \sim \text{Binomial}(m, p)$, $p \leq 1/4$, and $l \geq 3mp$. Then*

$$\sum_{i=\lceil l \rceil}^m \mathbb{P}(X \geq i) \leq 2\mathbb{P}(X \geq \lceil l \rceil) \leq 4\mathbb{P}(X = \lceil l \rceil).$$

Lemma C.2. *Let $X \sim \text{Binomial}(m, p)$, $l = 3mp + 3 \log m + t$ and $m \geq 3$. Then*

$$\mathbb{P}(X = \lceil l \rceil) \leq p2^{-t}.$$

The variable $Y \sim \text{Binomial}(m, P(c_k))$ in expression (17), and $|X_i - \pi_{\rho, \{c_k\}}(X)_i| \leq X_i$ so $\|X_c - \pi_{\rho, \{c_k\}}(X)_c\|_1 \leq m$. Thus we have

$$\begin{aligned} \mathbb{E}\left[\|\pi_{\rho, \{c_k\}}(X)_c - X_c\|_1 1\{Y > l\}\right] &\leq m\mathbb{P}(Y > l) \stackrel{(i)}{\leq} 4m\mathbb{P}(Y = \lceil l \rceil) \\ &\stackrel{(ii)}{\leq} 4mP(c)2^{-(t+\log m)} \leq 2^{2-t}P(c) \end{aligned} \quad (18)$$

where inequality (i) is a consequence of Lemma C.1 and (ii) of Lemma C.2 once we recall that $\rho \geq 3mp + 4 \log m + t$.

Variance and moment generating function We have $\text{Var}(\pi_{\rho, \{c_k\}}(X)_j) \leq \text{Var}(X_j) = mp_j(1 - p_j)$, because projections reduce variance. We also have $\pi_{\rho, \{c_k\}}(X)_j \leq \rho$, so as a consequence, we

obtain the moment generating function bound

$$\begin{aligned} & \mathbb{E}[\exp(\lambda(\pi_{\rho, \{c_k\}}(X)_j - \mathbb{E}[\pi_{\rho, \{c_k\}}(X)_j]))] \\ &= 1 + \frac{\lambda^2 \text{Var}(\pi_{\rho, \{c_k\}}(X)_j)}{2} + \sum_{k=3}^{\infty} \frac{\lambda^k \mathbb{E}[(\pi_{\rho, \{c_k\}}(X)_j - \mathbb{E}[\pi_{\rho, \{c_k\}}(X)_j])^k]}{k!} \\ &\leq 1 + \frac{\lambda^2 m p_j}{2} + \lambda^2 m p_j \sum_{k=3}^{\infty} \frac{\lambda^{k-2} \rho^{k-2}}{k!} \leq \exp(\lambda^2 m p_j) \end{aligned}$$

for $|\lambda| \leq \rho^{-1}$, where we have used that $1 + x \leq e^x$. Thus for any coordinate j we have

$$\mathbb{E}[\exp(\lambda n(\mathbb{M}_j(S, \rho, \{c_k\}) - \mathbb{E}[\mathbb{M}_j(S, \rho, \{c_k\})]))] \leq \exp\left(\lambda^2 n m p_j + \frac{\lambda^2 \rho^2 \sigma^2}{2}\right)$$

for all $|\lambda| \leq \rho^{-1}$. Using the bias bound (18), we see that there exists a $q \in \mathbb{R}_+$ with $\mathbf{1}^T q_c \leq P(c)$ for each cluster $c \in \{c_k\}$ such that for any cluster c , $j \in c$, and $u \geq 0$ we have

$$\mathbb{P}(|\mathbb{M}_j(S, \rho, \{c_k\}) - m p_j| \geq 2^{2-t} q_j + u) \leq \exp\left(\frac{\lambda^2 m p_j}{n} + \frac{\lambda^2 \sigma^2 \rho^2}{2n^2} - \lambda u\right).$$

Exactly as in the proof of Proposition 1 (see specifically Appendix B.1), we thus obtain that for a numerical constant $C > 0$ and all $u \geq 0$,

$$\mathbb{P}(|\mathbb{M}_j(S, \rho, \{c_k\}) - m p_j| \geq 2^{2-t} q_j + u) \leq \exp\left(-C \min\left\{\frac{n u^2}{m p_j}, \frac{n^2 u^2}{\sigma^2 \rho^2}, \frac{n u}{\rho}\right\}\right).$$

The variance bounds are immediate by noting that no (non-private) estimator has mean-squared error asymptotically better than $\frac{m p_j (1-p_j)}{n}$.

C.1 Proof of Lemma C.1

For $j \geq 3mp$ we have

$$\frac{\mathbb{P}(X = j+1)}{\mathbb{P}(X = j)} = \frac{\binom{m}{j+1} p^{j+1} (1-p)^{m-j-1}}{\binom{m}{j} p^j (1-p)^{m-j}} = \frac{m-j}{j} \frac{p}{1-p} \leq \frac{4}{3} \left(\frac{m}{j} - 1\right) p \leq \frac{1}{2}. \quad (19)$$

By quasi-convexity of the ratio function, the last inequality implies that $\mathbb{P}(X \geq j+1)/\mathbb{P}(X \geq j) \leq \frac{1}{2}$ for $j \geq 3mp$. The first inequality of the lemma now follows as $\sum_{i=0}^{\infty} 2^{-i} = 2$. The second inequality then follows as $\mathbb{P}(X \geq l) = \sum_{i=l}^{\infty} \mathbb{P}(X = i) \leq \mathbb{P}(X = l) \sum_{i=0}^{\infty} 2^{-i}$.

C.2 Proof of Lemma C.2

Inequality (19) in the proof of Lemma C.1 gives $\frac{\mathbb{P}(X=j+1)}{\mathbb{P}(X=j)} \leq 1/2$ for $j \geq 3mp$. We consider two cases according to the value of p . First, if $p \leq 1/m^2$, we have $mp < 1$ and so

$$\mathbb{P}(X = \lceil l \rceil) \stackrel{(i)}{\leq} \mathbb{P}(X = \lceil 3mp + 2 \log m \rceil) 2^{-t} \stackrel{(ii)}{\leq} \mathbb{P}(X = 2) 2^{-t} \leq m^2 p^2 2^{-t} \leq p 2^{-t},$$

where inequality (i) uses that $3 \log m > 2 \log m + 1$ and inequality (ii) that $2 \log m > 2$, in both cases as $m \geq 3$. In the other case, we let $p \geq 1/m^2$. Then

$$\mathbb{P}(X = \lceil l \rceil) \stackrel{(iii)}{\leq} \mathbb{P}(X = \lceil 3mp \rceil) 2^{-2 \log(m)-t} \leq \frac{2^{-t}}{m^2} \leq p 2^{-t},$$

where inequality (iii) uses that $\mathbb{P}(X = k) \leq \mathbb{P}(X = k-1)$ for $k \geq mp$ and again that $3 \log m > 2 \log m + 1$.

D Proof of Theorem 1

We prove the theorem for a more general family of updates, which include projected stochastic gradient as a special case, known as the APROX (approximate proximal point) family [5, 6]; several authors present convergence analyses for these methods [21, 15, 6, 5]. These methods iteratively build a model of the loss at the current iterate and minimize the model with regularization. A *model* of ℓ at a point θ_0 , denoted $\ell_{\theta_0}(\cdot; x)$, is a function satisfying the following conditions [15, 5].

(C.i) The model $\theta \mapsto \ell_{\theta_0}(\theta; x)$ is convex and subdifferentiable.

(C.ii) The model is locally accurate at θ_0 : $\ell_{\theta_0}(\theta_0; x) = \ell(\theta_0; x)$.

(C.iii) The model provides a lower bound: $\ell_{\theta_0}(\theta; x) \leq \ell(\theta; x)$ for $\theta \in \Theta$.

When the losses ℓ are convex and differentiable, the simplest model is the linear (first-order) approximation $\ell_{\theta_0}(\ell; x) := \ell(\theta_0; x) + \langle \nabla \ell(\theta_0; x), \theta - \theta_0 \rangle$, which satisfies conditions (C.i)–(C.iii).

For an initial point θ_0 and stepsize $\alpha > 0$, we define the approximate proximal point update

$$\mathbf{aprox}_{\alpha}^{\ell}(\theta_0; x) := \underset{\theta \in \Theta}{\operatorname{argmin}} \left\{ \ell_{\theta_0}(\theta; x) + \frac{1}{2\alpha} \|\theta - \theta_0\|_2^2 \right\},$$

and gradient mapping

$$\mathbf{g}_{\alpha}(\theta_0; x) := \frac{1}{\alpha} \left(\theta_0 - \mathbf{aprox}_{\alpha}^{\ell}(\theta_0; x) \right).$$

In standard application of such methods [21, 15, 5, 6], given a datapoint x and stepsize α_k , we update $\theta_{k+1} = \mathbf{aprox}_{\alpha_k}^{\ell}(\theta_k; x) = \theta_k - \alpha_k \mathbf{g}_{\alpha_k}(\theta_k; x)$. This recovers the standard projected gradient method whenever ℓ_{θ} is the first-order model $\ell_{\theta_0}(\theta; x) = \ell(\theta_0; x) + \langle \nabla \ell(\theta_0; x), \theta - \theta_0 \rangle$. We then perform the obvious generalization of the noisy stochastic gradient iteration (14), and we will prove the convergence guarantee claimed in the theorem for the iteration

$$\theta_{k+1}^n := \theta_k^n - \alpha_k \left(\mathbf{g}_{\alpha_k}(\theta_k^n; X_{ri(k)}^n) + \sigma_n Z_k \right). \quad (20)$$

We develop a few notational shorthands for the analysis. Let

$$\widehat{\theta}_n := \underset{\theta \in \Theta}{\operatorname{argmin}} L_n(\theta) \quad \text{and} \quad H_n := \nabla^2 L_n(\widehat{\theta}_n) = \frac{1}{n} \sum_{i=1}^n \nabla^2 \ell(\widehat{\theta}_n; X_i).$$

Then under the conditions of Assumption A1, standard asymptotics [49] give that

$$\widehat{\theta}_n \xrightarrow{a.s.} \theta^* \quad \text{and} \quad \widehat{\theta}_n - \theta^* = -\frac{1}{n} \nabla^2 L(\theta^*)^{-1} \sum_{i=1}^n \nabla \ell(\theta^*; X_i) + o_P(1/\sqrt{n}). \quad (21)$$

Moreover, under Assumption A1, there exists $\lambda > 0$ such if we define the event

$$\mathcal{E}_n := \left\{ \|\widehat{\theta}_n - \theta^*\|_2 \leq \frac{\epsilon}{8}, \nabla^2 L_n(\theta) \succeq \lambda I \text{ for } \theta \in \theta^* + \epsilon \mathbb{B}, \frac{1}{n} \sum_{i=1}^n \mathbf{L}_a(X_i)^2 \leq 2\mathbb{E}[\mathbf{L}_a(X)^2] \text{ for } a \in \{0, 1, 2\} \right\},$$

there exists a (potentially random, but finite N) such that $n \geq N$ implies \mathcal{E}_n holds.

The sequence $\bar{\theta}_k^n$ defines a triangular array, which adds some complexity to our proof and necessitates a somewhat more careful treatment, which we now provide. Our analysis follows Polyak and Juditsky [44] and Asi and Duchi [6]. We begin by defining the triply-indexed matrices

$$B_i^k(n) := \alpha_i \sum_{j=i}^k \prod_{l=i+1}^j (I - \alpha_l H_n) \quad \text{and} \quad A_i^k(n) := B_i^k(n) - H_n^{-1},$$

where we note that H_n^{-1} exists on \mathcal{E}_n and satisfies $H_n^{-1} \preceq \lambda^{-1}I$. Now, for sample size n , which corresponds to running algorithm (20) at the given sample size with sample $\{X_1, \dots, X_n\}$, we define

$$\ell_k^n(\theta) = \ell(\theta; X_{\text{ri}(k)}^n),$$

that is, the loss encountered in iteration k of the algorithm with sample size n , where $\text{ri}(k)$ is the random index in $[n]$ chosen at iteration k . We let $\mathcal{F}^n = \sigma(X_1, \dots, X_n)$ denote the σ -field of the n observations, and \mathcal{F}_k^n be the σ -field generated by X_1^n and the first k random indices $\text{ri}(1), \dots, \text{ri}(k)$.

Now we follow Asi and Duchi [6]. Let us implicitly assume the event \mathcal{E}_n holds, so that all derivatives are defined (by Assumption A1). Define the remainder

$$R_n(\theta) := \nabla L_n(\theta) - H_n(\theta - \hat{\theta}_n)$$

and the localized (sub)gradient errors

$$\zeta_k^n := \left(\nabla \ell_k^n(\theta_k^n) - \nabla \ell_k^n(\hat{\theta}_n) \right) - \left(\nabla L_n(\theta_k^n) - \nabla L_n(\hat{\theta}_n) \right).$$

Finally, we consider the *model* subgradient errors, where we note that θ_{k+1}^n satisfies

$$0 \in \partial \ell_{\theta_k^n}(\theta_{k+1}^n; X_{\text{ri}(k)}^n) + \frac{1}{\alpha_k}(\theta_{k+1}^n - \theta_k^n) + \mathcal{N}_{\Theta}(\theta_{k+1}^n)$$

where $\mathcal{N}_{\Theta}(\theta) = \{v \in \mathbb{R}^d \mid \langle v, \tau - \theta \rangle \leq 0, \text{ all } \tau \in \Theta\}$ denotes the normal cone to Θ at the point θ . Thus, there is some vector $v_{k+1}^n \in \mathcal{N}_{\Theta}(\theta_{k+1}^n)$ such that

$$0 \in \partial \ell_{\theta_k^n}(\theta_{k+1}^n; X_{\text{ri}(k)}^n) + v_{k+1}^n + \frac{1}{\alpha_k}(\theta_{k+1}^n - \theta_k^n) \quad (22)$$

where $v_{k+1}^n = 0$ if $\theta_{k+1}^n \in \text{int } \Theta$. If $\theta_{k+1}^n \notin \text{int } \Theta$, then [6, Lemma A.5] guarantees that $\|v_{k+1}^n\|_2 \leq 2\mathbf{L}_0(X_{\text{ri}(k)}^n)$ regardless. With this, we define the *model* subgradient errors

$$\varepsilon_k^n := \nabla \ell_{\theta_k^n}(\theta_{k+1}^n; X_{\text{ri}(k)}^n) + v_{k+1}^n - \nabla \ell(\theta_k^n; X_{\text{ri}(k)}^n).$$

With these substitutions, we have [6, Eq. (13)] that

$$\theta_{k+1}^n - \hat{\theta}_n = (I - \alpha_k)H_n(\theta_k^n - \hat{\theta}_n) - \alpha_k(\nabla \ell_k^n(\hat{\theta}_n) + \sigma_n Z_k) - \alpha_k(R_n(\theta_k^n) + \zeta_k^n + \varepsilon_k^n).$$

Then following Polyak and Juditsky [44] and Asi and Duchi [6] (see Eq. (14) of the paper [6], with a fixed negative sign), we have on the event \mathcal{E}_n that

$$\begin{aligned} \sqrt{k}\Delta_k^n &= \frac{1}{\sqrt{k}} \sum_{i=1}^k H_n^{-1} \nabla \ell_i^n(\hat{\theta}_n) + \sigma_n H_n^{-1} \frac{1}{\sqrt{k}} \sum_{i=1}^k Z_i \\ &\quad + \frac{1}{\sqrt{k}} \sum_{i=1}^k A_i^k(n) \left(\nabla \ell_i^n(\hat{\theta}_n) + \sigma_n Z_i \right) + \frac{1}{\sqrt{k}} \sum_{i=1}^k B_i^k(n) [R_n(\theta_i^n) + \zeta_i^n + \varepsilon_i^n] + O(1/\sqrt{k}), \end{aligned} \quad (23)$$

where the $O(1/\sqrt{k})$ term is non-random on \mathcal{E}_n . Moreover, $\sup_{i,k,n} \mathbf{1}\{\mathcal{E}_n\} \|B_i^k(n)\|_{\text{op}} < \infty$ as well [6, 44, Lemma 2], and independent of n , there exists $\epsilon > 0$ such that for all $k \geq K(\epsilon)$, $\mathbf{1}\{\mathcal{E}_n\} \frac{1}{k} \sum_{i=1}^k \|A_i^k(n)\|_{\text{op}} \leq \epsilon$. We control each of these quantities in turn.

Lemma D.1. Define $\delta_{k,n} := \|\theta_k^n - \hat{\theta}_n\|_{21} \mathbf{1}\{\mathcal{E}_n\}$. Then

$$\mathbb{E}[\delta_{k+1,n}^2 \mid \mathcal{F}^n] \leq (1 - c_0 \alpha_k) \delta_{k,n}^2 + \alpha_k^2 \mathbb{E}[\mathbf{L}_0(X)^2] \quad (24)$$

for a constant $c_0 > 0$ that depends only on $\lambda > 0$ in the definition of \mathcal{E}_n and Θ . Additionally, for some $C < \infty$ independent of n and k , we have

$$\mathbb{E}[\delta_{k,n}^2 \mid \mathcal{F}^n] \leq C \alpha_k \log k.$$

Lemma D.2. Let Assumption A1 hold. If $k(n) \rightarrow \infty$ as $n \rightarrow \infty$, then $\frac{1}{\sqrt{k(n)}} \sum_{i=1}^{k(n)} \|R_n(\theta_i^n)\| \xrightarrow{P} 0$.

Lemma D.3. Let Assumption A1 hold. If $k(n) \rightarrow \infty$ as $n \rightarrow \infty$, then $\frac{1}{\sqrt{k(n)}} \sum_{i=1}^{k(n)} B_i^k(n) \zeta_i^n \xrightarrow{P} 0$.

Lemma D.4. Let Assumption A1 hold. If $k(n) \rightarrow \infty$ as $n \rightarrow \infty$, then $\frac{1}{\sqrt{k(n)}} \sum_{i=1}^{k(n)} \|\varepsilon_i^n\|_2 \xrightarrow{P} 0$.

Lemma D.5. Let Assumption A1 hold and $\lim_n \sigma_n = \sigma \in [0, \infty)$. If $k(n) \rightarrow \infty$ as $n \rightarrow \infty$, then

$$\frac{1}{\sqrt{k(n)}} \sum_{i=1}^{k(n)} A_i^k(n) (\nabla \ell_i^n(\hat{\theta}_n) + \sigma_n Z_i) \xrightarrow{P} 0.$$

We prove the lemmas in Appendices D.1, D.2, D.3, D.4, D.5, respectively.

Combining the preceding three lemmas into the recursion (23), we see that if $k = k(n) \rightarrow \infty$ as $n \rightarrow \infty$, we use that $\sup_{i,k,n} \mathbf{1}\{\mathcal{E}_n\} \|B_i^k(n)\|_{\text{op}} < \infty$ and that \mathcal{E}_n occurs eventually with probability 1 to write

$$\sqrt{k} \Delta_k^n = \underbrace{\frac{1}{\sqrt{k}} \sum_{i=1}^k H_n^{-1} \nabla \ell_i^n(\hat{\theta}_n)}_{=: \mathcal{T}_{1,n}} + \underbrace{\frac{1}{\sqrt{k}} \sum_{i=1}^k H_n^{-1} \sigma_n Z_i}_{=: \mathcal{T}_{2,n}} + o_P(1), \quad (25)$$

where the $o_P(1)$ term converges to 0 in probability as $n \uparrow \infty$. From this point in the proof, we will treat k as a function of n implicitly, noting that $k = k(n)$ satisfies $\lim_n k(n)/n = \gamma$. The recursion (25) takes a form similar to a multiplier central limit theorem [50], allowing us to precisely compute its asymptotics by computing the asymptotics of $\mathcal{T}_{1,n}$ and $\mathcal{T}_{2,n}$, which are (asymptotically) independent. Let $M_{n,i} \in \mathbb{N}$ denote the number of times observation X_i is chosen in the sampling procedure to generate θ_k^n after $k = k(n)$ iterations, noting that $(M_{n,i})_{i=1}^n \sim \text{Multinomial}(k, \mathbf{1}/n)$ is multinomial-distributed with probabilities $1/n$, and $\sum_{i=1}^n M_{n,i} = k$. Thus we have

$$\mathcal{T}_{1,n} = \frac{1}{\sqrt{k}} \sum_{i=1}^n H_n^{-1} M_{n,i} \nabla \ell(\hat{\theta}_n; X_i).$$

On the event \mathcal{E}_n , a Taylor expansion yields

$$\nabla \ell(\hat{\theta}_n; X_i) = \nabla \ell(\theta^*; X_i) + (\nabla^2 \ell(\theta^*; X_i) + E_{n,i}) (\hat{\theta}_n - \theta^*),$$

where $\|E_{n,i}\|_{\text{op}} \leq \mathbf{L}_2(X_i) \|\hat{\theta}_n - \theta^*\|_2$ by Assumption A1. Rearranging the count-based recursion thus gives

$$\begin{aligned} \mathcal{T}_{1,n} &= \frac{1}{\sqrt{k}} H_n^{-1} \sum_{i=1}^n M_{n,i} \nabla \ell(\theta^*; X_i) + \frac{1}{\sqrt{k}} H_n^{-1} \left(\sum_{i=1}^n M_{n,i} (\nabla^2 \ell(\theta^*; X_i) + E_{n,i}) \right) (\hat{\theta}_n - \theta^*) \\ &= \frac{1}{\sqrt{k}} H_n^{-1} \sum_{i=1}^n M_{n,i} \nabla \ell(\theta^*; X_i) \\ &\quad - \frac{1}{\sqrt{k}} H_n^{-1} \left(\frac{1}{n} \sum_{i=1}^n M_{n,i} (\nabla^2 \ell(\theta^*; X_i) + E_{n,i}) \right) \left(\nabla^2 L(\theta^*)^{-1} \sum_{i=1}^n \nabla \ell(\theta^*; X_i) + o_P(\sqrt{n}) \right). \end{aligned} \quad (26)$$

Now, we use that $\mathbb{E}[M_{n,i}] = k/n$ and $\text{Var}(M_{n,i}) = k/n(1 - 1/n)$, with $\text{Cov}(M_{n,i}, M_{n,j}) = -k/n^2$, independently of X_i , to obtain $\frac{1}{n} \sum_{i=1}^n M_{n,i}(\nabla^2 \ell(\theta^*; X_i) + E_{n,i}) = \frac{k}{n} \frac{1}{n} \sum_{i=1}^n \nabla^2 \ell(\theta^*; X_i) + o_P(1) = \frac{k}{n} H_n + o_P(1)$, so that expansion (26) becomes

$$\begin{aligned} \mathcal{T}_{1,n} &= \frac{1}{\sqrt{k}} H_n^{-1} \sum_{i=1}^n M_{n,i} \nabla \ell(\theta^*; X_i) - \frac{1}{\sqrt{k}} \frac{k}{n} (1 + o_P(1)) \nabla^2 L(\theta^*)^{-1} \sum_{i=1}^n \nabla \ell(\theta^*; X_i) + o_P(1) \\ &= \frac{1}{\sqrt{k}} (\nabla^2 L(\theta^*) + o_P(1))^{-1} \sum_{i=1}^n \left(M_{n,i} - \frac{k}{n} \right) \nabla \ell(\theta^*; X_i) + \sqrt{\frac{k}{n}} o_P(1) \end{aligned} \quad (27)$$

where the error $o_P(1) \xrightarrow{P} 0$ as $n \uparrow \infty$.

Substituting expression (27) into the expansion (25) and renormalizing by \sqrt{n} instead of \sqrt{k} ,

$$\sqrt{n} \bar{\Delta}_k^n = (\nabla^2 L(\theta^*) + o_P(1))^{-1} \left[\sqrt{\frac{n}{k}} \cdot \frac{1}{\sqrt{n}} \sum_{i=1}^n \sqrt{\frac{n}{k}} \left(M_{n,i} - \frac{k}{n} \right) \nabla \ell(\theta^*; X_i) + \sqrt{\frac{n}{k}} \frac{1}{\sqrt{k}} \sigma_n \sum_{i=1}^k Z_i \right] + o_P(1).$$

Now, note that by the classic multiplier central limit theorems (cf. [50, Chapters 2.9 and 3.6]), using that $(n/k)\text{Var}(M_{n,i}) = 1 - 1/n$ we have the joint convergence

$$\left(\frac{1}{\sqrt{n}} \sum_{i=1}^n \sqrt{\frac{k}{n}} \left(M_{n,i} - \frac{k}{n} \right) \nabla \ell(\theta^*; X_i), \frac{1}{\sqrt{n}} \sum_{i=1}^n \nabla \ell(\theta^*; X_i) \right) \xrightarrow{d} \mathbf{N} \left(\begin{bmatrix} 0 \\ 0 \end{bmatrix}, \begin{bmatrix} \Sigma_\ell & 0 \\ 0 & \Sigma_\ell \end{bmatrix} \right).$$

Adding and subtracting $\sqrt{n}(\hat{\theta}_n - \theta^*)$ as in the standard asymptotic expansion (21), we have

$$\begin{aligned} \sqrt{n}(\bar{\theta}_k^n - \theta^*) &= \nabla^2 L(\theta^*)^{-1} \left[\sqrt{\frac{n}{k}} \frac{1}{\sqrt{n}} \sum_{i=1}^n \sqrt{\frac{k}{n}} \left(M_{n,i} - \frac{k}{n} \right) \nabla \ell(\theta^*; X_i) \dots \right. \\ &\quad \left. + \frac{1}{\sqrt{n}} \sum_{i=1}^n \nabla \ell(\theta^*; X_i) + \sqrt{\frac{n}{k}} \frac{\sigma_n}{\sqrt{k}} \sum_{i=1}^k Z_i \right] + o_P(1) \\ &\xrightarrow{d} \mathbf{N} \left(0, \nabla^2 L(\theta^*)^{-1} \left((1 + 1/\gamma) \Sigma_\ell + (1/\gamma) \Sigma_z \sigma^2 \right) \nabla^2 L(\theta^*)^{-1} \right). \end{aligned}$$

D.1 Proof of Lemma D.1

We have [6, Lemma 3.4] that

$$\begin{aligned} \frac{1}{2} \|\theta_{k+1}^n - \hat{\theta}_n\|_2^2 &\leq \frac{1}{2} \|\theta_k^n - \hat{\theta}_n\|_2^2 - \alpha_k \left[\ell_k^n(\theta_k^n) - \ell_k^n(\hat{\theta}_n) \right] + \frac{\alpha_k^2}{2} \|\nabla \ell_k^n(x_k^n)\|_2^2 \\ &\leq \frac{1}{2} \|\theta_k^n - \hat{\theta}_n\|_2^2 - \alpha_k \left[\ell_k^n(\theta_k^n) - \ell_k^n(\hat{\theta}_n) \right] + \frac{\alpha_k^2}{2} \mathbf{L}_0(X_{\text{ri}(k)}^n)^2. \end{aligned}$$

Taking expectations conditional on \mathcal{F}_{k-1}^n , the σ -field of the sample $\{X_i\}_{i=1}^n$ and the first $k-1$ random indices $\text{ri}(1), \dots, \text{ri}(k-1)$, and noting that $\mathcal{E}_n \in \mathcal{F}^n \subset \mathcal{F}_{k-1}^n$, we have

$$\begin{aligned} \frac{1}{2} \mathbf{1}\{\mathcal{E}_n\} \mathbb{E}[\|\theta_{k+1}^n - \hat{\theta}_n\|_2^2 \mid \mathcal{F}_{k-1}^n] &\leq \mathbf{1}\{\mathcal{E}_n\} \cdot \left\{ \frac{1}{2} \|\theta_k^n - \hat{\theta}_n\|_2^2 - \alpha_k \left[L_n(\theta_k^n) - L_n(\hat{\theta}_n) \right] + \sum_{i=1}^n \frac{\alpha_k^2}{2n} \mathbf{L}_0(X_i)^2 \right\} \\ &\leq \mathbf{1}\{\mathcal{E}_n\} \cdot \left\{ \frac{1 - c_0 \alpha_k}{2} \|\theta_k^n - \hat{\theta}_n\|_2^2 + \alpha_k^2 \mathbb{E}[\mathbf{L}_0(X)^2] \right\}, \end{aligned}$$

where $c_0 > 0$ is a constant depending on λ, Θ , which is positive because $\nabla^2 L_n(\theta) \succeq \lambda I$ for θ near θ^* . In particular, with the definition $\delta_{k,n} := \|\theta_k^n - \hat{\theta}_n\|_2 \mathbf{1}\{\mathcal{E}_n\}$, then integrating over the indices $\text{ri}(k)$ gives the result (24).

The second result follows exactly as in the proof of Lemma A.2 of the paper [6] (see specifically inequality (17) in the `arXiv` technical report version).

D.2 Proof of Lemma D.2

On the event \mathcal{E}_n , L_n has $\sqrt{2\mathbb{E}[\mathbb{L}_1(X)^2]}$ -Lipschitz gradient on Θ , and so a Taylor approximation gives that for some $C < \infty$ independent of n and k , $R_n(\theta) \leq C\|\theta - \hat{\theta}_n\|_2^2$. Thus

$$\mathbb{E}[\|R_n(\theta_k^n)\|_2 \mathbf{1}\{\mathcal{E}_n\}] \leq C\mathbb{E}[\mathbf{1}\{\mathcal{E}_n\} \|\theta_k^n - \hat{\theta}_n\|_2^2] \leq C\alpha_k \log k,$$

where we have used Lemma D.1. Thus

$$\frac{1}{\sqrt{k}} \sum_{i=1}^k \mathbb{E}[\|R_n(\theta_k^n)\|_2 \mathbf{1}\{\mathcal{E}_n\}] \leq \frac{C \log k}{\sqrt{k}} \sum_{i=1}^k \alpha_i \leq Ck^{1-\beta-\frac{1}{2}} \log k \rightarrow 0$$

as $k \uparrow \infty$. As \mathcal{E}_n happens eventually, we have the result.

D.3 Proof of Lemma D.3

Fixing the sample $\{X_i\}_{i=1}^n$, the localized subgradient errors ζ_k^n are a martingale sequence adapted to $\mathcal{F}_k^n = \sigma(\mathcal{F}^n, \text{ri}(1), \dots, \text{ri}(k))$, the σ -field of \mathcal{F}^n and the random indices of the iteration through time k . Moreover, $\mathcal{E}_n \in \mathcal{F}^n$ and $B_i^k(n) \in \mathcal{F}^n$ for all i, k . Thus

$$\mathbb{E} \left[\left\| \sum_{i=1}^k B_i^k(n) \zeta_i^n \right\|_2^2 \middle| \mathcal{F}^n \right] = \sum_{i=1}^k \mathbb{E} \left[\|B_i^k(n) \zeta_i^n\|_2^2 \middle| \mathcal{F}^n \right].$$

Now, we note that if $\theta_k^n, \hat{\theta}_n \in \theta^* + \epsilon\mathbb{B}$, then

$$\|\zeta_k^n\|_2 \leq \left(\mathbb{L}_1(X_{\text{ri}(k)}^n) + \frac{1}{n} \sum_{i=1}^n \mathbb{L}_1(X_i) \right) \|\theta_k^n - \hat{\theta}_n\|_2,$$

while otherwise we have

$$\|\zeta_k^n\|_2 \leq 2\mathbb{L}_0(X_{\text{ri}(k)}^n) + \frac{2}{n} \sum_{i=1}^n \mathbb{L}_0(X_i).$$

In either case, on the event \mathcal{E}_n , the compactness of Θ guarantees that there exists some $C < \infty$ independent of n and k such that

$$\mathbf{1}\{\mathcal{E}_n\} \|\zeta_k^n\|_2 \leq C \cdot \mathbf{1}\{\mathcal{E}_n\} \left(\mathbb{L}_0(X_{\text{ri}(k)}^n) + \mathbb{L}_1(X_{\text{ri}(k)}^n) + \mathbb{E}[\mathbb{L}_1(X)^2]^{1/2} \right) \|\theta_k^n - \hat{\theta}_n\|_2.$$

In particular, as $\theta_k^n \in \mathcal{F}_{k-1}^n$, we obtain that

$$\mathbf{1}\{\mathcal{E}_n\} \mathbb{E} \left[\|\zeta_k^n\|_2^2 \middle| \mathcal{F}_{k-1}^n \right] \leq C \cdot \mathbf{1}\{\mathcal{E}_n\} \sqrt{\mathbb{E}[\mathbb{L}_0(X)^2] + \mathbb{E}[\mathbb{L}_1(X)^2]} \cdot \|\theta_k^n - \hat{\theta}_n\|_2^2.$$

As $\sup_{i,k,n} \mathbb{1}\{\mathcal{E}_n\} \|B_i^k(n)\|_{\text{op}} < \infty$, we have

$$\begin{aligned} \mathbb{1}\{\mathcal{E}_n\} \mathbb{E} \left[\left\| \sum_{i=1}^k B_i^k(n) \zeta_i^n \right\|_2^2 \mid \mathcal{F}^n \right] &\leq C \mathbb{1}\{\mathcal{E}_n\} \sqrt{\mathbb{E}[\mathbf{L}_0(X)^2 + \mathbf{L}_1(X)^2]} \sum_{i=1}^k \mathbb{E} \left[\|\theta_i^n - \hat{\theta}_n\|_2^2 \mid \mathcal{F}^n \right] \\ &\leq C \log k \sum_{i=1}^k \alpha_i, \end{aligned}$$

where the final inequality uses Lemma D.1. Dividing by k gives the result.

D.4 Proof of Lemma D.4

We continue to build off of Asi and Duchi [6]. By Lemma A.4 (a specialization of [16, Thm. 6.1]) of their paper, as $\ell(\cdot; x)$ has $\mathbf{L}_1(x)$ -Lipschitz gradient on $\theta^* + \epsilon\mathbb{B} \subset \text{int } \Theta$, we have (see also [6, Eq. (15)]) that whenever $\theta_k^n, \theta_{k+1}^n \in \theta^* + (\epsilon/4)\mathbb{B}$,

$$\|\varepsilon_k^n\|_2 \leq 2\mathbf{L}_1(X_{r_i(k)}^n) \|\theta_k^n - \theta_{k+1}^n\|_2 \leq \alpha_k \mathbf{L}_1(X_{r_i(k)}^n)^2 + \alpha_k \|\nabla \ell_k^n(\theta_k^n)\|_2^2.$$

We also always have $\|\varepsilon_k^n\|_2 \leq 4\mathbf{L}_0(X_{r_i(k)}^n)$ by the triangle inequality applied to the containment (22). Consequently, we obtain that

$$\begin{aligned} \frac{1}{\sqrt{k}} \sum_{i=1}^k \|\varepsilon_i^n\|_2 &\leq \frac{4}{\sqrt{k}} \sum_{i=1}^k \mathbb{1}\{\|\theta_i^n - \theta^*\|_2 \geq \epsilon/4, \|\theta_{i+1}^n - \theta^*\|_2 \geq \epsilon/4\} \mathbf{L}_0(X_{r_i(i)}^n) \\ &\quad + \frac{1}{\sqrt{k}} \sum_{i=1}^k \alpha_i \left(\mathbf{L}_1(X_{r_i(i)}^n)^2 + \|\nabla \ell_i^n(\theta_i^n)\|_2^2 \right). \end{aligned}$$

Now, we use the triangle inequality to see that on the event \mathcal{E}_n , as $\|\hat{\theta}_n - \theta^*\|_2 \leq \epsilon/8$, to have $\|\theta_{i+1}^n - \theta^*\|_2 \geq \epsilon/4$ we must have $\|\theta_{i+1}^n - \hat{\theta}_n\|_2 \geq \epsilon/8$. Moreover, for this to be the case, the Lipschitz continuity of ℓ over Θ and that $\|\theta_{i+1}^n - \theta_i^n\|_2 \leq \alpha_i \mathbf{L}_0(X_{r_i(i)}^n)$ together give that

$$\|\theta_{i+1}^n - \theta^*\|_2 \geq \frac{\epsilon}{4} \quad \text{implies} \quad \|\theta_i^n - \hat{\theta}_n\|_2 + \alpha_i \mathbf{L}_0(X_{r_i(i)}^n) \geq \frac{\epsilon}{8}.$$

Thus, revisiting the previous display, we have on \mathcal{E}_n that

$$\begin{aligned} \frac{1}{\sqrt{k}} \sum_{i=1}^k \|\varepsilon_i^n\|_2 &\leq \frac{4}{\sqrt{k}} \sum_{i=1}^k \left(2 \cdot \mathbb{1}\{\|\theta_i^n - \hat{\theta}_n\|_2 \geq \epsilon/16\} + \mathbb{1}\{\alpha_i \mathbf{L}_0(X_{r_i(i)}^n) \geq \epsilon/8\} \right) \mathbf{L}_0(X_{r_i(i)}^n) \\ &\quad + \frac{1}{\sqrt{k}} \sum_{i=1}^k \alpha_i \left(\mathbf{L}_1(X_{r_i(i)}^n)^2 + \|\nabla \ell_i^n(\theta_i^n)\|_2^2 \right). \end{aligned}$$

Taking expectations conditional on \mathcal{F}^n and using that $\mathcal{E}_n \in \mathcal{F}^n$, we have on the event \mathcal{E}_n that

$$\begin{aligned} &\mathbb{E} \left[\frac{1}{\sqrt{k}} \sum_{i=1}^k \|\varepsilon_i^n\|_2 \mid \mathcal{F}^n \right] \\ &\leq \frac{8}{\sqrt{k}} \sum_{i=1}^k \mathbb{E} \left[\mathbf{L}_0(X_{r_i(i)}^n) \mathbb{1}\{\|\theta_i^n - \hat{\theta}_n\|_2 \geq \epsilon/16\} \mid \mathcal{F}^n \right] + \frac{4}{\sqrt{k}} \sum_{i=1}^k \frac{1}{n} \sum_{j=1}^n \mathbf{L}_0(X_j) \mathbb{1}\{\alpha_i \mathbf{L}_0(X_j) \geq \epsilon/8\} \\ &\quad + \frac{4}{\sqrt{k}} \sum_{i=1}^k \alpha_i \left(\mathbb{E}[\mathbf{L}_1(X)^2] + \mathbb{E}[\mathbf{L}_0(X)^2] \right), \end{aligned} \tag{28}$$

where we have used that on \mathcal{E}_n , $\frac{1}{n} \sum_{i=1}^n \mathbf{L}_a(X_i)^2 \leq 2\mathbb{E}[\mathbf{L}_a(X)^2]$ for $a \in \{0, 1, 2\}$.

We now control the first terms in the righthand sum of inequality (28). For the second, we note that if Y is a random variable with $\mathbb{E}[Y^2] \leq C$, then

$$\mathbb{E}[Y 1\{\alpha Y \geq \epsilon\}] \leq \sqrt{\mathbb{E}[Y^2] \mathbb{P}(\alpha Y \geq \epsilon)} \leq \sqrt{\alpha^2 \mathbb{E}[Y^2] \mathbb{E}[Y^2] / \epsilon^2} \leq C\alpha/\epsilon$$

by the Cauchy-Schwarz and Chebyshev inequalities, so that on event \mathcal{E}_n that $\frac{1}{n} \sum_{i=1}^n \mathbf{L}_0(X_i)^2 \leq 2\mathbb{E}[\mathbf{L}_0(X)^2]$, we have

$$\frac{1}{n} \sum_{j=1}^n \mathbf{L}_0(X_j) 1\{\alpha_i \mathbf{L}_0(X_j) \geq \epsilon/8\} \leq \frac{16}{\epsilon} \alpha_i.$$

For the first term in the right side of (28), recalling the definition $\delta_{k,n} = \|\theta_k^n - \hat{\theta}_n\|_2 1\{\mathcal{E}_n\}$ in Lemma D.1, we use that $\theta_i^n \in \mathcal{F}_{i-1}^n$ to obtain

$$\begin{aligned} 1\{\mathcal{E}_n\} \mathbb{E} \left[\mathbf{L}_0(X_{\hat{r}(i)}^n) 1\left\{ \|\hat{\theta}_n - \theta_i^n\|_2 \geq \epsilon/16 \right\} \mid \mathcal{F}^n \right] &= \frac{1}{n} \sum_{j=1}^n \mathbf{L}_0(X_j) \mathbb{P}(\delta_{i,n} \geq \epsilon/16 \mid \mathcal{F}^n) \\ &\leq \frac{1}{n} \sum_{j=1}^n \mathbf{L}_0(X_j) \frac{C\alpha_i \log i}{\epsilon^2}, \end{aligned}$$

where the inequality is a consequence of Lemma D.1 and Chebyshev's inequality. Returning to inequality (28), we find that

$$1\{\mathcal{E}_n\} \mathbb{E} \left[\frac{1}{\sqrt{k}} \sum_{i=1}^k \|\varepsilon_i^n\|_2 \mid \mathcal{F}^n \right] \leq \frac{C}{\sqrt{k}} \sum_{i=1}^k \alpha_i \log i$$

where $C < \infty$ may depend on problem parameters (e.g. ϵ and $\mathbb{E}[\mathbf{L}_a(X)^2]$) but is independent of k and n . As $\sum_{i=1}^k \alpha_i \log i / \sqrt{k} = O(1)k^{1-\beta-1/2+\epsilon}$ for any $\epsilon > 0$, and \mathcal{E}_n occurs with probability one eventually, taking expectations over \mathcal{F}^n gives the lemma.

D.5 Proof of Lemma D.5

Recall that on \mathcal{E}_n , if $k = k(n) \rightarrow \infty$ then $\frac{1}{k} \sum_{i=1}^k \|A_i^k(n)\|_{\text{op}} \rightarrow 0$. As conditional on \mathcal{F}^n we have $\mathbb{E}[\nabla \ell_i^n(\hat{\theta}_n) \mid \mathcal{F}^n] = \frac{1}{n} \sum_{i=1}^n \nabla \ell(\hat{\theta}_n; X_i) = 0$ on \mathcal{E}_n , and the Z_i are mean-zero independent of \mathcal{F}^n with $\text{Cov}(Z_i) = \Sigma_z$, we have

$$\begin{aligned} &1\{\mathcal{E}_n\} \mathbb{E} \left[\left\| \frac{1}{\sqrt{k}} \sum_{i=1}^k A_i^k(n) (\nabla \ell_i^n(\hat{\theta}_n) + \sigma_n Z_i) \right\|_2^2 \mid \mathcal{F}^n \right] \\ &= 1\{\mathcal{E}_n\} \frac{1}{k} \sum_{i=1}^k \frac{1}{n} \sum_{j=1}^n \left\| A_i^k(n) \nabla \ell(\hat{\theta}_n; X_j) \right\|_2^2 + 1\{\mathcal{E}_n\} \frac{\sigma_n^2}{k} \sum_{i=1}^k \text{tr}(A_i^k(n) \Sigma_z A_i^k(n)) \\ &\leq 1\{\mathcal{E}_n\} \frac{2\mathbb{E}[\mathbf{L}_0(X)^2]}{k} \sum_{i=1}^k \|A_i^k(n)\|_{\text{op}}^2 \leq 1\{\mathcal{E}_n\} \frac{\sigma_n^2}{k} \text{tr}(\Sigma_z) \sum_{i=1}^k \|A_i^k(n)\|_{\text{op}}^2 \rightarrow 0 \end{aligned}$$

as $k \rightarrow \infty$, because $\sup_{i,k,n} \|A_i^k(n)\|_{\text{op}} 1\{\mathcal{E}_n\} < \infty$. That \mathcal{E}_n occurs eventually gives the lemma.

References

- [1] M. Abadi, A. Chu, I. Goodfellow, B. McMahan, I. Mironov, K. Talwar, and L. Zhang. Deep learning with differential privacy. In *23rd ACM Conference on Computer and Communications Security (ACM CCS)*, pages 308–318, 2016.
- [2] M. Andrés, N. Bordenabe, K. Chatzikokolakis, and C. Palamidessi. Geo-indistinguishability: Differential privacy for location-based systems. In *Proceedings of the ACM SIGSAC Conference on Computer and Communications Security*, pages 901–914. Association for Computing Machinery, 2013.
- [3] Apple Differential Privacy Team. Learning with privacy at scale, 2017. Available at <https://machinelearning.apple.com/2017/12/06/learning-with-privacy-at-scale.html>.
- [4] D. Arthur and S. Vassilvitskii. k-means++: The advantages of careful seeding. In *Proceedings of the Eighteenth ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 1027–1035, 2007.
- [5] H. Asi and J. C. Duchi. The importance of better models in stochastic optimization. *Proceedings of the National Academy of Sciences*, 116(46):22924–22930, 2019. URL <https://doi.org/10.1073/pnas.1908018116>.
- [6] H. Asi and J. C. Duchi. Stochastic (approximate) proximal point methods: Convergence, optimality, and adaptivity. *SIAM Journal on Optimization*, 29(3):2257–2290, 2019. URL <https://arXiv.org/abs/1810.05633>.
- [7] B. Balle, G. Barthe, and M. Gaboardi. Privacy amplification by subsampling: Tight analyses via couplings and divergences. In *Advances in Neural Information Processing Systems 31*, pages 6277–6287, 2018.
- [8] R. F. Barber and J. C. Duchi. Privacy and statistical risk: Formalisms and minimax bounds. *arXiv:1412.4451 [math.ST]*, 2014.
- [9] J. Baumgartner. Reddit comments, 2017. URL <http://files.pushshift.io/reddit/comments/>.
- [10] R. Bhaskar, S. Laxman, A. Smith, and A. Thakurta. Discovering frequent patterns in sensitive data. In *Proceedings of the 16th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD)*, 2010.
- [11] A. Bhowmick, J. Duchi, J. Freudiger, G. Kapoor, and R. Rogers. Protection against reconstruction and its applications in private federated learning. *arXiv:1812.00984 [stat.ML]*, 2018.
- [12] M. Bun and T. Steinke. Concentrated differential privacy: Simplifications, extensions, and lower bounds. In *Theory of Cryptography Conference (TCC)*, pages 635–658, 2016.
- [13] K. Chatzikokolakis, M. Andrés, N. Bordenabe, and C. Palamidessi. Broadening the scope of differential privacy using metrics. In *The 13th Privacy Enhancing Technologies Symposium*, pages 82–102, 2013. URL <https://hal.inria.fr/hal-00767210/document>.
- [14] K. Chaudhuri, C. Monteleoni, and A. D. Sarwate. Differentially private empirical risk minimization. *Journal of Machine Learning Research*, 12:1069–1109, 2011.
- [15] D. Davis and D. Drusvyatskiy. Stochastic model-based minimization of weakly convex functions. *SIAM Journal on Optimization*, 29(1):207–239, 2019.
- [16] D. Davis, D. Drusvyatskiy, and C. Paquette. The nonsmooth landscape of phase retrieval. *arXiv:1711.03247 [math.OC]*, 2017.
- [17] J. Deng, W. Dong, R. Socher, L. Li, K. Li, and L. Fei-Fei. ImageNet: a large-scale hierarchical image database. In *Proceedings of the IEEE Conference on Computer Vision and Pattern*

- Recognition*, pages 248–255, 2009.
- [18] J. Dong, A. Roth, and W. J. Su. Gaussian differential privacy. *arXiv:arXiv:1905.02383 [cs.LG]*, 2019.
 - [19] J. C. Duchi. Information theory and statistics. Lecture Notes for Statistics 311/EE 377, Stanford University, 2019. URL <http://web.stanford.edu/class/stats311/lecture-notes.pdf>. Accessed May 2019.
 - [20] J. C. Duchi and R. Rogers. Lower bounds for locally private estimation via communication complexity. In *Proceedings of the Thirty Second Annual Conference on Computational Learning Theory*, 2019.
 - [21] J. C. Duchi and F. Ruan. Stochastic methods for composite and weakly convex optimization problems. *SIAM Journal on Optimization*, 28(4):3229–3259, 2018.
 - [22] J. C. Duchi and F. Ruan. Asymptotic optimality in stochastic optimization. *Annals of Statistics*, To Appear, 2019.
 - [23] J. C. Duchi, M. I. Jordan, and M. J. Wainwright. Minimax optimal procedures for locally private estimation (with discussion). *Journal of the American Statistical Association*, 113(521):182–215, 2018.
 - [24] C. Dwork. Differential privacy: a survey of results. In *Theory and Applications of Models of Computation*, volume 4978 of *Lecture Notes in Computer Science*, pages 1–19. Springer, 2008.
 - [25] C. Dwork and A. Roth. The algorithmic foundations of differential privacy. *Foundations and Trends in Theoretical Computer Science*, 9(3 & 4):211–407, 2014.
 - [26] C. Dwork and G. Rothblum. Concentrated differential privacy. *arXiv:1603.01887 [cs.DS]*, 2016.
 - [27] C. Dwork, K. Kenthapadi, F. McSherry, I. Mironov, and M. Naor. Our data, ourselves: Privacy via distributed noise generation. In *Advances in Cryptology (EUROCRYPT 2006)*, 2006.
 - [28] C. Dwork, F. McSherry, K. Nissim, and A. Smith. Calibrating noise to sensitivity in private data analysis. In *Proceedings of the Third Theory of Cryptography Conference*, pages 265–284, 2006.
 - [29] C. Dwork, M. Naor, T. Pitassi, and G. Rothblum. Differential privacy under continual observation. In *Proceedings of the Forty-Second Annual ACM Symposium on the Theory of Computing*, pages 715–724. Association for Computing Machinery, 2010.
 - [30] U. Erlingsson, V. Pihur, and A. Korolova. RAPPOR: Randomized aggregatable privacy-preserving ordinal response. In *Proceedings of the 21st ACM Conference on Computer and Communications Security (CCS)*, 2014.
 - [31] T. Hastie, R. Tibshirani, and J. Friedman. *The Elements of Statistical Learning*. Springer, second edition, 2009.
 - [32] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 770–778, 2016.
 - [33] S. P. Kasiviswanathan, K. Nissim, S. Raskhodnikova, and A. Smith. Analyzing graphs with node differential privacy. In A. Sahai, editor, *Theory of Cryptography*, volume 7785 of *Lecture Notes in Computer Science*, pages 457–476. Springer, 2013.
 - [34] M. Kearns, A. Roth, Z. S. Wu, and G. Yaroslavtsev. Private algorithms for the protected in social network search. *Proceedings of the National Academy of Sciences*, 113(4):913–918, 2016.
 - [35] A. Krizhevsky and G. Hinton. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.

- [36] P. McCullagh and J. Nelder. *Generalized Linear Models*. Chapman and Hall, London, 1989.
- [37] H. B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics*, 2017.
- [38] H. B. McMahan, D. Ramage, K. Talwar, and L. Zhang. Learning differentially private recurrent language models. In *Proceedings of the Sixth International Conference on Learning Representations*, 2018. URL <http://arxiv.org/abs/1710.06963>.
- [39] F. McSherry and K. Talwar. Mechanism design via differential privacy. In *48th Annual Symposium on Foundations of Computer Science*, 2007.
- [40] I. Mironov. Rényi differential privacy. In *30th IEEE Computer Security Foundations Symposium (CSF)*, pages 263–275, 2017.
- [41] A. Nemirovski, A. Juditsky, G. Lan, and A. Shapiro. Robust stochastic approximation approach to stochastic programming. *SIAM Journal on Optimization*, 19(4):1574–1609, 2009.
- [42] A. Paszke, S. Gross, S. Chintala, G. Chanan, E. Yang, Z. DeVito, Z. Lin, A. Desmaison, L. Antiga, and A. Lerer. Automatic differentiation in pytorch. In *Neural Information Processing Systems (NIPS) Workshop on Automatic Differentiation*, 2017.
- [43] J. Pennington, R. Socher, and C. D. Manning. Glove: Global vectors for word representation. In *Proceedings of Empirical Methods for Natural Language Processing*, 2014.
- [44] B. T. Polyak and A. B. Juditsky. Acceleration of stochastic approximation by averaging. *SIAM Journal on Control and Optimization*, 30(4):838–855, 1992.
- [45] H. Robbins and S. Monro. A stochastic approximation method. *Annals of Mathematical Statistics*, 22:400–407, 1951.
- [46] A. Smith. Privacy-preserving statistical estimation with optimal convergence rates. In *Proceedings of the Forty-Third Annual ACM Symposium on the Theory of Computing*, pages 813–822. ACM, 2011.
- [47] T. Steinke and J. Ullman. Between pure and approximate differential privacy. *Journal of Privacy and Confidentiality*, 7(2):3–22, 2017.
- [48] B. Thomee, D. Shamma, G. Friedland, B. Elizalde, K. Ni, D. Poland, D. Borth, and L. Li. Yahoo Flickr Creative Commons 100M: The new data in multimedia research. *Communications of the ACM*, 2(59):64–73, 2016.
- [49] A. W. van der Vaart. *Asymptotic Statistics*. Cambridge Series in Statistical and Probabilistic Mathematics. Cambridge University Press, 1998.
- [50] A. W. van der Vaart and J. A. Wellner. *Weak Convergence and Empirical Processes: With Applications to Statistics*. Springer, New York, 1996.
- [51] M. J. Wainwright. *High-Dimensional Statistics: A Non-Asymptotic Viewpoint*. Cambridge University Press, 2019.