

TagAlign: Improving Vision-Language Alignment with Multi-Tag Classification

Qinying Liu^{1,*†}, Wei Wu^{1,*†}, Kecheng Zheng^{2,3,✉}, Zhan Tong³, Jiawei Liu¹,
Yu Liu⁴, Wei Chen², Zilei Wang^{1,✉}, Yujun Shen³

¹USTC ²Zhejiang University ³Ant Group ⁴Alibaba Group

Abstract

The crux of learning vision-language models is to extract semantically aligned information from visual and linguistic data. Existing attempts usually face the problem of coarse alignment, e.g., the vision encoder struggles in localizing an attribute-specified object. In this work, we propose an embarrassingly simple approach to better align image and text features with no need of additional data formats other than image-text pairs. Concretely, given an image and its paired text, we manage to parse objects (e.g., cat) and attributes (e.g., black) from the description, which are highly likely to exist in the image. It is noteworthy that the parsing pipeline is fully automatic and thus enjoys good scalability. With these parsed semantics as supervision signals, we can complement the commonly used image-text contrastive loss with the multi-tag classification loss. Extensive experimental results on a broad suite of semantic segmentation datasets substantiate the average 5.2% improvement of our framework over existing alternatives. Furthermore, the visualization results indicate that attribute supervision makes vision-language models accurately localize attribute-specified objects. Project page can be found at <https://qinying-liu.github.io/Tag-Align>.

1. Introduction

Key aspect in the process of learning vision-language (V&L) encoders, e.g., CLIP [28], is to effectively extract semantically aligned information from both visual and linguistic data. A well-aligned vision-language encoder stands out for its remarkable versatility, which includes unprecedented quality in text-to-image generation, as well as the improvement in multi-modality understanding tasks. However, existing attempts usually face the problem of coarse alignment, e.g., the vision encoder struggles in localizing an attribute-specified object (as depicted in Fig. 1),

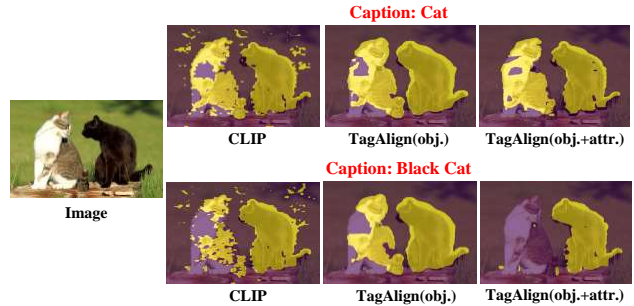


Figure 1. **Illustration of the effect of various tag supervisions (e.g., object and attribute) for open-vocabulary semantic segmentation.** The vanilla CLIP struggles in localizing an attribute-specified object. When introducing object supervision (as depicted in the third column), CLIP can focus on the more accurate region of text-specified object (e.g., cat). In addition, adding attribute supervision brings CLIP a stronger understanding of visual attribute-related concepts (as depicted in the fourth column). Best viewed in color.

making it hard to achieve precise localization of arbitrary concepts.

To improve the precise multi-modality alignment, various methods draw some supports from large-scale supervised data with manual annotations. Specifically, some supervised data (*i.e.*, mask, bounding box, or category) such as SA-1B [16], OpenImages [17], and JFT300M [36] has been proven to be critical for improving precise localization of arbitrary categories. Despite the performance improvements observed in commonly used categories, the utilization of such annotated datasets necessitates rigorous efforts in data gathering, sampling, and human annotation, limiting their scalability and generalization.

Thereupon, recent researchers have turned their attention to how to automatically parse the data of image-text pairs, especially text. Concretely, automatic text parsing tool (*i.e.*, NLTK) has become a *de-facto* approach in V&L field, which can generate some tags from caption of image. While these tags can bring performance improvements in V&L models, these endeavors, incorporating much noise

* Equal contribution ✉ Corresponding authors † Interns at Ant Group

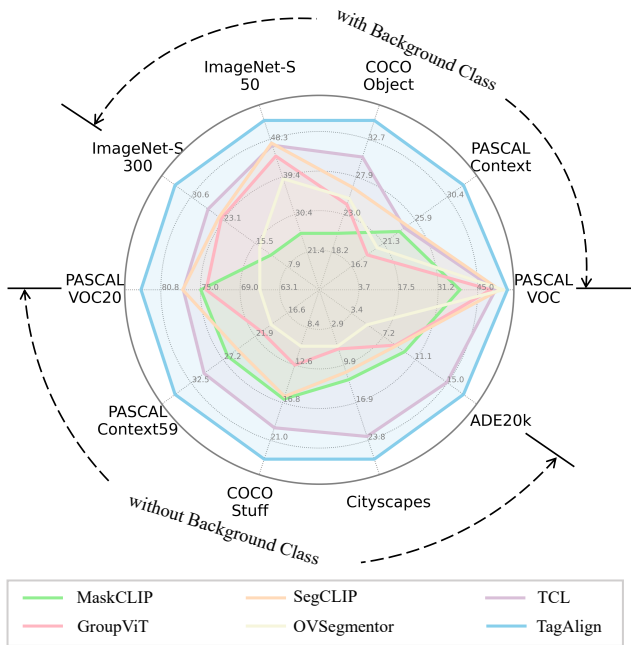


Figure 2. **Performance Comparison on various semantic segmentation benchmarks.** TagAlign outperforms existing methods by a large margin on all these benchmarks. Best viewed in color.

from NLTK, may restrict the models’ ability to reach the upper limit of accurately perceiving semantic concepts. For collecting higher-quality data, Tag2Text [13] designs a universal and unified label system with an efficient data annotation engine, which generate about 4,000 tags from some image-text datasets (e.g., CC12M). Based on these tags, the series works of RAM [13, 46] explore an image-tag recognition system with *decoder module*, which can classify commonly human-used categories. Additionally, DiHT [27] distills the knowledge from an extra multi-tag classification model, trained on collected private tags, only into the *visual encoder* of CLIP. These methods focus on improving the classification performance of visual encoders, without explicitly exploring the alignment between vision and language. A core viewpoint still worth exploring: *how to utilize various multi-tags to help alignment between the image and text embeddings from V&L encoders?* I argue that there are two important questions in the training design of multi-modal encoders based on multi-tags. The first one is the impact about the number of tag. Even using high-end tag signals in prior methods, a limited number of tags makes them fail to fully unleash the potential of multiple tags. Furthermore, the second one is that there is a lack of comprehensive exploration on how to effectively utilize various tags (e.g., attribute and objects).

In this paper, we propose an embarrassingly simple approach to improve the alignment between image and text features without the need for additional data formats

beyond image-text pairs. Specifically, given an image and its paired text, we automatically parse objects (e.g., cat) and attributes (e.g., brown) from the description, which are highly likely to exist in the image. This parsing pipeline is implemented by a large language model, which is high-end and fully automatic, ensuring quality and scalability. By using these parsed semantics as supervision signals, we can complement the commonly used image-text contrastive loss with a multi-tag classification loss, enabling the model to better capture the visual semantic concepts referred to in the texts. Through that, our method becomes capable of accurately localizing text-specified objects (e.g., attribute-specified object), fulfilling more precise alignment between image and text. Extensive experimental results as shown in Fig. 2 on a broad suite of semantic segmentation datasets (10 datasets) substantiate the average 5.2% improvement of our framework over existing alternatives. Moreover, it is mentioned that we only use the CC12M dataset with the parsed text as the training set, indicating that our method is both efficient and effective.

Besides remarkable performance on open-vocabulary semantic segmentation tasks, TaskAlign also enjoys the high flexibility to incorporate attribute information. Concretely, the visualization results, as shown in Fig. 1, show that the inclusion of attribute supervision enables CLIP to accurately localize the attribute-specified object (‘brown cat’). This finding indicates that different types of tag supervision have the potential to enhance the ability of cross-modal alignment in different aspects of CLIP.

2. Related Work

Image-text alignment is the key of vision-language models (VLMs). Recent VLMs such as CLIP [28] and Align [14] jointly train vision encoder and language encoder through contrastive learning. However, current commonly used contrastive learning only act on the *cls* token from image encoder and the end token from text encoder, which leads to coarse alignment between visual and linguistic data. To address this issue, previous approaches attempt to improve image-text alignment by incorporating additional annotated data to supervise the training process. GLIP [18] trains the image encoder and text encoder to predict correct paired detected bounding boxes and phrases in the given text prompt. SAM-CLIP [37] merges CLIP and Segment Anything Model into a unified model by performing multi-task distillation on large scale image-text paired dataset and SA-1B [16]. The reliance of manual annotated dataset poses limitations on the scalability and generalization of vision-language models.

Language-Supervised Semantic Segmentation aims to learn segmentation from only image-text pairs without any dense annotation. Existing methods can be categorized into two groups. The first group modifies or fine-tunes pre-

trained CLIP models for segmentation. MaskCLIP [48] modifies the last attention layer of the CLIP image encoder to obtain a dense image embedding for segmentation. Sim-Seg [43] sparsely samples a portion of patches and words used for the bidirectional contrastive losses. TCL [3] introduces a region-level text grounder to produce text-grounded masks, then performs matching on grounded image regions and texts. The second group focuses on designing effective visual encoders for segmentation and further trains the model using image-text pairs. GroupViT [41] proposes to group patch tokens into arbitrary-shaped segments with learnable group tokens in a bottom-up manner. ViL-Seg [21] uses an online clustering head trained via mutual information maximization to group and classify segments. SegCLIP [23] adds a reconstruction loss and a superpixel-based KL loss to the normal image-text contrastive loss. OVSegmentor [42] proposes a slot attention-based binding module to group patch tokens and then aligns the image embedding with the text embedding via an image-text contrast loss and a cross-image mask consistency loss.

Multi-Label Classification, also known as multi-tag recognition [15, 24, 35, 39], is a fundamental computer vision task that aims to identify multiple tags for a given image. However, most existing multi-label datasets rely on manual annotations, which are labor-intensive and difficult to scale up. To address this issue, RAM related works [12, 13, 46] leverage text semantic parsing technical to efficiently obtain image tags and create a large-scale image tagging dataset consisting of about 4,000 commonly used categories. Meanwhile, private multi-tag data, named Instagram hashtags (IG-3.6B), are proposed in weakly supervised pretraining [15, 24, 35, 35]. Thanks to the high-end multi-tags, it can help the visual encoders to achieve superior tag recognition capabilities. Although the recent RAM-related works share some similarities with our TagAlign in multi-tag classification, there are several fundamental differences. Specifically, they introduce the decoder fusion module to process the image and text embeddings together, which not directly consider the embedding alignment between language and image. We argue that improving the cross-modality embedding alignment of encoders from metric learning perspective (*e.g.*, dataset-wise multi-tag classification loss) is a key aspect in vision-language field. Then, our method has analyzed the effects of attributes and objects separately, which may bring more insights about how to intelligently utilize the different kinds of tags. Furthermore, the number of tag should be explored, which may be highly related to ability of open-vocabulary understanding.

3. Method

Our method comprises two key ingredients: 1) LLM-aided tag parsing, which aims to extract diverse tags (*e.g.*, objects and attributes) from the captions of the images; 2) multi-tag

classification, which targets to guide the model training via a multi-tag classification objective. To be specific, given an image-caption pair, we prompt LLM to analyze the caption and extract tags from it. As a result, a large tag list can be established from the whole image-caption dataset. By indexing on this tag list, we transform the tags of each image to a binarized label, which enables us to use the label to supervise the model training with a simple multi-tag classification loss.

3.1. LLM-Aided Tag Parsing

In this section, we provide a detailed explanation of our proposed method for extracting tags from captions. Traditional methods [41, 42] commonly employ the Natural Language ToolKit (NLTK) [22] for text parsing. However, as illustrated in Fig. 5, NLTK analyzes the texts solely based on Part-of-Speech (POS), leading to challenges in understanding the scene described in the caption. On the other hand, large language models (LLMs) have demonstrated exceptional instruction-following capabilities, rendering them more controllable and flexible when parsing the texts. In light of this, we propose to prompt existing LLM to analyze and extract tags (*i.e.*, objects and attributes) from given captions. Without loss of generality, we focus on objects for illustration purposes in the following.

Prompt Engineering. The prompts we employ consist of specific *rules* and *examples*. Firstly, a set of rules is crafted to constrain the LLM’s responses, ensuring a focus on tangible and visible objects likely to exist in the image. Secondly, examples are provided to guide the LLM in generating desired response format. These examples leverage the in-context learning ability of LLM to instruct it on how to structure and format the output accurately. The Vicuna-33b [5] is used as the LLM to extract tags in our implementation. We refer to Appendix for more details about the used prompts.

With the prompts in place, we query LLM to extract tags from the captions. In Fig. 5, we offer examples to illustrate the comparison between tags extracted by LLM and NLTK. As demonstrated, LLM offers two significant advantages over NLTK. Firstly, it demonstrates a more accurate understanding of the scene described in the caption, resulting in a more precise listing of tangible and visible objects. Secondly, LLM performs word splitting in a more logical manner, mitigating the issue of segmenting entire objects into multiple components.

Tag List Construction. Given an image-caption dataset consisting of image-caption pairs, each caption is sequentially processed by the LLM to extract tags. Subsequently, a comprehensive tag list is generated by aggregating all extracted tags and eliminating duplicates. To ease the pre-training process, we selectively retain only the top K tags that appear most frequently. The most frequent

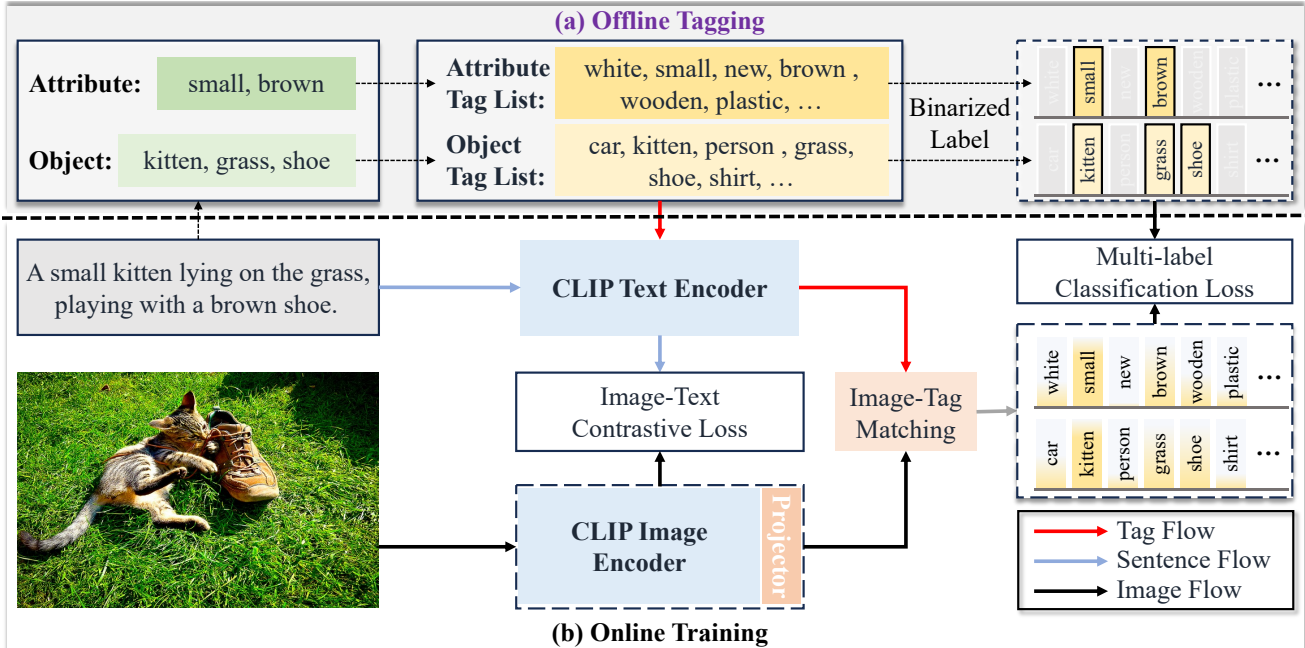


Figure 3. **The framework of TagAlign.** At the core of TagAlign are two key components: a) LLM-aided tag parsing that parses the image captions into diverse tags (*i.e.*, objects and attributes); b) Multi-tag classification that utilizes the parsed tags to supervise the model training. Best viewed in color.

object and attribute tags extracted by LLM are illustrated in Fig. 4(a)(b).

Binarized Label Construction. After establishing the tag list, we proceed to construct a binarized label $\mathbf{y} \in \mathbb{R}^K$ for each image caption based on the presence of the extracted tags. Specifically, for each element y_k in the label vector \mathbf{y} , we set it to 1 if the k -th tag in the tag list exists in the extracted tags from the caption. Conversely, if the k -th tag does not appear in the extracted tags, we assign y_k a value of 0.

3.2. Multi-Tag Classification

In this section, we elaborate on how to leverage the binarized labels to guide the model training, thereby boosting the fine-grained image-text alignment.

As shown in Fig. 3, for an image x , we first pass it through the pre-trained image encoder of CLIP to obtain the patch embeddings (excluding the [CLS] embedding). These patch embeddings are then processed by a lightweight projector, resulting in the final patch feature map denoted as $\mathbf{Z} \in \mathbb{R}^{L \times D}$, where L is the number of patches. With these patch-level embeddings, our objective is to achieve fine-grained image-text alignment, despite the availability of only image-level labels for training. This is a special case of Multiple Instance Learning (MIL), in which a “bag” (image) contains multiple “instances” (patches), and the labels of these instances collectively determine

the label of the bag. Following the standard practice in MIL [38], it is necessary to train a classifier for predicting the bag-level labels (*i.e.*, image-level tags). Once trained, the classifier can be applied to the instances (patches), where the instances triggering the bag label should exhibit high activations.

To implement this approach, we first apply average pooling over the patch feature map to obtain the image-level representation $\mathbf{z} \in \mathbb{R}^D$, calculated as $\mathbf{z} = \frac{1}{L} \sum_{l=1}^L \mathbf{Z}_l$. Subsequently, \mathbf{z} is fed into a tag classifier to predict tag classification scores. To leverage the zero-shot transfer capability of CLIP, instead of using randomly initialized weights, we leverage the pre-trained text encoder from CLIP to generate *fixed* weights for the K tags. More specifically, the tags are firstly prompted with the template “A photo of a {tag}”, and then the prompted texts are processed by the text encoder, resulting in tag embeddings, denoted by $\{\mathbf{c}_1, \dots, \mathbf{c}_K\}$. These tag embeddings serve as the weights for the tag classifier. As a result, the tag classification scores can be computed as the relative similarity between the image-level representation and the tag embeddings. Formally, the k -th tag classification score p_k is expressed as:

$$p_k = \frac{\exp(\rho \cdot \cos(\mathbf{z}, \mathbf{c}_k))}{\sum_{i=1}^K \exp(\rho \cdot \cos(\mathbf{z}, \mathbf{c}_i))}. \quad (1)$$

where ρ is a learnable temperature scalar. Finally, we

text contrastive loss is expressed as:

$$\begin{aligned}\mathcal{L}_{\text{Contrast}}^{\text{i2t}} &= -\sum_{n=1}^N \log \frac{\exp(\gamma \cdot \cos(\mathbf{z}_n, \mathbf{t}_n))}{\sum_{i=1}^N \exp(\gamma \cdot \cos(\mathbf{z}_n, \mathbf{t}_i))}, \\ \mathcal{L}_{\text{Contrast}}^{\text{t2i}} &= -\sum_{n=1}^N \log \frac{\exp(\gamma \cdot \cos(\mathbf{t}_n, \mathbf{z}_n))}{\sum_{i=1}^N \exp(\gamma \cdot \cos(\mathbf{t}_n, \mathbf{z}_i))}, \\ \mathcal{L}_{\text{Contrast}} &= \mathcal{L}_{\text{Contrast}}^{\text{i2t}} + \mathcal{L}_{\text{Contrast}}^{\text{t2i}}.\end{aligned}\quad (5)$$

Here, with a slight abuse of notation, N represents the number of image-text pairs within a batch, and \mathbf{z}_n and \mathbf{t}_n denote the feature of the n -th image and the feature of the n -th caption, respectively.

Therefore, the overall training objective of our method is:

$$\mathcal{L} = \mathcal{L}_{\text{Tag}} + \lambda \mathcal{L}_{\text{Contrast}}, \quad (6)$$

where λ is the weight of the $\mathcal{L}_{\text{Contrast}}$. We set λ to 1 in all our experiments.

Inference. We quantitatively evaluate our model over segmentation datasets to showcase its ability in achieving fine-grained image-text alignment. For generating the segmentation results, we begin by reshaping the patch feature map $\mathbf{Z} \in \mathbb{R}^{L \times D}$ to a spatially structured format $\mathbf{Z} \in \mathbb{R}^{H \times W \times D}$, where $L = HW$. Next, we compute the similarity map between the patch features and the class embeddings. The class embeddings are generated by applying the prompt template “a photo of a {class name}” to the class names. Afterward, we upsample the similarity map to match the original image size through linear interpolation. Finally, the Argmax function is applied on the similarity map along the class dimension, thereby assigning each pixel to a particular class.

4. Experiments

4.1. Datasets and Evaluation Metric

In the training phase, we use Conceptual 12M (CC12M) [33] as the training dataset, which contains 12M image-text pairs. To provide an extensive evaluation, we evaluate our method on 10 semantic segmentation benchmark datasets: PASCAL VOC [8] (21 classes), PASCAL Context [26] (60 classes), COCO-Object [1] (81 classes), Imagenet-S50 [9] (50 classes), ImageNet-S300 [9] (300 classes), PASCAL VOC20 [8] (20 classes), PASCAL Context59 [26] (59 classes), COCO-Stuff [1] (171 classes), Cityscapes [6] (19 classes), and ADE20K [49] (150 classes), and 3 referring image segmentation benchmark datasets: RefCOCO [44], RefCOCO+ [44], and RefCOCog [25].

We employ mean intersection-over-union (mIoU) to evaluate the performance, which is a standard metric in semantic segmentation.

4.2. Implementation Details

In our implementation, we utilize the Vicuna [5] as the large language model (LLM) for extracting tags. The visual encoder is based on the CLIP ViT-B/16 model. The input images are resized to a resolution of 224×224 pixels, and the patch size used is 16×16 . We follow the modifications described in [19] to adapt the CLIP image encoder for our method. For the projector, we adopt the design proposed in [3], which consists of two gated convolution blocks, but we exclude the upsampling interpolations in our implementation. In our framework, only the lightweight projector is trainable, while all other modules are fixed. All our experiments are conducted on a single node equipped with 8 NVIDIA A100 GPUs, with each GPU having 80GB of memory. We train the model with a batch size of 4,096 and a constant learning rate of $1e-3$ for a total of 30,000 iterations. Notably, the learning rate in our approach is not adjusted using any heuristic tricks (e.g., warmup or decay schedule), thereby reducing the number of hyperparameters involved in the training process. During inference, following the CLIP-based method TCL [3], we combine the segmentation results of our method and those of original CLIP through a weighted sum. Please refer to the **Appendix** for more details.

4.3. Main Results

Zero-shot semantic segmentation. In Table 1, we summarize the zero-shot semantic segmentation performance comparison between our method and previous methods across 10 benchmark datasets, including datasets with and without a background class. To ensure a fair comparison, we report the performance of previous methods with and without the use of post-processing techniques, such as CRF [43] or PAMR [3, 40]. Our experimental results demonstrate that our method achieves significant improvements over previous state-of-the-art (SOTA) methods, using only the CC12M dataset for training. For instance, without post-processing techniques, our method outperforms the previous SOTA method TCL [3] by an average of 6.3% and 4.1% on datasets with and without a background class, respectively. When post-processing techniques are applied, our method maintains its superiority over previous methods by 4.2% and 3.4%. These results serve as compelling evidence for the effectiveness of our approach in zero-shot semantic segmentation.

Zero-shot referring segmentation. Additionally, we evaluate the performance of our method on referring segmentation datasets. Unlike the aforementioned semantic segmentation task, which primarily focuses on segmenting a set of object classes, referring segmentation entails the segmentation of entities described in unstructured natural language text, which frequently encompasses objects with distinct attributes. The experimental results, as depicted

Table 1. **Zero-shot segmentation performance comparison on 10 object-related semantic segmentation datasets.** mIoU (%) metric is used in every experiment. ‘Post’ indicates whether any post-processing tricks (e.g., CRF [43] or PAMR [3, 40]) are employed during the inference stage. ‘CC12M*’ denotes that the OVSegmentor constructs the CC4M dataset by filtering CC12M with frequently appeared entities. Each dataset abbreviation stands for VOC: PASCAL VOC, Context: PASCAL Context, Object: COCO-Object, IN: ImageNet-S, Stuff: COCO-Stuff, City: Cityscapes, ADE: ADE20K.

Methods	Post	Datasets	with background class						without background class						
			VOC	Context	Object	IN50	IN300	Avg.	VOC20	Context59	Stuff	City	ADE	Avg.	
CLIPpy [29]	✗	HQITP-134M	52.2	-	32.0	-	-	-	-	-	-	-	-	-	-
ZeroSeg [4]	✗	CC12M+COCO	40.8	20.4	20.2	-	-	-	-	-	-	-	-	-	-
ViL-Seg [21]	✗	CC12M	37.3	18.9	18.1	-	-	-	-	-	-	-	-	-	-
ViewCo [31]	✗	CC12M	45.7	20.8	20.6	-	-	-	-	-	-	-	-	-	-
MixReorg [2]	✗	CC12M	47.9	23.9	21.3	-	-	-	-	-	-	-	-	-	-
PGSeg [45]	✗	CC12M	49.0	20.6	22.9	-	-	-	-	-	-	-	-	-	-
ViewCo [31]	✗	CC12M+YFCC	52.4	23.0	23.5	-	-	-	-	-	-	-	-	-	-
SimSeg [43]	✗	CC3&12M	53.8	23.5	25.7	-	-	-	-	-	-	-	-	-	-
ReCo [34]	✗	ImageNet1K	25.1	19.9	15.7	-	-	-	57.7	22.3	14.8	21.1	11.2	25.4	25.4
Donget al. [7]	✗	LAION-20M	38.8	23.6	20.6	25.9	11.7	18.1	74.9	26.4	16.4	12.6	9.8	28.0	28.0
OVSegmentor [42]	✗	CC12M*	53.8	20.4	25.1	38.9	14.4	30.5	66.1	19.2	10.5	6.4	5.3	-	-
GroupViT [41]	✗	CC12M+YFCC	49.5	19.0	24.3	44.3	23.5	32.1	74.1	20.8	12.6	6.9	8.7	24.6	24.6
CoCu [40]	✗	CC3&12M+YFCC	49.7	22.8	22.0	46.7	24.7	33.2	-	-	14.9	21.9	12.0	-	-
SegCLIP [23]	✗	CC12M+COCO	52.6	24.7	26.5	47.4	24.0	35.0	77.6	24.8	16.1	11.2	8.8	27.7	27.7
TCL [3]	✗	CC3&12M	51.6	24.3	30.4	46.9	26.6	35.8	77.5	30.3	19.6	23.1	14.9	33.1	33.1
TagAlign	✗	CC12M	55.3	32.7	35.1	52.8	34.4	42.1+6.3	83.8	35.1	23.1	27.3	16.9	37.2+4.1	37.2+4.1
MixReorg [2]	✓	CC12M	50.5	25.4	23.6	-	-	-	-	-	-	-	-	-	-
ReCo [34]	✓	ImageNet1K	27.2	21.9	17.3	-	-	-	62.4	24.7	16.3	22.8	12.4	27.7	27.7
Donget al. [7]	✓	LAION-20M	37.2	22.6	18.9	-	-	-	72.1	25.3	15.1	11.2	9.0	26.5	26.5
GroupViT [41]	✓	CC12M+YFCC	51.1	19.0	27.9	-	-	-	81.5	23.8	15.4	11.6	9.4	28.3	28.3
SimSeg [43]	✓	CC3&12M	57.4	26.2	29.7	-	-	-	-	-	-	-	-	-	-
CoCu [40]	✓	CC3&12M+YFCC	51.4	23.6	22.7	48.8	25.5	34.4	-	-	15.2	22.1	12.3	-	-
TCL [3]	✓	CC3&12M	55.0	30.4	31.6	50.0	29.9	39.4	83.2	33.9	22.4	24.0	17.1	36.1	36.1
TagAlign	✓	CC12M	57.9	34.3	35.4	55.1	35.1	43.6+4.2	88.4	38.6	25.8	27.6	17.3	39.5+3.4	39.5+3.4

Table 2. **Zero-shot segmentation performance comparison on 3 referring segmentation datasets.** mIoU (%) metric is used in every experiment.

Methods	RefCOCO			RefCOCO+			RefCOCOg
	val	testA	testB	val	testA	testB	val
GroupViT [41]	7.99	6.16	10.51	8.49	6.79	10.59	10.68
MaskCLIP [50]	11.52	11.85	12.06	11.87	12.01	12.57	12.74
TagAlign-Obj.	15.87	17.52	15.69	16.04	17.26	16.44	18.59
+ Attr.	18.75	20.31	20.64	19.24	20.88	21.23	23.69

in Table 2, clearly demonstrate the substantial performance improvement achieved by our method when attributes are incorporated, compared to the case where attributes are not utilized. These results validate the effectiveness and importance of attribute-guided learning in enhancing the performance of referring segmentation.

4.4. Ablation Study

In this section, we perform a series of ablation experiments to assess the individual impact of each technique employed in our method. In addition to the commonly used PASCAL VOC (VOC) dataset, we also evaluate our method on the ImageNet-S50 (IN50) and ImageNet-300 (IN300) datasets, providing insights into how our method performs across datasets that vary in the number of classes

Impact of the number of object tags. In this work,

Table 3. **Ablation study on the number of object tag (i.e., K).** We report the performance where only the multi-tag classification loss \mathcal{L}_{Tag} is used.

K	2.5k	7.5k	10k	25k	50k	100k
VOC	45.1	45.0	45.7	45.1	45.0	44.8
IN50	27.2	28.8	29.2	28.9	29.3	29.4
IN300	15.0	17.4	17.8	18.0	18.8	19.0

we establish the tag list by selecting the most frequent K tags. As shown in Table 3, we evaluate the performance for different values of K by considering only the multi-tag classification loss \mathcal{L}_{Tag} and have the following observations. The performance on the ImageNet-S300 dataset, which contains more classes, tends to improve with larger values of K . This suggests that including a larger number of tags in the tag list allows the model to capture a wider range of object classes, leading to better performance on datasets with more diverse classes. Conversely, on the ImageNet-S50 dataset, which contains fewer classes, the performance tends to be better with smaller values of K . This indicates that a smaller tag list, focused on a subset of the most frequent tags, is sufficient to cover the object classes present in datasets with fewer classes. Considering the trade-off between complexity and performance, we choose $K = 10,000$ as the default value in our work. Increasing K

Table 4. **Ablation study on the tag parsing methods**, including Tag2text, NLTK, and LLM. “No. of Tags” indicates the total number of object tags and attribute tags.

Text Parser	No. of Tags	VOC	IN50	IN300
LLM	20000	55.3	52.8	34.4
NLTK	20000	51.0	49.1	31.2
Tag2text [13]	4585	50.1	48.2	32.1

Table 5. **Performance comparison with DiHT [27]** that distills a pre-trained multi-tag classification vision model to CLIP.

Method	Dataset	VOC	IN50	IN300
TagAlign	CC12M	55.3	52.8	34.4
DiHT [27]	Laion-2B	13.5	10.6	9.7

beyond this value leads to marginal improvements.

Impact of text parsing methods. Here, we compare the performance of using NLTK and LLM for tag extraction, as depicted in the first two rows of Table 4. Our results demonstrate that LLM outperforms NLTK significantly, highlighting the superiority of our proposed LLM-aided parsing method.

Additionally, we refer to Tag2text [13], which also employs NLTK for tag extraction. However, Tag2text retains a limited set of 4,585 tags encompassing both objects and attributes. To assess the impact of this restricted vocabulary, we conduct an experiment where we solely consider tags employed by Tag2text. The corresponding results are presented in the last row of Table 4. Notably, this approach performs worse compared to the other two methods. This outcome can be attributed to the limited open vocabulary capacity of the tags.

Performance comparison with DiHT [27]. Here, we compare our TagAlign with another method that also utilizes multi-tag classification to enhance CLIP, *i.e.*, DiHT [27]. The results of this comparison are presented in Table 5. From the table, it can be observed that DiHT performs poorly on the semantic segmentation benchmarks compared to our method. There are a couple of reasons for this performance difference. 1) DiHT does not explicitly align the visual embeddings and textual tag embeddings. 2) DiHT primarily concentrates on leveraging multi-tag classification to enhance the image-level representations.

Impact of the long-tailed training loss. As illustrated in Fig. 4(b), the extracted tags are highly imbalanced. Here we explore various loss functions aimed at mitigating tag imbalance, including balanced softmax loss [30], weighted softmax loss [47], focal loss [20], and asymmetric loss [32]. The experimental results in Table 6 demonstrate that the balanced softmax loss outperforms other alternatives, mak-

Table 6. **Ablation study on the long-tailed training loss.**

Method	VOC	IN50	IN300
Balanced Softmax Loss	55.3	52.8	34.4
Weighted Softmax Loss	52.9	49.4	32.7
Focal Loss	52.0	48.7	32.6
Asymmetric Loss	52.7	50.0	32.3

Table 7. **Combining with SOTA methods in different architectures.**

Method	Architecture	IN50	IN300
OVSegmentor	GroupViT	38.9	14.4
+ Multi-Tags	GroupViT	41.0	15.7
CLIP	ViT	47.2	27.1
+ Multi-Tags	ViT	52.8	34.4

ing it our default choice.

Combining with the state-of-the-art methods in different architectures. In this study, we utilize the ViT of CLIP as the primary visual encoder. To assess the versatility of our method across different visual encoders, we conduct experiments by applying our method to a GroupViT-based encoder [41], which is another popular visual encoder in the literature. The recent method OVSegmentor [42] is adopted as the baseline for the GroupViT-based encoder. The performances of using different kinds of visual encoders are presented in Table 7. As can be seen, our method demonstrates significant performance improvements on both kinds of encoders, highlighting the generalization ability of our approach.

4.5. Visualization

In Fig. 6, we visualize the similarity maps between text features and image features obtained from CLIP, TagAlign (Obj.), TagAlign (Obj.+Attr.), and existing language-supervised semantic segmentation methods, *i.e.* MaskCLIP [48], TCL [3], and SimSeg [43]. We notice that the background exhibits high activation when aligning text features with image features extracted by CLIP and existing methods. The similarity maps obtained from TagAlign (Obj.) indicate the alignment between text and image features is strongly affected by object-related regions, *e.g.*, “car” (first row) and “man” (second row). By incorporating attribute tags, TagAlign (Obj.+Attr.) can identify a more appropriate region within the given image based on the description. In addition, we visualize the similarity maps of previous methods including MaskCLIP [50], TCL [3] and SimSeg [43]. The comparison reveals that the qualitative results of TagAlign (Obj.+Attr.) surpass those obtained from the aforementioned methods. The visualization results

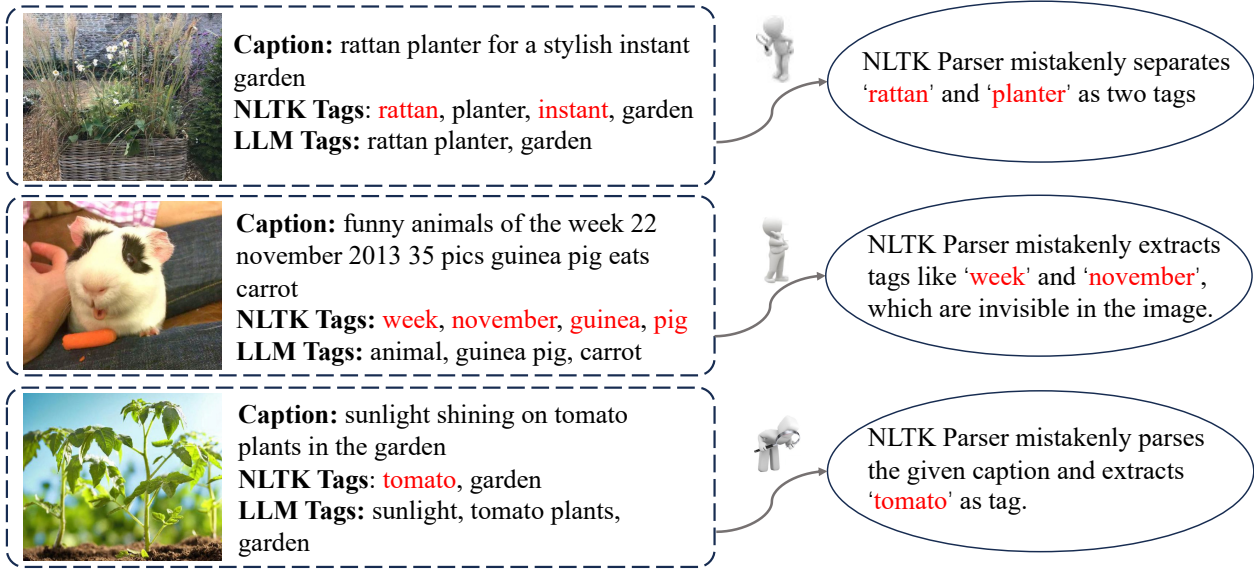


Figure 5. Comparison of tags extracted with text parsing methods (*i.e.*, NLTK and LLM). The tags in red are misidentified by the parser. Best viewed in color.

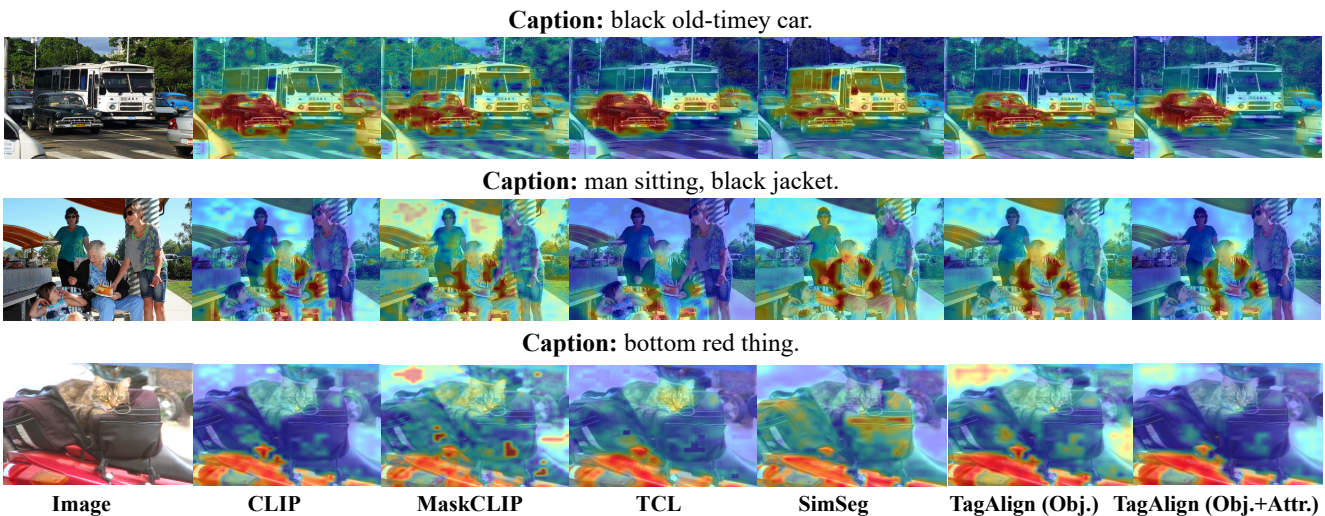


Figure 6. Visualization of the similarity maps between patch features and text features generated by different methods. Best viewed in color.

further prove the capacity of TagAlign to prompt more precise alignment between image-text encoders.

5. Conclusion

In this work, we design a simple yet effective approach to assist precise alignment of the vision-language model without requiring extra annotations. Specifically, we employ a large language model to automatically parse object tags and attribute tags from the caption. These parsed tags are utilized to supervise the training procedure with multi-tag classification loss, in cooperation

with the commonly used image-text contrastive loss. Extensive experiments demonstrate that our method achieves remarkable performances on 10 semantic segmentation benchmarks and 3 referring expression segmentation benchmarks. Besides, visual examples illustrate that integrating object and attribute supervision significantly improves the localization of attribute-specified objects. This inspires our future direction: delving into a wider variety of tag types (*e.g.*, object relation) to further boost the vision-language alignment.

References

- [1] Holger Caesar, Jasper Uijlings, and Vittorio Ferrari. Coco-stuff: Thing and stuff classes in context. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 1209–1218, 2018. [6](#)
- [2] Kaixin Cai, Pengzhen Ren, Yi Zhu, Hang Xu, Jianzhuang Liu, Changlin Li, Guangrun Wang, and Xiaodan Liang. MixReorg: Cross-modal mixed patch reorganization is a good mask learner for open-world semantic segmentation. In *Int. Conf. Comput. Vis.*, pages 1196–1205, 2023. [7](#)
- [3] Junbum Cha, Jonghwan Mun, and Byungseok Roh. Learning to generate text-grounded mask for open-world semantic segmentation from only image-text pairs. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 11165–11174, 2023. [3](#), [6](#), [7](#), [8](#), [14](#)
- [4] Jun Chen, Deyao Zhu, Guocheng Qian, Bernard Ghanem, Zhicheng Yan, Chenchen Zhu, Fanyi Xiao, Sean Chang Culatana, and Mohamed Elhoseiny. Exploring open-vocabulary semantic segmentation from CLIP vision encoder distillation only. In *Int. Conf. Comput. Vis.*, pages 699–710, 2023. [7](#)
- [5] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. See <https://vicuna.lmsys.org> (accessed 14 April 2023), 2023. [3](#), [6](#), [13](#)
- [6] Marius Cordts, Mohamed Omran, Sebastian Ramos, Timo Rehfeld, Markus Enzweiler, Rodrigo Benenson, Uwe Franke, Stefan Roth, and Bernt Schiele. The cityscapes dataset for semantic urban scene understanding. In *IEEE Trans. Pattern Anal. Mach. Intell.*, pages 3213–3223, 2016. [6](#)
- [7] Xiaoyi Dong, Jianmin Bao, Yinglin Zheng, Ting Zhang, Dongdong Chen, Hao Yang, Ming Zeng, Weiming Zhang, Lu Yuan, Dong Chen, et al. Maskclip: Masked self-distillation advances contrastive language-image pretraining. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 10995–11005, 2023. [7](#)
- [8] Mark Everingham, Luc Van Gool, Christopher KI Williams, John Winn, and Andrew Zisserman. The pascal visual object classes (voc) challenge. *Int. J. Comput. Vis.*, 88:303–338, 2010. [6](#)
- [9] Shanghua Gao, Zhong-Yu Li, Ming-Hsuan Yang, Ming-Ming Cheng, Junwei Han, and Philip Torr. Large-scale unsupervised semantic segmentation. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2022. [6](#)
- [10] Michael Gutmann and Aapo Hyvärinen. Noise-contrastive estimation: A new estimation principle for unnormalized statistical models. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics*, pages 297–304, 2010. [5](#)
- [11] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 9729–9738, 2020. [5](#)
- [12] Xinyu Huang, Yi-Jie Huang, Youcai Zhang, Weiwei Tian, Rui Feng, Yuejie Zhang, Yanchun Xie, Yaqian Li, and Lei Zhang. Inject semantic concepts into image tagging for open-set recognition. *arXiv preprint arXiv:2310.15200*, 2023. [3](#)
- [13] Xinyu Huang, Youcai Zhang, Jinyu Ma, Weiwei Tian, Rui Feng, Yuejie Zhang, Yaqian Li, Yandong Guo, and Lei Zhang. Tag2Text: Guiding vision-language model via image tagging. *arXiv preprint arXiv:2303.05657*, 2023. [2](#), [3](#), [8](#), [13](#)
- [14] Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *Int. Conf. Mach. Learn.*, pages 4904–4916, 2021. [2](#)
- [15] Armand Joulin, Laurens Van Der Maaten, Allan Jabri, and Nicolas Vasilache. Learning visual features from large weakly supervised data. In *Eur. Conf. Comput. Vis.*, pages 67–84, 2016. [3](#)
- [16] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. *arXiv preprint arXiv:2304.02643*, 2023. [1](#), [2](#)
- [17] Alina Kuznetsova, Hassan Rom, Neil Alldrin, Jasper Uijlings, Ivan Krasin, Jordi Pont-Tuset, Shahab Kamali, Stefan Popov, Matteo Mallocci, Alexander Kolesnikov, et al. The open images dataset v4: Unified image classification, object detection, and visual relationship detection at scale. *Int. J. Comput. Vis.*, pages 1956–1981, 2020. [1](#)
- [18] Liunian Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, et al. Grounded language-image pre-training. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 10965–10975, 2022. [2](#)
- [19] Yi Li, Hualiang Wang, Yiqun Duan, and Xiaomeng Li. CLIP surgery for better explainability with enhancement in open-vocabulary tasks. *arXiv preprint arXiv:2304.05653*, 2023. [6](#), [13](#)
- [20] Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. Focal loss for dense object detection. In *Int. Conf. Comput. Vis.*, pages 2980–2988, 2017. [8](#)

- [21] Quande Liu, Youpeng Wen, Jianhua Han, Chunjing Xu, Hang Xu, and Xiaodan Liang. Open-world semantic segmentation via contrasting and clustering vision-language embedding. In *Eur. Conf. Comput. Vis.*, pages 275–292. Springer, 2022. 3, 7
- [22] Edward Loper and Steven Bird. NLTK: The natural language toolkit. *arXiv preprint cs/0205028*, 2002. 3
- [23] Huaishao Luo, Junwei Bao, Youzheng Wu, Xiaodong He, and Tianrui Li. SegCLIP: Patch aggregation with learnable centers for open-vocabulary semantic segmentation. In *Int. Conf. Mach. Learn.*, pages 23033–23044. PMLR, 2023. 3, 7
- [24] Dhruv Mahajan, Ross Girshick, Vignesh Ramanathan, Kaiming He, Manohar Paluri, Yixuan Li, Ashwin Bharambe, and Laurens Van Der Maaten. Exploring the limits of weakly supervised pretraining. In *Eur. Conf. Comput. Vis.*, pages 181–196, 2018. 3
- [25] Junhua Mao, Jonathan Huang, Alexander Toshev, Oana Camburu, Alan L Yuille, and Kevin Murphy. Generation and comprehension of unambiguous object descriptions. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 11–20, 2016. 6
- [26] Roozbeh Mottaghi, Xianjie Chen, Xiaobai Liu, Namgyu Cho, Seong-Wan Lee, Sanja Fidler, Raquel Urtasun, and Alan Yuille. The role of context for object detection and semantic segmentation in the wild. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 891–898, 2014. 6
- [27] Filip Radenovic, Abhimanyu Dubey, Abhishek Kadian, Todor Mihaylov, Simon Vandenhende, Yash Patel, Yi Wen, Vignesh Ramanathan, and Dhruv Mahajan. Filtering, distillation, and hard negatives for vision-language pre-training. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 6967–6977, 2023. 2, 8
- [28] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *Int. Conf. Mach. Learn.*, pages 8748–8763, 2021. 1, 2, 5, 13
- [29] Kanchana Ranasinghe, Brandon McKinzie, Sachin Ravi, Yinfei Yang, Alexander Toshev, and Jonathon Shlens. Perceptual grouping in contrastive vision-language models. In *Int. Conf. Comput. Vis.*, pages 5571–5584, 2023. 7
- [30] Jiawei Ren, Cunjun Yu, Xiao Ma, Haiyu Zhao, Shuai Yi, et al. Balanced meta-softmax for long-tailed visual recognition. In *Adv. Neural Inform. Process. Syst.*, pages 4175–4186, 2020. 5, 8
- [31] Pengzhen Ren, Changlin Li, Hang Xu, Yi Zhu, Guangrun Wang, Jianzhuang Liu, Xiaojun Chang, and Xiaodan Liang. ViewCo: Discovering text-supervised segmentation masks via multi-view semantic consistency. In *Int. Conf. Learn. Represent.*, 2022. 7
- [32] Tal Ridnik, Emanuel Ben-Baruch, Nadav Zamir, Asaf Noy, Itamar Friedman, Matan Protter, and Lihi Zelnik-Manor. Asymmetric loss for multi-label classification. In *Int. Conf. Comput. Vis.*, pages 82–91, 2021. 8
- [33] Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *ACL*, pages 2556–2565, 2018. 6
- [34] Gyungin Shin, Weidi Xie, and Samuel Albanie. ReCo: Retrieve and co-segment for zero-shot transfer. *Adv. Neural Inform. Process. Syst.*, pages 33754–33767, 2022. 7
- [35] Mannat Singh, Laura Gustafson, Aaron Adcock, Vinicius de Freitas Reis, Bugra Gedik, Raj Prateek Kosaraju, Dhruv Mahajan, Ross Girshick, Piotr Dollár, and Laurens Van Der Maaten. Revisiting weakly supervised pre-training of visual perception models. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 804–814, 2022. 3
- [36] Chen Sun, Abhinav Shrivastava, Saurabh Singh, and Abhinav Gupta. Revisiting unreasonable effectiveness of data in deep learning era. In *Int. Conf. Comput. Vis.*, pages 843–852, 2017. 1
- [37] Haoxiang Wang, Pavan Kumar Anasosalu Vasu, Farfash Faghri, Raviteja Vemulapalli, Mehrdad Farajtabar, Sachin Mehta, Mohammad Rastegari, Oncel Tuzel, and Hadi Pouransari. SAM-CLIP: Merging vision foundation models towards semantic and spatial understanding. *arXiv preprint arXiv:2310.15308*, 2023. 2
- [38] Yun Wang, Juncheng Li, and Florian Metz. A comparison of five multiple instance learning pooling functions for sound event detection with weak labeling. In *ICASSP*, pages 31–35, 2019. 4
- [39] Wentao Wu, Aleksei Timofeev, Chen Chen, Bowen Zhang, Kun Duan, Shuangning Liu, Yantao Zheng, Jon Shlens, Xianzhi Du, Zhe Gan, et al. MOFI: Learning image representations from noisy entity annotated images. *arXiv preprint arXiv:2306.07952*, 2023. 3
- [40] Yun Xing, Jian Kang, Aoran Xiao, Jiahao Nie, Shao Ling, and Shijian Lu. Rewrite caption semantics: Bridging semantic gaps for language-supervised semantic segmentation. In *Adv. Neural Inform. Process. Syst.*, 2023. 6, 7
- [41] Jiarui Xu, Shalini De Mello, Sifei Liu, Wonmin Byeon, Thomas Breuel, Jan Kautz, and Xiaolong Wang. GroupViT: Semantic segmentation emerges from text supervision. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 18134–18144, 2022. 3, 5, 7, 8, 14

- [42] Jilan Xu, Junlin Hou, Yuejie Zhang, Rui Feng, Yi Wang, Yu Qiao, and Weidi Xie. Learning open-vocabulary semantic segmentation models from natural language supervision. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 2935–2944, 2023. [3](#), [7](#), [8](#), [13](#), [14](#)
- [43] Muyang Yi, Quan Cui, Hao Wu, Cheng Yang, Osamu Yoshie, and Hongtao Lu. A simple framework for text-supervised semantic segmentation. In *IEEE Conf. Comput. Vis. Pattern Recog.*, pages 7071–7080, 2023. [3](#), [6](#), [7](#), [8](#)
- [44] Licheng Yu, Patrick Poirson, Shan Yang, Alexander C Berg, and Tamara L Berg. Modeling context in referring expressions. In *Eur. Conf. Comput. Vis.*, pages 69–85, 2016. [6](#)
- [45] Fei Zhang, Tianfei Zhou, Boyang Li, Hao He, Chaofan Ma, Tianjiao Zhang, Jiangchao Yao, Ya Zhang, and Yanfeng Wang. Uncovering prototypical knowledge for weakly open-vocabulary semantic segmentation. In *Adv. Neural Inform. Process. Syst.*, 2023. [7](#)
- [46] Youcai Zhang, Xinyu Huang, Jinyu Ma, Zhaoyang Li, Zhaochuan Luo, Yanchun Xie, Yuzhuo Qin, Tong Luo, Yaqian Li, Shilong Liu, et al. Recognize anything: A strong image tagging model. *arXiv preprint arXiv:2306.03514*, 2023. [2](#), [3](#), [13](#)
- [47] Yifan Zhang, Bingyi Kang, Bryan Hooi, Shuicheng Yan, and Jiashi Feng. Deep long-tailed learning: A survey. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2023. [8](#)
- [48] Zhuowen Tu Zheng Ding, Jieke Wang. Open-vocabulary universal image segmentation with maskCLIP. In *Int. Conf. Mach. Learn.*, 2023. [3](#), [8](#)
- [49] Bolei Zhou, Hang Zhao, Xavier Puig, Tete Xiao, Sanja Fidler, Adela Barriuso, and Antonio Torralba. Semantic understanding of scenes through the ade20k dataset. *Int. J. Comput. Vis.*, 127:302–321, 2019. [6](#)
- [50] Chong Zhou, Chen Change Loy, and Bo Dai. Extract free dense labels from clip. In *Eur. Conf. Comput. Vis.*, pages 696–712, 2022. [7](#), [8](#)

A. Pseudo Code

For clarity, we present the pseudo-code for the core implementation of TagAlign in Algorithm 1. As can be seen, the pipeline of TagAlign is implementation-friendly.

Algorithm 1 Pseudo code of TagAlign in Pytorch-like style.

```
1 # x_v: a batch of images (B, H, W, 3)
2 # x_t: a batch of captions (B, L_t), where L_t
   is the length of the captions
3 # x_w: the prompted text of the tags (K, L_t)
4 # y: the binarized labels of the input images (
   B, K)
5 # image_enc: the visual encoder of CLIP
6 # text_enc: the text encoder of CLIP
7 # proj: the projector
8
9 # generate patch embedding
10 z_p = proj(image_enc(x_v)) # (B, D, L), where L
   is the number of patches
11 # apply global average pooling to generate
   image embedding
12 z = mean(z_p, dim=-1) # (B, D)
13 # generate caption embedding
14 t = text_enc(x_t) # (B, D)
15 # generate tag embedding
16 w = text_enc(x_w) # (K, D)
17
18 # compute tag classification probability
19 p = softmax(z @ w.t(), dim=-1) # (B, K)
20 # compute tag classification loss
21 l_tag = cross_entropy(p, y)
22
23 # compute image-text contrastive loss
24 l_nce = infor_nce(z, t) + infor_nce(t, z)
25
26 l = l_tag + l_nce
```

B. Discussion with Related Works

In the main manuscript, we discussed the differences between our method and previous methods in the Related Work section. In this section, we would like to further highlight the differences between our method and the series works of RAM (*i.e.*, Tag2text [13] and RAM [46]). These works also enhance vision-language models by incorporating tag information extracted from image captions. However, these methods focus on classifying the tag while overlooking the fine-grained image-text alignment, which makes them fundamentally different from our method.

Specifically, in both Tag2text [13] and RAM [46], a decoder module is employed to classify commonly used tags. This module incorporates multiple cross-attention layers, where the tag features serve as queries and the patch features serve as keys/values. Through this mechanism, the decoder module produces updated tag embeddings that have interacted with the patch features. Subsequently, the tag embeddings are fed to a fully connected layer to predict the probabilities of the image belonging to different tags. In contrast, our method aggregates patch features into an image feature through average pooling, and then **explicitly** aligns the tag features with the image feature via contrastive

loss (*i.e.*, the multi-label classification loss). Additionally, based on the principle of multiple-instance learning, this way also explicitly aligns the tag features with the patch features.

Hence, compared with Tag2text [13] and RAM [46], our method offers two distinct advantages: 1) Fine-grained alignment between patch features and text features: By explicitly aligning the tag features with both the image feature representation and the individual patch features, TagAlign achieves a fine-grained alignment between visual and textual elements. This fine-grained alignment enables TagAlign to perform tasks that require detailed visual-textual correspondence, *e.g.*, semantic segmentation. In contrast, it is challenging to adapt Tag2text and RAM for such fine-grained tasks. 2) Flexibility and robustness in recognizing a wider range of open-world concepts: TagAlign computes the similarity between visual features and text features using cosine similarity, without relying on a heavy decoder module as in Tag2text and RAM. This approach allows for greater flexibility in recognizing diverse concepts and leveraging the capabilities of text embeddings from CLIP text encoders. Notably, CLIP itself is trained using cosine similarity between visual features and text features, making TagAlign particularly effective in leveraging the strengths of CLIP. The experimental section of the manuscript demonstrates that the tags defined in Tag2text are limited in their generalizability on open-world datasets.

C. Implementation Details

C.1. Architecture Details

Large language model. We employ the Vicuna-33b [5] as our large language model (LLM) to extract tags. The prompts we have devised are depicted in Table 8. It is important to note that the tag parsing process is carried out offline and performed only once, rendering it cost-effective in practical scenarios.

Visual encoder. The visual encoder is based on the CLIP ViT-B/16 model [28], while we follow the modifications described in [19] to adapt the CLIP visual encoder for our method. Specifically, we maintain the existing architecture in the shallow layers while introducing changes in the deep layers, where we replace the k-q attention operations with v-v attention operations and remove the feed-forward network (FFN) within these deep layers. Please refer to [19] for more details about the encoder structure.

Projector. Regarding the projector, we adopt the structure of the decoder proposed in [42]. This projector comprises two gated convolution blocks. However, we deviate from the original implementation by removing the upsampling

interpolations that were utilized in [42]. We refer to [42] for more details about the structure of the gated convolution blocks.

Table 8. **Prompts to extract tags from the caption.** For each query, we illustrate the prompt construction process for Vicuna to collect the conversation response.

```

messages = [ {"role": "system",
"content": f"""You are a Natural Language
Processing (NLP) expert. I will provide you with
a caption that describes a image. Please analyze
the caption and identify all distinct physical objects
mentioned and specific attributes.

When you identify objects, please follow these
guidelines:
(1) Analyze the caption and identify objects specifically
mentioned.
(2) If an object is a proper noun or specified by a brand
or model, convert it to its generic noun form.
(3) Only list tangible and visible objects that would
likely be the primary focus or clear elements within an
image, excluding abstract concepts or items inferred but
not directly stated.
(4) Exclude any adjectives that may describe a noun.
Only the primary object nouns should be included in
your response.

Based on the identified objects, please analyze the
specific attribute of them following these guidelines:
(5) Analyze the attribute of the identified objects
specifically mentioned.
(6) If one attribute consists of multiple words, shorten it
to one word.

I will provide the caption. Your response should
be in the format of "objects: [object1, object2,
...], attributes:[(attribute1, object1), (attribute2,
object2),...]". If there is no attribute in the caption,
Your response should be in the format of "objects:
[object1, object2, ...], attributes:[]". If the caption, for
example, reads "An image of two grey Maine Coon cats
sitting next to a blue IKEA bowl filled with daisies on a
wooden Crate & Barrel table with a Sting Ray parked in
the background", you should reply with "objects: [cat,
bowl, daisy, table, car], attributes: [(grey, cat), (two,
cat), (blue, bowl), (wooden, table)]". """}]

```

C.2. Training Details

Our method is trained on a single node equipped with 8 NVIDIA A100 GPUs, with each GPU having 80GB of memory. We train the model with a batch size of 4,096 and a constant learning rate of $1e-3$ for a total of 30,000 iterations. We use AdamW as the optimizer. During

training, only the parameters of the projector are trainable. The model takes less than 12 hours to train in total.

C.3. Testing Details

As described in the main paper, our approach involves computing the cosine similarity map between patch features and text features of different classes. Subsequently, the similarity map is upsampled to match the shape of the input image. We denote the upsampled similarity map as $\mathbf{M} \in \mathbb{R}^{H \times W \times C}$, where H and W represent the spatial dimensions of the image, and C is the number of classes in the testing dataset.

In our implementation, we calculate two similarity maps, referred to as $\mathbf{M}_{\text{TagAlign}}$ and \mathbf{M}_{CLIP} . The first one, $\mathbf{M}_{\text{TagAlign}}$, uses the patch features after the projector, *i.e.*, the features produced by our TagAlign model. The second one, \mathbf{M}_{CLIP} , is based on the patch features before the projector, *i.e.*, the features produced by the original CLIP model. Following [3], we merge $\mathbf{M}_{\text{TagAlign}}$ and \mathbf{M}_{CLIP} using a weighted sum to obtain the final similarity map \mathbf{M} :

$$\mathbf{M} = \alpha \mathbf{M}_{\text{TagAlign}} + (1 - \alpha) \mathbf{M}_{\text{CLIP}} \quad (7)$$

where α is the pre-defined weight.

Afterward, we apply Softmax over the similarity map \mathbf{M} along the class dimension:

$$\hat{\mathbf{M}} = \text{Softmax}(s\mathbf{M}), \quad (8)$$

where s is a scaling factor. $\hat{\mathbf{M}}_{i,j} \in \mathbb{R}^C$ denotes the probabilities of each pixel belonging to the C classes. The Argmax operation is applied over $\hat{\mathbf{M}}$ for assigning each pixel to a specific class. In scenarios where the testing dataset includes a background class, we apply a thresholding strategy to $\hat{\mathbf{M}}$, where a pixel is assigned to the background class if the maximum value of $\hat{\mathbf{M}}_{i,j}$ is smaller than a certain threshold.

Following common practice [41], we resize each input image to have a shorter side of size 448 pixels during inference. In addition, sliding windows are cropped from the image with a fixed stride and the segmentation results of different sliding windows are fused together.

As stated above, there are two inference techniques used to enhance the performance: 1) combining with CLIP; 2) using sliding windows over the image. The experiments detailed in Table 9 are designed to assess the impact of these techniques. Additionally, the previous best performance of other methods is listed in the second row for comparison. As can be seen, while these techniques do enhance our method’s performance, they are not the primary factors contributing to superiority over other methods.

D. Visualization Examples

In addition to the visualized examples provided in the main manuscript, we present more examples in Fig. 7 to

Table 9. Ablation study on the inference techniques.

Method	VOC	IN50	IN300
second competitor	53.8	47.4	26.6
plain TagAlign	54.5	51.1	33.0
+ combine with CLIP	54.5	51.6	33.2
+ sliding windows → TagAlign	55.3	52.8	34.4

further reinforce the reliability of our observations. These additional examples demonstrate consistent findings that align with the observations made in the main manuscript.

Specifically, we find that TagAlign (Obj.) and TagAlign (Obj.+Attr.) outperform CLIP in terms of segmenting noun-based objects (*e.g.*, “Girl”, “Line”). Furthermore, we observe that TagAlign (Obj.+Attr.) exhibits superior performance compared to TagAlign (Obj.) in segmenting objects specified by the attributes (*e.g.*, “Smiling Girl”, “Yellow Line”).

These additional visualized examples provide further support for our observations, thereby reinforcing the effectiveness of TagAlign (Obj.) and TagAlign (Obj.+Attr.) in accurately aligning text features and image features compared to CLIP.

E. Limitation and Future Work

In this section, we present several examples that demonstrate failure cases of our method, as depicted in Fig. 8. Based on our analysis, we attribute these failures to two main reasons: 1) Inaccurate understanding of the text: In certain cases, the model exhibits difficulties in accurately comprehending the textual queries. For instance, when presented with the query “Baby Head”, the model tends to interpret both “Baby” and “Head” as separate queries, resulting in the highlighting of both the regions corresponding to “Baby” and “Head”. Moreover, the model struggles to understand queries such as “Person on right, not on horse”, leading to the simultaneous highlighting of both the “person” and the “horse”. 2) Inaccurate understanding of object relations: The model faces challenges in comprehending complex object relations, as exemplified by its failure to correctly understand queries like “Person in blue sweatshirt just right of the red umbrella.”

Based on the identified failure cases, we outline potential directions for future research: 1) Integration with a powerful large language model: We plan to connect our visual encoder with a large language model that possesses a better understanding of textual input. This integration can potentially enhance the model’s ability to accurately comprehend and interpret complex queries. 2) Modeling object relations: In addition to capturing objects and attributes, we intend to explore the modeling of relationships between objects. By incorporating explicit modeling of

object relations, we expect to improve the ability of the model to understand and reason about complex spatial and semantic relationships among objects.

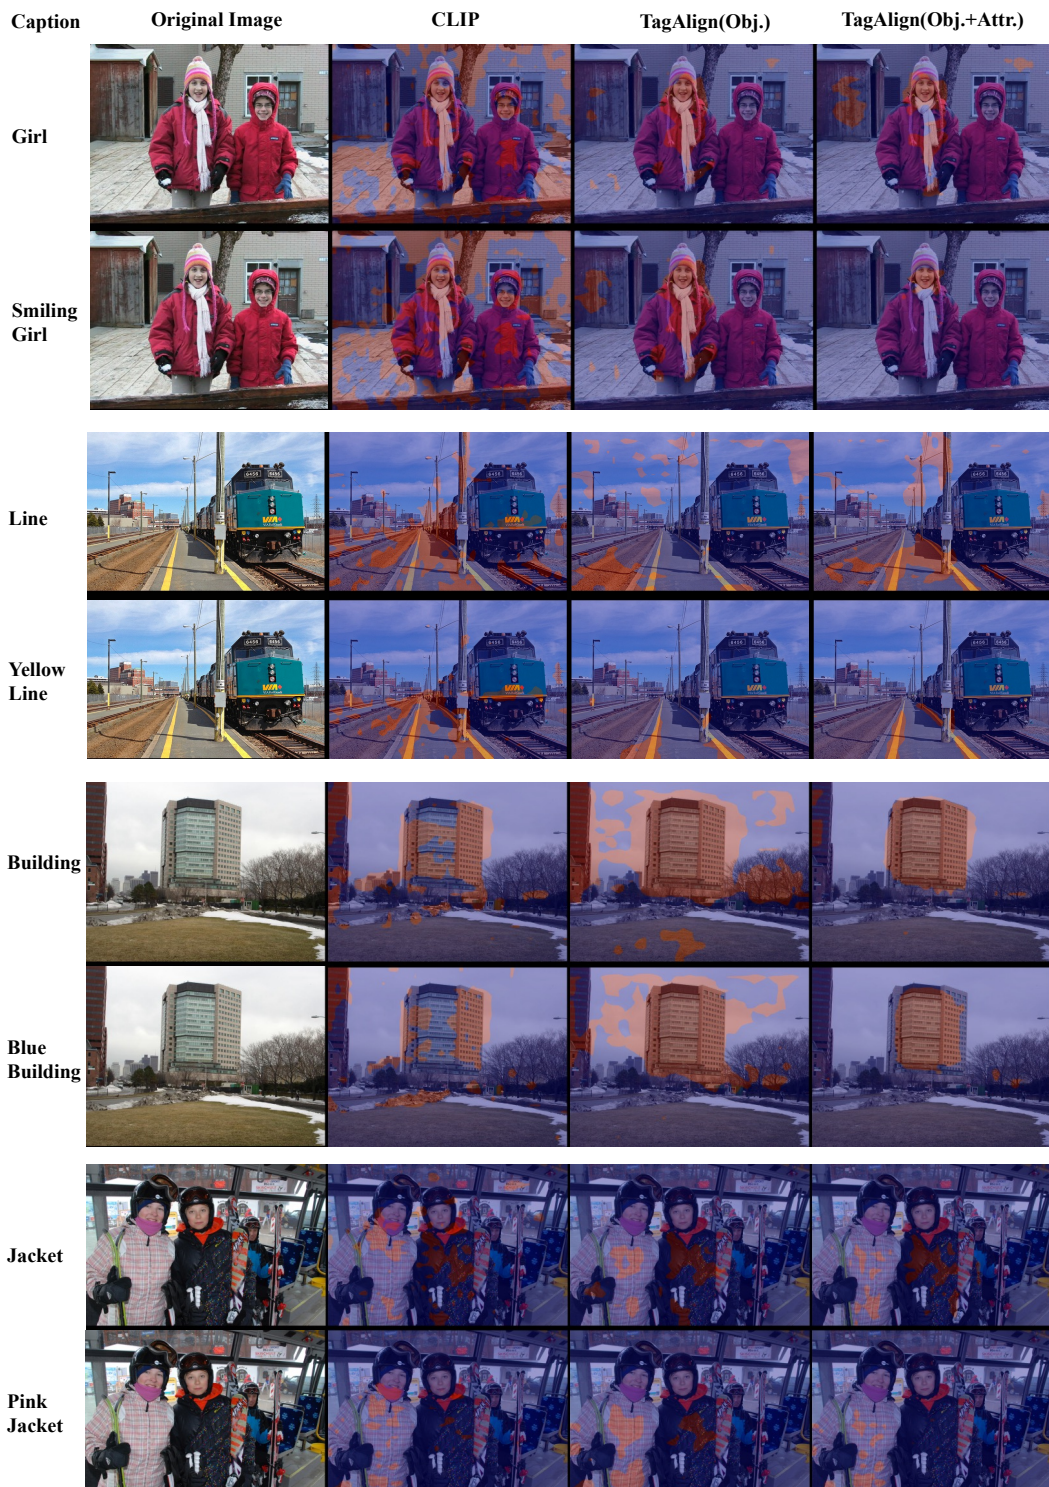


Figure 7. **Visualized examples for different methods.** “CLIP” denotes the original CLIP model. “TagAlign(Obj.)” indicates the utilization of object tags, while “TagAlign(Obj.+Attr.)” incorporates both object tags and attribute tags.

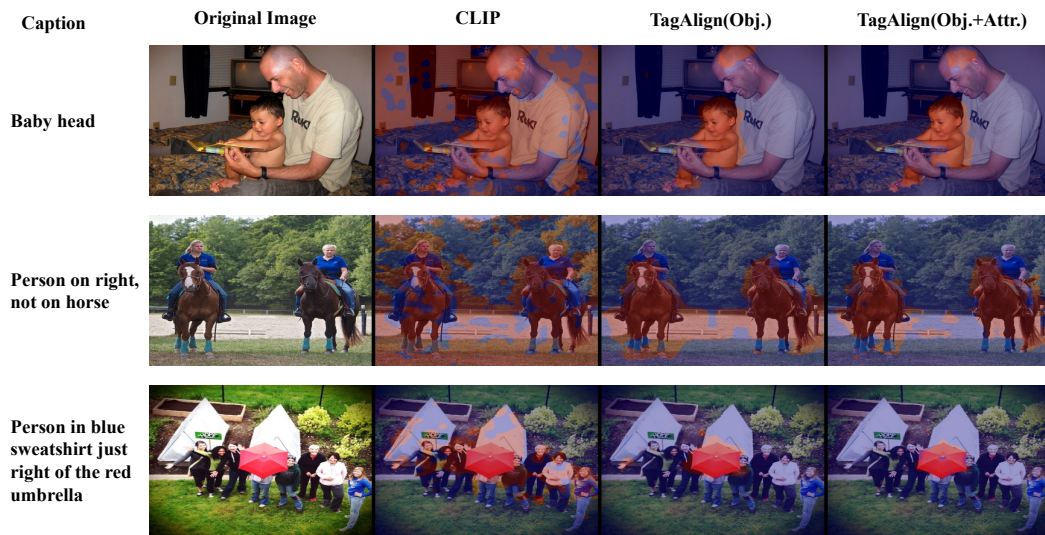


Figure 8. **Samples of failure cases.** The presented examples illustrate instances where both CLIP and TagAlign encounter challenges in accurately segmenting the given queries (captions).