



Parrot: Multilingual Visual Instruction Tuning

Hai-Long Sun^{1,2,3*} Da-Wei Zhou^{1,2} Yang Li³ Shiyin Lu³ Chao Yi^{1,2}
Qing-Guo Chen³ Zhao Xu³ Weihua Luo³ Kaifu Zhang³ De-Chuan Zhan^{1,2} Han-Jia Ye^{1,2†}

¹School of Artificial Intelligence, Nanjing University

²National Key Laboratory for Novel Software Technology, Nanjing University

³AI Business, Alibaba Group

Abstract

The rapid development of Multimodal Large Language Models (MLLMs) like GPT-4V has marked a significant step towards artificial general intelligence. Existing methods mainly focus on aligning vision encoders with LLMs through supervised fine-tuning (SFT) to endow LLMs with multimodal abilities, making MLLMs' inherent ability to react to *multiple languages* progressively deteriorate as the training process evolves. We empirically find that the imbalanced SFT datasets, primarily composed of English-centric image-text pairs, lead to significantly reduced performance in non-English languages. This is due to the failure of aligning the vision encoder and LLM with multilingual tokens during the SFT process. In this paper, we introduce PARROT, a novel method that utilizes textual guidance to drive visual token alignment at the language level. PARROT makes the visual tokens condition on diverse language inputs and uses Mixture-of-Experts (MoE) to promote the alignment of multilingual tokens. Specifically, to enhance non-English visual tokens alignment, we compute the cross-attention using the initial visual features and textual embeddings, the result of which is then fed into the MoE router to select the most relevant experts. The selected experts subsequently convert the initial visual tokens into language-specific visual tokens. Moreover, considering the current lack of benchmarks for evaluating multilingual capabilities within the field, we collect and make available a Massive Multilingual Multimodal Benchmark which includes 6 languages, 15 categories, and 12,000 questions, named as **MMMB**. Our method not only demonstrates state-of-the-art performance on multilingual MMBench and MMMB, but also excels across a broad range of multimodal tasks. Code is available at: <https://github.com/AIDC-AI/Parrot>.

1 Introduction

The rapid development of Large Language Models (LLMs), such as GPT-4 [52; 8; 45; 46; 53; 59; 66], has gained significant attention. However, LLMs are limited to processing a single textual modality. The expansion into visual modalities has endowed LLMs with multimodal capabilities [64; 2; 63; 75; 17; 27; 32; 65; 72; 7], thereby accelerating the development of Multimodal Large Language Models (MLLMs) and further bringing us closer to the realization of Artificial General Intelligence (AGI).

Current MLLMs mainly rely on pre-trained LLMs and vision encoders, focusing on bridging the modality gap by aligning visual features with language embedding tokens. Existing research predominantly employs either a Q-Former [31; 17; 6] or an MLP projector [38; 35; 12; 34; 37; 42] to align vision encoders with LLMs. The training data [38] mainly consists of English-centric data from

*Work done during an internship at AI Business, Alibaba Group.

†Corresponding author, email: yehj@lamda.nju.edu.cn.

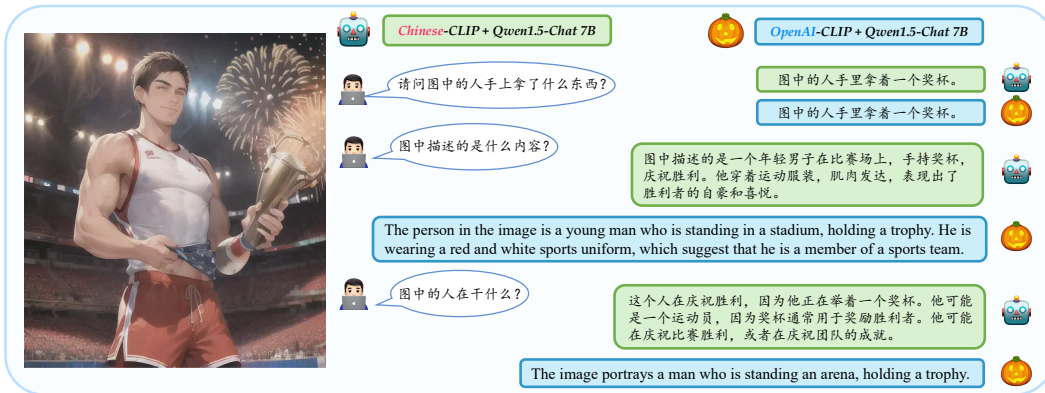


Figure 1: The output of OpenAI-CLIP-based and Chinese-CLIP-based models using the same Chinese prompts. We can observe that the OpenAI-CLIP-based model exhibits confusion between Chinese and English responses.

image captions and multimodal conversations. During training, the alignment component converts the visual features into language embedding tokens. With encoded visual features, the LLM can integrate visual information to respond to multimodal inputs.

Multilingual capability in MLLMs entails the ability to generate responses in the same language as the input, catering to the linguistic diversity inherent in conversation. Therefore, it is critically important for processing language-specific content and cultural differences, ensuring equitable access to technological benefits for individuals across diverse regions and nations [13; 24]. Many LLMs possess multilingual capabilities [60; 5; 46], enabling diverse language responses according to user input. However, after the alignment training of MLLMs, the model may lose its ability to understand, process, or generate in non-English languages, and we call this phenomenon *multilingual erosion*. For example, LLaVA [38] usually responds in English, regardless of the input language. Therefore, it is essential to enhance MLLM’s multilingual capabilities during multimodal alignment.

The main reason for multilingual erosion is that the data used for multimodal alignment is highly imbalanced at the language level. Due to the dominance of English-centric data, while the model aligns visual and textual tokens well in English, it performs poorly in other languages. Hence, it is crucial to align visual and textual tokens compatibly at the language level. We hypothesize that multilingual erosion may arise from the lack of alignment between visual tokens and textual tokens in other languages. From the perspective of pre-trained datasets, OpenAI-CLIP [51] is trained on the large-scale image-text pairs through contrastive learning, with the text corpus being mostly in English, potentially biasing image encoding towards an English semantic space. As shown in Figure 1, we train two separate models using the same data: one with OpenAI-CLIP vision encoder and the other with Chinese-CLIP [62] vision encoder. Interestingly, the model equipped with OpenAI-CLIP struggles to generate suitable outputs according to Chinese inputs while the other model with Chinese-CLIP can not only understand the queries but also generate appropriate outputs in Chinese. Furthermore, we observed an improvement in performance, from 66.4 to 68.3, on the MMBench-CN [39] dataset when using Chinese-CLIP. Therefore, the challenge arises: how to use English-centric multilingual image-text data to bridge the modality gap while enhancing the MLLM’s multilingual capabilities.

Due to the scarcity of non-English multimodal data (*e.g.*, lack of large-scale, high-quality image-text data), we require almost the same amount of image-text data as LLaVA to enhance the model’s multilingual capabilities. Moreover, motivated by preliminary experiments, it is necessary to condition the visual tokens on diverse language inputs. In this paper, we introduce PARROT, a novel method that utilizes textual guidance to drive visual token alignment at the language level and converts visual tokens into language-specific embeddings using a Mixture-of-Experts (MoE) module [25; 56]. Specifically, we first calculate the cross-attention between the class token of visual features extracted by the vision encoder and the text embeddings derived from word token embeddings. The result is then passed through the router of MoE to obtain the activated probability distribution of each language expert. Subsequently, demanding the input language, the English-biased visual tokens are converted into language-specific embeddings using the selected experts. This enables PARROT not only to enhance its multilingual capabilities but also to bridge the multimodal gap effectively.

To address the scarcity of current multilingual benchmarks, we introduce a new benchmark encompassing six languages: English, Chinese, Portuguese, Arabic, Turkish, and Russian. This includes an extension of the MMBench-DEV dataset to these six languages and a Massive Multilingual

Multimodal Benchmark (MMMB) featuring 2,000 evaluation questions per language, totaling 12,000 questions. We compare several open-source multimodal methods and evaluate some private models. Extensive experiments validate the PARROT’s state-of-the-art performance across two multilingual benchmarks. Specifically in Turkish and Arabic, our method even outperforms LLaVA-NeXT [37] by more than 10 percentage points in both benchmarks. Additionally, we evaluate our model across a broad range of multimodal benchmarks (*e.g.*, MME [22], ScienceQA-IMG [41], and SEED-Bench-IMG [28]), demonstrating its competitive performance in diversity tasks.

2 Related Work

Multimodal Large Language Models. The domain of MLLMs has witnessed significant advances, particularly in the enhancement of visual and language processing. Current MLLM is usually a combination of visual encoders [51; 57; 21; 70; 48; 68], LLMs, and fusion modules. Innovations like Flamingo [2] and OpenFlamingo [4] have advanced visual representation by integrating a Perceiver Resampler with vision encoders. BLIP-2 [31] and InstructBLIP [17] employ Q-Former to connect the frozen LLM and vision encoder. InternVL [14] trains huge ViT and QFormer to integrate visual modalities through a multi-stage training method. MiniGPT4 [75] leverages both a Q-Former and a linear projector to bridge the gap between the vision module and LLM. Furthermore, LLaVA [38] adopts a simple MLP projector to promote the alignment between the LLM and vision encoder. mPLUG-Owl [64] introduces an approach that begins to finetune the vision encoder and align visual features, followed by tuning the LLM using LoRA [23]. Qwen-VL [6] improves visual module resolution to 448, aiming to refine the model’s visual processing capabilities. Fuyu-8B [7] directly projects image patches before integration with LLM. MM1 [43] has conducted ablative studies on connector design choices, revealing that the modality adapter type is less critical than the number of visual tokens and the resolution. MiniGemini [34] utilizes high-resolution visual tokens and high-quality data to narrow the performance gap with GPT-4 and Gemini. With the rapid advancements in open-source models, proprietary models such as GPT-4V/4o [46; 47], Gemini [58; 54], Qwen-VL-Plus/MAX [6], and Claude3 [3] have achieved outstanding results in evaluations and practical applications. In this work, owing to the simplicity of the LLaVA architecture, we adopt a framework similar to LLaVA to design our model.

Multilingual Multimodal Models. Recent years have witnessed rapid progress in the expansion of multimodal models to include a wider variety of languages. M³P [44] leverages English as a pivot and alternates between English-only vision-language pre-training and multilingual masked language modeling. In contrast, UC² [74] translates English captions into various languages and uses images as the anchor. mCLIP [10] enhances the CLIP model by aligning it with a multilingual text encoder through knowledge distillation. Thanks to the expansion of the overall capabilities of large language models [1; 5; 26; 67], their multilingual capacities have significantly improved. Integrating multilingual LLMs with visual abilities has increasingly become a research focus. In the domain of LLMs, PaLI [13] develops a 17B multilingual language-image model that spans over 100 languages. Ying-VLM [33] discovers that instruction tuning in English can extend its applicability to other languages. Ziya-Visual [40] illustrates the translation of English image-text datasets into Chinese, using in-context learning for instruction-response generation. VisCPM [24] introduces a training paradigm that fine-tunes the MLLM in a quasi-zero-shot manner based on a strong multilingual large language model. Despite these advancements, they are primarily confined to two languages or rely on the massive translated corpus. On the other hand, there is no suitable multilingual benchmark for MLLMs to evaluate the performance of multiple languages. There are also some multilingual research studies in other domains, such as multilingual machine translation [73; 49; 50; 69].

3 MMMB: A Massive Multilingual Multimodal Benchmark

In this section, we first discuss the limitations of existing benchmarks and then present the characteristics that an ideal multilingual benchmark should possess. Furthermore, we design and construct a new benchmark and provide its corresponding evaluation strategy.

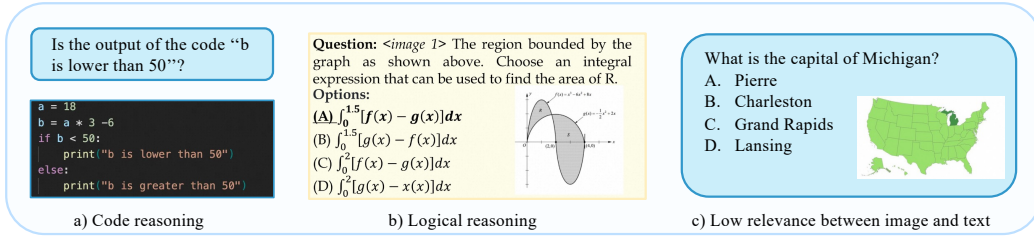


Figure 2: Some bad cases for multilingual benchmark. **Left:** code reasoning is strongly related to English. **Middle:** logical reasoning is too challenging. **Right:** lack relevance between image and text.

3.1 Limitations of Existing Benchmarks

There are several existing multilingual benchmarks (*e.g.*, Multi30K [20], M3Exam [71], MM-Bench [39], and LLaVA-Bench [38; 24]) for MLLMs, but they have some limitations: **1) Outdated Benchmarks.** Multi30k is designed for image-text retrieval tasks, and the performance has nearly reached the upper bound due to the relatively easy problems. **2) Non-Standardized Evaluations.** Other benchmarks, like LLaVA-Bench, rely on evaluations using GPT-4. Dependence on GPT-4 as a de facto “Ground Truth” may hinder reproducibility. Meanwhile, since LLaVA uses a deprecated version (GPT-4-0314), using other different versions could result in unfair comparisons. On the other hand, because M3Exam does not offer consistent test samples across different languages, it cannot ensure whether poor performance is due to the problem’s difficulty or the model’s lack of multilingual capabilities. **3) Limited Languages.** MMBench and LLaVA-Bench are limited in English and Chinese, which can not measure the multilingual capabilities across a broad spectrum.

3.2 Construction of the Multilingual Benchmark

To more suitably evaluate the multilingual capabilities of MLLMs, an ideal benchmark should exhibit the following characteristics:

1) Languages with Significant Differences. It should cover a diverse array of language families, selecting languages that are as distinct and non-repetitive as possible. This ensures a broad assessment of MLLMs’ ability to adapt across linguistic variances.

2) Problems with Medium Level of Difficulty. The problems should not be too difficult (*e.g.*, logical reasoning) because the aim is to assess the multilingual understanding, processing, and generating capabilities of MLLMs, not logical reasoning skills.

3) Tasks with Multilingual and Multimodal. As shown in Figure 2, data within datasets should not be strongly related to English (*e.g.*, code reasoning). It cannot be inherently transformed into multiple languages since they are composed of English words. Moreover, images should be an indispensable part when MLLMs answer the question. For instance, if given a map of the United States and asked to identify its capital, MLLMs only require the text-only ability to answer this question. Therefore, it is essential that questions highlight a significant correlation between images and texts.

4) Content Consistency across Languages. The goal of this benchmark is to evaluate the multilingual capabilities of MLLMs, and we aim to show the discrepancies across different languages fairly. For example, if English questions mainly focus on *addition within one hundred* while Chinese questions mainly concern *calculus computation*, it becomes difficult to ascertain whether poor performance in Chinese arises from the complexity of the problem or the limited multilingual capabilities of MLLMs. Hence, it is crucial to ensure content consistency across languages for a fair comparison.

We selected six languages for inclusion: English (*en*), Chinese (*zh*), Portuguese (*pt*), Arabic (*ar*), Turkish (*tr*), and Russian (*ru*). These languages represent a diverse range of linguistic families, and we list the detailed information and some multilingual cases in Figure 3. In terms of dataset requirements and consistency, our benchmark incorporates datasets in two main respects: **1)** Since MMBench [39] officially includes English and Chinese versions, we extend it to the other four languages. **2)** For the massive multilingual multimodal benchmark, denoted as **MMMB**, we select and clean the suitable data from ScienceQA [41], MME [22], and SEED-Bench [28] datasets with established guidelines. These datasets are then processed into a Visual Question Answering (VQA) format, resulting in a total of 12,000 samples across all six languages.

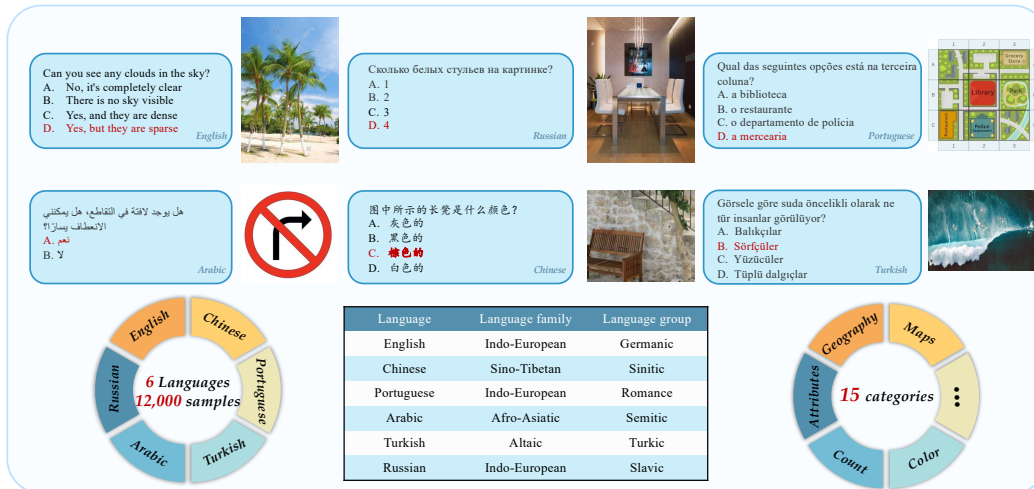


Figure 3: Overview of MMB. It incorporates 6 languages, 15 categories, and 12,000 questions.

3.3 Evaluation Strategy

Since random guessing can lead to $\sim 25\%$ Top-1 accuracy for 4-choice questions, potentially reducing the discernible performance differences between various MLLMs. Additionally, MLLMs may prefer to predict a certain choice among all given choices [39], which further amplifies the bias in evaluation. To address these issues, we implement a circular validation strategy inspired by MMBench. Specifically, MMB is adapted to the format of Yes/No questions, where each image is paired with two questions, demanding ‘Yes’ and ‘No’ answers, respectively. As shown in Figure 8, an answer is considered accurate only if both questions are answered correctly; failing either results in marking the entire instance as incorrect. This strategy ensures a more rigorous evaluation of MLLMs, reducing the likelihood of random guessing and promoting more validated comparisons across different models.

4 Methods

4.1 Preliminaries: Visual Instruction Tuning

A representative work in MLLMs is LLaVA [38], which introduces a simple yet effective method for achieving alignment between the vision encoder and the pre-trained LLM. Specifically, for a given input image \mathbf{X}_v , LLaVA utilizes the pre-trained CLIP vision encoder ViT-L/14 [51] to extract the visual features $\mathbf{Z}_v = g(\mathbf{X}_v)$. It then employs Vicuna [15] as the LLM to obtain the textual embeddings \mathbf{H}_t . To align the vision encoder with the LLM, a projector in the form of a multi-layer perceptron (MLP) denoted as \mathbf{W} is learned. This projector converts \mathbf{Z}_v into language embedding tokens \mathbf{H}_v , effectively facilitating the integration of multimodal information within the LLM’s framework.

$$\mathbf{H}_v = \mathbf{W} \cdot \mathbf{Z}_v, \text{ with } \mathbf{Z}_v = g(\mathbf{X}_v). \quad (1)$$

Finally, we input \mathbf{H}_v and \mathbf{H}_t into LLM to generate the model’s responses. However, after the modality alignment training, LLaVA loses its ability to process in non-English languages.

4.2 Pilot Study

To address the challenge of multilingual erosion in MLLMs due to the dominance of English in image-text data, we hypothesize that there is an inherent mismatch between visual tokens \mathbf{H}_v and textual tokens \mathbf{H}_t , which tends to bias them towards English semantics, making the model more likely to generate outputs in English. Specifically, the widely-used vision encoder of OpenAI-CLIP [51] is pre-trained on a vast corpus of English-centric image-text pairs, resulting in visual representations more aligned with English.

To explore this phenomenon, we train two distinct models using the same data: one incorporating OpenAI-CLIP vision encoder and the other integrating Chinese-CLIP [62] vision encoder. As shown in Figure 1, the model equipped with OpenAI-CLIP struggles to generate suitable outputs according

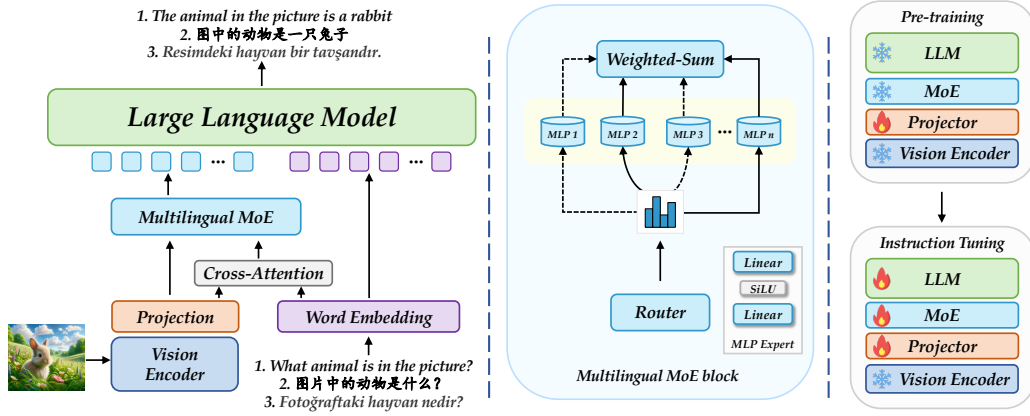


Figure 4: The overall architecture of PARROT. It converts English-biased features to language-specific features based on the multilingual MoE module, aiming to improve the multilingual capabilities. The training details within each stage are presented on the right.

to the Chinese inputs, whereas the model using Chinese-CLIP not only understands the queries but also generates appropriate outputs in Chinese. Moreover, to further evaluate the model’s Chinese capability, we test it on Chinese datasets and observe improved performance: from 66.4 to 68.3 on MMBench-CN and from 62.4 to 66.1 on MMBB-zh when utilizing Chinese-CLIP.

4.3 Textual Guidance to Drive Visual Token Alignment

Due to the low-resource nature of non-English multimodal data (*e.g.*, lack of large-scale, high-quality image-text data), we need to use nearly the same amount of data as LLaVA to enhance the model’s multilingual capabilities. Furthermore, motivated by these interesting findings and aiming to align visual tokens with textual embeddings at the language level, we propose PARROT, a novel approach that leverages textual guidance to facilitate the multilingual alignment of visual features. PARROT enables the transition of English-biased visual features acquired through the OpenAI-CLIP to accommodate other languages. This approach ensures that it can provide language-specific visual tokens to LLM based on the multiple language inputs, thereby enhancing its multilingual capabilities.

First, we extract visual features through the vision encoder and transform them into language embedding tokens \mathbf{H}_v using a projector. We obtain the embeddings $\mathbf{H}_t \in \mathbb{R}^{N \times C}$ derived from text inputs via the word embedding table. Subsequently, to convert the English-biased features into language-specific features using textual guidance, we employ a cross-modal cross-attention mechanism to obtain $\mathbf{H}'_v \in \mathbb{R}^C$:

$$\mathbf{H}'_v = \text{Attention}(\mathbf{Q}, \mathbf{K}, \mathbf{V}) = \text{Softmax} \left(\frac{\mathbf{H}_v^{\text{cls}} \mathbf{H}_t^T}{\sqrt{C}} \right) \mathbf{H}_t, \quad (2)$$

where \mathbf{Q} equals the matrix \mathbf{H}_v , \mathbf{K} and \mathbf{V} are equivalent to \mathbf{H}_t . $\mathbf{H}_v^{\text{cls}} \in \mathbb{R}^C$ is the [CLS] token of \mathbf{H}_v . This process allows the visual features to be dynamically adjusted based on the multilingual inputs.

Since the projected language embedding tokens \mathbf{H}_v are English-biased, we need to convert them to language-specific embeddings for different languages. To this end, we introduce a lightweight Mix-of-Experts (MoE) module, which includes a router and several language transformation experts. The router of MoE is a linear layer that generates a probability distribution over the set of experts $\mathcal{E} = [e_1, e_2, \dots, e_E]$, effectively predicting the probability of selecting and activating each expert. Each expert is an MLP designed to convert English-biased embeddings into language-specific embeddings. The inputs to experts \mathcal{E} is \mathbf{H}_v , and the outputs have the same dimensions as the inputs.

Subsequently, to obtain a normalized probability distribution for activating language-specific experts, \mathbf{H}'_v is fed as input to the router. The router network contains a linear layer that computes the normalized weight matrix using \mathbf{H}'_v for voting, producing $\mathcal{P} \in \mathbb{R}^E$:

$$\mathcal{P} = \text{Softmax}(\text{Linear}(\mathbf{H}'_v)), \quad (3)$$

which selects and activates the specific experts. Moreover, we process the English-biased embeddings \mathbf{H}_v through the selected experts to convert them into language-specific visual representations:

$$\text{MoE}(\mathbf{H}_v) = \sum_{i=1}^k \mathcal{P}[i] \cdot \mathcal{E}(\mathbf{H}_v)_i. \quad (4)$$

This approach effectively aligns English-biased embeddings with multiple languages, ensuring a more accurate and comprehensive representation across different linguistic contexts. To stabilize training and convert visual embeddings with less variance in visual-semantic information, ensuring the model performs well in tasks beyond the multilingual multimodal domain, we utilize MoE reweighting to obtain the final language-specific visual embeddings \mathbf{G}_v :

$$\mathbf{G}_v = \mathbf{H}_v + \alpha \text{MoE}(\mathbf{x}), \quad (5)$$

where α is the trade-off parameter. In conclusion, we first fuse the visual and textual inputs via Eq. 2 to transform the visual embeddings with textual guidance. Moreover, the fused result is inputted into the MoE module to select and activate the most relevant language experts via Eq. 3 and then obtain the language-specific embeddings via Eq. 4. Lastly, we employ MoE reweighting to convert visual embeddings with less variance in original visual-semantic information 5. This approach enables us to endow the MLLM with multilingual capabilities using as little multilingual data as possible. Figure 4 illustrates the architecture, the detailed MoE module, and the training stages of PARROT.

4.4 Training Stage

Our goal is to utilize as little multilingual data as possible to enhance the multilingual capabilities of MLLMs. The whole training procedure is divided into two distinct stages:

Stage 1: Modality Alignment. In this stage, we keep both the vision encoder and the LLM weights frozen, focusing solely on optimizing the projectors to align the visual features \mathbf{H}_v with the pre-trained LLM word embedding. This stage can be likened to training a visual tokenizer that is compatible with the frozen LLM. To enhance the diversity of images, we extract a portion of data from LAION [55] and CC12M [9] datasets and construct the in-house caption data through GPT-4V.

Stage 2: Instruction Tuning for Multilingual Alignment. We still keep the vision encoder weights frozen while continuing to train the projector, MoE, and LLM. Due to the design of the MoE module, PARROT can rapidly learn to align visual representations across multiple languages by using a small amount of multilingual image-text data. As shown in Table 1, we only use nearly 10K training data for each language in stage 2. This approach is particularly beneficial given the scarcity of data resources in low-resource languages.

To address the challenge of limited data in non-English languages, we use a semi-automatic approach to acquire image-text data. Initially, we partition the ShareGPT4V dataset [12] randomly for each language, extracting a selection of non-duplicate, non-parallel image-text data for training. Subsequently, we implement a translation and calibration scheme using GPT-4 to convert English texts into texts of other languages. Recognizing that this step may introduce noise and potential translation errors, we apply a manual calibration process to further fine-tune and clean the data, thereby obtaining high-quality multilingual image-text data.

This two-stage training approach ensures effective modality and multilingual alignment, even with limited Non-English data, aligning well with the realities of data scarcity in low-resource languages.

5 Experiments

In this section, we begin with an overview of the experimental framework, providing details on specific implementations, evaluation benchmarks, and MLLMs used for comparative evaluation. Following this, we conduct a comprehensive comparison of PARROT with the state-of-the-art approaches using multilingual benchmarks. Additionally, we compare PARROT with leading models across a range of multimodal tasks. Finally, this section concludes with ablation studies and visualization of multilingual cases, highlighting the exceptional ability of PARROT in handling multilingual tasks.

Table 1: Details on the PARROT’s training data, derived from publicly available datasets and our in-house multilingual data.

Training Stage	Datasets	Samples	Total
Stage 1	LLaVA-1.5-pretrain [38]	558K	1.2M
	Laion-Caption* [55]	12K	
	CC12M-Caption* [9]	645K	
Stage 2	LLaVA-1.5-finetune [38]	665K	793K
	ShareGPT4V-zh* [12]	71K	
	ShareGPT4V-pt* [12]	14K	
	ShareGPT4V-ar* [12]	12K	
	ShareGPT4V-tr* [12]	17K	
	ShareGPT4V-ru* [12]	14K	

5.1 Experimental Setup

Implementation Details: In this study, we configure PARROT with the pre-trained CLIP ViT-L/14 [51] as the vision encoder and Qwen1.5-Chat [5] as the backbone for LLM. The initial learning rates for the two stages are set at $1e^{-3}$ and $2e^{-5}$, respectively, with the batch size of 256 and 128. The entire training process is notably optimized to 21 hours on the $16 \times A100$ GPUs setup, attributed to the use of the relatively small training datasets. Additionally, BF16 and TF32 precision formats are employed to meticulously balance speed and accuracy throughout the training process. As defined in Eq. 4, we set the number of experts to six to match the number of languages. Each expert is an MLP composed of two linear layers with SiLU [19] activation function. More details are shown in Table 5.

Evaluation Benchmark: Our evaluation is divided into two parts: one evaluates the multilingual capabilities of MLLMs, while the other assesses its overall performance. The first evaluation is performed on two datasets: MMBench [39] and a newly developed benchmark MMMB. For MMBench, we expand it to include six languages through translation via GPT-4, followed by manual verification. For MMMB, we construct it following the methodology described in Section 3. We present the accuracy for each language in Table 2. Furthermore, the second evaluation covers a wide broad range of multimodal tasks, such as MME [22], MMStar [11], ScienceQA [41], RealWorldQA [61] and SEED-Bench [28], with performance reported using a radar chart in Figure 5b.

Comparison Models: For comprehensive comparisons, we select leading open-source models in MLLMs, including LLaVA-1.5 [29], LLaVA-NeXT [37], Qwen-VL [6], Monkey [35], VisualGLM [18], VisCPM [24], MiniGPT-4-v2 [75], shareGPT4V [12], InstructBLIP [17], mPLUG-Owl2 [64], Mini-Gemini [34]. Furthermore, we incorporate closed-source methods in our benchmarks, including GPT-4V [12], Qwen-VL-MAX [6], and Gemini Pro [54], to demonstrate their remarkable performance. For the evaluation process, we employ the VLMEvalKit in OpenCompass [16], ensuring consistent configuration settings across all methods to maintain fairness in comparison. For most of the mentioned methods, we directly use the VLMEvalKit implementation. Alternatively, we integrate other methods not officially provided into this framework to ensure consistency in evaluation.

5.2 Main Results

In this section, we present the results of the multilingual experiment in Table 2 and the overall experiment in Figure 5b. According to Table 2, PARROT-14B achieves state-of-the-art (SOTA) performance in all languages on the MMBench benchmark and also achieves the SOTA performance in five languages on the MMMB benchmark, with English in the second place. The multilingual capabilities of PARROT-14B closely reach that of GPT-4V, demonstrating the exceptional ability of our proposed architecture. Notably, PARROT-7B also validates the SOTA performance on both benchmarks across all languages, even surpassing the LLaVA-NeXT-13B. Additionally, as shown in Figure 5b, this evaluation aims to show that PARROT not only possesses excellent multilingual capabilities but also provides an overall understanding of PARROT’s capabilities in handling various complex multimodal tasks (*e.g.*, MME [22], MMStar [11], and SEED-Bench [28]). Additionally, as depicted in Figure 5c, we visualize the expert distributions within the MoE. It is evident that the second expert is predominantly activated when using the Chinese prompt, indicating that different experts are utilized for various language prompts. In existing multilingual benchmarks, PARROT also demonstrates competitive performance while using less than 1% of the data compared to other multilingual MLLMs, as illustrated in Figure 6.

5.3 Ablation Study

Ablation study on each component. We conduct an ablation experiment on the multilingual data and the MoE module. As shown in Figure 5a, using multilingual data improves performance in each language. Moreover, the MoE module significantly improves performance, demonstrating the effectiveness of our proposed method.

Ablation study on different datasets. As shown in Table 3, it is evident that the inclusion of different multilingual datasets continually improves performance on the MMBench benchmark, and all models with 7B parameters are used for this experiment. This highlights the robustness and scalability of our approach to handling multiple languages effectively.

Table 2: Accuracy performance comparison on multilingual benchmarks. We report all compared methods with VLMEvalKit [16]. The best and second results are shown in **bold** and underline, respectively.

Method	LLM	MMMB						MMBench					
		en	zh	pt	ar	tr	ru	en	zh	pt	ar	tr	ru
<i>Open-source models</i>													
LLaVA-1.5 [36]	Vicuna-v1.5-7B	67.07	58.83	59.76	43.50	46.43	59.06	65.37	58.33	59.02	36.16	43.90	56.95
LLaVA-1.5 [36]	Vicuna-v1.5-13B	69.76	62.86	60.76	45.49	54.44	62.69	68.98	63.23	62.97	46.56	53.17	61.59
LLaVA-NeXT [37]	Vicuna-v1.5-7B	70.87	61.57	61.81	42.74	46.95	63.85	67.95	60.56	60.39	38.40	45.36	59.62
LLaVA-NeXT [37]	Vicuna-v1.5-13B	74.44	67.19	63.21	45.36	53.09	68.24	<u>70.87</u>	64.51	64.08	45.36	52.92	61.85
Qwen-VL [6]	Qwen-7B	52.63	36.37	38.65	36.54	37.42	40.70	42.26	22.25	25.08	18.72	26.37	28.17
Qwen-VL-Chat [6]	Qwen-7B	56.02	57.77	46.37	43.04	41.05	48.65	54.29	56.52	43.12	35.73	39.17	42.86
MiniGPT-4-v2 [75]	LLaMA2-13B	38.71	30.05	31.52	26.60	26.02	29.23	23.88	11.76	14.26	2.49	6.78	12.54
ShareGPT4V [12]	Vicuna-v1.5-7B	69.24	60.23	60.29	43.57	45.26	61.23	69.59	61.6	59.62	37.37	43.38	59.45
InstructBLIP [17]	Vicuna-7B	39.47	32.92	35.67	23.80	28.36	36.37	27.83	18.81	27.14	3.26	8.50	20.87
mPLUG-Owl2 [64]	LLaMA2-7B	67.25	60.99	59.70	45.78	45.43	62.63	66.15	59.36	58.24	37.88	47.68	60.39
Monkey [35]	Qwen-VL-7B	66.02	58.18	46.31	38.83	37.66	48.59	58.07	53.52	49.57	31.01	31.35	45.18
Monkey-chat [35]	Qwen-VL-7B	71.63	66.54	60.35	48.77	46.31	58.59	70.79	65.72	65.03	46.90	48.10	59.36
VisualGLM [18]	ChatGLM-6B	31.05	18.07	19.42	15.38	22.81	19.77	23.2	17.18	11.43	2.92	6.62	5.33
VisCPM-Chat [24]	CPM-Bee-10B	53.10	47.54	28.19	26.90	26.78	26.84	45.88	46.39	15.81	1.46	9.19	1.20
PARROT	Qwen1.5-7B	70.00	<u>68.13</u>	<u>67.31</u>	<u>62.69</u>	<u>58.01</u>	<u>66.26</u>	70.70	<u>70.36</u>	<u>65.12</u>	<u>57.82</u>	<u>58.43</u>	<u>64.00</u>
PARROT	Qwen1.5-14B	<u>73.92</u>	71.64	69.82	68.13	64.33	70.18	74.40	72.25	69.16	66.15	64.52	69.33
<i>Closed-source models</i>													
GPT-4V [46]	Private	74.97	74.21	71.46	73.51	68.95	73.10	77.60	74.40	72.51	72.34	70.53	74.83
Gemini Pro [58]	Private	75.03	71.87	70.64	69.94	69.59	72.69	73.63	72.08	70.27	61.08	69.76	70.45
Qwen-VL-MAX [6]	Private	77.19	75.26	72.16	70.82	66.02	74.21	76.80	77.58	74.57	75.00	69.07	75.00

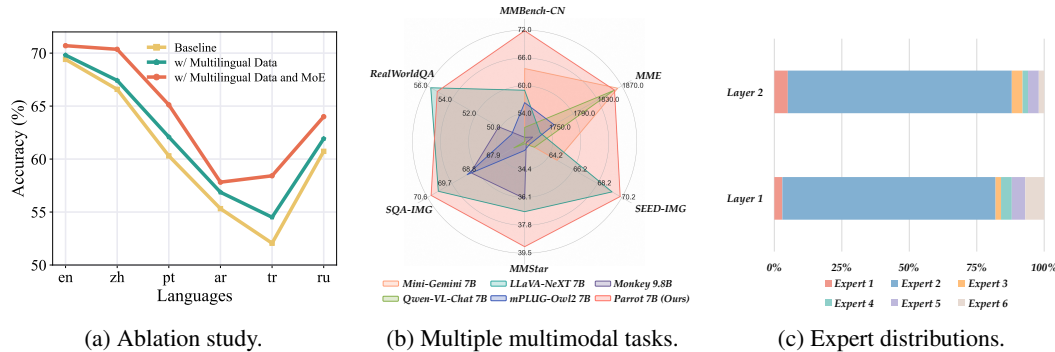


Figure 5: **Left:** The ablation study of multilingual data and the MoE module using the MMBench benchmark. **Middle:** The performance of PARROT on a broad range of multimodal tasks compared with existing models. Models with 7B parameters are used for the two experiments. **Right:** Expert distributions of MoE. We summarize the activated experts during the feed-forward process using Chinese Prompts.

Ablation study on monolingual fine-tuning datasets. The ablation study presented in Table 9 evaluates the performance of different monolingual datasets added incrementally to the baseline dataset LLaVA-1.5-finetune. It highlights the significant impact of adding different multilingual datasets to a baseline model. Each dataset incrementally improves performance in its respective language and, when combined, leads to overall enhanced performance across all evaluated languages. This indicates the robustness and effectiveness of the proposed method in handling multilingual data, making it a scalable solution for multilingual tasks.

5.4 Visualization of Multilingual Conversations

To enhance the intuitive understanding of the PARROT’s multilingual capability, we prepare a comprehensive case study accompanied by illustrative visuals. For instance, as depicted in Figure 6, our framework demonstrates remarkable multilingual capabilities. This underscores the PARROT’s versatility in navigating different languages and presents its potential in bridging linguistic gaps across diverse domains. Through careful analysis and visualization, we aim to provide a deeper insight into the mechanism driving this capability, illustrating its practical implications and potential applications in real-world scenarios. This visualization serves as a strong indicator of the PARROT’s solid architecture and its exceptional ability to understand, process, and generate multiple languages with remarkable efficiency. More multilingual conversation cases are shown in Appendix E.

Table 3: Ablation study on different multilingual training datasets in MMBench benchmark. Models with 7B parameters are used for this ablation.

Dataset	English	Chinese	Portuguese	Arabic	Turkish	Russian
LLaVA-1.5-finetune	69.4	66.6	60.3	55.3	52.1	60.7
+ zh	69.2 -0.2	68.6 +2.0	64.1 +3.8	59.1 +3.8	50.9 -1.2	61.6 +0.9
+ zh pt	71.1 +1.7	70.4 +3.8	65.4 +5.1	57.9 +2.6	52.1 +0.0	62.9 +2.2
+ zh pt ar	71.0 +1.6	68.6 +2.0	65.7 +5.4	58.6 +3.3	52.2 +0.1	62.2 +1.5
+ zh pt ar tr	70.4 +1.0	68.7 +2.1	64.9 +4.6	61.2 +5.9	59.7 +7.6	62.0 +1.3
+ zh pt ar tr ru	70.7 +1.3	70.4 +3.8	65.1 +4.8	57.8 +2.5	58.4 +6.3	64.0 +3.3

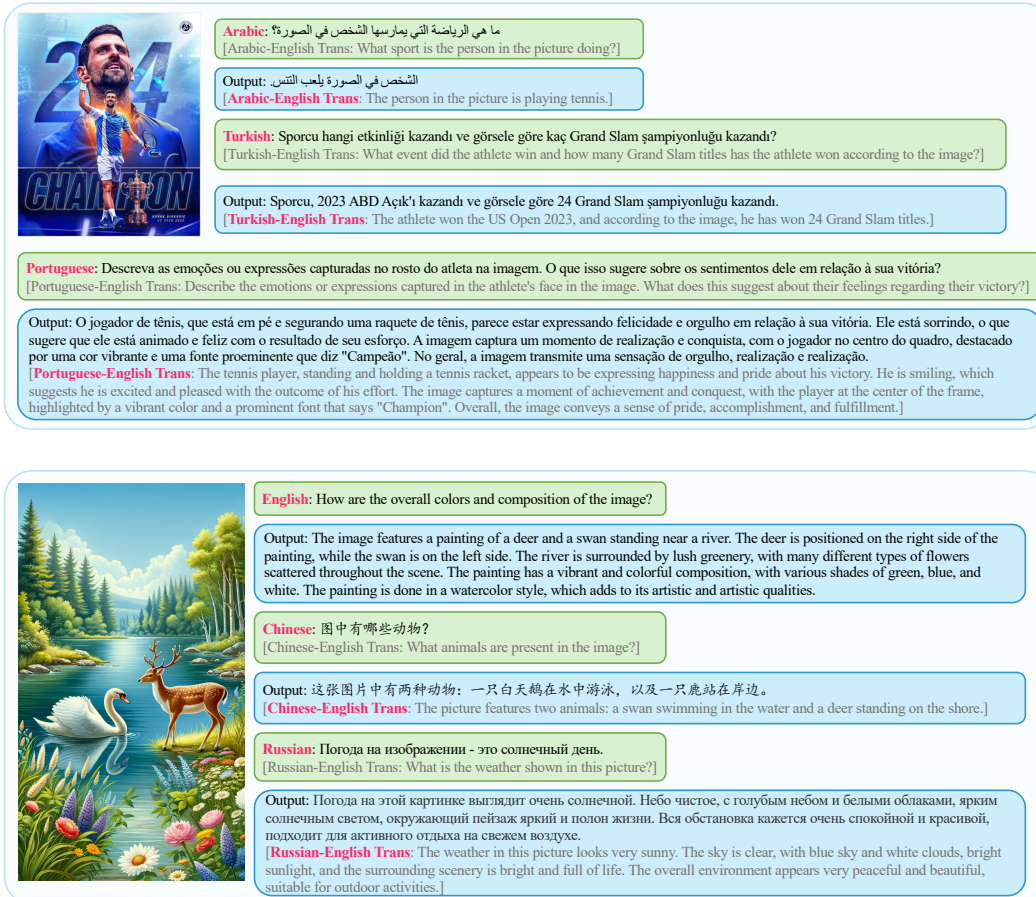


Figure 6: Multimodal conversation cases of PARROT in multiple languages.

6 Conclusion

This paper addresses the critical challenge of enhancing the multilingual capabilities of MLLMs. We introduce PARROT, a novel method leveraging textual guidance to drive visual token alignment at the language level, thus enabling the transition of English-biased visual embeddings into language-specific ones using an MoE module. Extensive experiments conducted on a newly introduced Massive Multilingual Multimodal Benchmark (MMMB) across six languages demonstrate the state-of-the-art performance of PARROT compared to existing methods, particularly presenting remarkable improvements in Turkish and Arabic. Furthermore, our model exhibits competitive results across a wide range of diverse multimodal benchmarks, emphasizing its efficacy in addressing both multilingual and multimodal challenges. PARROT not only advances the frontier of MLLMs but also underscores the importance of equitable access to technological benefits across linguistic and cultural diversities.

References

- [1] Meta AI. Build the future of ai with meta llama 3. Technical report, Meta AI, 2024.
- [2] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *NeurIPS*, 2022.
- [3] anthropic. Introducing the next generation of claude. Technical report, anthropic, 2024.
- [4] Anas Awadalla, Irena Gao, Josh Gardner, Jack Hessel, Yusuf Hanafy, Wanrong Zhu, Kalyani Marathe, Yonatan Bitton, Samir Gadre, Shiori Sagawa, et al. Openflamingo: An open-source framework for training large autoregressive vision-language models. *arXiv:2308.01390*, 2023.
- [5] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, et al. Qwen technical report. *arXiv:2309.16609*, 2023.
- [6] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv:2308.12966*, 2023.
- [7] Rohan Bavishi, Erich Elsen, Curtis Hawthorne, Maxwell Nye, Augustus Odena, Arushi Somani, and Sağnak Taşlılar. Introducing our multimodal models, 2023.
- [8] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *NeurIPS*, 2020.
- [9] Soravit Changpinyo, Piyush Sharma, Nan Ding, and Radu Soricut. Conceptual 12m: Pushing web-scale image-text pre-training to recognize long-tail visual concepts. In *CVPR*, 2021.
- [10] Guanhua Chen, Lu Hou, Yun Chen, Wenliang Dai, Lifeng Shang, Xin Jiang, Qun Liu, Jia Pan, and Wenping Wang. mclip: Multilingual clip via cross-lingual transfer. In *ACL*, 2023.
- [11] Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024.
- [12] Lin Chen, Jisong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. *arXiv:2311.12793*, 2023.
- [13] Xi Chen, Xiao Wang, Soravit Changpinyo, AJ Piergiovanni, Piotr Padlewski, Daniel Salz, Sebastian Goodman, Adam Grycner, Basil Mustafa, Lucas Beyer, et al. Pali: A jointly-scaled multilingual language-image model. *arXiv preprint arXiv:2209.06794*, 2022.
- [14] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Zhong Muyan, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv:2312.14238*, 2023.
- [15] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90% chatgpt quality, 2023.
- [16] OpenCompass Contributors. Opencompass: A universal evaluation platform for foundation models. <https://github.com/open-compass/opencompass>, 2023.
- [17] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning. *arXiv:2305.06500*, 2023.
- [18] Zhengxiao Du, Yujie Qian, Xiao Liu, Ming Ding, Jiezhong Qiu, Zhilin Yang, and Jie Tang. Glm: General language model pretraining with autoregressive blank infilling. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 320–335, 2022.

- [19] Stefan Elfving, Eiji Uchibe, and Kenji Doya. Sigmoid-weighted linear units for neural network function approximation in reinforcement learning. *Neural networks*, 107:3–11, 2018.
- [20] Desmond Elliott, Stella Frank, Khalil Sima’an, and Lucia Specia. Multi30k: Multilingual english-german image descriptions. *arXiv preprint arXiv:1605.00459*, 2016.
- [21] Yuxin Fang, Quan Sun, Xinggang Wang, Tiejun Huang, Xinlong Wang, and Yue Cao. Eva-02: A visual representation for neon genesis. *arXiv:2303.11331*, 2023.
- [22] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Zhenyu Qiu, Wei Lin, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv:2306.13394*, 2023.
- [23] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv:2106.09685*, 2021.
- [24] Jinyi Hu, Yuan Yao, Chongyi Wang, Shan Wang, Yinxu Pan, Qianyu Chen, Tianyu Yu, Hanghao Wu, Yue Zhao, Haoye Zhang, et al. Large multilingual models pivot zero-shot multimodal learning across languages. *arXiv:2308.12038*, 2023.
- [25] Robert A Jacobs, Michael I Jordan, Steven J Nowlan, and Geoffrey E Hinton. Adaptive mixtures of local experts. *Neural computation*, 3(1):79–87, 1991.
- [26] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv:2310.06825*, 2023.
- [27] Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkang Yang, and Ziwei Liu. Otter: A multi-modal model with in-context instruction tuning. *arXiv:2305.03726*, 2023.
- [28] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. In *CVPR*, 2024.
- [29] Chunyuan Li, Cliff Wong, Sheng Zhang, Naoto Usuyama, Haotian Liu, Jianwei Yang, Tristan Naumann, Hoifung Poon, and Jianfeng Gao. Llava-med: Training a large language-and-vision assistant for biomedicine in one day. *arXiv:2306.00890*, 2023.
- [30] Jiachen Li, Xinyao Wang, Sijie Zhu, Chia-Wen Kuo, Lu Xu, Fan Chen, Jitesh Jain, Humphrey Shi, and Longyin Wen. Cumo: Scaling multimodal llm with co-upcycled mixture-of-experts. *arXiv preprint arXiv:2405.05949*, 2024.
- [31] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv:2301.12597*, 2023.
- [32] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *ICML*, 2022.
- [33] Lei Li, Yuwei Yin, Shicheng Li, Liang Chen, Peiyi Wang, Shuhuai Ren, Mukai Li, Yazheng Yang, Jingjing Xu, Xu Sun, Lingpeng Kong, and Qi Liu. M³it: A large-scale dataset towards multi-modal multilingual instruction tuning. *arXiv:2306.04387*, 2023.
- [34] Yanwei Li, Yuechen Zhang, Chengyao Wang, Zhisheng Zhong, Yixin Chen, Ruihang Chu, Shaoteng Liu, and Jiaya Jia. Mini-gemini: Mining the potential of multi-modality vision language models. *arXiv:2403.18814*, 2024.
- [35] Zhang Li, Biao Yang, Qiang Liu, Zhiyin Ma, Shuo Zhang, Jingxu Yang, Yabo Sun, Yuliang Liu, and Xiang Bai. Monkey: Image resolution and text label are important things for large multi-modal models. *arXiv:2311.06607*, 2023.
- [36] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. *arXiv:2310.03744*, 2023.
- [37] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024.

- [38] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *arXiv:2304.08485*, 2023.
- [39] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? *arXiv:2307.06281*, 2023.
- [40] Junyu Lu, Dixiang Zhang, Xiaojun Wu, Xinyu Gao, Ruyi Gan, Jiaying Zhang, Yan Song, and Pingjian Zhang. Ziya-visual: Bilingual large vision-language model via multi-task instruction tuning. *arXiv preprint arXiv:2310.08166.*, 2023.
- [41] Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *NeurIPS*, 2022.
- [42] Shiyin Lu, Yang Li, Qing-Guo Chen, Zhao Xu, Weihua Luo, Kaifu Zhang, and Han-Jia Ye. Ovis: Structural embedding alignment for multimodal large language model. *arXiv preprint arXiv:2405.20797*, 2024.
- [43] Brandon McKinzie, Zhe Gan, Jean-Philippe Fauconnier, Sam Dodge, Bowen Zhang, Philipp Dufter, Dhruvi Shah, Xianzhi Du, Futang Peng, Floris Weers, et al. Mm1: Methods, analysis & insights from multimodal llm pre-training. *arXiv:2403.09611*, 2024.
- [44] Minheng Ni, Haoyang Huang, Lin Su, Edward Cui, Taroon Bharti, Lijuan Wang, Dongdong Zhang, and Nan Duan. M3p: Learning universal representations via multitask multilingual multimodal pre-training. In *CVPR*, 2021.
- [45] OpenAI. Chatgpt: A language model for conversational ai. Technical report, OpenAI, 2023.
- [46] OpenAI. Gpt-4 technical report. *arXiv:2303.08774*, 2023.
- [47] OpenAI. Gpt-4o: Hello gpt-4o. Technical report, OpenAI, 2024.
- [48] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *arXiv:2304.07193*, 2023.
- [49] Telmo Pessoa Pires, Robin M Schmidt, Yi-Hsiu Liao, and Stephan Peitz. Learning language-specific layers for multilingual machine translation. *arXiv preprint arXiv:2305.02665*, 2023.
- [50] Taido Purason and Andre Tättar. Multilingual neural machine translation with the right amount of sharing. In *Proceedings of the 23rd Annual Conference of the European Association for Machine Translation*, pages 91–100, 2022.
- [51] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, 2021.
- [52] Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training, 2018.
- [53] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [54] Machel Reid, Nikolay Savinov, Denis Teplyashin, Dmitry Lepikhin, Timothy Lillicrap, Jean-baptiste Alayrac, Radu Soricut, Angeliki Lazaridou, Orhan Firat, Julian Schrittwieser, et al. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv:2403.05530*, 2024.
- [55] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *NeurIPS*, 2022.

- [56] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*, 2017.
- [57] Quan Sun, Yuxin Fang, Ledell Wu, Xinlong Wang, and Yue Cao. Eva-clip: Improved training techniques for clip at scale. *arXiv:2303.15389*, 2023.
- [58] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- [59] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv:2302.13971*, 2023.
- [60] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv:2307.09288*, 2023.
- [61] x.ai. Realworldqa dataset. <https://x.ai/blog/grok-1.5v>, 2024.
- [62] An Yang, Junshu Pan, Junyang Lin, Rui Men, Yichang Zhang, Jingren Zhou, and Chang Zhou. Chinese clip: Contrastive vision-language pretraining in chinese. *arXiv preprint arXiv:2211.01335*, 2022.
- [63] Han-Jia Ye, Yi Shi, and De-Chuan Zhan. Identifying ambiguous similarity conditions via semantic matching. In *CVPR*, pages 16610–16619, 2022.
- [64] Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, et al. mplug-owl: Modularization empowers large language models with multimodality. *arXiv:2304.14178*, 2023.
- [65] Chao Yi, De-Chuan Zhan, and Han-Jia Ye. Bridge the modality and capacity gaps in vision-language model selection. *arXiv preprint arXiv:2403.13797*, 2024.
- [66] Shukang Yin, Chaoyou Fu, Sirui Zhao, Ke Li, Xing Sun, Tong Xu, and Enhong Chen. A survey on multimodal large language models. *arXiv preprint arXiv:2306.13549*, 2023.
- [67] Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, et al. Yi: Open foundation models by 01. ai. *arXiv:2403.04652*, 2024.
- [68] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 11975–11986, 2023.
- [69] Biao Zhang, Ankur Bapna, Rico Sennrich, and Orhan Firat. Share or not? learning to schedule language-specific capacity for multilingual translation. In *ICLR*, 2021.
- [70] Hao Zhang, Feng Li, Shilong Liu, Lei Zhang, Hang Su, Jun Zhu, Lionel M Ni, and Heung-Yeung Shum. Dino: Detr with improved denoising anchor boxes for end-to-end object detection. *arXiv:2203.03605*, 2022.
- [71] Wenxuan Zhang, Mahani Aljunied, Chang Gao, Yew Ken Chia, and Lidong Bing. M3exam: A multilingual, multimodal, multilevel benchmark for examining large language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [72] Yi-Kai Zhang, Ting-Ji Huang, Yao-Xiang Ding, De-Chuan Zhan, and Han-Jia Ye. Model spider: Learning to rank pre-trained models efficiently. *NeurIPS*, 36, 2024.
- [73] Xinyu Zhao, Xuxi Chen, Yu Cheng, and Tianlong Chen. Sparse moe with language guided routing for multilingual machine translation. In *ICLR*, 2024.

- [74] Mingyang Zhou, Luwei Zhou, Shuohang Wang, Yu Cheng, Linjie Li, Zhou Yu, and Jingjing Liu. Uc2: Universal cross-lingual cross-modal vision-and-language pre-training. In *CVPR*, 2021.
- [75] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigt-4: Enhancing vision-language understanding with advanced large language models. *arXiv:2304.10592*, 2023.

A Training Datasets in LLaVA

In this section, we analyze the multilingual data in LLaVA [38]. From Table 4 and Figure 7, it is evident that during the pre-train stage, LLaVA solely utilizes multimodal image-text pairs data for training, comprising 558K of English data. During the SFT stage, both multimodal and text-only data are incorporated into the training process. Multilingual data appear only in the text-only dataset. Apart from English, the most prominent non-English data is Chinese, amounting to just 3.1K, constituting 0.25% of the total dataset. Therefore, it is evident that LLaVA’s datasets are English-centric and imbalanced. The specific language and abbreviation are as follows: English (*en*), Chinese (*zh*), Korean (*ko*), Spanish (*es*), French (*fr*), Japanese (*ja*), German (*de*), Portuguese (*pt*), Traditional Chinese (*zh-tw*), Italian (*it*).

Table 4: The detailed information about LLaVA’s datasets.

(a) The detailed information in two stages.

Training Stage	Type	Total Size	English	Other Languages
Stage 1 (Pre-train)	Multimodal	558K	558K	-
	Text-only	-	-	-
Stage 2 (SFT)	Multimodal	624K	558K	-
	Text-only	41K	31K	10K

(b) The top-10 multilingual information

Language	<i>en</i>	<i>zh</i>	<i>ko</i>	<i>es</i>	<i>fr</i>	<i>ja</i>	<i>de</i>	<i>pt</i>	<i>zh-tw</i>	<i>it</i>
Size	31K	3192	1219	1123	1049	551	435	422	305	234

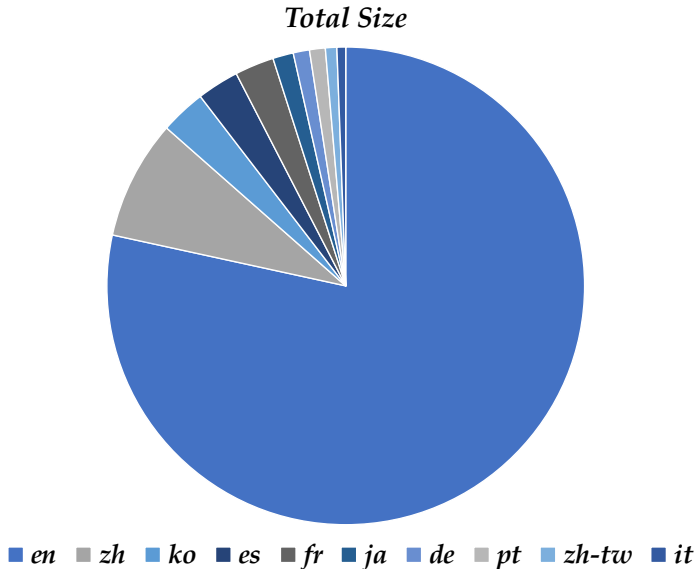


Figure 7: The pie chart of LLaVA’s multilingual data.

B Training Details

As shown in Table 5, we provide the training hyperparameters for PARROT. Throughout all stages of training, we consistently train for one epoch, with a batch size of 256 for the first stage and 128

Table 5: Training hyperparameters.

Config	Stage 1	Stage 2
Experts	-	6
MLP expert network	2 Linear layers with SiLU	
Deepspeed	Zero2	Zero3
Image resolution	336x336	
Image encoder	Clip-ViT-L/14-336	
Feature select layer	-2	
Image projector	2 Linear layers with GeLU	
Epoch	1	
Optimizer	AdamW	
Learning rate	1e-3	2e-5
Learning rate scheduler	Cosine	
Weight decay	0.0	
Text max length	2048	
Batch size per GPU	16	8
GPU	16 × A100-80G	
Precision	Bf16	
Gradient checkpoint	True	

for the second stage. We maintain an image resolution of 336x336 for all two stages and enable the gradient checkpoint mode for each training stage.

C Extended Experiments

In this section, we further provide more experiments and ablation studies to validate the generality and capability of PARROT across various tasks. Additionally, we present more training details about Figure 1 to offer a clearer understanding for readers.

C.1 Bilingual Evaluation on LLaVA-Bench

VisCPM [24] extends the LLaVA-Bench dataset to the Chinese version for bilingual evaluation. To comprehensively compare PARROT with other multilingual models, we conduct experiments on this benchmark. Due to the deprecation of the GPT-4-0314 version by OpenAI, we test PARROT in LLaVA-Bench following the version of GPT-4-1106-preview for comparison. As shown in Table 6, PARROT not only demonstrates exceptional ability in the English version of this benchmark but also presents competitive performance in the Chinese version.

Notably, as shown in Table 7, VisCPM uses 140M English data and 1M Chinese data to train the model, while Qwen-VL-Chat uses 1.1B English data and 300M Chinese data, whereas PARROT only utilizes approximately 2M data in total. Despite using less than 1% of the training data, PARROT achieves remarkable performance in both the English and Chinese versions on LLaVA-Bench. Owing to the architecture we proposed, significant improvement in the model’s multilingual capability can be achieved with minimal data usage.

C.2 Radar Charts on MMBench and MMB

For a more intuitive demonstration of the multilingual capabilities of PARROT, we present radar charts for the multilingual MMBench and MMB benchmarks. As depicted in Figure 9a and Figure 9b, our proposed method PARROT exhibits significantly better performance compared to other models.

C.3 More Experimental Details about Different Backbones

In this section, we provide detailed information to explain Figure 1. Firstly, to ensure a fair comparison between the OpenAI-CLIP-based model and the Chinese-CLIP-based model, we train distinct models using the same training data as LLaVA, as shown in Table 4a. The hyperparameters are listed in Table 5 without the MoE hyperparameters. As depicted in Figure 1, the OpenAI-CLIP-based model struggles to generate Chinese outputs when given Chinese prompts due to the English-centric training

Table 6: Experimental results on LLaVA Test Set accessed by GPT-4. Con: Conversation, DD: Detailed Description, CR: Complex Reasoning, AVG: the average score of three tasks. The best/second best results are marked in **bold** and underlined, respectively. The symbol * denotes that the data are judged following the version of GPT-4-1106-preview because the GPT-4-0314 version is deprecated by OpenAI.

Model		LLM Backbone	English				Chinese			
			Con	DD	CR	AVG	Con	DD	CR	AVG
English Model	MiniGPT-4	Vicuna-13B	65.0	67.3	76.6	69.7	-	-	-	-
	InstructBLIP	Vicuna-13B	81.9	68.0	91.2	80.5	-	-	-	-
	LLaVA	Vicuna-13B	89.5	70.4	96.2	85.6	-	-	-	-
En-Zh Bilingual Model	mPLUG-OWL	BLOOMZ-7B	64.6	47.7	80.1	64.2	76.3	61.2	77.8	72.0
	VisualGLM	ChatGLM-6B	62.4	63.0	80.6	68.7	76.6	87.8	83.6	82.7
	Qwen-VL-Chat	Qwen-7B	82.4	76.9	91.9	83.8	82.3	93.4	89.5	88.2
	VisCPM-Balance	CPM-Bee-10B	75.5	64.7	91.3	77.3	85.4	81.4	96.6	88.0
Multilingual Model	PARROT*	Qwen1.5-7B	82.5	71.0	89.3	81.1	82.1	88.6	92.3	87.7

Table 7: Comparison of vision encoders, LLMs, and training data.

Model	vision encoder	LLM	Training Data
mPLUG-Owl	ViT-L/14 (0.3B)	BLOOMZ-7B	-
VisualGLM	Q-Former (1.6B)	ChatGLM-6B	English: 300M; Chinese 30M
Qwen-VL-Chat	ViT-bigG (1.9B)	Qwen-7B	English: 1.1B; Chinese: 300M
VisCPM	Muffin (0.7B)	CPM-Bee-10B	English: 140M; Chinese: 1M
PARROT	ViT-L/14 (0.3B)	Qwen1.5-Chat-7B	English: 1.8M; Chinese: 71K

data. In contrast, despite the extremely scarce amount of Chinese training data, the Chinese-CLIP-based model naturally acquires zero-shot capability to understand, process, and generate Chinese texts. Furthermore, we compare both models on MMBench-CN and MMBB-zh to evaluate their Chinese capability. As shown in Table 8, the performance of the Chinese-CLIP-based model is significantly higher than that of the OpenAI-CLIP-based model. On the other hand, we empirically find that different LLMs have a significant impact on performance. Qwen [5] demonstrates superior Chinese capability compared to Vicuna [15], yet its English capability remains competitive.

D Broader Impact and Limitations

Broader Impact. PARROT leveraging MoE to enhance multilingual alignment presents a positive social impact by promoting linguistic diversity and inclusivity. To address the challenge of the

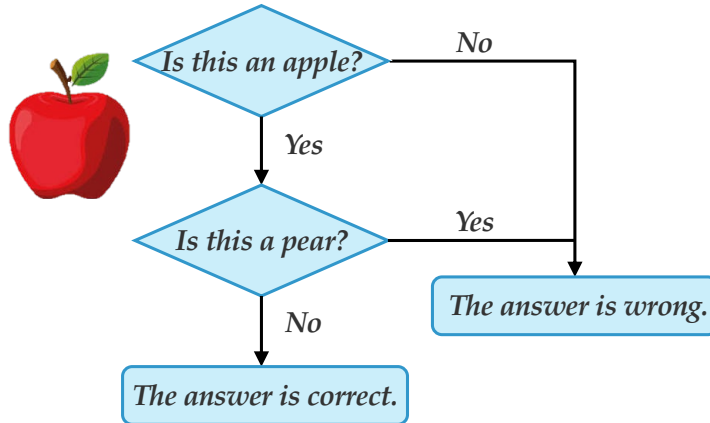


Figure 8: An example of circular evaluation strategy.

Table 8: The performance of different vision encoders and LLMs on MMBench and MMB. MMB refers to MMBench. “En/en” represents the English version, and “CN/zh” represents the Chinese version.

Method	Vision encoder	LLM	MMB-EN	MMB-CN	MMMB-en	MMMB-zh
LLaVA	OpenAI-CLIP ViT-L/14	Vicuna 7B	65.4	58.3	67.1	58.8
LLaVA	OpenAI-CLIP ViT-L/14	Qwen1.5-Chat 7B	68.8	66.4	68.2	62.4
LLaVA	Chinese-CLIP ViT-L/14	Qwen1.5-Chat 7B	68.1	68.3	67.6	66.1
PARROT	OpenAI-CLIP ViT-L/14	Qwen1.5-Chat 7B	70.7	70.4	70.0	68.1

imbalanced language data in SFT datasets and improve non-English visual tokens alignment, this approach contributes to breaking language barriers and facilitating cross-cultural communication, thereby fostering understanding and collaboration across diverse linguistic communities. Additionally, the creation of the Massive Multilingual Multimodal Benchmark (MMMB) fills a crucial gap in evaluating multilingual capabilities, enabling researchers to assess and improve upon models’ performance across different languages and cultures. However, it’s crucial to acknowledge potential negative social impacts, such as the risk of hallucination. This could potentially result in the model generating misleading or incorrect information, which is a common challenge observed in MLLMs.

Limitations. Despite advancements, MLLMs may still exhibit limitations in accurately understanding and responding to complex language-specific contexts, leading to misinformation or misinterpretation of multilingual inputs. On the other hand, due to the visual component of PARROT being based on CLIP, there are inherent limitations in its ability to process high-resolution images, resulting in the inability to recognize extremely detailed content in some images. Hence, enhancing PARROT’s ability to handle high-resolution processing will be part of future work.

E More Visualization Results

In this section, we include additional visualization results between users’ questions and PARROT’s responses using multiple languages. These pictures are selected from LLaVA [38] and CuMo [30]. As depicted in Figures Figures 10 to 15, it is evident that PARROT possesses superior multilingual capabilities for understanding, processing, and generating multilingual texts. In certain specific cases, PARROT may also experience hallucinations. As depicted in the upper case of Figure 10, it misidentifies Xiaomi SU7 as a Porsche Taycan.

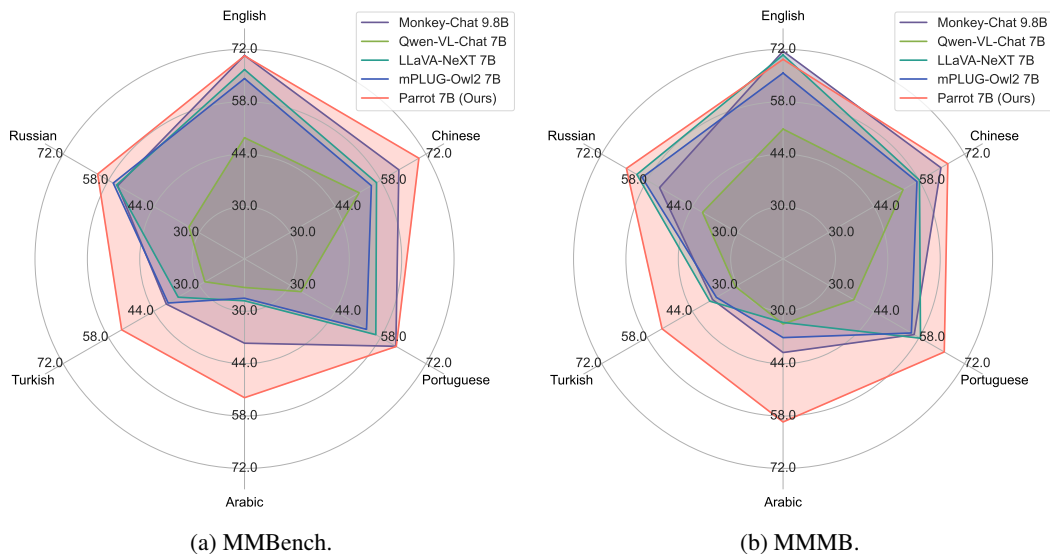




Figure 9: The radar charts for the multilingual MMBench and MMBB benchmarks.


Table 9: **Ablation study on monolingual fine-tuning dataset in MMBB benchmark.** The table shows an effect of performance on six languages when using fine-tuning data from different languages. Models with 7B parameters are used for this ablation.

Dataset	English	Chinese	Portuguese	Arabic	Turkish	Russian
LLaVA-1.5-finetune	72.69	67.60	65.61	57.72	48.30	63.80
+ <i>zh</i> 71k	69.18	69.06	63.92	58.13	48.95	63.63
+ <i>pt</i> 14k	69.94	68.83	65.67	58.65	51.11	63.04
+ <i>ar</i> 12k	70.47	68.36	64.39	60.79	51.11	63.16
+ <i>tr</i> 17k	70.82	69.01	64.85	60.76	60.70	64.39
+ <i>ru</i> 14k	69.59	68.07	64.27	60.35	53.92	64.15
+ <i>zh pt ar tr ru</i>	70.00	68.13	67.31	62.69	58.01	66.26







English: What car is it in this image?




Output: The turquoise blue car is **Porsche Taycan**.





English: What animals are in this image?



Output: A cat and a dog are in the image.

Figure 10: More visualization results between the user and PARROT using English prompts. We highlight the **hallucinations** from the responses of PARROT.





Chinese: 你知道这幅画是谁画的吗?
[Chinese-English Trans: Do you know who drew this painting]



Output: 莱昂纳多·达芬奇
[Chinese-English Trans: Leonardo da Vinci]





Chinese: 请描述这幅画的主要内容
[Chinese-English Trans: Please describe the main content of this painting.]



Output: 这幅画是一幅肖像画，描绘了一个年轻女子的头部和肩膀。她穿着一件黑色连衣裙，上面有金色的装饰。她的头发是深棕色的，被梳成一个发髻。她的脸上有褐色的斑点，眼睛是棕色的。她正在微笑，表明她心情愉快。这幅画的风格是肖像画，它以描绘人物的头部和肩膀为特征。肖像画通常使用逼真的技巧，以捕捉人物的特征和表情。这幅画中人物的服装和环境暗示着它可能描绘的是文艺复兴时期的艺术家。
[Chinese-English Trans: This painting is a portrait, depicting the head and shoulders of a young woman. She is dressed in a black dress with gold embellishments. Her hair is dark brown and styled into a bun. There are brown spots on her face, and her eyes are brown. She is smiling, indicating she is in a good mood. The style of the painting is portraiture, characterized by the depiction of the subject's head and shoulders. Portraits often use realistic techniques to capture the features and expressions of the person. The attire and setting of the figure in this painting suggest it may be depicting an artist from the Renaissance period.]

Figure 11: More visualization results between the user and PARROT using Chinese prompts.



 **Portuguese:** Qual é o final deste filme?
[Portuguese-English Trans: What's the ending of this movie?]



 **Output:** O filme "Titanic" é um romance histórico de 1997 que apresenta uma narrativa fictícia de uma mulher chamada Rose e um homem chamado Jack. A narrativa se passa durante o final do século XIX, quando o navio "Titanic" está se preparando para sua viagem de luxo para Nova York. Jack e Rose se enamoram e se casam, mas a viagem é marcada por um desastre inesperado.
[Portuguese-English Trans: The movie "Titanic" is a 1997 historical romance that features a fictional narrative about a woman named Rose and a man named Jack. The story is set during the late 19th century, as the ship "Titanic" is preparing for its luxury voyage to New York. Jack and Rose fall in love and get married, but the journey is marked by an unexpected disaster.]


Figure 12: More visualization results between the user and PARROT using Portuguese prompts.



 **Arabic:** ما الأشياء التي يجب أن أكون حذرًا منها عند زيارتي هنا؟
[Arabic-English Trans: What's the ending of this movie?]

 **Output:** أثناء زيارة هذا الموقع، يجب أن يكون حذرًا من أي مخاطر محتملة، مثل الأسطح المبللة، أو الأشياء المائية، أو أي عوائق محتملة، مثل الصخور أو الصخور أو الأشياء المائية. بالإضافة إلى ذلك، يجب على الزوار أن يكونوا على علم بالعوامل البيئية، مثل تغيرات الطقس، أو درجات الحرارة، أو الظروف المائية، لضمان تجربة آمنة ومرضية.
[Arabic-English Trans: During the visit to this site, one should be cautious of any potential hazards, such as wet surfaces, or water-related objects, or any potential obstacles, like rocks or boulders or aquatic objects. Additionally, visitors should be aware of environmental factors, such as changes in weather, temperature, or water conditions, to ensure a safe and satisfying experience.]

Figure 13: More visualization results between the user and PARROT using Arabic prompts.



Turkish: Bu malzemelerle hangi yemekleri yapabilirim?
 [Turkish-English Trans: What are the meals that I can cook with these?]

Output: Buzdolabındaki çeşitli malzemelerle, çilekli bir salata, havuçlu bir sandviç, meyveli bir yemek ve süt ve yoğurtla bir yemek gibi çeşitli yemekler yapılabilir. Buzdolabı, havuç, çilek ve yoğurt gibi diğer gıda maddelerini de içerir; bunlar çeşitli yemekler yaratmak için kullanılabilir. Birden fazla yiyecek maddesi ve kapların olması, buzdolabının iyi stoklandığını ve çeşitli yemek seçeneklerine olanak tanıdığını gösterir.
 [Turkish-English Trans: With the various items in the refrigerator, one can cook a variety of meals, such as a salad with strawberries, a sandwich with carrots, a meal with berries, and a meal with milk and yogurt. The refrigerator also contains other food items, such as carrots, strawberries, and yogurt, which can be used to create a diverse range of dishes. The presence of multiple food items and containers suggests that the refrigerator is well-stocked, allowing for a variety of meal options.]

Figure 14: More visualization results between the user and PARROT using Turkish prompts.



Russian: Пожалуйста, помогите мне представить это место на фотографии.
 [Russian-English Trans: Please help me introduce the place in this picture.]

Output: Место, изображенное на картинке, - это собор Василия Блаженного, официально известный как собор Покрова Пресвятой Богородицы на рву. Это знаковое строение находится в Москве, Россия, на Красной площади.
 [Russian-English Trans: The place depicted in the picture is the Saint Basil's Cathedral, officially known as the Cathedral of the Intercession of the Most Holy Theotokos on the Moat. This iconic structure is located in Moscow, Russia, on Red Square.]

Figure 15: More visualization results between the user and PARROT using Russian prompts.