


Reduced Effectiveness of Kolmogorov-Arnold Networks on Functions with Noise

Haoran Shen, Chen Zeng, Jiahui Wang, and Qiao Wang , *Senior Member, IEEE*

Abstract—It has been observed that even a small amount of noise introduced into the dataset can significantly degrade the performance of KAN. In this brief note, we aim to quantitatively evaluate the performance when noise is added to the dataset. We propose an oversampling technique combined with denoising to alleviate the impact of noise. Specifically, we employ kernel filtering based on diffusion maps for pre-filtering the noisy data for training KAN network. Our experiments show that while adding i.i.d. noise with any fixed SNR, when we increase the amount of training data by a factor of r , the test-loss (RMSE) of KANs will exhibit a performance trend like test-loss $\sim \mathcal{O}(r^{-\frac{1}{2}})$ as $r \rightarrow +\infty$. We conclude that applying both oversampling and filtering strategies can reduce the detrimental effects of noise. Nevertheless, determining the optimal variance for the kernel filtering process is challenging, and enhancing the volume of training data substantially increases the associated costs, because the training dataset needs to be expanded multiple times in comparison to the initial clean data. As a result, the noise present in the data ultimately diminishes the effectiveness of Kolmogorov-Arnold networks.

Index Terms—Kolmogorov-Arnold networks, kernel filtering, Multi-layer Perceptrons, KAN, MLP, diffusion map

I. INTRODUCTION

The Kolmogorov-Arnold networks (KAN) have attracted considerable attention following their release on Arxiv [1]. However, [4] pointed out that these networks are susceptible to noise.

Having been introduced only a few months ago, KANs are considered innovative neural network structures and potential substitutes for Multi-Layer Perceptrons (MLPs). Various applications of KAN networks have been reported across different domains, including: time series analysis [13] [14], ODEs [15], PDEs [16], hyperspectral image classification [17] [18], physical modeling [19], computer vision [20] [23], and graph learning [21] [22] [25].

In addition, various enhancements to KANs have been introduced. For instance, [24] substituted the spline functions used as weights with Chebyshev polynomials, [26] merged the strengths of KANs and LSTM, [27] utilized wavelet-based structure for KANs, [28] developed Convolutional KANs, [29] employed fractional-orthogonal Jacobi functions as the basis functions for KANs, and [30] enhanced the computational process of KANs.

Both H. Shen and C. Zeng was with the School of Information Science and Engineering, Southeast University, Nanjing, China (email: haoran-shen28@163.com, zengchen0797@163.com).

J. Wang was with the School of Economics and Management, Southeast University, Nanjing, China (email: wangjh0512@qq.com).

Q. Wang was with both the School of Information Science and Engineering and the School of Economics and Management, Southeast University, Nanjing, China (Corresponding Author, email: qiaowang@seu.edu.cn).

In this paper, we aim to measure the notable decrease in performance of KAN networks when subjected to noise interference, and explore methods to alleviate the noise effects. We propose two strategies: implementing filtering techniques and increasing the volume of training data.

The contributions of this paper are as follows: Firstly, it demonstrates that incorporating noise into the training data drastically diminishes the performance of Kolmogorov-Arnold Networks (KANs). To tackle this problem, the authors propose two strategies. One strategy utilizes a kernel filtering technique to mitigate some of the noise. The difficulty lies in determining the optimal variance parameter for the filter since it's nonlinearly dependent on the Signal-to-Noise Ratios (SNRs). The other strategy addresses the noise issue by expanding the training dataset. The authors discovered an intriguing pattern showing that if the number of training samples is increased by a factor of r from the initial amount, the performance (test-loss) will asymptotically decrease as $r^{-\frac{1}{2}}$ as $r \rightarrow \infty$.

The structure of this paper is organized as follows: In Section II, we showed that introducing noise to the training dataset leads to a significant drop in the performance of KANs. We then develop two methods to counteract the noise effect. In Section III, we propose a filtering technique based on kernel filtering, which can remove some noise to an extent. The most difficult challenge here is determining the optimal variance parameter σ of this Gaussian-like kernel filter. Unfortunately, the optimal variance is nonlinearly dependent on the SNRs, making it difficult to ascertain. Following this, in Section IV, we introduce a technique to reduce noise interference by increasing the training dataset size and demonstrate how the test loss statistically declines asymptotically as the data volume increases. In Section V, we integrate kernel filtering with oversampling. However, it turns out to be challenging to find an equilibrium between the repetition factor r of the data size and the SNR of the data. Finally, in Section VI, we draw our conclusions for this paper.

II. THE IMPACT OF NOISE IN KANS

The Kolmogorov-Arnold theorem addresses the representation of multivariate continuous functions. The theorem states that any continuous function of multiple variables can be represented as a superposition of continuous functions of one variable and addition [2] [6] [7]. Formally, it can be stated as:

Theorem 1 (Kolmogorov-Arnold Theorem). *Let $f : [0, 1]^n \rightarrow \mathbb{R}$ be any multivariate continuous function, there exist continuous univariate functions ϕ_i and ψ_{ij} such that:*

TABLE I: Functions Used for Fitting and Corresponding KAN Structures

Functions	Structure
$f_1 = \exp(\sin(\pi x) + y^2)$	[2,5,1] cf. [1]
$f_2 = xy$	[2,5,1]
$f_3 = \exp(\frac{1}{2}(\sin(\pi x_1^2 + \pi x_2^2) + \sin(\pi x_3^2 + \pi x_4^2)))$	[4,2,1,1]
$f_4 = 1 + x \sin(y)$	[2,2,1]
$f_5 = \arcsin(x \sin(y))$	[2,2,1]
$f_6 = x\sqrt{y^2 + z^2}$	[3,2,2,1]

TABLE II: Test loss comparison between data affected by Gaussian noise ($\mu = 0, \sigma = 0.2$) and noise-free data.

Functions	Noisy-free Test Loss	Noisy Test Loss	SNR (dB)
f_1	5.46×10^{-3}	3.20×10^{-2}	21.5
f_2	1.31×10^{-3}	3.16×10^{-2}	4.7
f_3	4.22×10^{-3}	3.39×10^{-2}	18.7

$$f(x_1, x_2, \dots, x_n) = \sum_{i=1}^{2n+1} \phi_i \left(\sum_{j=1}^n \psi_{ij}(x_j) \right). \quad (1)$$

Unfortunately, this theorem is existential rather than constructive, unlike the Lagrange interpolation theorem. In 2009, [9] provided a constructive proof of this theorem. Nonetheless, it might pose challenges when working with functions that exhibit noise.

According to [4], adding a small Gaussian noise to the training labels of a dataset and employing this altered dataset to train a KAN network can unexpectedly worsen the test loss.

To ascertain the existence of this phenomenon and explore solutions to reduce noise impact, we added noise to the training datasets involved in different fitting tasks. These noisy datasets were subsequently fed into the network for training, and the results were contrasted against those obtained from the original datasets. We selected six functions for fitting and utilized various KAN network architectures. They are listed in Table I.

As shown in Table II, it is clear that even small amounts of noise can significantly impact network performance. With 3000 training samples, adding noise with a standard deviation of $\sigma = 0.2$ leads to a significant increase in test-loss.

What causes KAN's vulnerability to noise? The lack of regularity induced by noise leads to a deterioration in the performance of KANs. The activation function in KAN comprises a basis function $b(x)$ and a spline function $\text{spline}(x)$, as shown in following equation,

$$\phi(x) = w(b(x) + \text{spline}(x)), \quad (2)$$

where

$$b(x) = \frac{x}{1 + \exp(-x)}, \quad (3)$$

both of which possess adequate smoothness. Moreover, KAN neurons perform only simple summation operations, making

it hard to accurately represent a non-smooth function with added noise using nested smooth functions. This results in a poor recovery of the original function in a noisy environment.

III. DENOISE BY KERNEL FILTERING

We now aim to reduce the impact of noise in general multivariate functions. Given that the training data is not uniformly sampled in this scenario when fitting multidimensional functions with KANs, it is logical to utilize multidimensional filtering techniques.

A. Kernel Filtering

In this subsection, we utilize kernel filtering to remove noise from the data. Alternatively, for data on non-linear manifolds, diffusion maps can be employed as described in [32].

For the sake of simplicity, we consider the Gaussian-like kernel [5]

$$k(x, y) = C e^{-d^2(x, y)/2\sigma^2}, \quad (4)$$

where C is the normalization coefficient, and d the distance function defined as

$$d^2(x, y) = \sum_{n=1}^N \left(x^{(n)} - y^{(n)} \right)^2, \quad (5)$$

for data $x = (x^{(n)})_{n=1}^N, y = (y^{(n)})_{n=1}^N$. Clearly, the kernel filtering for data $\{f(x_n); n = 1, 2, \dots, M\}$ produces updated data

$$\hat{f}(x_j) = \sum_{n=1}^M k(x_j, x_n) f(x_n), \quad (6)$$

and the kernel $k(x_j, x_n)$ might be stored as a matrix in practical computation. Actually, for large matrix, we may treat it as sparse matrix since $k(x_j, x_n) \approx 0$ when $d(x_j, x_n)$ is large enough.

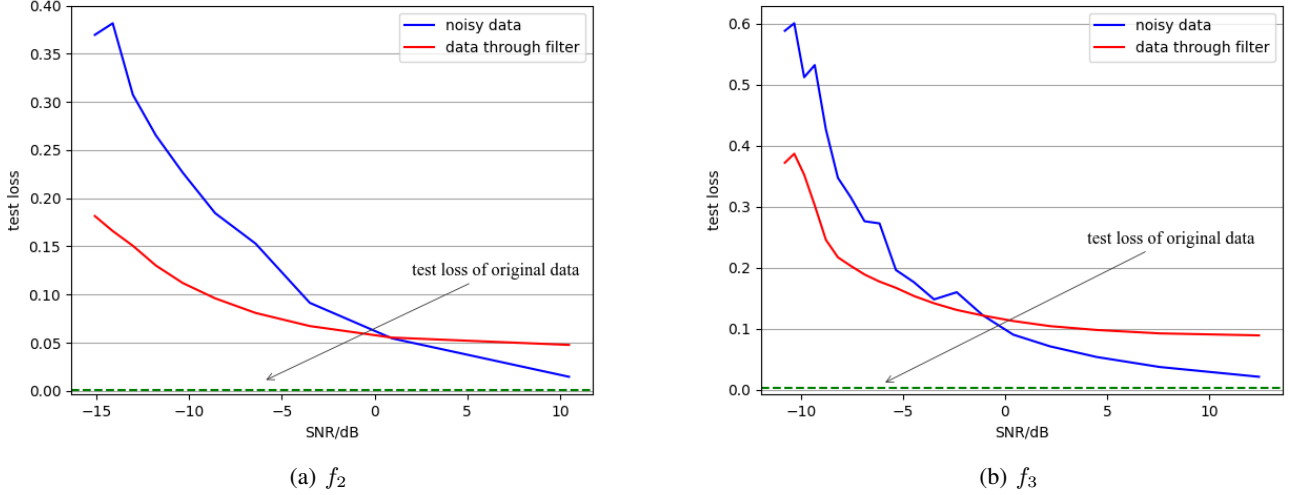


Fig. 1: Applying kernel filtering to f_2 and f_3 with $\sigma = 0.1$.

Notice that the standard deviation-like σ is the scaling parameter, and might be regarded as the "width" of kernel function.

We will evaluate the performance of the previously mentioned functions f_2 and f_3 by altering the SNRs using kernel filtering with $\sigma = 0.11$. To obtain the data presented in Figure 1, we conducted this experiment three times and calculated the average of the results.

For f_2 , as the SNR increases, both noisy and filtered data will exhibit a reduced test loss, with an intersection occurring at an SNR of 0dB. This indicates that kernel filtering can be beneficial for contaminated datasets when the SNR is below 0dB, but it becomes detrimental when the SNR exceeds 0dB. In the case of f_3 , the effect is comparable, except the intersection point shifts to -2 dB. This suggests that in low SNR scenarios, kernel filtering can slightly enhance the performance of KAN networks.

we employed f_2 as the fitting objective and injected Gaussian noise denoted by $N(0, 0.2)$. Various levels of kernel filtering were implemented, leading to the test-loss versus SNR curves illustrated in Fig 2. It is evident that beginning with $\sigma = 0.08$ (small σ), the curve resembles noisy data shown in blue and diminishes rapidly. As σ increased (with a larger σ resulting in smoother data), the initial point on the left side of the performance curve improves, achieving lower test-loss initially. Nevertheless, the decay is more gradual, and importantly, the right side of the curve performs worse, displaying a considerably higher test loss compared to earlier curves. **Ultimately, no matter what σ value is selected, kernel filtering ceases to function effectively once the data's SNR surpasses the critical limit. Filtering is only effective in the low SNR region.**

B. The Optimal Filter Parameter σ

Let's focus on the equation (4) that describes Gaussian-like kernel. The parameter σ represents the standard deviation of the Gaussian function, which controls the width of the kernel.

To find the impact of σ on filtering performance, We chose functions f_4, f_5 and f_6 for fitting. We applied Gaussian-like kernel filtering with different values of σ under various SNR conditions for the three functions mentioned above. The number of training samples is 500. The results depicted in Fig 3a, 3b and 3c, show that as σ increased, the test loss initially decreased and then increased, indicating the existence of a best σ . Additionally, with the decrease in SNR, the best σ tends to increase.

The results are straightforward to understand. When σ is very small, the filtering isn't sufficient and does not smooth the noise effectively. On the other hand, if σ is too large, excessive filtering happens, which can obscure critical details in the data. Additionally, as the SNR diminishes, indicating higher noise levels, the standard deviation of Gaussian noise increases. Therefore, the optimal σ for the Gaussian-like kernel filter must also increase to efficiently mitigate the higher noise

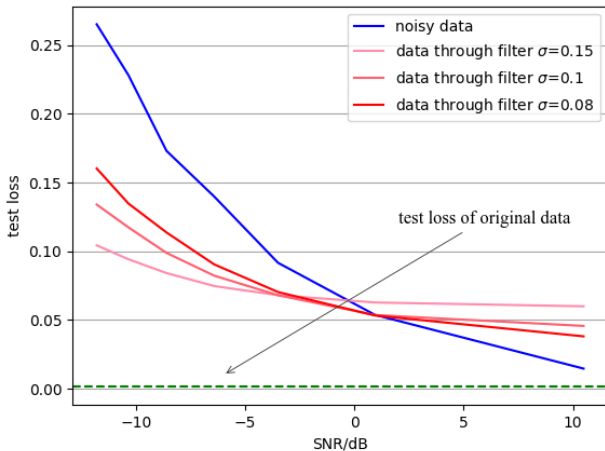
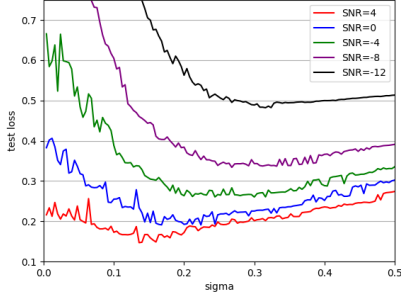
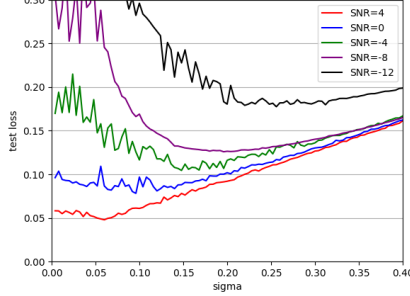
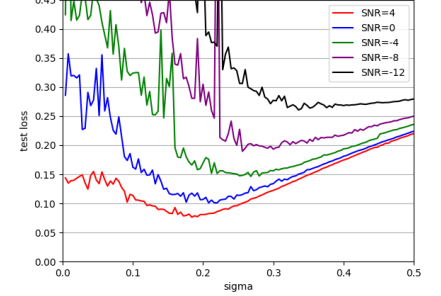
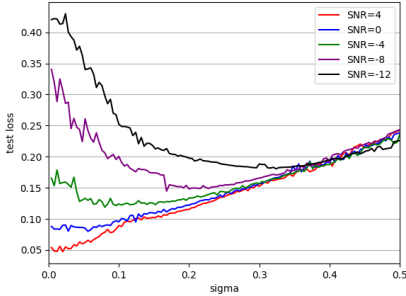
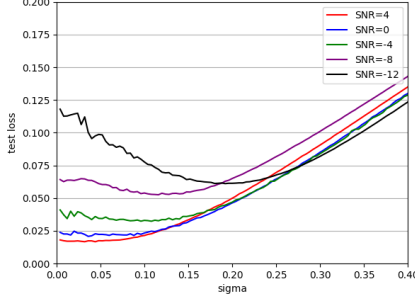
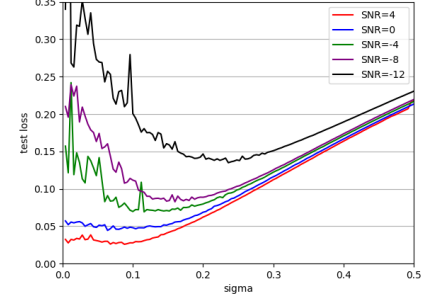


Fig. 2: Applying kernel filtering to f_2 with different σ .

To investigate the impact of σ on filtering performance,

(a) Fitting f_4 with training samples = 500(b) Fitting f_5 with training samples = 500(c) Fitting f_6 with training samples = 500(d) Fitting f_4 with training samples = 5000(e) Fitting f_5 with training samples = 5000(f) Fitting f_6 with training samples = 5000Fig. 3: Filtering performance with different values of σ under various SNRs.

levels. However, the best value for σ differed among various functions (f_4 , f_5 , and f_6) and SNRs. Additionally, in real-world situations, the SNR is usually not known, complicating the task of finding the optimal σ to attain the best filtering results for general functions with noise of unknown variance.

IV. ENHANCE TRAINING DATASET TO MITIGATE NOISE

In contrast to denoising techniques, we discovered that augmenting the number of training samples is an efficient method for reconstructing noisy data. This process is akin to recovering a band-limited signal from noisy discrete oversampling data, which can be elucidated by frame theory [3].

A. Reconstruct Signal from Noisy Oversampled Data

Numerous important studies in signal processing have been conducted on this subject over the past decades, e.g. [10]. We outline the process using the formula

$$f(t) = \sum_k f_k \operatorname{sinc}(t - \frac{kT}{2\Omega}), \quad f_k = f(\frac{kT}{2\Omega}) + \epsilon_k \quad (7)$$

where f_k denotes the samples and ϵ_k signifies i.i.d. Gaussian noise with zero mean. We highlight that $0 < T \leq 1$ to ensure the oversampling rate, and a smaller T implies a higher number of samples. Despite the presence of noise in these samples, the sampling formula (7) acts as a stationary oversampling reconstruction method that closely approximates the original noise-free signal $f(t)$, as explained by frame theory in [3]. Specifically, a higher sampling rate can mitigate the effect of samples with lower SNR. This formula (7) is effective because the target function $f(t)$ is band-limited,




implying it must be highly regular, being an entire function of exponential $|\Omega|$ type according to Paley-Wiener's Theorem [8].

B. Increase Training Samples


In our case, a larger training dataset allows KANs to extract the original data from a substantial amount of information and resist noise interference [12]. We discovered that increasing the quantity of training samples is an effective method for reconstructing data affected by noise. By having a larger set of training samples, KANs are capable of extracting the original data from the extensive samples and enduring noise interference.

Using $f_1(x, y) = \exp(\sin(\pi x) + y^2)$ and $f_2(x, y) = xy$ as an illustration, we start with 3000 training samples and incrementally add 2000 samples at each step. These datasets are input into a [2,5,1] network at various sampling rates, and the test loss for each sample size is plotted, resulting in Figure 4 and Figure 5.

To fit $f_3(x_1, x_2, x_3, x_4) = \exp(\frac{1}{2}(\sin(\pi x_1^2 + \pi x_2^2) + \sin(\pi x_3^2 + \pi x_4^2)))$ with [4,4,2,1] KAN will result in Figure 6a, which produces the same asymptotical behavior as other functions. However, if we utilize a [4,2,1,1] KAN as suggested in [5], we observe that more data and higher SNR might exhibit higher test losses, as illustrated in Figure 6b. Through extensive experimentation, we found that this pattern persisted. The [4,4,2,1] KAN shown in Fig. 6a approximates f_3 more accurately than the [4,2,1,1] KAN illustrated in Fig. 6b, reducing the considerable variations observed with the [4,2,1,1] KAN. Furthermore, as the dataset grows, the [4,4,2,1] KAN

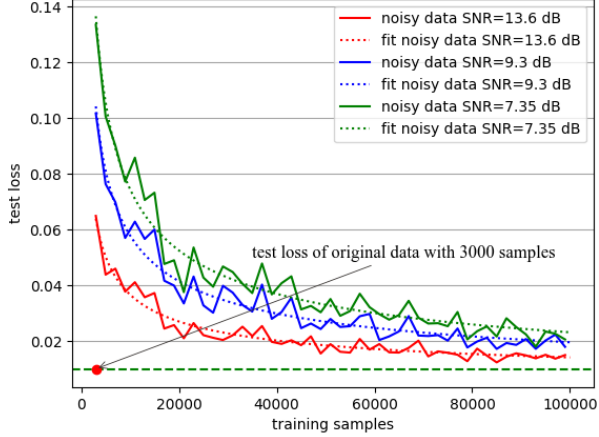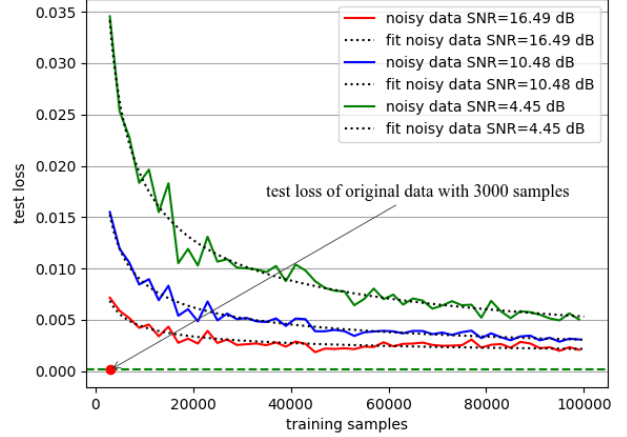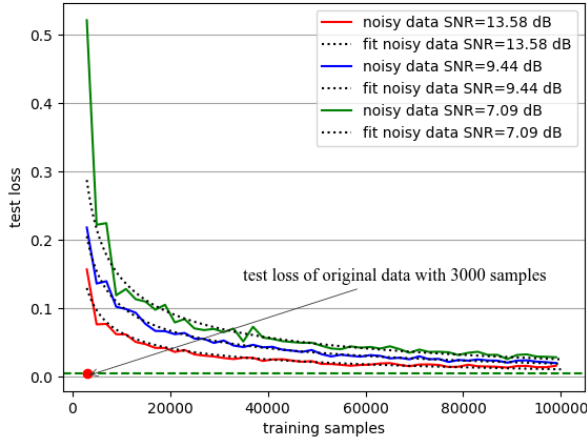Fig. 4: Applying oversampling to f_1 with different SNRs.Fig. 5: Applying oversampling to f_2 with different SNRs.

(a) [4,4,2,1] KAN

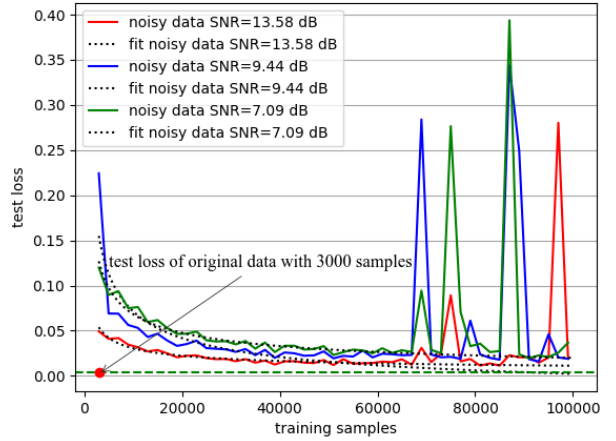

(b) [4,2,1,1] KAN

Fig. 6: Applying oversampling to f_3 with different SNRs.

better fits with the function. It is important to note that KAN might not always adhere to the anticipated structure of the function, making pruning operations necessary for achieving a more efficient network architecture.

For f_3 , the structure [4,2,1,1] seems ideal, as shown in Fig. 7. Nevertheless, the comparison between the structures [4,2,1,1] and [4,4,2,1] in Fig. 6 reveals that KAN needs more parameters and a more complex structure to properly model this function. According to Table 3 in [1], which compares manually designed KAN shapes with those discovered automatically, for other functions, KAN might require fewer parameters than the predetermined structure. This implies that KAN could have difficulty precisely defining the function and finding the optimal structure, hence complicating the determination of the most suitable KAN configuration for practical applications. As a result, modeling functions with KAN purely based on noisy training data without any prior understanding of the function may lead to inconsistent results.

As anticipated, the test loss of KAN decreases steadily as the number of training samples grows. Initially, with the increasing sample size, the test loss drops rapidly, and then it asymptotically follows a decay rate of $r^{-\frac{1}{2}}$. Here, r represents the multiple of the initial training data, and the test loss will asymptotically behave like

$$\text{test-loss (RMSE)} \sim \mathcal{O}(r^{-\frac{1}{2}}), \quad \text{as } r \rightarrow +\infty. \quad (8)$$

This behavior is actually analogous to the linear reconstruction of a band-limited signal from noisy data, see [31].

When we utilize a KAN with grid=5 to fit various functions, we aim to increase the number of training samples and generate a graph illustrating the relationship between test loss and training samples. For f_3 , we reached a conclusion similar to f_1 : The test loss rapidly decreases to about half under noisy conditions when the training sample size reaches 20000, and beyond that point, the rate of decline in test loss gradually slows down. The optimal denoising effect is achieved when the sample size reaches approximately 60000, where the

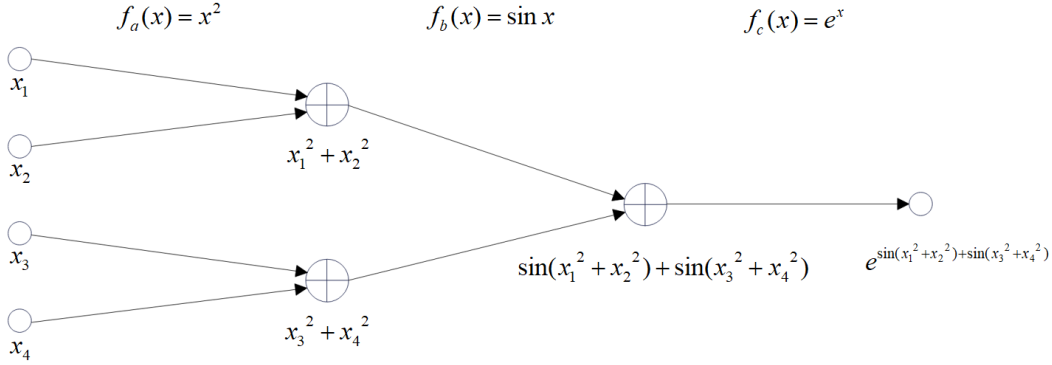
Fig. 7: Ideal [4,2,1,1] KAN structure for f_3

TABLE III: Noisy test-loss compares with noisy-free test-loss

Functions	original dataset	test loss with noise	kernel filtering	25 times size of original samples	25 times of original kernel filtering ($\sigma = 0.1$)	50 times of original kernel filtering ($\sigma = 0.1$)
f_1	4.94×10^{-3}	2.14×10^{-1}	3.39×10^{-1}	3.42×10^{-2}	2.79×10^{-1}	2.77×10^{-2}
f_2	1.31×10^{-3}	3.16×10^{-2}	5.12×10^{-2}	7.31×10^{-3}	5.52×10^{-2}	5.43×10^{-2}
f_3	4.22×10^{-3}	8.73×10^{-2}	8.69×10^{-2}	1.87×10^{-2}	1.03×10^{-1}	9.96×10^{-2}

test loss is nearly equivalent to the test loss obtained from training on the original dataset. However, while increasing the sampling rate for f_2 significantly reduces test loss, it remains challenging to replicate the results from training on the original dataset. Nonetheless, this outcome is still quite promising.

V. COMBINING OVERSAMPLING AND KERNEL FILTERING

Previous experiments have shown that both oversampling and kernel filtering are effective in reducing noise. It is natural to combine these techniques by applying kernel filtering to the dataset and slightly increasing the training sampling rate. We will then compare the test loss with that of a dataset that uses only one noise reduction method. This experiment introduces different noise levels to three functions, resulting in SNRs of 7.38dB, 4.46dB, and 10.53dB for the datasets f_1 , f_2 , and f_3 , respectively. The results are presented in Table III

Regrettably, merging the two techniques did not yield significantly improved outcomes. In fact, this combined approach results in a higher test loss compared to using oversampling alone. It appears that kernel filtering disrupts the effectiveness of oversampling, and this disruption remains even when the sample size is increased to 50 times its original size.

As mentioned earlier, increasing the amount of training data can effectively reduce test loss and enhance filtering performance. Therefore, for these functions (f_4 , f_5 , and f_6), we increased the training data by 10 times, respectively, to observe how the test loss changes. The results are shown in Fig 3d, 3e and 3f. We can find that compared to the training data size of 500, the training data size of 5000 significantly reduces the test loss. Additionally, as σ varies, the change in test loss also decreases considerably, indicating that the impact of σ on filtering performance is diminishing.

From the experiments performed, it is clear that both the particular function and the SNR influence the value and variability of the optimal σ , making it difficult to ascertain. In real-world situations, increasing the sampling rate is a more effective method than filtering.

VI. CONCLUSION

In this brief note, we assess the decline in KANs performance for functions affected by noise. We explore two methods to alleviate these problems: the first focuses on noise elimination, and the second on increasing the size of the training dataset. Although the latter method demonstrates considerable enhancement, the overall performance remains deficient due to the excessive amount of required data. Consequently, we conclude that KANs must overcome the challenges presented by noise interference.

ACKNOWLEDGMENT

The authors would like to express their heartfelt gratitude to Dr. Aijun Zhang for the insightful discussions regarding the adverse impacts of noise on the KANs network, and for providing numerous invaluable suggestions for this manuscript.

REFERENCES

- [1] Z. Liu, Y. Wang, S. Vaidya, F. Ruehle, J. Halverson, M. Soljačić, T. Y. Hou, and M. Tegmark, "Kan: Kolmogorov-arnold networks," 2024.
- [2] A. N. Kolmogorov, "On the representation of continuous functions of several variables as superpositions of continuous functions of a smaller number of variables," *Doklady Akademii Nauk SSSR*, vol. 108, no. 2, pp. 179–182, 1956.
- [3] I. Daubechies, *Ten Lectures on Wavelets*. Society for Industrial and Applied Mathematics, 1992. [Online]. Available: <https://epubs.siam.org/doi/abs/10.1137/1.9781611970104>

- [4] A. Zhang, “Kans can’t deal with noise,” 2024, https://github.com/SelfExplainML/PiML-Toolbox/blob/main/docs/Workshop/KANs_Can't_Deal_with_Noise.ipynb.
- [5] A. A. Gomez, A. S. Neto, and J. Zubelli, “Diffusion representation for asymmetric kernels,” 2024.
- [6] A. N. Kolmogorov, “On the representation of continuous functions of several variables by superpositions of continuous functions of one variable and addition,” *Doklady Akademii Nauk SSSR*, vol. 114, pp. 953–956, 1957.
- [7] V. I. Arnold, “On functions of three variables,” *Doklady Akademii Nauk SSSR*, vol. 114, pp. 679–681, 1957.
- [8] A. Papoulis, “Signal analysis,” 1977. [Online]. Available: <https://api.semanticscholar.org/CorpusID:115354299>
- [9] J. Braun and M. Griebel, “On a constructive proof of kolmogorov’s superposition theorem,” *Constructive Approximation*, vol. 30, pp. 653–675, 2009. [Online]. Available: <https://doi.org/10.1007/s00365-009-9054-2>
- [10] S. Hein and A. Zakhor, “Reconstruction of oversampled band-limited signals from sigma/delta encoded binary sequences,” *IEEE Transactions on Signal Processing*, vol. 42, no. 4, pp. 799–811, 1994.
- [11] I. Maravic and M. Vetterli, “Sampling and reconstruction of signals with finite rate of innovation in the presence of noise,” *IEEE Transactions on Signal Processing*, vol. 53, no. 8, pp. 2788–2805, 2005.
- [12] J. Zhang, T. Wang, W. Ng, and W. Pedrycz, “Perturbation-based oversampling technique for imbalanced classification problems,” *International Journal of Machine Learning and Cybernetics*, vol. 14, pp. 773–787, 2023.
- [13] C. J. Vaca-Rubio, L. Blanco, R. Pereira, and M. Caus, “Kolmogorov-Arnold Networks (KANs) for Time Series Analysis,” *arXiv e-prints*, p. arXiv:2405.08790, May 2024.
- [14] K. Xu, L. Chen, and S. Wang, “Kolmogorov-Arnold Networks for Time Series: Bridging Predictive Power and Interpretability,” *arXiv e-prints*, p. arXiv:2406.02496, Jun. 2024.
- [15] B. C. Koenig, S. Kim, and S. Deng, “KAN-ODEs: Kolmogorov-Arnold Network Ordinary Differential Equations for Learning Dynamical Systems and Hidden Physics,” *arXiv e-prints*, p. arXiv:2407.04192, Jul. 2024.
- [16] Y. Wang, J. Sun, J. Bai, C. Anitescu, M. Sadegh Eshaghi, X. Zhuang, T. Rabczuk, and Y. Liu, “Kolmogorov Arnold Informed neural network: A physics-informed deep learning framework for solving PDEs based on Kolmogorov Arnold Networks,” *arXiv e-prints*, p. arXiv:2406.11045, Jun. 2024.
- [17] S. Teymoor Seydi, “Unveiling the Power of Wavelets: A Wavelet-based Kolmogorov-Arnold Network for Hyperspectral Image Classification,” *arXiv e-prints*, p. arXiv:2406.07869, Jun. 2024.
- [18] A. Jamali, S. K. Roy, D. Hong, B. Lu, and P. Ghamisi, “How to Learn More? Exploring Kolmogorov-Arnold Networks for Hyperspectral Image Classification,” *arXiv e-prints*, p. arXiv:2406.15719, Jun. 2024.
- [19] Y. Peng, M. He, F. Hu, Z. Mao, X. Huang, and J. Ding, “Predictive Modeling of Flexible EHD Pumps using Kolmogorov-Arnold Networks,” *arXiv e-prints*, p. arXiv:2405.07488, May 2024.
- [20] B. Azam and N. Akhtar, “Suitability of KANs for Computer Vision: A preliminary investigation,” *arXiv e-prints*, p. arXiv:2406.09087, Jun. 2024.
- [21] R. Bresson, G. Nikolentzos, G. Panagopoulos, M. Chatzianastasis, J. Pang, and M. Vazirgiannis, “KAGNNs: Kolmogorov-Arnold Networks meet Graph Learning,” *arXiv e-prints*, p. arXiv:2406.18380, Jun. 2024.
- [22] F. Zhang and X. Zhang, “GraphKAN: Enhancing Feature Extraction with Graph Kolmogorov Arnold Networks,” *arXiv e-prints*, p. arXiv:2406.13597, Jun. 2024.
- [23] C. Li, X. Liu, W. Li, C. Wang, H. Liu, and Y. Yuan, “U-KAN Makes Strong Backbone for Medical Image Segmentation and Generation,” *arXiv e-prints*, p. arXiv:2406.02918, Jun. 2024.
- [24] S. SS, K. AR, G. R, and A. KP, “Chebyshev Polynomial-Based Kolmogorov-Arnold Networks: An Efficient Architecture for Nonlinear Function Approximation,” *arXiv e-prints*, p. arXiv:2405.07200, May 2024.
- [25] M. Kiamari, M. Kiamari, and B. Krishnamachari, “GKAN: Graph Kolmogorov-Arnold Networks,” *arXiv e-prints*, p. arXiv:2406.06470, Jun. 2024.
- [26] R. Genet and H. Inzirillo, “TKAN: Temporal Kolmogorov-Arnold Networks,” *arXiv e-prints*, p. arXiv:2405.07344, May 2024.
- [27] Z. Bozorgasl and H. Chen, “Wav-KAN: Wavelet Kolmogorov-Arnold Networks,” *arXiv e-prints*, p. arXiv:2405.12832, May 2024.
- [28] A. Dylan Bodner, A. Santiago Tepsich, J. Natan Spolski, and S. Pourteau, “Convolutional Kolmogorov-Arnold Networks,” *arXiv e-prints*, p. arXiv:2406.13155, Jun. 2024.
- [29] A. Afzal Aghaei, “fKAN: Fractional Kolmogorov-Arnold Networks with trainable Jacobi basis functions,” *arXiv e-prints*, p. arXiv:2406.07456, Jun. 2024.
- [30] Q. Qiu, T. Zhu, H. Gong, L. Chen, and H. Ning, “ReLU-KAN: New Kolmogorov-Arnold Networks that Only Need Matrix Addition, Dot Multiplication, and ReLU,” *arXiv e-prints*, p. arXiv:2406.02075, Jun. 2024.
- [31] N. Thao and M. Vetterli, “Reduction of the mse in r-times oversampled a/d conversion $\mathcal{O}(1/r)$ to $\mathcal{O}(1/r^2)$,” *IEEE Transactions on Signal Processing*, vol. 42, no. 1, pp. 200–203, 1994.
- [32] R. R. Coifman and S. Lafon, “Diffusion maps,” *Applied and Computational Harmonic Analysis*, vol. 21, no. 1, pp. 5–30, 2006.