Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

Pankaj K. Agarwal¹

Department of Computer Science, Duke University, Durham, NC 27708, USA pankaj@cs.duke.edu

Lars Arge²

MADALGO, Aarhus University, Aarhus, Denmark large@cs.au.dk

Frank Staals³

Dept. of Information and Computing Sciences, Utrecht University, Utrecht, The Netherlands f.staals@uu.nl

— Abstract

We present an efficient dynamic data structure that supports geodesic nearest neighbor queries for a set S of point sites in a static simple polygon P. Our data structure allows us to insert a new site in S, delete a site from S, and ask for the site in S closest to an arbitrary query point $q \in P$. All distances are measured using the geodesic distance, that is, the length of the shortest path that is completely contained in P. Our data structure achieves polylogarithmic update and query times, and uses $O(n \log^3 n \log m + m)$ space, where n is the number of sites in S and m is the number of vertices in P. The crucial ingredient in our data structure is an implicit representation of a vertical shallow cutting of the geodesic distance functions. We show that such an implicit representation exists, and that we can compute it efficiently.

2012 ACM Subject Classification Computational Geometry

Keywords and phrases data structure, simple polygon, geodesic distance, nearest neighbor searching, shallow cutting

1 Introduction

Nearest neighbor searching is a classic problem in computational geometry in which we are given a set of point sites S, and we wish to preprocess these points such that for a query point q, we can efficiently find the site $s \in S$ closest to q. We consider the case where S is a dynamic set of points inside a simple polygon P. That is, we may insert a new site into S or delete an existing one. We measure the distance between two points p and q by the length of the geodesic $\Pi(p,q)$, that is, the shortest path connecting p and q that is completely contained in P. We refer to this distance as the geodesic distance $\pi(p,q)$.

¹ P.A. was supported by NSF under grants CCF-15-13816, CCF-15-46392, and IIS-14-08846, by ARO under grant W911NF-15-1-0408, and by grant 2012/229 from the U.S.–Israel Binational Science Foundation

 $^{^2}$ L.A. was supported by the Danish National Research Foundation under grant nr. DNRF84

³ F.S. was supported by the Netherlands Organisation for Scientific Research (NWO) under project no. 612.001.651.

4:2 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

Related work. It is well known that if we have only a fixed set S of n sites, we can answer nearest neighbor queries efficiently by computing the Voronoi diagram of S and preprocessing it for planar point location. This requires $O(n \log n)$ preprocessing time, the resulting data structure uses linear space, and we can answer queries in $O(\log n)$ time. Voronoi diagrams have also been studied in case the set of sites is restricted to lie in a simple polygon P, and we measure the distance between two points p and q by their geodesic distance $\pi(p,q)$ [3, 18, 25, 27]. The approach of Hershberger and Suri [18] computes the geodesic Voronoi diagram in $O((m + n) \log(m + n))$ time, where m is the total number of vertices in the polygon P, and is applicable even if P has holes. Very recently, Oh and Ahn [25] presented an $O(m + n \log n \log^2 m)$ time algorithm. When $n \leq m/\log^3 m$ this improves the previous results. All these approaches allow for $O(\log(n + m))$ time nearest neighbor queries. However, they are efficient only when the set of sites S is fixed, as inserting or deleting even a single site may cause a linear number of changes in the Voronoi diagram.

To support nearest neighbor queries, it is, however, not necessary to explicitly maintain the (geodesic) Voronoi diagram. Bentley and Saxe [5] show that nearest neighbor searching is a *decomposable search problem*. That is, we can find the answer to a query by splitting S into groups, computing the solution for each group individually, and taking the solution that is best over all groups. This observation has been used in several other approaches for nearest neighbor searching with the Euclidean distance [1, 7, 11]. However, even with this observation, it is hard to get both polylogarithmic update and query time. Chan [7] was the first to achieve this. His data structure can answer Euclidean nearest neighbor queries in $O(\log^2 n)$ time, and supports insertions and deletions in $O(\log^3 n)$ and $O(\log^6 n)$ amortized time, respectively. Recently, Kaplan et al. [19] extended the result of Chan to more general, constant complexity, distance functions.

Unfortunately, the above results do not directly lead to an efficient solution to our problem. The function describing the geodesic distance may have complexity $\Theta(m)$, and thus the results of Kaplan et al. [19] do not apply. Moreover, even directly combining the decomposable search problem approach with the static geodesic Voronoi diagrams described above does not lead to an efficient solution, since every update incurs an $\Omega(m)$ cost corresponding to the complexity of the polygon. Only the very recent algorithm of Oh and Ahn [25] can be made amendable to such an approach. This results in an O(n + m) size data structure with $O(\sqrt{n}(\log n + \log m))$ query time and $O(\sqrt{n} \log n \log^2 m)$ updates. Independently from Oh and Ahn, we developed a different data structure yielding similar results [2]. The core idea in both data structures is to represent the Voronoi diagram implicitly. Moreover, both approaches use similar primitives. In this manuscript, we build on the ideas from our earlier work, and significantly extend them to achieve polylogarithmic update and query times.

Our results. We develop a fully dynamic data structure to support nearest neighbor queries for a set of sites S inside a (static) simple polygon P. Our data structure allows us to locate the site in S closest to a query point $q \in P$, to insert a new site s into S, and to delete a site from S. Our data structure supports queries in $O(\log^2 n \log^2 m)$ time, insertions in $O(\log^5 n \log m + \log^4 n \log^3 m)$ amortized expected time, and deletions in $O(\log^7 n \log m + \log^6 n \log^3 m)$ amortized expected time. The space usage is $O(n \log^3 n \log m + m)$.

Furthermore, we show that using a subset of the tools and techniques that we develop, we can build an improved data structure for when there are no deletions. In this insertiononly setting, queries take worst-case $O(\log^2 n \log^2 m)$ time, and insertions take amortized $O(\log n \log^3 m)$ time. We can also achieve these running times in case there are both insertions and deletions, but the order of these operations is known in advance. The space usage of this version is $O(n \log n \log m + m)$.

2 An overview of the approach

As in previous work on geodesic Voronoi diagrams [3,27], we assume that P and S are in general position. That is, (i) no two sites s and t in S (ever) have the same geodesic distance to a vertex of P, and (ii) no three points (either sites or vertices) are collinear. Note that (i) implies that no bisector b_{st} between sites s and t contains a vertex of P.

Throughout the paper we will assume that the input polygon P has been preprocessed for two-point shortest path queries using the data structure by Guibas and Hershberger [13] (see also the follow up note of Hershberger [17]). This takes O(m) time and allows us to compute the geodesic distance $\pi(p,q)$ between any pair of query points $p, q \in P$ in $O(\log m)$ time.

Dynamic Euclidean nearest neighbor searching. We briefly review the data structures for dynamic Euclidean nearest neighbor searching of Chan [7] and Kaplan et al. [19], and the concepts they use, as we will build on these results.

Let F be a set of bivariate functions, and let $\mathcal{A}(F)$ denote the arrangement of the (graphs of the) functions in \mathbb{R}^3 . In the remainder of the paper we will no longer distinguish between a function and its graph. A point $q \in \mathbb{R}^3$ has *level* k if the number of functions in F that pass strictly below q is k. The *at most* k-*level* $L_{\leq k}(F)$ is the set of all points in \mathbb{R}^3 for which the level is at most k, and the k-level $L_k(F)$ is the boundary of that region.

Consider a collection X of points in \mathbb{R}^3 (e.g. a line segment), and let F_X denote the set of functions from F intersecting X. We refer to F_X as the *conflict list* of X. Furthermore, let <u>X</u> denote the vertical (downward) projection of X onto the x, y-plane.

A pseudo-prism is a constant complexity region in \mathbb{R}^3 that is bounded from above by a function, unbounded from below, and whose sides are surfaces vertical with respect to the z-direction. A *a k-shallow* (1/r)-*cutting* $\Lambda_{k,r}(F)$ is a collection of such pseudo-prisms with pairwise disjoint interiors whose union covers $L_{\leq k}(F)$ and for which each pseudo-prism intersects at most n/r functions in F [24]. Hence, for each region (pseudo-prism) $\nabla \in \Lambda_{k,r}(F)$, the conflict list F_{∇} contains n/r functions. The number of regions in $\Lambda_{k,r}(F)$ is the size of the cutting. Matoušek [24] originally defined a shallow cutting in terms of simplicies, however using pseudo-prisms is more convenient in our setting. In this case the parameter r cannot become arbitrarily large, however we are mostly interested in k-shallow O(k/n)-cuttings. In the remainder of the paper we simply refer to such a cutting $\Lambda_k(F)$ as a k-shallow cutting. Observe that each pseudo-prism in $\Lambda_k(F)$ is intersected by O(k) functions.

Let $f_s(x)$ be the distance from x to s. The data structures of Kaplan et al. [19] and Chan [7] actually maintain the lower envelope $L_0(F)$ of the set of distance functions $F = \{f_s \mid s \in S\}$. To find the site s closest to a query point q they can simply query the data structure to find the function f_s that realizes $L_0(F)$ at q. The critical ingredient in both data structures, as well as our own data structure, is an efficient algorithm to construct a shallow cutting of the functions in F. Chan and Tsakalidis [8] show that if F is a set of linear functions (i.e. planes in \mathbb{R}^3), we can compute a k-shallow cutting $\Lambda_k(F)$ of size O(n/k) in $O(n \log n)$ time. Kaplan et al. [19] show how to compute a k-shallow cutting of size $O(n \log^2 n/k)$, in time $O(n \operatorname{polylog} n)$ for a certain class of constant complexity algebraic functions F. Since the geodesic distance function $f_s(x) = \pi(s, x)$ of a single site s may already have complexity $\Theta(m)$, any k-shallow cutting of such functions may have size $\Omega(m)$. To circumvent this issue, we allow the regions (pseudo-prisms) to have non-constant complexity. We do this in such a way that we can compactly represent each pseudo-prism, while still retaining some nice properties such as efficiently testing if a point lies inside it. Hence, in the remainder of the paper we will drop the requirement that the regions in a cutting need to have constant complexity.

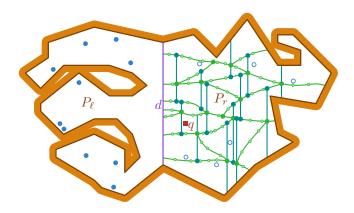


Figure 1 A schematic drawing of the downward projection of an implicit k-shallow cutting $\Lambda_k(F_\ell)$ in P_r . The faces are pseudo-trapezoids. Neighboring pseudo-trapezoids share a vertical segment, or part of a bisector. We store only the degree one and three vertices (fat), and their topology.

The general approach. The general idea in our approach is to recursively partition the polygon into two roughly equal size sub-polygons P_{ℓ} and P_r that are separated by a diagonal. For the sites S_{ℓ} in the "left" subpolygon P_{ℓ} , we then consider their geodesic distance functions $F_{\ell} = \{f_s \mid s \in S_{\ell}\}$ restricted to the "right" subpolygon P_r , that is, $f_s(x) = \pi(s, x)$, for $x \in P_r$. The crucial part, and our main contribution, is that for these functions F_ℓ we can represent a vertical shallow cutting implicitly. See Fig. 1 for a schematic illustration. More specifically, in $O((n/k)\log^3 n(\log n + \log^2 m) + n\log^2 m + n\log^3 n\log m)$ expected time, we can build a representation of the shallow cutting of size $O((n/k)\log^2 n)$. We can then use this algorithm for building implicitly represented shallow cuttings in the data structure of Chan [7] and Kaplan et al. [19]. That is, we build and maintain the lower envelope $L_0(F_\ell)$. Symmetrically, for the sites in P_r , we maintain the lower envelope $L_0(F_r)$ that their distance functions F_r induce in P_ℓ . When we get a query point $q \in P_r$, we use $L_0(F_\ell)$ to find the site in P_{ℓ} closest to q in $O(\log^2 n \log m)$ time. To find the site in P_r closest to q, we recursively query in sub-polygon P_r . In total we query in $O(\log m)$ levels, leading to an $O(\log^2 n \log^2 m)$ query time. When we add or remove a site s we, insert or remove its distance function in $O(\log m)$ lower envelope data structures (one at every level). Every insertion takes $O(\log^5 n + \log^4 n \log^2 m)$ amortized expected time, and every deletion takes $O(\log^7 n + \log^6 \log^2 m)$ amortized expected time. Since every site is stored $O(\log m)$ times, this leads to the following main result.

▶ **Theorem 1.** Let P be a simple polygon P with m vertices. There is a fully dynamic data structure of size $O(n \log^3 n \log m + m)$ that maintains a set of n point sites in P and allows for geodesic nearest neighbor queries in worst case $O(\log^2 n \log^2 m)$ time. Inserting a site takes $O(\log^5 n \log m + \log^4 n \log^3 m)$ amortized expected time, and deleting a site takes $O(\log^7 n \log m + \log^6 n \log^3 m)$ amortized expected time.

The main complexity is in developing our implicit representation of the k-shallow cutting, and the algorithm to construct such a cutting. Once we have this algorithm we can directly plug it in into the data structure of Chan [7] and Kaplan et al. [19]. Our global strategy is similar to that of Kaplan et al. [19]: we compute an approximate k-level of $\mathcal{A}(F)$ –in our case an implicit representation of this approximate k-level– and then argue that, under certain conditions, this approximate k-level is actually a k-shallow cutting $\Lambda_k(F)$ of $\mathcal{A}(F)$. Our approximate k-level will be a t-level, for some appropriate t, on a random sample of the

functions in F. So, that leaves us two problems: i) computing an implicit representation of a *t*-level, and ii) computing the conflict lists for all pseudo-prism in our cutting $\Lambda_k(F)$.

For problem *i*), representing the *t*-level implicitly, we use the connection between the *t*-level and the t^{th} -order Voronoi diagram. In Section 3 we describe a small, implicit representation of the t^{th} -order Voronoi diagram that still allows us to answer point location queries efficiently. Initially, we use the recent algorithm of Oh and Ahn [25] to construct this representation. In Section 5 we then design an improved algorithm for our particular use case.

For problem ii), computing the conflict lists, we will use a data structure developed by Chan [6] together with the implicit Voronoi diagrams that we developed in Section 5. We describe these results in more detail in Section 6. In Section 7, we then show in detail how we can combine all the different parts into a fully dynamic data structure for nearest neighbor queries. Finally, we describe our simpler data structures for insertion-only and offline-updates in Section 8.

3 Implicit representations

Let $F = \{f_s \mid s \in S\}$ denote the set of geodesic distance functions inside the entire polygon P. Our implicit representation of a k-shallow cutting $\Lambda_k(F)$ is based on an implicit representation of the k-level in $\mathcal{A}(F)$. To this end, we first study higher order geodesic Voronoi diagrams.

Higher order Voronoi diagrams. Consider a set of n sites S, a domain \mathcal{D} , and a subset $H \subseteq S$ of size k. The k^{th} -order Voronoi region $V_k(H, S)$ is the region in \mathcal{D} in which the points are closer to (a site in) H, with respect to some distance metric, than to any other subset $H' \subseteq S$ of size k. The k^{th} -order Voronoi diagram $\mathcal{V}_k(S)$ is the partition of \mathcal{D} into such maximal regions $V_k(H, S)$ over all subsets $H \subseteq S$ of size k [22]. Liu et al. [23] study the geodesic k^{th} -order Voronoi diagram. They show that $\mathcal{V}_k(S)$ has complexity O(k(n-k)+km). In particular, it consists of O(k(n-k)) degree one and degree three vertices, and O(km) degree two vertices (and by our general position assumption, there are no vertices of degree more than three).

Consider a Voronoi region $V_k(H, S)$. Let $e_1, ..., e_\ell$, be the edges bounding $\partial V_k(H, S)$, let H_j be the set of sites defining the other Voronoi region incident to e_j , and observe that $H_j \setminus H$ contains a single site q_j [22]. Let $Q = \{q_j \mid j \in [1, \ell]\}$ be the set of sites neighboring $V_k(H, S)$. Observe that these results imply that two adjacent regions $V_k(H, S)$ and $V_k(H_j, S)$ in $\mathcal{V}_k(S)$ are separated by a part of a bisector b_{st} , where $s = H \setminus H_j$ and $t = q_j$.

By combining the above two observations we can represent $\mathcal{V}_k(S)$ implicitly. That is, we store only the locations of these degree one and degree three vertices, the adjacency relations between the regions, and the pair of labels (s, t) corresponding to each pair (R_s, R_t) of neighboring regions. See also the recent result of Oh and Ahn [25]. It follows that the size of this representation is linear in the number of degree one and degree three vertices of $\mathcal{V}_k(S)$. We refer to this as the *topological complexity* of $\mathcal{V}_k(S)$.

Representing the k-level. Consider the partition of P into maximally connected regions in which all points in a region have the same k^{th} nearest site in S. Observe that this partition corresponds to the downward projection $\underline{L_k(F)}$ of the k-level $L_k(F)$. As we argue next, this partition is closely related to the k^{th} -order Voronoi diagram defined above.

Lee observes that there is a relation between the i^{th} -order Voronoi diagram and the $(i+1)^{\text{th}}$ -order Voronoi diagram [22]. In particular, he shows that we can partition each i^{th} -order Voronoi region $V_i(H, S)$ into $(i+1)^{\text{th}}$ order Voronoi regions by intersecting $V_i(H, S)$ with

4:6 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

the (first order) Voronoi diagram of the set of sites neighboring $V_i(H, S)$. More specifically:

▶ **Observation** 2. Let $V_i(H, S)$ be a geodesic *i*th-order Voronoi region, and let Q be the sites neighboring $V_i(H, S)$. For any point $p \in V_i(H, S)$, the (i + 1)-closest site from p is the site $s \in Q$ for which $p \in \mathcal{V}(s, Q)$.

▶ Lemma 3. The topological complexity of $L_k(F)$ is O(k(n-k)).

Proof. By Observation 2, we can obtain $\underline{L_k(F)}$ from $\mathcal{V}_{k-1}(S)$ by partitioning every region $V_{k-1}(H,S)$ using the Voronoi diagram of the sites Q neighboring $V_{k-1}(H,S)$, and merging regions that have the same k^{th} nearest neighbor in the resulting subdivision. Thus, the vertices in $L_k(F)$ appear either in $V_{k-1}(H,S)$ or in one of the newly created Voronoi diagrams.

There are O((k-1)(n-k+1)) = O(k(n-k)) degree one and degree three vertices that are also vertices in $V_{k-1}(H, S)$. Since the (first order) geodesic Voronoi diagram has O(k)degree one and degree three vertices, a region $V_{k-1}(H, S)$ creates |Q| new degree one and three vertices. Summing over all faces in $\mathcal{V}_{k-1}(H, S)$ this then sums to O(k(n-k)).

As with $\mathcal{V}_k(S)$ we can represent $\underline{L_k(F)}$ implicitly by storing only the locations of the degree one and three vertices and the topology of the diagram. Note that if we can efficiently locate the region R_s of $\underline{L_k(F)}$ that contains a query point q, we can also easily compute the z-coordinate of $L_k(F)$ at q, simply by computing the geodesic distance $\pi(s,q)$. Since we preprocessed P for two-point shortest path queries this takes only $O(\log m)$ time (in addition to locating the region of $L_k(F)$ containing q).

Representing a vertical decomposition. For every degree three and degree one vertex in $L_k(F)$ we now extend a vertical segment up and down until it hits another edge of $L_k(F)$. Observe that the topological complexity of the resulting *implicit vertical decomposition* $L_k^{\nabla}(F)$ that we obtain still has topological complexity O(k(n-k)). Furthermore, each region in $L_k^{\nabla}(F)$ is a *pseudo-trapezoid* Σ that is bounded on the left and right either by a vertical segment or a piece of polygon boundary, and on the top and bottom by pieces of bisectors or a piece of polygon boundary. We




Figure 2 A pseudo prism ∇ and its projection $\underline{\nabla}$ (darker red) onto P_r .

refer to the four degree one or degree three vertices on the boundary of $\underline{\nabla}$ as the *corners* of $\underline{\nabla}$. See Fig. 2 for an illustration. In the remainder of the paper, we will no longer distinguish between $\underline{L}_{k}^{\nabla}(F)$ and its implicit representation. In Section 6, we will use such an implicit vertical decomposition to obtain an implicit representation of a shallow cutting.

Computing implicit representations. We can use the algorithm of Oh and Ahn [25] to compute the implicit representation of $\mathcal{V}_k(S)$ in $O(k^2n\log n\log^2 m)$ time. To compute (the representation of) $\underline{L_k(F)}$ we first construct $\mathcal{V}_{k-1}(S)$, and for each region $\mathcal{V}_{k-1}(H,S)$ in $\mathcal{V}_{k-1}(S)$, we again use their algorithm to compute the Voronoi diagrams $\mathcal{V}(Q)$ of the set neighbors Q. We then clip these diagrams to $V_{k-1}(H,S)$. This clipping can be done by a breadth first search in $\mathcal{V}(Q)$, starting with one of the vertices that is also in $\partial \mathcal{V}_{k-1}(H,S)$. This takes $O(|Q| \log |Q| \log^2 m)$ time in total. Summing over all faces in $\mathcal{V}_{k-1}(S)$ gives us again a running time of $O(k^2n\log n\log^2 m)$. Finally, to compute $\underline{L_k^{\nabla}(F)}$ we need to insert two vertical extension segments at each vertex of $\underline{L_k(F)}$. We can find the other endpoint of each extension segment using a point location query. Thus, we obtain the following result.

▶ Lemma 4. An implicit representation $L_k^{\nabla}(F)$ of the k-level $L_k(F)$ that uses O(k(n-k))space, can be computed in $O(k^2 n \log n \log^2 m)$ time. Using this representation, the pseudoprism containing a query point (if it exists) can be determined in $O(\log n + \log m)$ time.

In Section 5 we will show that if the sites defining the functions in F lie in one half of the polygon and we restrict the functions to the other half we can improve these results. Moreover, we can then compute an implicit representation of a k-shallow cutting of F.

4 Approximating the k-level

An xy-monotone surface Γ is an ε -approximation of $L_k(F)$ if and only if Γ lies between $L_k(F)$ and $L_{(1+\varepsilon)k}(F)$. Following the same idea as in Kaplan et al. [19] we construct an ε -approximation of $L_k(F)$ as follows. We choose a random sample R of F of size $r = (cn/k\varepsilon^2) \log n$ and consider the t-level of $\mathcal{A}(R)$ for some randomly chosen level t in the range $[(1+\varepsilon/3)h, (1+\varepsilon/2)h]$. Here c and c' are some constants, $h = c'/\varepsilon^2 \log n$, and $\varepsilon \in [0, 1/2]$ is the desired approximation ratio. We now argue that $L_t(R)$ is an ε -approximation of $L_k(F)$.

Consider the range space $\mathcal{S} = (F, \mathcal{R})$, where each range in \mathcal{R} is the subset of functions of F intersected by a downward vertical ray in the (-z)-direction. See Har-Peled [15] for details on range spaces. An important concept is the *VC*-dimension of \mathcal{S} , defined as the size of the largest subset $F' \subseteq F$ for which the number of sets in $\{F' \cap F_{\rho} \mid F_{\rho} \in \mathcal{R}\}$ is $2^{|F'|}$.

▶ Lemma 5 (Lemma 2.3.5 of Aronov et al. [4]). Let s, t, and u be three sites in P. Their bisectors b_{st} and b_{tu} intersect in at most a single point.

Lemma 6. The VC-dimension of the range space S is finite.

Proof. The range space (F, \mathcal{R}) is equivalent to (S_{ℓ}, \mathcal{D}) where $\mathcal{D} \subseteq 2^{S_{\ell}}$ is the family of subsets of S_{ℓ} that lie within some geodesic distance of some point $p \in P$. That is $\mathcal{D} = \{\{s \in S_{\ell} \mid \pi(p, s) \leq z\} \mid p \in P, z \geq 0\}$. We now observe that any three points s, t, and u, define at most one geodesic disk (Lemma 5). Namely, the disk centered at the intersection point $p = b_{st} \cap b_{tu}$ and radius $\pi(p, s) = \pi(p, t) = \pi(p, u)$. This means the same argument used by as Har-Peled [15, Lemma 5.15] now gives us that the shattering dimension of \mathcal{S} (see [15]) is constant (three). It then follows that the VC-dimension of \mathcal{S} is finite.

Since S has finite VC-dimension (Lemma 6), and R has size $r = (cn/k\varepsilon^2)\log n \ge \left(\frac{c}{\varepsilon^2 p}\left(\log \frac{1}{p} + \log \frac{1}{q}\right)\right)$, for $p = \frac{k}{2n}$ and $q = 1/n^b$ for some sufficiently large constant b, it follows that with high probability, R is a *relative* $(p, \frac{\varepsilon}{3})$ -approximation for $S = (F, \mathcal{R})$ [16]. So, for every range $H \in \mathcal{R}$, we have (whp.) that

$$\left|\frac{|H|}{|F|} - \frac{|H \cap R|}{|H|}\right| \le \begin{cases} \frac{\varepsilon}{3} \frac{|H|}{|F|}, & \text{if } |H| \ge p|F|, \text{ and} \\ \frac{\varepsilon}{3}p & \text{if } |H| < p|F|. \end{cases}$$
(1)

Using exactly the same argument as Kaplan et al. [19] we then obtain the following result.

▶ Lemma 7. The level $L_t(R)$ is an ε -approximation of the k-level $L_k(F)$.

What remains is to show that the (expected) topological complexity of the *t*-level $L_t(R)$ is small, that is, that the expected number of degree three and degree one vertices is at most $O((n/k\varepsilon^5)\log^2 n)$.

▶ Lemma 8. The expected topological complexity of level $L_t(R)$ is $O((n/k\varepsilon^5)\log^2 n)$.

4:8 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

Proof. The lower envelope $L_0(R)$ of R has topological complexity O(r), so by Clarkson and Shor [9] the total topological complexity of all levels in the range $[(1 + \varepsilon/3)h, (1 + \varepsilon/2)h]$ is $O(rh^2)$. Hence, the expected topological complexity of a level $L_t(R)$, with t randomly chosen from this range, is $O(rh^2/h\varepsilon) = O(rh/\varepsilon)$. Substituting $r = (cn/k\varepsilon^2) \log n$ and $h = c'/\varepsilon^2 \log n$, we get $O(nk/\varepsilon^5 \log^2 n)$ as claimed.

Again as in Kaplan et al. [19], if $k < (1/\varepsilon^2) \log n$, we can skip the sampling of the set R, and directly take a random level t in $\mathcal{A}(F)$ in the range $[k, k(1 + \varepsilon)]$. This level has also an expected topological complexity of at most $O((n/k\varepsilon^5) \log^2 n)$. Using Lemma 4 (and restarting the computation if the size of the cutting exceeds $O((n/k\varepsilon^5) \log^2 n)$) we then get:

▶ Lemma 9. An ε -approximation of the k-level of $\mathcal{A}(F)$ that has topological complexity $O((n/k\varepsilon^5)\log^2 n)$ can be computed in expected $O((n/k\varepsilon^6)\log^3 n\log^2 m)$ time.

The main difference between our approach and that of Kaplan et al. [19] is the range space used. In our approach, the ranges are defined by downward vertical rays, whereas in Kaplan et al. the ranges are defined by more general objects. For example, their range space includes a range consisting of the functions intersected by some other constant complexity algebraic function. This allows them to directly turn their approximate level into a shallow cutting. Unfortunately, this idea does not directly extend to the geometric setting, as the VC-dimension of such a range space may again depend on the complexity of the polygon. Therefore, we will use a different approach in Section 6.

5 Computing implicit representations in subpolygon P_r

Consider a diagonal d that splits the polygon P into two subpolygons P_{ℓ} and P_r , and assume without loss of generality that d is vertical and that P_r lies right of d. We consider only the sites S_{ℓ} in P_{ℓ} , and we restrict their functions $F = \{f_s \cap (P_r \times \mathbb{R}) \mid s \in S_{\ell}\}$ to P_r . We now present a more efficient algorithm to compute the implicit representation of $L_k(F)$ in this setting. To this end, we show that the two-point shortest path query data structure of Guibas and Hershberger [13] essentially gives us an efficient way of accessing the bisector b_{st} between a pair of sites without explicitly computing it. See Appendix A. In Section 5.1 we first use this to compute an implicit representation of the Voronoi diagram of S_{ℓ} in P_r . Building on these results, we can compute an implicit representation of the k^{th} -order Voronoi diagram $\mathcal{V}_k(S_{\ell})$ in P_r (Section 5.2), the k-level $L_k(F)$ of F in $P_r \times \mathbb{R}$ (Section 5.3), and finally an implicit vertical decomposition $L_k^{\nabla}(F)$ of $L_k(F)$ in P_r (Section 5.3).

5.1 Computing an implicit Voronoi diagram

The Voronoi diagram $\mathcal{V} = \mathcal{V}(S_{\ell})$ in P_r is a forest [3]. We now show that we can compute (the topology of) this forest efficiently by considering it as an abstract Voronoi diagram [21]. Our forest stores only the locations of the degree one and degree three vertices and their adjacencies. This turns out to be sufficient to still answer point location queries efficiently.

Assuming that certain geometric primitives like computing the intersections between "related" bisectors take O(X) time we can construct an abstract Voronoi diagram of n sites in expected $O(Xn \log n)$ time [21]. We will show that \mathcal{V} is a actually a *Hamiltonian* abstract voronoi diagram, which means that it can be constructed in O(Xn) time [20]. We show this in Section 5.1.1. In Section 5.1.2 we discuss the geometric primitives used by the algorithm of Klein and Lingas [20]; essentially computing (a representation of) the concrete Voronoi diagram of five sites. We show that we can implement these primitives in $O(\log^2 m)$ time

by computing the intersection point between two "related" bisectors b_{st}^* and b_{tu}^* . This then gives us an $O(n \log^2 m)$ time algorithm for constructing \mathcal{V} . Finally, in Section 5.1.3 we argue that having only the topological structure \mathcal{V} is sufficient to find the site in S_{ℓ} closest to a query point $q \in P_r$.

5.1.1 Hamiltonian abstract Voronoi diagrams

In this section we show that we can consider \mathcal{V} as a Hamiltonian abstract Voronoi diagram. A Voronoi diagram is *Hamiltonian* if there is a curve –in our case the diagonal d– that intersects all regions exactly once, and furthermore this holds for all subsets of the sites [20]. Let S_{ℓ} be the set of sites in P_{ℓ} that we consider, and let T_{ℓ} be the subset of sites from S_{ℓ} whose Voronoi regions intersect d, and thus occur in \mathcal{V} .

▶ Lemma 10. The Voronoi diagram $\mathcal{V}(T_{\ell})$ in P_r is a Hamiltonian abstract Voronoi diagram.

Proof. By Lemma 29 any bisector b_{st} intersects the diagonal d at most once. This implies that for any subset of sites $T \subseteq S_{\ell}$, so in particular for T_{ℓ} , the diagonal d intersects all Voronoi regions in $\mathcal{V}(T)$ at most once. By definition, d intersects all Voronoi regions of the sites in T_{ℓ} at least once. What remains is to show that this holds for any subset of T_{ℓ} . This follows since the Voronoi region $V(s, T_1 \cup T_2)$ of a site s with respect to a set $T_1 \cup T_2$ is contained in the voronoi region $V(s, T_1)$ of s with respect to T_1 .

Computing the order along *d*. We will use the algorithm of Klein and Lingas [20] to construct $\mathcal{V} = \mathcal{V}(S_{\ell}) = \mathcal{V}(T_{\ell})$. To this end, we need the set of sites T_{ℓ} whose Voronoi regions intersect *d*, and the order in which they do so. Next, we show that we can maintain the sites in S_{ℓ} so that we can compute this information in $O(n \log^2 m)$ time.

▶ Lemma 11. Let $s_1, ..., s_n$ denote the sites in S_ℓ ordered by increasing distance from the bottom-endpoint p of d, and let $t_1, ..., t_z$ be the subset $T_\ell \subseteq S_\ell$ of sites whose Voronoi regions intersect d, ordered along d from bottom to top. For any pair of sites $t_a = s_i$ and $t_c = s_j$, with a < c, we have that i < j.

Proof. Since t_a and t_c both contribute Voronoi regions intersecting d, their bisector must intersect d in some point w in between these two regions. Since a < c it then follows that all points on d below w, so in particular the bottom endpoint p, are closer to $t_a = s_i$ than to $t_c = s_j$. Thus, i < j.

Lemma 11 suggests a simple iterative algorithm for extracting T_{ℓ} from $S_{\ell} = s_1, ..., s_n$.

▶ Lemma 12. Given $S_{\ell} = s_1, .., s_n$, T_{ℓ} can be computed from S_{ℓ} in $O(n \log^2 m)$ time.

Proof. We consider the sites in S_{ℓ} in increasing order, while maintaining T_{ℓ} as a stack. More specifically, we maintain the invariant that when we start to process s_{j+1} , T_{ℓ} contains exactly those sites among $s_1, ..., s_j$ whose Voronoi region intersects d, in order along d from bottom to top.

Let s_{j+1} be the next site that we consider, and let $t = s_i$, for some $i \leq j$, be the site currently at the top of the stack. We now compute the distance $\pi(s_{j+1}, q)$ between s_{j+1} and the topmost endpoint q of d. If this distance is larger than $\pi(t, q)$, it follows that the Voronoi region of s_{j+1} does not intersect d: since the bottom endpoint p of d is also closer to $t = s_i$ than to s_{j+1} , all points on d are closer to t than to s_{j+1} .

If $\pi(s_{j+1}, q)$ is at most $\pi(t, q)$ then the Voronoi region of s_{j+1} intersects d (since t was the site among $s_1, ..., s_j$ that was closest to q before). Furthermore, since p is closer to $t = s_i$

4:10 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

than to s_{j+1} the bisector between s_{j+1} and t must intersect d in some point a. If this point a lies above the intersection point c of d with the bisector between t and the second site t' on the stack, we have found a new additional site whose Voronoi region intersects d. We push s_{j+1} onto T_{ℓ} and continue with the next site s_{j+2} . Note that the Voronoi region of every site intersects d in a single segment, and thus T_{ℓ} correctly represents all sites intersecting d. If a lies below c then the Voronoi region of t, with respect to $s_1, ..., s_{j+1}$, does not intersect d. We thus pop t from T_{ℓ} , and repeat the above procedure, now with t' at the top of the stack.

Since every site is added to and deleted from T_{ℓ} at most once the algorithm takes a total of O(n) steps. Computing $\pi(s_{j+1}, q)$ takes $O(\log m)$ time, and finding the intersection between d and the bisector of s_{j+1} and t takes $O(\log^2 m)$ time (Lemma 40). The lemma follows.

We now simply maintain the sites in S_{ℓ} in a balanced binary search tree on increasing distance to the bottom endpoint p of d. It is easy to maintain this order in $O(\log m + \log k)$ time per upate. We then extract the set of sites T_{ℓ} that have a Voronoi region intersecting d, and thus P_r , ordered along d using the algorithm from Lemma 12.

5.1.2 Implementing the required geometric primitives

In this section we discuss how to implement the geometric primitives needed by the algorithm of Klein and Lingas [20]. They describe their algorithm in terms of the following two basic operations: (i) compute the concrete Voronoi diagram of five sites, and (ii) insert a new site s into the existing Voronoi diagram $\mathcal{V}(S)$. In their analysis, this first operation takes constant time, and the second operation takes time proportional to the size of $\mathcal{V}(S)$ that lies inside the Voronoi region of t in $\mathcal{V}(S \cup \{t\})$. We observe that that to implement these operations it is sufficient to be able to compute the intersection between two "related" bisectors b_{st} and b_{tu} –essentially computing the Voronoi diagram of three sites– and to test if a given point qlies on the s-side of the bisector b_{st} (i.e. testing if q is "closer to" s than to t). We then show that in our setting we can implement these operations in $O(\log^2 m)$ time, thus leading to an $O(n \log^2 m)$ time algorithm to compute \mathcal{V} .

Inserting a new site. Klein and Lingas [20] sketch the following algorithm to insert a new site t into the Hamiltonian Voronoi diagram $\mathcal{V}(S)$ of a set of sites S. We provide some missing details of this procedure, and briefly argue that we can use it to insert into a diagram of three sites. Let D denote the domain in which we are interested in $\mathcal{V}(S)$ (in our application, D is the subpolygon P_r) and let d be the curve that intersects all regions in $\mathcal{V}(S)$. Recall that $\mathcal{V}(S)$ is a forest. We root all trees such that the leaves correspond to the intersections of the bisectors with d. The roots of the trees now corresponds to points along




Figure 3 The part of T, the tree representing the Hamiltonian Voronoi diagram (green), that lies inside the Voronoi region V (blue) of a new site t is a subtree T' (fat). We can compute T', by exploring T from a point p inside V. In case t is the first site in the ordering along d we can start from the root h of the "first" tree in \mathcal{V} .

the boundary ∂D of D. We connect them into one tree T using curves along ∂D . Now consider the Voronoi region V of t with respect to $S \cup \{t\}$, and observe that $T \cap V$ is a subtree T' of T. Therefore, if we have a starting point p on T that is known to lie in V (and

thus in T'), we can compute T' simply by exploring T. To obtain $\mathcal{V}(S \cup \{t\})$ we then simply remove T', and connect up the tree appropriately. See Fig. 3 for an illustration. We can test if a vertex v of T is part of T' simply by testing if v lies on the t-side of the bisector between t and one of the sites defining v. We can find the exact point q where an edge (u, v) of T, representing a piece of a bisector b_{su} leaves V by computing the intersection point of b_{su} with b_{tu} and b_{st} .

We can find the starting point p by considering the order of the Voronoi regions along d. Let s and u be the predecessor and successor of t in this order. Then the intersection point of d with b_{su} must lie in V. This point corresponds to a leaf in T. In case t is the first site in the ordering along d we start from the root h of the tree that contains the bisector between the first two sites in the ordering; if this point is not on the t-side of the bisector between t and one of the sites defining h then b_{tu} forms its own tree (which we then connect to the global root). We do the same when t is the last point in the ordering. This procedure requires O(|T'|) time in total (excluding the time it takes to find t in the ordering of S; we already have this information when the procedure is used in the algorithm of Klein and Lingas [20]).

We use the above procedure to compute the Voronoi diagram of five sites in constant time: simply pick three of the sites s, t, and u, ordered along d, compute their Voronoi diagram by computing the intersection of b_{st} and b_{tu} (if it exists), and insert the remaining two sites. Since the intermediate Voronoi diagrams have constant size, this takes constant time.

Computing the intersection of bisectors b_{st}^* and b_{tu}^* . Since \mathcal{V} is a Hamiltonian Voronoi diagram, any any pair of bisectors b_{st}^* and b_{tu}^* , with $s, t, u \in T_{\ell}$, intersect at most once (Lemma 5). Next, we show how to compute this intersection point (if it exists).

▶ Lemma 13. Given $\hat{\mathcal{P}}(z, s, t)$ and $\hat{\mathcal{P}}(z', t, u)$, finding the intersection point p of b_{st}^* and b_{tu}^* (if it exists) takes $O(\log^2 m)$ time.

Proof. We will find the edge of b_{st}^* containing the intersection point p by binary searching along the vertices of b_{st}^* . Analogously we find the edge of b_{tu}^* containing p. It is then easy to compute the exact location of p in constant time.

Let w be the starting point of b_{st}^* , i.e. the intersection of b_{st} with d, and assume that t is closer to w than u, that is, $\pi(t, w) < \pi(u, w)$ (the other case is symmetric). In our binary search, we now simply find the last vertex v = v_k for which $\pi(t, v) < \pi(u, v)$. It then follows




Figure 4 We find the intersection point of the two bisectors by binary searching along b_{st}^* .

that p lies on the edge (v_k, v_{k+1}) of b_{st}^* . See Fig. 4. Using Lemma 39 we can access any vertex of b_{st}^* in $O(\log m)$ time. Thus, this procedure takes $O(\log^2 m)$ time in total.

Note that we can easily extend the algorithm from Lemma 13 to also return the actual edges of b_{st}^* and b_{tu}^* that intersect. With this information we can construct the cyclic order of the edges incident to the vertex of \mathcal{V} representing this intersection point. It now follows that for every group S_{ℓ} of sites in P_{ℓ} , we can compute a representation of \mathcal{V} of size O(k) in $O(k \log^2 m)$ time.


4:12 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

5.1.3 Planar point location in V

In this section we show that we can efficiently answer point location queries, and thus nearest neighbor queries using \mathcal{V} .

▶ Lemma 14. For $s,t \in S_{\ell}$, the part of the bisector $b_{st}^* = b_{st} \cap P_r$ that lies in P_r is *x*-monotone.

Proof. Assume, by contradiction, that b_{st} is not x-monotone in P_r , and let p be a point on b_{st} such that p_x is a local maximum. Since b_{st}^* is not x-monotone, it intersects the vertical line through p also in another point p' further along b_{st}^* . Let q be a point in the region enclosed by the subcurve along b_{st}^* from p to p' and $\overline{pp'}$. See Fig. 5. This means that either $\Pi(s,q)$ or $\Pi(t,q)$ is non x-monotone. Assume without loss of generality that it is $\Pi(s,q)$. It is now easy to show that $\Pi(s,q)$ must pass through p. However, that means that b_{st}^* (and thus b_{st}) touches the polygon boundary in p. By the general position assumption b_{st} has no points in common with ∂P other than its end points. Contradiction.



Since the (restriction of the) bisectors are x-monotone (Lemma 14) we can preprocess \mathcal{V} for point location using the data structure of Edelsbrunner and Stolfi [12]. Given the

Figure 5 A non *x*-monotone bisector can occur only in degenerate inputs.

combinatorial embedding of \mathcal{V} , this takes $O(|\mathcal{V}|)$ time. To decide if a query point q lies above or below an edge $e \in \mathcal{V}$ we simply compute the distances $\pi(s,q)$ and $\pi(t,q)$ between q and the sites s and t defining the bisector corresponding to edge e. This takes $O(\log m)$ time. Point q lies on the side of the site that has the shorter distance. It follows that we can preprocess \mathcal{V} in O(k) time, and locate the Voronoi region containing a query point q in $O(\log k \log m)$ time. We summarize our results in the following Lemma.

▶ Lemma 15. Given a set of n sites S_{ℓ} in P_{ℓ} , ordered by increasing distance from the bottom-endpoint of d, the forest \mathcal{V} representing the Voronoi diagram of S_{ℓ} in P_r can be computed in $O(n \log^2 m)$ time. Given \mathcal{V} , finding the site $s \in S_{\ell}$ closest to a query point $q \in P_r$ requires $O(\log n \log m)$ time.

5.2 Computing an implicit kth-order Voronoi diagram

Based on the relation between the i^{th} -order Voronoi diagram and the $(i + 1)^{\text{th}}$ -order Voronoi diagram (see Section 3) Lee developed an iterative algorithm to compute the Euclidean k^{th} -order Voronoi diagram in $O(nk^2)$ time. His algorithm extends to any distance metric. Since the geodesic distance is a metric, this approach, together with our algorithm from the previous section gives us a way to compute $\mathcal{V}_k(S_\ell)$ in P_r . We obtain a $O(k^2n(\log n + \log^2 m))$ time algorithm. This then results in an $O(k^2n(\log n + \log^2 m))$ time algorithm for computing a decomposition of (space below the) k-level into pseudo-prisms.

▶ **Theorem 16.** An implicit representation of the k-th order Voronoi diagram of S_{ℓ} in P_r can be constructed in $O(k^2n(\log n + \log^2 m))$ time.

Proof. We use Lee's algorithm to iteratively build the k-th order Voronoi diagram $\mathcal{V}_k(S_\ell)$ in P_r . Consider a cell $C = V_i(H, S_\ell)$ in the *i*th-order Voronoi diagram. We collect the set of sites Q neighboring C by traversing ∂C , and order them on increasing distance to the bottom endpoint of d. Note that each edge e_j on ∂C corresponds to a piece of bisector b_{st} , and the

site $q_j \in Q$ that we are looking for is either s or t, depending on which side of b_{st} our cell C lies. This means that we can collect the q sites in Q, and order them on increasing distance to the bottom endpoint of d in $O(q(\log q + \log m))$ time. We then construct (an implicit representation) of its voronoi diagram $\mathcal{V}(Q)$ in P_r in $O(q \log^2 m)$ time (Lemma 15). Finally, we clip $\mathcal{V}(Q)$ to C. Since all intersection points of $\mathcal{V}(Q)$ with C are vertices of $\mathcal{V}_i(S_\ell)$ on ∂C (see Lee [22]), all that remains is to find these points in $\mathcal{V}(Q)$. We use a point location query to find one of the vertices of ∂C in $\mathcal{V}(Q)$, and then find the remaining vertices in C using a breadth first search in $\mathcal{V}(Q)$. It follows that in total we spend at most $O(q(\log n + \log^2 m))$ time. Summing over all O(i(n-i)) cells in $\mathcal{V}_i(S_\ell)$, and all k rounds, gives us a running time of $O(k^2n(\log n + \log^2 m))$ as claimed.

Similar to in Theorem 16 we can compute the downward projection $L_k(F)$ of the k-level.

5.3 Computing an implicit vertical decomposition of $L_k(F)$

We now show how to turn our implicit representation of $\underline{L_k(F_\ell)}$ into an implicit vertical decomposition as follows. We note that this same procedure applies for computing a vertical decomposition of $\mathcal{V}_k(S_\ell)$.

▶ Lemma 17. A representation $L_k^{\nabla}(F)$ of the k-level $L_k(F)$ consisting of O(k(n-k)) pseudotrapezoids can be computed in $O(k^2n(\log n + \log^2 m))$ time. Given a query point $q \in P_r$, the k-nearest site in S_ℓ can be reported in $O(\log n \log m)$ time.

Proof. For every vertex v, we know the faces of $\underline{L_k(F)}$ incident to v directly above and below v. The upward and downward extension segments will be contained in these faces, respectively. For each face X, we collect the vertices whose upward extension segment will be contained in X, and use a simple sweep line algorithm to compute which edge of (the implicit representation of) X each such extension segment hits. For each vertex v we then know that the upper endpoint of its upward extension segment lies on a bisector b_{st} , for some $s, t \in S_\ell$. To find the exact location of this endpoint, we use a binary search along b_{st} . We use the same approach for finding the bottom endpoint of the downward extension segment. Finding the edges of the implicit representation of $\mathcal{V}_k(S_\ell)$ hit, takes $O(|X| \log |X|)$ time per face, summing over all faces this solves to $O(kn \log n)$. The final binary search to find the exact location of the endpoint takes $O(\log^2 m)$ time per point (Theorem 41). It follows that we spend $O(k(n-k)(\log n + \log^2 m))$ time to compute all extension segments. This is dominated by the time it takes to compute $\underline{L_k(F)}$ itself. Note that in the resulting subdivision, all faces are again monotone (ignoring the boundary of P), so we can preprocess it for efficient point location as in Section 5.1.

6

An implicit shallow cutting of the geodesic distance function

Let F again denote the set of geodesic distance functions that the sites S_{ℓ} in P_{ℓ} induce in P_r . We now argue that we can compute an implicit k-shallow cutting $\Lambda_k(F)$ for these functions.

As in Section 4, let R be our random sample of size r, and let $L_t(R)$ be our approximate k-level of $\mathcal{A}(F)$. Let \underline{L}_t^{∇} be the vertical decomposition of L_t . We now raise every pseudo-trapezoid in \underline{L}_t^{∇} to the t-level. Denote the result by Λ . Let $F_p = F_{\rho(p)}$ denote the conflict list of $p \in \mathbb{R}^3$, i.e., the functions intersecting the vertical downward half-line $\rho(p)$ starting in p.

▶ Lemma 18. Let ∇ be a pseudo prism in Λ . The conflict list F_{∇} of ∇ is the union of the conflict lists of its corners W, i.e. $F_{\nabla} = \bigcup_{v \in W} F_v$.

4:14 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

Proof. Let f_s be the function defining the ceiling of ∇ . We have that $F' = \bigcup_{v \in W} F_v \subseteq F_{\nabla}$ by definition, so we focus on proving $F_{\nabla} \subseteq F'$. Assume by contradiction that $f_t \in F_{\nabla}$, but $f_t \notin F'$. So, there is a point $q \in \underline{\nabla}$ for which $\pi(t,q) < \pi(s,q)$, but $\pi(s,v) < \pi(t,v)$ for all corners $v \in W$. Hence, all four corners lie on the "s-side" of b_{st}^* , whereas p lies on the "t-side" of b_{st}^* . Assume without loss of generality that s is closer to the points above b_{st}^* (and thus all corners lie above b_{st}^*). See Fig. 6. Since b_{st}^* is x-monotone (Lemma 14) it must intersect the bottom edge of ∇ twice. This bottom edge is part of a single bisector b_{su}^* , for some $f_u \in F$. However, by Lemma 5 b_{st}^* and b_{su}^* intersect at most Once. Contradiction.




Figure 6 Since the bisectors restricted to P_r are x-monotone it follows that if a site t conflicts with a prism ∇ , it must conflict with a corner of ∇ .

◄

▶ **Theorem 19.** Λ is a vertical k-shallow $(k(1 + \varepsilon)/n)$ -cutting of $\mathcal{A}(F)$ whose topological complexity, and thus its size, is $O((n/k\varepsilon^5)\log^2 n)$. Each pseudo-prism in Λ intersects at least k and at most $4k(1 + \varepsilon)$ functions in F.

Proof. By Lemma 8 Λ consists of $O((n/k\varepsilon^5)\log^2 n)$ regions. Note that all regions are pseudoprisms. Lemma 18 then gives us that the conflict list of each pseudo-prism is contained in the conflict lists of its at most four corners.

6.1 Computing the conflict lists

Using Lemma 17 we can construct an implicit representation of the k-shallow cutting $\Lambda = \Lambda_k(F)$. So, all that remains is to compute the conflict lists of the pseudo-prisms. By Lemma 18 it is sufficient to compute the conflict lists of the four corner points of each pseudo-prism. Next, we show how to do this in $O(n(\log^3 n \log m + \log^2 m))$ expected time.

We use the same approach as used by Chan [6]. That is, we first build a data structure on our set of functions F so that for a vertical query line ℓ (in \mathbb{R}^3) and a value k, we can report the lowest k functions intersected by ℓ in $O((\log n + k) \log m)$ expected time. We then extend this to report only the functions that pass strictly below some point $q \in \mathbb{R}^3$. To compute the conflict lists of all corners in $\Lambda_k(F)$ we repeatedly query this data structure.

The data structure. Our data structure consists of a hierarchy of the lower envelopes of random samples $R_0 \subset R_1 \subset .. \subset R_{\log n}$, where $|R_i| = 2^i$. For each set R_i we store an implicit vertical decomposition representing the (the downward projection of the) lower envelope $L_{0,i} = L_0(R_i)$. This decomposes the space below $L_{0,i}$ into pseudo-prisms. For each such pseudo-prism ∇ we store its conflict list F_{∇} with respect to F, i.e. the functions from (the entire set) F that intersect ∇ . The following lemma shows that for each R_i , the expected amount of space used is O(n). The total expected space used is thus $O(n \log n)$.

▶ Lemma 20. Let $r \in [1, n]$ and consider a random sample R of F of size r. (i) The expected value of $\sum_{\nabla} |F_{\nabla}|$ over all pseudo-prisms below $L_0(R)$ is O(n), and (ii) For any vertical line ℓ , the expected value of $|F_{\nabla}|$, where ∇ is the pseudo-prism of $L_0(R)$ intersected by ℓ , is O(n/r).

Proof. The first statement follows directly from a Clarkson and Shor style sampling argument. More specifically, from what Har-Peled [15] calls the "Bounded moments theorem" (Theorem 8.8). The second statement then follows directly from the first statement.

Building the data structure. For each set R_i , we use the algorithm from Section 5 to construct an implicit vertical decomposition of $L_{0,i}$. To this end, we need to order the (sites corresponding to the) functions in R_i on increasing distance to the bottom endpoint of the diagonal d. For $R_{\log n} = F$ we do this in $O(n(\log n + \log m))$ time. For R_{i-1} we do this by filtering the ordered set R_i in linear time. Since the sizes of R_i are geometrically decreasing, it follows that we spend $O(n(\log n + \log^2 m))$ time in total.

▶ Lemma 21. Let $f_s \in F \setminus R$ be a function that intersects a pseudo-prism of $L_0(R)$, let T be the set of sites whose functions contribute to $L_0(R)$, ordered on increasing distance from the bottom endpoint of d, and let t and u be the predecessor and successor of s in T, respectively. The vertex $v \in L_0(R)$ that represents $d \cap b_{tu}$ is closer to s than to t and u.

Proof. If f_s intersects a pseudo prism of $L_0(R)$ then there is a point $q \in P_r$ for which s is closer than all other sites in T. It follows that there must be a point on the diagonal d that is closer to s than to all other sites in T. Lemma 11 then gives us that the Voronoi region of s (with respect to $R \cup \{s\}$) on d must lie in between that of t and u (if these still contribute a Voronoi region). Therefore, t and u no longer have a vertex of $\mathcal{V}(R \cup \{s\})$ on d. Since t and u were the closest sites to v in R, this implies that v must lie in the Voronoi region of s, hence s is closer to v than t and u.

By Lemma 21 we can now compute the conflict lists of the cells in $L_{0,i}$ as follows. For each function $f_s \in F \setminus R_i$ we find the vertex v defined in Lemma 21. If s is further from vthan the sites defining it, then f_s does not conflict with any pseudo-prism in $L_{0,i}$. Otherwise, we find all (degree one or degree three) vertices of $L_{0,i}$ that conflict with s. Since Voronoi regions are simply connected, we can do this using a breadth first search in $L_{0,i}$, starting from vertex v. When we have this information for all functions in $F \setminus R_i$, we actually also know for every vertex v in $L_{0,i}$ which functions $F \setminus R_i$ pass below it. That is, we have the conflict lists for all vertices v. The conflict list of a pseudo-prism in $L_{0,i}$ is then simply the union of the conflict lists of its four corners (Lemma 18).

Given the ordering of all sites in S on increasing distance to the bottom endpoint of d, we can find the initial vertices for all functions in $F \setminus R_i$ in $O(|R_i| \log m))$ time. For every other reported conflict we spend $O(\log m)$ time, and thus computing the conflict lists for all cells in $L_{0,i}$ takes $O(\sum_{\nabla \in L_{0,i}} |F_{\nabla}| \log m)$ time. By Lemma 20 this sums to $O(n \log m)$ in expectation. Summing over all $O(\log n)$ random samples, it follows that we spend $O(n \log n \log m)$ expected time to compute all conflict lists. The total expected time to build the data structure is thus $O(n(\log^2 m + \log n \log m))$.

Querying. The query algorithm is exactly as in Chan [6]. The main idea is to use a query algorithm that may fail, depending on some parameter δ , and then query with varying values of δ until it succeeds. The query algorithm locates the cell ∇ in $L_0(R_i)$ stabbed by the vertical line ℓ , for $i = \lceil \log \lceil n\delta/k \rceil \rceil$. If $|F_{\nabla}| > k/\delta^2$ or $|F_{\nabla} \cap \ell| < k$ the query algorithm simply fails. Otherwise it reports the k lowest functions intersecting ℓ . Since computing the intersection of a function f_s with ℓ takes $O(\log m)$ time, the running time is $O((\log n + k/\delta^2) \log m)$. Using three independent copies of the data structure, and querying with $\delta = 2^{-j}$ for increasing j gives us an algorithm that always succeeds in $O((\log n + k) \log m)$ time. Refer to Chan [6] for details. We can now also report all functions that pass below a point q by repeatedly querying with the vertical line through q and doubling the value of k. This leads to a query time of $O((\log n + k) \log m)$, where k is the number of functions passing below q.

4:16 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

▶ **Theorem 22.** There is a data structure of size $O(n \log n)$ that allows reporting the k lowest functions in $\mathcal{A}(F)$ intersected by a vertical line through a query point $q \in P_r$, that is, the k-nearest neighbors of a query point q, or all k functions that pass below q, in $O((\log n+k) \log m)$ time. Building the data structure takes $O(n(\log n \log m + \log^2 m))$ expected time.

Computing a shallow cutting. To construct a shallow cutting we now take a random sample R of size r, build an implicit representation of the t-level in this sample, and then construct the above data structure to compute the conflict lists. By Lemma 17 constructing the implicit representation of $L_t(R)$ takes $O(t^2r(\log r + \log^2 m))$ time. Plugging in $r = (cn/k\varepsilon^2)\log n$, $t = \Theta(1/\varepsilon^2\log n)$, and $\varepsilon = 1/2$, this takes $O((n/k)\log^3 n(\log n + \log^2 m))$ expected time.

Constructing the query data structure takes $O(n(\log n \log m + \log^2 m))$ time. We then query it with all degree three and degree one vertices in Λ . The total size of these conflict lists is $O(n \log^2 n)$ (Theorem 19). So, this takes $O(n \log^3 n \log m)$ time in total. We conclude:

► Theorem 23. A k-shallow cutting $\Lambda_k(F)$ of F of topological complexity $O((n/k)\log^2 n)$ can be computed in $O((n/k)\log^3 n(\log n + \log^2 m) + n\log^2 m + n\log^3 n\log m)$ expected time.

7 Putting everything together

Kaplan et al. [19] essentially prove the following result, which, combined with Theorem 23 gives us an efficient data structure to answer nearest neighbor queries when sites are in P_{ℓ} and the query points are in P_r .

▶ Lemma 24 (Kaplan et al. [19]). Given an algorithm to construct a k-shallow cutting Λ of size S(n,k) on n functions in T(n,k) time, and such that locating the cell ∇ in Λ containing a query point q takes Q(n,k) time, we can construct a data structure of size $O(S(n,k)\log n)$ that maintains a dynamic set of at most n functions F and can report the function that realizes the lower envelope $L_0(F)$ at a query point q in $O(Q(n,1)\log n)$ time. Inserting a new function in F takes $O((T(n,1)/n)\log n)$ amortized time, and deleting a function from F takes $O((T(n,1)/n)\log^3 n)$ amortized time.

Our main data structure is a balanced binary tree, corresponding to a balanced decomposition of P into sub-polygons [14], in which each node stores two copies of the data structure from Lemma 24. A node in the tree corresponds to a subpolygon P' of P, and a diagonal d that splits P' into two roughly equal size subpolygons P_{ℓ} and P_r . One copy of our data structure associated with this node stores the sites in S_{ℓ} and can answer queries in P_r . The other copy stores the sites in S_r and can answer queries in P_{ℓ} . Since the balanced hierarchical decomposition consists of $O(\log m)$ layers, every site is stored $O(\log m)$ times. This results in an $O(n \log^3 n \log m + m)$ size data structure. To answer a query q, we query $O(\log m)$ data structures, one at every level of the tree, and we report the site that is closest over all.

▶ **Theorem 1.** Let *P* be a simple polygon *P* with *m* vertices. There is a fully dynamic data structure of size $O(n \log^3 n \log m + m)$ that maintains a set of *n* point sites in *P* and allows for geodesic nearest neighbor queries in worst case $O(\log^2 n \log^2 m)$ time. Inserting a site takes $O(\log^5 n \log m + \log^4 n \log^3 m)$ amortized expected time, and deleting a site takes $O(\log^7 n \log m + \log^6 n \log^3 m)$ amortized expected time.

Proof. Theorem 23 gives us $T(n,k) = O((n/k) \log^3 n(\log n + \log^2 m) + n \log^2 m + n \log^3 n \log m)$, $S(n,k) = O(n \log^2 n)$, and $Q(n,k) = O(\log n \log m)$, where *m* is the size of our polygon. Therefore, $T(n,1)/n = O(\log^4 n + \log^3 n \log^2 m)$. Plugging in these results in Lemma 24 and using that the balanced decomposition consists of $O(\log m)$ levels completes the proof.

8 An Improved Data Structure for Offline-Updates or Insertions-Only

In this Section we briefly sketch how to use some of the tools and techniques we developed to gen an alternative, simpler data structure for nearest neighbor queries. For a fully dynamic scenario this data structure is slower than our result from Theorem 1, however in case there are no deletions, or the full sequence of updates is known in advance, this method is actually faster than the data structure of Theorem 1.

The main idea is still to recursively partition the polygon into a "left" subpolygon P_{ℓ} and a "right" subpolygon P_r . instead of building a dynamic lower envelope data structure of the sites $S_{\ell} = S \cap P_{\ell}$ in P_r we use the following approach. We further split the sites S_{ℓ} into subsets $S_1, ..., S_k$, and for each subset we use the algorithm from Section 5.1 to build (an implicit representation of) the Voronoi diagram they induce in P_r . To answer a query (of a query point in P_r) we simply query all k (implicit) Voronoi diagrams. To update the data structure we simply rebuild the Voronoi diagram(s) of the affected subset(s). For a simple fully dynamic data structure we can partition the sites S_{ℓ} in $k = O(\sqrt{n})$ groups of size $O(\sqrt{n})$ each, to get $O(\sqrt{n}$ polylog n polylog m) worst case update and query times.

Insertions only. In case our data structure has to support only insertions, we can improve the insertion time to $O(\log n \log^3 m)$, albeit being amortized. We now partition the sites in S_{ℓ} in groups of size 2^i , for $i \in [1..O(\log n)]$. When we insert a new site, we may get two groups of size 2^i . We then remove these groups, and construct a new group of size 2^{i+1} . For this group we rebuild the Voronoi diagram \mathcal{V} that these sites induce on P_r from scratch. Using a standard binary counter argument it can be shown that every data structure of size 2^{i+1} gets rebuild (at a cost of $O(2^i \log^2 m)$) only after 2^i new sites have been inserted [26]. So, if we charge $O(\log n \log^2 m)$ to each site, it can pay for rebuilding all of the structures it participates in. We do this for all $O(\log m)$ levels in the balanced decomposition, hence we obtain the following result.

▶ **Theorem 25.** Let P be a simple polygon m vertices. There is an insertion-only data structure of size $O(n \log m + m)$ that stores a set of n point sites in P, allows for geodesic nearest neighbor queries in worst-case $O(\log^2 n \log^2 m)$ time, and inserting a site in amortized $O(\log n \log^3 m)$ time.

Offline updates. When we have both insertions and deletions, but the order of these operations is known in advance, we can maintain S in amortized $O(\log n \log^3 m)$ time per update, where n is the maximum number of sites in S at any particular time. Queries take $O(\log^2 n \log^2 m)$ time, and may arbitrarily interleave with the updates. Furthermore, we do not have to know them in advance.

For ease of description, we assume that the total number of updates N is proportional to the number of sites at any particular time, i.e. $N \in O(n)$. We can easily extend our approach to larger N by grouping the updates in N/n groups of size O(n) each. Consider a node of the balanced decomposition whose diagonal that splits its subpolygon into P_{ℓ} and P_r . We partition the sites in S_{ℓ} into groups such that at any time, a query $q \in P_r$ can be answered by considering the Voronoi diagrams in P_r of only $O(\log n)$ groups. We achieve this by building a segment tree on the intervals during which the sites are "alive". More specifically, let $[t_1, t_2]$ denote a time interval in which a site s should occur in S_{ℓ} (i.e. s lies in P_{ℓ} and there is an INSERT(s) operation at time t_1 and its corresponding DELETE(s) at time t_2). We store the intervals of all sites in S_{ℓ} in a segment tree [10]. Each node v in this tree is associated with a subset S_v of the sites from S_{ℓ} . We build the Voronoi diagram that S_v

4:18 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

induces on P_r . Every site occurs in $O(\log n)$ subsets, and in $O(\log m)$ levels of the balanced decomposition, so the total size of our data structure is $O(n \log n \log m + m)$. Building the Voronoi diagram for each node v takes $O(|S_v| \log^2 m)$ time. Summing these results over all nodes in the tree, and all levels of the balanced decomposition, the total construction time is $O(n \log n \log^3 m + m)$ time. We conclude:

▶ **Theorem 26.** Let P be a simple polygon P with m vertices, and let S be a sequence of operations that either insert a point site inside P into a set S, or delete a site from S. There is a dynamic data structure of size $O(n \log n \log m + m)$, where n is the maximum number of sites in S at any time, that stores S, and allows for geodesic nearest neighbor queries in $O(\log^2 n \log^2 m)$ time. Updates take amortized $O(\log n \log^3 m)$ time.

— References -

- Pankaj K. Agarwal and Jiří Matoušek. Dynamic Half-Space Range Reporting and its Applications. Algorithmica, 13(4):325–345, 1995.
- 2 Lars Arge and Frank Staals. Dynamic geodesic nearest neighbor searching in a simple polygon. CoRR, abs/1707.02961, 2017.
- 3 Boris Aronov. On the Geodesic Voronoi Diagram of Point Sites in a Simple Polygon. Algorithmica, 4(1):109–140, 1989.
- 4 Boris Aronov, Steven Fortune, and Gordon Wilfong. The furthest-site geodesic voronoi diagram. *Discrete & Computational Geometry*, 9(3):217–255, Mar 1993.
- 5 Jon Louis Bentley and James B Saxe. Decomposable searching problems I. Static-todynamic transformation. *Journal of Algorithms*, 1(4):301–358, 1980.
- **6** Timothy M. Chan. Random Sampling, Halfspace Range Reporting, and Construction of $(\leq k)$ -levels in Three Dimensions. SIAM Journal on Computing, 30(2):561–575, 2000.
- 7 Timothy M. Chan. A Dynamic Data Structure for 3-D Convex Hulls and 2-D Nearest Neighbor Queries. Journal of the ACM, 57(3):16:1–16:15, March 2010.
- 8 Timothy M. Chan and Konstantinos Tsakalidis. Optimal Deterministic Algorithms for 2-d and 3-d Shallow Cuttings. In Proc. 31st International Symposium on Computational Geometry, volume 34 of Leibniz International Proceedings in Informatics, pages 719–732. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2015.
- 9 Kenneth L. Clarkson and Peter W. Shor. Applications of random sampling in computational geometry, II. Discrete & Computational Geometry, 4:387–421, 1989.
- 10 Mark de Berg, Otfried Cheong, Marc van Kreveld, and Mark Overmars. *Computational Geometry: Algorithms and Applications*. Springer, 3rd edition, 2008.
- 11 David Dobkin and Subhash Suri. Maintenance of Geometric Extrema. *Journal of the ACM*, 38(2):275–298, April 1991.
- 12 Herbert Edelsbrunner, Leo J. Guibas, and Jorge Stolfi. Optimal Point Location in a Monotone Subdivision. SIAM Journal on Computing, 15(2):317–340, May 1986.
- 13 Leonidas J. Guibas and John Hershberger. Optimal Shortest Path Queries in a Simple Polygon. Journal of Computer and System Sciences, 39(2):126 – 152, 1989.
- 14 Leonidas J. Guibas, John Hershberger, Daniel Leven, Micha Sharir, and Robert E. Tarjan. Linear-Time Algorithms for Visibility and Shortest Path Problems Inside Triangulated Simple Polygons. *Algorithmica*, 2(1):209–233, 1987.
- **15** Sariel Har-Peled. *Geometric Approximation Algorithms*, volume 173. American mathematical society Boston, 2011.
- **16** Sariel Har-Peled and Micha Sharir. Relative (p, ϵ) -approximations in Geometry. *Discrete* & Computational Geometry, 45(3):462–496, Apr 2011.
- 17 John Hershberger. A new data structure for shortest path queries in a simple polygon. Information Processing Letters, 38(5):231–235, June 1991.

- 18 John Hershberger and Subhash Suri. An Optimal Algorithm for Euclidean Shortest Paths in the Plane. *SIAM Journal on Computing*, 28(6):2215–2256, 1999.
- 19 Haim Kaplan, Wolfgang Mulzer, Liam Roditty, Paul Seiferth, and Micha Sharir. Dynamic Planar Voronoi Diagrams for General Distance Functions and their Algorithmic Applications. In Proc. 28th Annual ACM-SIAM Symposium on Discrete Algorithms. SIAM, 2017.
- 20 Rolf Klein and Andrzej Lingas. Hamiltonian abstract Voronoi diagrams in linear time, pages 11–19. Springer Berlin Heidelberg, Berlin, Heidelberg, 1994.
- 21 Rolf Klein, Kurt Mehlhorn, and Stefan Meiser. Randomized incremental construction of abstract Voronoi diagrams. *Computational Geometry*, 3(3):157 – 184, 1993.
- 22 Der-Tsai Lee. On k-nearest neighbor voronoi diagrams in the plane. IEEE Transactions on Computers, C-31(6):478–487, June 1982.
- 23 Chih-Hung Liu and D. T. Lee. Higher-order geodesic voronoi diagrams in a polygonal domain with holes. In Proc. 24th Annual ACM-SIAM Symposium on Discrete Algorithms, SODA, pages 1633–1645, 2013.
- 24 Jiří Matoušek. Reporting points in halfspaces. Computational Geometry Theory and Applications, 2(3):169–186, 1992.
- 25 Eunjin Oh and Hee-Kap Ahn. Voronoi Diagrams for a Moderate-Sized Point-Set in a Simple Polygon. In Proc. 33rd International Symposium on Computational Geometry, volume 77 of Leibniz International Proceedings in Informatics, pages 52:1–52:15. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2017.
- 26 Mark H Overmars. The design of dynamic data structures, volume 156. Springer Science & Business Media, 1983.
- 27 Evanthia Papadopoulou and Der-Tsai Lee. A New Approach for the Geodesic Voronoi Diagram of Points in a Simple Polygon and Other Restricted Polygonal Domains. *Algorithmica*, 20(4):319–352, 1998.

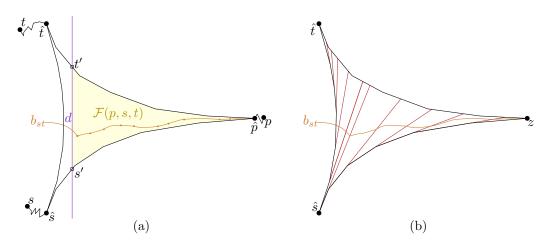


Figure 7 (a) The polygon $\mathcal{P}(p, s, t)$ bounded by the shortest paths between s, p, and t is a pseudo-triangle $\hat{\mathcal{P}}(p, s, t)$ with polylines attached to its corners \hat{s}, \hat{p} , and \hat{t} . It contains the funnel $\mathcal{F}(p, s, t)$. (b) The clipped extension segments in F_s^t are all pairwise disjoint, and end at the chain from t to z.

A Representing and Computing a Bisector

Assume without loss of generality that the diagonal d that splits P into P_{ℓ} and P_r is a vertical line-segment, and let s and t be two sites in S_{ℓ} . In this section we show that there is a representation of $b_{st}^* = b_{st} \cap P_r$, the part of the bisector b_{st} that lies in P_r , that allows efficient random access to the bisector vertices. Moreover, we can obtain such a representation using a slightly modified version of the two-point shortest path data structure of Guibas and Hershberger [13].

Let s be a site in S_{ℓ} , and consider the shortest path tree T rooted at s. Let $e = \overline{uv}$ be an edge of T for which v is further away from s than u. The half-line starting at v that is colinear with, and extending e has its first intersection with the boundary ∂P of P in a point w. We refer to the segment \overline{vw} as the extension segment of v [3]. Let E_s denote the set of all extension segments of all vertices in T.

Consider two sites $s, t \in S_{\ell}$, and its bisector b_{st} . We then have

▶ Lemma 27 (Lemma 3.22 of Aronov [3]). The bisector b_{st} is a smooth curve connecting two points on ∂P and having no other points in common with ∂P . It is the concatenation of O(m) straight and hyperbolic arcs. The points along b_{st} where adjacent pairs of these arcs meet, i.e., the vertices of b_{st} , are exactly the intersections of b_{st} with the segments of E_s or E_t .

▶ Lemma 28 (Lemma 3.28 of Aronov [3]). For any point $p \in P$, the bisector b_{st} intersects the shortest path $\Pi(s,p)$ in at most a single point.

Consider a point p on ∂P_r and let $\mathcal{P}(p, s, t)$ be the polygon defined by the shortest paths $\Pi(s, p)$, $\Pi(p, t)$, and $\Pi(t, s)$. This polygon $\mathcal{P}(p, s, t)$ is a pseudo-triangle $\hat{\mathcal{P}}(p, s, t)$ whose corners \hat{s} , \hat{t} , and \hat{p} , are connected to s, t, and p respectively, by arbitrary polylines.

Let s' and t' be the intersection points between d and the geodesics $\Pi(p, s)$ and $\Pi(p, t)$, respectively, and assume without loss of generality that $s'_y \leq t'_y$. The restriction of $\mathcal{P}(p, s, t)$ to P_r is a funnel $\mathcal{F}(p, s, t)$, bounded by $\Pi(t', p)$, $\Pi(p, s')$, and $\overline{s't'}$. See Fig. 7(a). Note that $\Pi(s, t)$ is contained in P_{ℓ} .




Figure 8 The geodesic distance from t to w_1 and w_2 equals its Euclidean distance. The shortest path from s to w_2 (dashed, green) has to go around R, and is thus strictly longer than $||tw_2||$.

Clearly, if b_{st} intersects P_r then it intersects d. There is at most one such intersection point:

Lemma 29. The bisector b_{st} intersects d in at most one point w.

Proof. Assume, by contradiction, that b_{st} intersects d in two points w_1 and w_2 , with w_1 above w_2 . See Fig. 8(b). Note that by Lemma 27, b_{st} cannot intersect ∂P_{ℓ} , and thus d, in more than two points. Thus, the part of b_{st} that lies in P_{ℓ} between w_1 and w_2 does not intersect ∂P_{ℓ} . Observe that this implies that the region R enclosed by this part of the curve, and the part of the diagonal from w_1 to w_2 (i.e. $\overline{w_1w_2}$) is empty. Moreover, since the shortest paths from t to w_1 and to w_2 intersect b_{st} only once (Lemma 28) region R contains the shortest paths $\Pi(t, w_1) = \overline{tw_1}$ and $\Pi(t, w_2) = \overline{tw_2}$.

Since s has the same geodesic distance to w_1 and w_2 as t, s must lie in the intersection X of the disks D_i with radius $||tw_i||$ centered at w_i , for $i \in 1, 2$. It now follows that s lies in one of the connected sets, or "pockets", of $X \setminus R$. Assume without loss of generality that it lies in a pocket above t (i.e. $s_y > t_y$). See Fig. 8. We now again use Lemma 28, and get that $\Pi(s, w_2)$ intersects b_{st} only once, namely in w_2 . It follows that the shortest path from s to w_2 has to go around $R \ni t$, and thus has length strictly larger than $||tw_2||$. Contradiction.

Since b_{st} intersects d only once (Lemma 29), and there is a point of b_{st} on $\Pi(s,t) \subset P_{\ell}$, it follows that there is at most one point z where b_{st} intersects ∂P_r the outer boundary of P_r , i.e. $\partial P_r \setminus d$. Observe that therefore z is a corner of the pseudo-triangle $\hat{\mathcal{P}}(z,s,t)$, and that $\mathcal{F}(z,s,t) \subseteq \hat{\mathcal{P}}(z,s,t)$. Let $b_{st}^* = b_{st} \cap P_r$ and orient it from w to z. We assign b_{st} the same orientation.

▶ Lemma 30. (i) The bisector b_{st} does not intersect $\Pi(s, z)$ or $\Pi(t, z)$ in any point other than z. (ii) The part of the bisector b_{st} that lies in P_r is contained in $\mathcal{F}(z, s, t)$.

Proof. By Lemma 28 the shortest path from s to any point $v \in P$, so in particular to z, intersects b_{st} in at most one point. Since, by definition, z lies on b_{st} , the shortest path $\Pi(s, z)$ does not intersect b_{st} in any other point. The same applies for $\Pi(t, z)$, thus proving (i). For (ii) we observe that any internal point of $\Pi(s, z)$ is closer to s than to t, and any internal

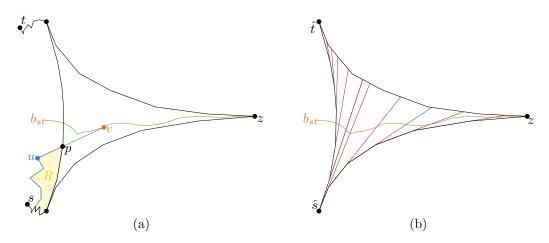


Figure 9 (a) Point v lies inside $\hat{\mathcal{P}}(z, s, t)$, so a shortest path from s to v that uses a vertex u outside of $\hat{\mathcal{P}}(z, s, t)$ intersects $\partial \hat{\mathcal{P}}(z, s, t)$ in a point p. This either yields two distinct shortest paths from s to p, or requires the shortest path from s to p via u to intersect b_{st} twice. Both yield a contradiction. (b) The extension segments in F_s^t are all pairwise disjoint, and end at the chain from t to z.

point of $\Pi(t, z)$ closer to t than to s. Thus, $\Pi(s, z)$ and $\Pi(t, z)$ must be separated by b_{st} . It follows that $b_{st} \cap P_r$ lies inside $\mathcal{F}(z, s, t)$.

▶ Lemma 31. All vertices of b_{st}^* lie on extension segments of the vertices in the pseudotriangle $\hat{\mathcal{P}}(z, s, t)$.

Proof. Assume by contradiction that $v \neq w$ is a vertex of $b_{st}^* = b_{st} \cap P_r$ that is not defined by an extension segment of a vertex in $\hat{\mathcal{P}}(z, s, t)$. Instead, let $e \in E_s$ be the extension segment containing v, and let $u \in P \setminus \hat{\mathcal{P}}(z, s, t)$ be the starting vertex of e. So $\Pi(s, v)$ has u as its last internal vertex.

By Lemma 30, b_{st}^* is contained in $\mathcal{F}(z, s, t)$ and thus in $\hat{\mathcal{P}}(z, s, t)$. Hence, $v \in \hat{\mathcal{P}}(z, s, t)$. Since $v \in \hat{\mathcal{P}}(z, s, t)$, and $u \notin \hat{\mathcal{P}}(z, s, t)$ the shortest path from s to v intersects $\partial \hat{\mathcal{P}}(z, s, t)$ in some point p. See Fig. 9(a). We then distinguish two cases: either p lies on $\Pi(s, z) \cup \Pi(s, t)$, or p lies on $\Pi(t, z)$.

In the former case this means there are two distinct shortest paths between s and p, that bound a region R that is non-empty, that is, it has positive area. Note that this region exists, even if u lies on the shortest path from s to its corresponding corner \hat{s} in $\hat{\mathcal{P}}(z, s, t)$ but not on $\hat{\mathcal{P}}(z, s, t)$ itself (i.e. $u \in \Pi(s, t) \cup \Pi(s, z) \setminus \hat{\mathcal{P}}(z, s, t)$. Since P is a simple polygon, this region R is empty of obstacles, and we can shortcut one of the paths to p. This contradicts that such a path is a shortest path.

In the latter case the point p lies on $\Pi(t, z)$, which means that it is at least as close to t as it is to s. Since s is clearly closer to s than to t, this means that the shortest path from s to v (that visits u and p) intersects b_{st} somewhere between s and p. Since it again intersects b_{st} at v, we now have a contradiction: by Lemma 28, any shortest path from s to v intersects b_{st} at most once. The lemma follows.

Let $F_s^t = e_1, ..., e_g$ denote the extension segments of the vertices of $\Pi(t, s)$ and $\Pi(s, z)$, ordered along $\hat{\mathcal{P}}(z, s, t)$, and clipped to $\hat{\mathcal{P}}(z, s, t)$. See Fig. 7(b). We define F_t^s analogously.

▶ Lemma 32. All vertices of b_{st}^* lie on clipped extension segments in $F_s^t \cup F_t^s$.




Figure 10 The extension segments in F_s^t are all pairwise disjoint, and end at the chain from t to z.

Proof. By Lemma 31 all vertices of b_{st} in P_r lie on $\hat{\mathcal{P}}(z, s, t)$. Furthermore, by Lemma 30 all these vertices lie in $\mathcal{F}(z, s, t)$. Hence, it suffices to clip all extension segments to $\hat{\mathcal{P}}(z, s, t)$ (or even $\mathcal{F}(z, s, t)$). For all vertices on $\Pi(t, z)$ the extension segments (with respect to s) are disjoint from $\hat{\mathcal{P}}(z, s, t)$. It follows that for site s, only the clipped extension segments from vertices on $\Pi(s, t)$ and $\Pi(s, z)$ are relevant. Analogously, for site t, only the clipped extension segments on $\Pi(s, t)$ and $\Pi(t, z)$ are relevant.

▶ **Observation 33.** The extension segments in F_s^t are all pairwise disjoint, start on $\Pi(s, t)$ or $\Pi(s, z)$, and end on $\Pi(t, z)$.

By Corollary 3.29 of Aronov [3] every (clipped) extension segment in $r \in F_s^t \cup F_s^s$ intersects b_{st} (and thus b_{st}^*) at most once. Therefore, every such extension segment r splits the bisector in two. Together with Lemma 32 and Observation 33 this now give us sufficient information to efficiently binary search among the vertices of b_{st}^* when we have (efficient) access to $\hat{\mathcal{P}}(z,s,t)$.

▶ Lemma 34. Consider extension segments e_i and e_j , with $i \leq j$, in F_s^t . If e_i intersects b_{st} then so does e_j .

Proof. It follows from Lemma 30 that b_{st} intersects $\partial \hat{\mathcal{P}}(z, s, t)$ only in z and in a point w' on $\Pi(s,t)$. Thus, b_{st} partitions $\hat{\mathcal{P}}(z,s,t)$ into an s-side, containing $\Pi(s,z)$, and a t-side, containing $\Pi(t,z)$. Since the extension segments also partition $\hat{\mathcal{P}}(z,s,t)$ it then follows that the extension segments in F_s^t intersect b_{st} if and only if their starting point lies in the s-side and their ending point lies in the t-side. By Observation 33 all segments in F_s^t end on $\Pi(t,z)$. Hence, they end on the t-side. We finish the proof by showing that if $e_i \in F_s^t$ starts on the s-side, so must $e_j \in F_s^t$, with $j \geq i$.

The extension segments of vertices in $\Pi(s, z)$ trivially have their start point on the s-side. It thus follows that they all intersect b_{st} . For the extension segments of vertices in $\Pi(s, t)$ the ordering is such that the distance to s is monotonically decreasing. Hence, if e_i intersects b_{st} , and thus starts on the s-side, so does e_i , with $j \ge i$.

▶ Lemma 35. Consider extension segments e_i and e_j , with $i \leq j$, in F_s^t . If e_i intersects b_{st}^* then so does e_j .

4:24 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

Proof. From Lemma 34 it follows that if e_i intersects b_{st} then so does e_j , with $j \ge i$. So, we only have to show that if e_i intersects b_{st} in P_r then so does e_j . Since the extension segments in F_s^t are pairwise disjoint, it follows that if e_i intersects b_{st} , say in point p then e_j , with $j \ge i$ must intersect b_{st} on the subcurve between p and z. Since b_{st} intersects d at most once (Lemma 29), and $p \in P_r$, it follows that this part of the curve, and thus its intersection with e_j , also lies in P_r .

▶ Corollary 36. The segments in F_s^t that define a vertex in b_{st}^* form a suffix G_s^t of F_s^t . That is, there is an index a such that $G_s^t = e_a, ..., e_g$ is exactly the set of extension segments in F_s^t that define a vertex of b_{st}^* .

When we have $\hat{\mathcal{P}}(z, s, t)$ and the point w, we can find the value a from Corollary 36 in $O(\log m)$ time as follows. We binary search along $\Pi(t, s)$ to find the first vertex $u_{a'}$ such that $u_{a'}$ is closer to s then to t. For all vertices after $u_{a'}$, its extension segment intersects b_{st} in $\hat{\mathcal{P}}(z, s, t)$. To find the first segment that intersects b_{st} in P_r , we find the first index $a \geq a'$ for which the extension segment intersects d below w. In total this takes $O(\log m)$ time.

Let $G_s^t = r_1, ..., r_{g'} = e_a, ..., e_g$ be the ordered set of extension segments that intersect b_{st}^* . Similarly, let $G_t^s = f_1, ..., f_{h'}$ be the suffix of extension segments from F_t^s that define a vertex of b_{st}^s .

▶ **Observation 37.** Let r_i be an extension segment in G_s^t , and let v_d be the vertex of b_{st} on r_i . Let f_j be the last extension segment in G_t^s such that f_j intersects r_i in a point closer to s than to t. See Fig. 11. The vertex v_c of b_{st} corresponding to f_j occurs before v_d , that is c < d.




Figure 11 The bisector vertex v_c on f_j occurs before v_d on r_i .

Proof. By definition of j it follows that the intersection point v_d of r_i and b_{st}^* lies between the intersection of r_i with f_j and f_{j+1} . See Fig. 11. Thus, the intersection point

▶ Lemma 38. Let j be the number of extension segments in G_t^s that intersect r_i in a point closer to s than to t. Then r_i contains vertex $v_d = v_{i+j}$ of b_{st}^* .

Proof. It follows from Corollary 36 and the definition of G_s^t and G_t^s that all vertices of b_{st}^* lie on extension segments in $\{r_1, ..., r_{g'}\} \cup \{f_1, ..., f_{h'}\}$. Together with Corollary 3.29 of Aronov [3] we get that every such extension segment defines exactly one vertex of b_{st}^* . Since the bisector intersects the segments $r_1, ..., r_{g'}$ in order, there are exactly i - 1 vertices of b_{st}^* before v_d , defined by the extension segments in G_s^t . Let f_ℓ be the last extension segment in G_t^s that intersects r_i in a point closer to s than to t. Observation 37 gives us that this extension segment defines a vertex v_c of b_{st} with c < d. We then again use that b_{st}^* intersects the segments $f_1, ..., f_{h'}$ in order, and thus $\ell = j$. Hence, v_d is the $(i + j)^{\text{th}}$ vertex of b_{st}^* .

It follows from Lemma 38 that if we have $\hat{\mathcal{P}}(z, s, t)$ and we have efficient random access to its vertices, we also have efficient access to the vertices of the bisector b_{st}^* . Next, we argue with some minor augmentations the preprocessing of P into a two-point query data structure by Guibas and Hershberger gives us such access.

Accessing $\hat{\mathcal{P}}(z, s, t)$. The data structure of Guibas and Hershberger can return the shortest path between two query points p and q, represented as a balanced tree [13, 17]. This tree is essentially a persistent balanced search tree on the edges of the path. Every node of the tree can access an edge e of the path in constant time, and the edges are stored in order

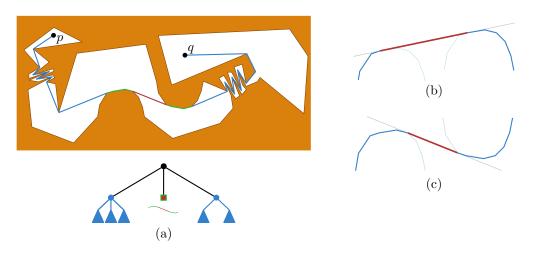


Figure 12 The data structure of Guibas and Hershberger [13] can return the geodesic between two query points p and q as a balanced tree (a). The leaves of the tree correspond to fundamental strings: two convex chains joined by a tangent. The internal nodes represent derived strings: the concatenation of two or three sub-paths (strings). A fundamental string can be convex (b) or non-convex (c).

along the path. The tree is balanced, and supports concatenating two paths efficiently. To support random access to the vertices of $\hat{\mathcal{P}}(z, s, t)$ we need two more operations: we need to be able to access the i^{th} edge or vertex in a path, and we need to be able to find the longest prefix (or suffix) of a shortest path that forms a convex chain. This last operation will allow us to find the corners \hat{s} and \hat{t} of $\hat{\mathcal{P}}(z, s, t)$. The data structure as represented by Guibas and Hershberger does not support these operations directly. However, with two simple augmentations we can support them in $O(\log m)$ time. In the following, we use the terminology as used by Guibas and Hershberger [13].

The geodesic between p and q is returned as a balanced tree. The leaves of this tree correspond to, what Guibas and Hershberger call, *fundamental strings*: two convex chains joined by a tangent. The individual convex chains are stored as balanced binary search trees. The internal nodes have two or three children, and represent *derived strings*: the concatenation of the fundamental strings stored in its descendant leaves. See Fig. 12 for an illustration.

To make sure that we can access the i^{th} vertex or edge on a shortest path in $O(\log m)$ time, we augment the trees to store subtree sizes. It is easy to see that we can maintain these subtree sizes without affecting the running time of the other operations.

To make sure that we can find the longest prefix (suffix) of a shortest path that is convex we do the following. With each node v in the tree we store a boolean flag v.convex that is true if and only if the sub path it represents forms a convex chain. It is easy to maintain this flag without affecting the running time of the other operations. For leaves of the tree (fundamental strings) we can test this by checking the orientation of the tangent with its two adjacent edges of its convex chains. These edges can be accessed in constant time. Similarly, for internal nodes (derived strings) we can determine if the concatenation of the shortest paths represented by its children is convex by inspecting the *convex* field of its children, and checking the orientation of only the first and last edges of the shortest paths. We can access these edges in constant time. This augmentation allows us to find the last vertex v of a shortest path $\Pi(p, q)$ such that $\Pi(p, v)$ is a convex chain in $O(\log m)$ time. We can then obtain $\Pi(p, v)$ itself (represented by a balanced tree) in $O(\log m)$ time by simply querying

4:26 Improved Dynamic Geodesic Nearest Neighbor Searching in a Simple Polygon

the data structure with points p and v. Hence, we can compute the longest prefix (or suffix) on which a shortest path forms a convex chain in $O(\log m)$ time.

Given point z, the above augmentation allow us $\hat{\mathcal{D}}(x,z,t)$ in $\mathcal{O}(2\pi z x)$ time. We

to access $\hat{\mathcal{P}}(z,s,t)$ in $O(\log m)$ time. We query the data structure to get the tree representing $\Pi(s, z)$, and, using our augmentations, find the longest convex suffix $\Pi(s', z)$. Similarly, we find the longest convex suffix $\Pi(t', z)$ of $\Pi(t, z)$. Observe that the corners \hat{s} and \hat{t} of $\hat{\mathcal{P}}(z,s,t)$ lie on $\Pi(s', z)$ and $\Pi(t', z)$, respectively (otherwise $\Pi(\hat{s}, z)$ and $\Pi(\hat{t}, z)$ would not be convex chains). Unfortunately, we cannot directly use the same approach to find the part $\Pi(s',t')$ that is convex, as it may both start and end with a piece that is non-convex (with respect to $\Pi(s', t')$). However, consider the extension segment of the first edge of the shortest path from z to s (see Fig. 13). This extension segment intersects the shortest path $\Pi(s',t')$ exactly once in a point v. By construction, this point vmust lie in the pseudo-triangle $\hat{\mathcal{P}}(z,s,t)$. Thus, we can decompose $\Pi(s',t')$ into two sub-paths, one of which starts with a convex chain and the other ends with a convex chain. Hence, for those chains we can use the *convex* fields to find the vertices s''and t'' such that $\Pi(s'', v)$ and $\Pi(v, t'')$ are convex,




Figure 13 We can find the first point s' on $\Pi(s, z)$ such that $\Pi(s', z)$ is convex. When we have a point v of $\Pi(s', t')$ known to be in $\hat{\mathcal{P}}(z, s, t)$, we can find $s'' = \hat{s}$ (darkblue). The first point s'' on $\Pi(s', t')$ such that $\Pi(s'', v)$ is convex has to lie on $\Pi(s', z)$. If this is not the case (as shown in red), then we can shortcut the shortest path to avoid s'', leading to a contradiction.

and thus $\Pi(s'', t'')$ is convex. Finally, observe that s'' must occur on $\Pi(s', z)$, otherwise we could shortcut $\Pi(s', t')$. See Fig. 13. Hence, $s'' = \hat{s}$ and $t'' = \hat{t}$ are the two corners of the pseudo-triangle $\hat{\mathcal{P}}(z, s, t)$. We can find v in $O(\log m)$ time by a binary search on $\Pi(s', t')$. Finding the longest convex chains starting and ending in v also takes $O(\log m)$ time, as does computing the shortest path $\Pi(\hat{s}, \hat{t})$. It follows that given z, we can compute (a representation of) $\hat{\mathcal{P}}(z, s, t)$ in $O(\log m)$ time.

With the above augmentations, and using Lemma 38, we then obtain the following result.

▶ Lemma 39. Given the points w and z where b_{st}^* intersects d and the outer boundary of P_r , respectively, we can access the i^{th} vertex of b_{st}^* in $O(\log m)$ time.

Proof. Recall that the data structure of Guibas and Hershberger [13] reports the shortest path between query points p and q as a balanced tree. We augment these trees such that each node knows the size of its subtree. It is easy to do this using only constant extra time and space, and without affecting the other operations. We can then simply binary search on the subtree sizes, using Lemma 38 to guide the search.

Finding w and z. We first show that we can find the point w where b_{st} enters P_r (if it exists), and then show how to find z, the other point where b_{st} intersects ∂P_r .

Lemma 40. Finding w requires $O(\log^2 m)$ time.

Proof. Consider the geodesic distance of s to diagonal d as a function f_s , parameterized by a value $\lambda \in [0, 1]$ along d. Similarly, let f_t be the distance function from t to d. Since b_{st} intersects d exactly once –namely in w– the predicate $\hat{\mathcal{P}}(\lambda) = f_s(\lambda) < f_t(\lambda)$ changes

from TRUE to FALSE (or vice versa) exactly once. Query the data structure of Guibas and Hershberger [13] to get the funnel representing the shortest paths from s to the points in d. Let $p_1, ..., p_h$, with h = O(m), be the intersection points of the extension segments of vertices in the funnel with d. Similarly, compute the funnel representing the shortest paths from tto d. The extension segments in this funnel intersect d in points $q_1, ..., q_k$, with k = O(m). We can now simultaneously binary search among $p_1, ..., p_h$ and $q_1, ..., q_k$ to find the smallest interval I bounded by points in $\{p_1, ..., p_h, q_1, ..., q_k\}$ in which $\hat{\mathcal{P}}$ flips from TRUE to FALSE. Hence, I contains w. Computing the distance from s (t) to some q_i (p_i) takes $O(\log m)$ time, and thus we can find I in $O(\log^2 m)$ time. On interval I both f_s and f_t are simple hyperbolic functions consisting of a single piece, and thus we can compute w in constant time.

Consider the vertices $v_1, ..., v_h$ of P_r in clockwise order, where $d = \overline{v_h v_1}$ is the diagonal. Since the bisector b_{st} intersects the outer boundary of P_r in only one point, there is a vertex v_a such that $v_1, ..., v_a$ are all closer to t than to s, and $v_{a+1}, ..., v_h$ are all closer to s than to t. We can thus find this vertex v_a using a binary search. This takes $O(\log^2 m)$ time, as we can compute $\pi(s, v_i)$ and $\pi(t, v_i)$ in $O(\log m)$ time. It then follows that z lies on the edge $\overline{v_a, v_{a+1}}$. We can find the exact location of z using a similar approach as in Lemma 40. This takes $O(\log^2 m)$ time. Thus, we can find z in $O(\log^2 m)$ time. We summarize our results from this section in the following theorem.

▶ **Theorem 41.** Let P be a simple polygon with m vertices that is split into P_{ℓ} and P_r by a diagonal d. The polygon P can be preprocessed in O(m) time, so that for any pair of points s and t in P_{ℓ} , a representation of $b_{st}^* = b_{st} \cap P_r$ can be computed in $O(\log^2 m)$ time. This representation supports accessing any of its vertices in $O(\log m)$ time.