

Towards End-to-End Open Conversational Machine Reading

Sizhe Zhou^{1,2,3}, Siru Ouyang^{1,2,3}, Zhuosheng Zhang^{1,2,3} Hai Zhao^{1,2,3}

¹ Department of Computer Science and Engineering, Shanghai Jiao Tong University

² Key Laboratory of Shanghai Education Commission for Intelligent Interaction and Cognitive Engineering, Shanghai Jiao Tong University

³ MoE Key Lab of Artificial Intelligence, AI Institute, Shanghai Jiao Tong University
{sizhezhou, oysr0926, zhangzs}@sjtu.edu.cn, zhaohai@cs.sjtu.edu.cn

Abstract

In open-retrieval conversational machine reading (OR-CMR) task, machines are required to do multi-turn question answering given dialogue history and a textual knowledge base. Existing works generally utilize two independent modules to approach this problem’s two successive sub-tasks: first with a hard-label decision making and second with a question generation aided by various entailment reasoning methods. Such usual cascaded modeling is vulnerable to error propagation and prevents the two sub-tasks from being consistently optimized. In this work, we instead model OR-CMR as a unified text-to-text task in a fully end-to-end style. Experiments on the OR-ShARC dataset show the effectiveness of our proposed end-to-end framework on both sub-tasks by a large margin, achieving new state-of-the-art results. Further ablation studies support that our framework can generalize to different backbone models.

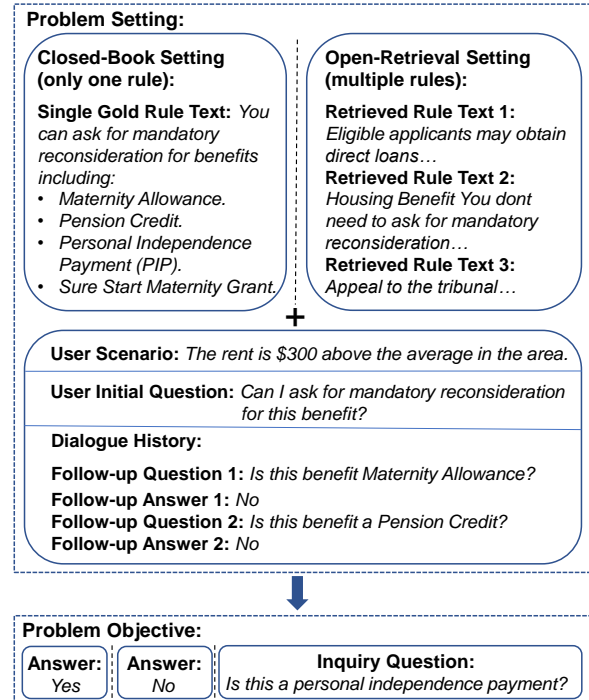


Figure 1: CMR and OR-CMR Task Overview

1 Introduction

In a multi-turn dialogue comprehension scenario, machines are expected to answer high-level questions through interactions with human beings until enough information is gathered to derive a satisfying answer (Zhu et al., 2018; Zhang et al., 2018; Zaib et al., 2020; Huang et al., 2020; Fan et al., 2020; Gu et al., 2021). As a specific and challenging dialogue comprehension task, conversational machine reading (CMR) (Saeidi et al., 2018) requires machines to understand the given user’s initial setting and dialogue history before the machine itself is able to give a final answer or inquire for more clarifications according to rule texts (see Fig. 1).

In terms of acquisition of rule texts which are the main reference for tackling the CMR, there is closed-book setting where the rule texts are all given and there is correspondingly open-retrieval

setting where the rule texts need to be retrieved from a knowledge base (Gao et al., 2021) (see Fig. 1). In terms of problem objectives, current approaches in general divide the targets into two categories, one as decision making and one as question generation (Zhong and Zettlemoyer, 2019; Lawrence et al., 2019; Verma et al., 2020; Gao et al., 2020b,c). For decision making sub-task, the machine is required to give decisions to directly answer the user question which concludes the dialogue or generate clarifying questions which continues the dialogue. For question generation sub-task, the machine is required to generate the clarifying questions that are essential to the later final decision making. Following this line of approaching the CMR task, a variety of works have been proposed based on mainly modeling the matching relationships on conditions (Henaff et al.,

2017; Zhong and Zettlemoyer, 2019; Lawrence et al., 2019; Verma et al., 2020; Gao et al., 2020b,c) with sequential encoding methods or graph-based methods (Ouyang et al., 2021).

However, by tackling the CMR task with two divided sub-tasks, the corresponding division of the optimization on decision making sub-task and the optimization on the question generation sub-task may result in problems including error propagation, thus hindering further performance advance. (Ouyang et al., 2021) has shown that transferring some knowledge between the training of two sub-tasks is beneficial for better performance. However, reducing the gap between two sub-tasks to achieve a end-to-end optimization CMR task still needs further and more comprehensive attempts.

In this work, we propose a completely unified end-to-end framework (UNICMR) to tackle the division of optimization challenge by formulating the CMR/OR-CMR task into a single text-to-text task. Our contributions are summarized as follows:

(i) We completely unify two sub-tasks of OR-CMR into a single task in terms of optimization, achieving a full end-to-end optimization paradigm.

(ii) Experimental results on the OR-ShARC dataset and ShARC dev set show the effectiveness of our method, especially on the question generation sub-task with a relatively small amount of parameters. Furthermore, our method achieves the new state-of-the-art results on all sub-tasks.

(iii) By further ablation studies, we have shown that our proposed framework largely advances the decision making performance, and reduces error propagation thus boosting the question generation performance. We have also shown that our proposed framework can generalize to different backbone models.

2 Related Work

2.1 Conversational Machine Reading

The mainstream of research on the conversation-based reading comprehension task focuses on either the decision making (Choi et al., 2018; Reddy et al., 2019; Sun et al., 2019; Cui et al., 2020) or the follow-up utterance generation (Bi et al., 2019; Gao et al., 2020a). The former approaches leave out cultivating the machine’s ability to reduce the information gap by clarifying interactions. While the latter approaches neglect exploring the machine’s ability to concentrate on target information and make vital decisions. In

contrast, our work focuses on a more challenging conversation-based reading comprehension task called conversational machine reading task (CMR) (Saeidi et al., 2018; Gao et al., 2021), which requires machines to make decisions and generate clarifying questions in a dialogue given rule texts and user scenarios.

2.2 Open-Retrieval CMR

Most of the current studies on CMR concentrate on the closed-book setting of CMR where the essential reference for the final decision, a piece of rule text corresponding to each dialogue, is given (Zhong and Zettlemoyer, 2019; Verma et al., 2020; Gao et al., 2020b,c). One typical example benchmark is called ShARC (Saeidi et al., 2018). However, in a more realistic and also more challenging setting, the machine is required to retrieve rule texts based on different scenarios. Similar to open domain question answering setting where the supporting texts are retrieved from a collections of documents to answering factoid questions (Moldovan et al., 2000; Voorhees and Tice, 2000), open-retrieval conversational machine reading (OR-CMR) task is established by requiring the machine to retrieve useful information from a given knowledge base composed of rule texts. In contrast to most of the previous works on CMR, we focus on OR-CMR in pursuit of a more realistic and more challenging setting.

2.3 Joint Optimization of CMR

Existing studies generally approach conversational machine reading task by separating it into two sub-tasks (Zhong and Zettlemoyer, 2019; Verma et al., 2020; Gao et al., 2020b,c), decision making and question generation. Therefore, existing approaches generally focus on different methods to extract the fulfillment of rules and conduct fine entailment reasoning. This includes applying attention mechanisms on the sequential model encoded user information and dialogue history (Zhong and Zettlemoyer, 2019; Lawrence et al., 2019; Verma et al., 2020; Gao et al., 2020b,c) and extract discourse structures for better fulfillment matching (Ouyang et al., 2021).

However, one of the major challenges emerges as the division of the optimization of decision making sub-task and the optimization of the question generation sub-task. (Zhang et al., 2021) have taken the initial attempt to shrink the division between two sub-tasks by considering the encoded

hidden states from decision making in question generation module. However, it still lacks synergy of optimization and relies on separate feature extractions including the entailment reasoning. In contrast, our work approaches the conversational machine reading task by unifying the two sub-tasks into one, enabling an end-to-end joint model optimization on both the decision making target and question generation target.

3 Problem Formulation

As shown by Fig. 1, in traditional CMR task, the machine will be given: user scenario S , user initial question Q , a gold rule text R , and dialogue history $D := \{(q_1, a_1), (q_2, a_2), \dots, (q_n, a_n)\}$ which consists of n follow-up question-answer pairs. The machine is required to do the two sub-tasks:

- **Decision Making.** The machine makes a decision to either answer the user initial question with *Yes* or *No*, or give *Inquire*¹ which activates the second sub-task to generate the inquiry question for more clarification.

- **Question Generation.** The machine generates an inquiry question aimed at essential clarifications to answer the user’s initial question.

Beyond CMR, open-retrieval conversational machine reading (OR-CMR) (Gao et al., 2021) further mimics the more challenging second scenario, which is the focus of this work. As shown by Fig. 1, the difference between the CMR and OR-CMR lies in the rule text part R . In CMR, the machine is provided with a gold rule text in a closed-book style. While in OR-CMR, the machine needs to retrieve rule texts from a knowledge base in an open-retrieval style alternatively. The machine is given a knowledge base B containing rule texts. Therefore, under the OR-CMR setting, the machine needs to first retrieve m rule texts R_1, R_2, \dots, R_m to complete the input for the same downstream decision making and question generation sub-tasks.

4 Framework

Our model is composed of two main modules: a retriever and a text-to-text encoder-decoder model.

¹For the completeness of the conversational machine reading task, there is an additional decision making answer *Irrelevant* which states that the user question is unanswerable. This is the case for CMR task. However, in our work, we mainly follow the setting of OR-CMR and assume that no such answer will be encountered.

The retriever is applied to retrieve rule texts R_1, R_2, \dots, R_m from a given knowledge base B . The text-to-text encoder-decoder model will take in the preprocessed textual input and generate the textual answer directly as a whole. Subsequent extraction methods will be applied for decision making and question generation sub-tasks to obtain the predictions for each sub-task respectively.

4.1 Retriever

To obtain the rule texts, the user scenario S and user initial question Q are concatenated as the query to the retriever. Our retriever employs the MUDERN TF-IDF-based method (Gao et al., 2021), which takes account of bigram features and scores the similarity between rule texts and queries in the form of bag-of-words weighted by the TF-IDF model. Top-scored m rule texts R_1, R_2, \dots, R_m will then be chosen for the following text-to-text encoder-decoder model.

4.2 Text-to-Text Encoder-Decoder

One of the major challenges of the CMR or OR-CMR task is the division of sub-task optimizations. Motivated by T5 (Raffel et al., 2020) which formulate several traditional NLP tasks into a unified text-to-text generation task, we unify the two sub-tasks by formulating the input and output to our encoder-decoder model as follows.

4.2.1 Input Formulation

Discourse Segmentation. We employ the discourse segmentation approach (Shi and Huang, 2019) to parse the retrieved rule texts into explicit conditions for the model. After discourse segmentation, each retrieved R_i is parsed into N_i elementary discourse units (EDUs) $EDU_{i,1}, EDU_{i,2}, \dots, EDU_{i,N_i}$. Formulation of final input I is shown by the setting part in Fig. 2.

4.2.2 Output Formulation

The output of the text-to-text encoder-decoder will be a sequence of textual tokens $O := \{o_1, o_2, \dots, o_k\}$ where the length k is determined by the model itself but within the maximum generation length hyperparameter. To extract the prediction of the decision making sub-task and the question generation sub-task respectively, we assume the first output token o_1 is model’s prediction, and the following tokens $\{o_2, \dots, o_k\}$ are the generated follow-up question, which is only meaningful when o_1 represents the *Inquire* decision.

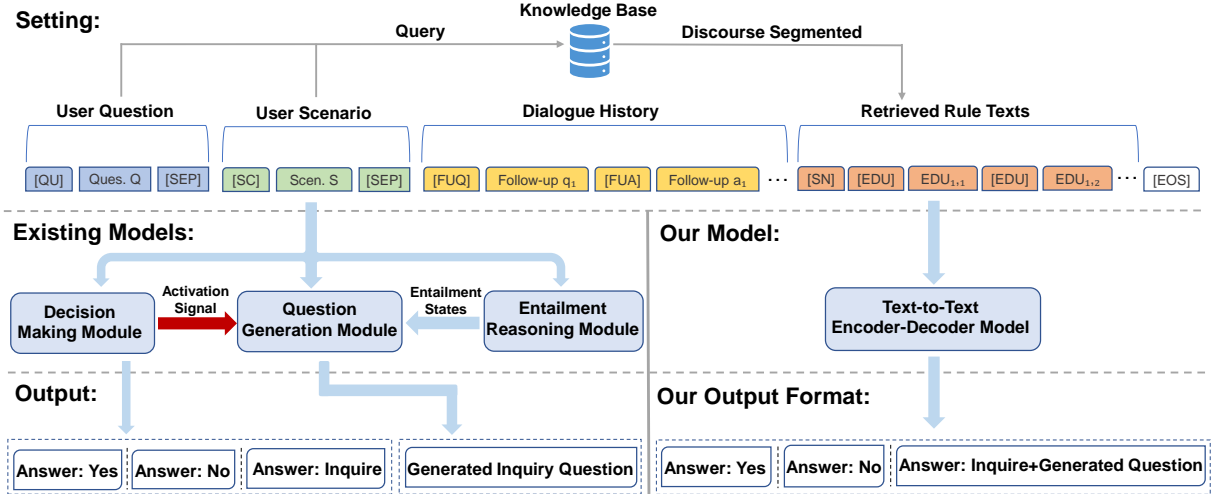


Figure 2: The overall framework for our proposed model (bottom right part) compared with the existing ones (bottom left part). Note that the ways of preprocessing the problem setting input vary from model to model, but they are generally similar. And the setting part only shows our preprocessing overview. Also note that [QU], [SEP], [SC], [SEP], [FUQ], [FUA], [SN], [EDU] are added special tokens while [EOS] is the end-of-sequence token for encoder-decoder model.

4.2.3 Training Objective

In training stage, the labels $Y := \{y_1, y_2, \dots, y_k\}$ are formulated as: { Yes Token, [EOS]}, { No Token, [EOS]}, and { Inquire Token, Follow-up Question Tokens, [EOS]}. The training objective is defined as:

$$\mathcal{L} = - \sum_{j=1}^k \log P(y_j | y_{<j}, I; \theta), \quad (1)$$

where I is the input to our encoder-decoder model and θ is all the parameters of our model.

5 Experiments

5.1 Datasets

Our training and evaluation is based on the OR-ShARC dataset (Gao et al., 2021). Original dataset ShARC (Saeidi et al., 2018) contains 948 dialogues trees which is then flattened into 32,436 examples with entries composed of rule documents, dialogue history, and decision. Derived from ShARC, OR-ShARC modifies the *initial question* to be independent of gold rule texts. Then the gold rule texts are removed to form the knowledge base B of 651 rules. The train and dev set of ShARC are further split into train, dev, and test set, with sizes 17,936, 1,105, and 2,373, respectively.

The dev and test set each satisfies that around 50% of examples ask questions based on the rule texts used in training (seen) and the remaining asks questions based on the unseen rule texts in training.

This feature of the datasets aims to mimic more realistic scenario where user may asks questions on information that the machine has encountered or has never encountered (Gao et al., 2021).

5.2 Evaluation Metrics

For decision making sub-task, the evaluation is Micro- and Macro- Accuracy of the decisions. For question generation sub-task, we adopt the $F1_{BLEU}$ (Gao et al., 2021) which calculates the F1 score with precision of BLEU (Papineni et al., 2002) when the predicted decision is *Inquire* and recall of BLEU when the ground truth decision is *Inquire*.

5.3 Implementation Details

Following the MUDERN model, we employ T5 as our text-to-text encoder-decode model and initialize the model with the pretrained T5-base and T5-large weights². For the main model either base or large, we set the max generation length as 30, number of beams in generation as 5, and use the first 8 top scored retrieved rule texts in preparing input. The training process utilizes AdamW (Loshchilov and Hutter, 2017) optimizer for 16 epochs with a learning rate of $3e-5$. Max gradient norm of 1 is used to conduct gradient clipping. The batch size is 4 with a gradient accumulation step as 8. Random seeds 19, 27, and 95 are applied. Experiments are conducted in

²<https://huggingface.co/t5-base>, and <https://huggingface.co/t5-large>, respectively.

Model	Dev Set				Test Set			
	Decision Making		Question Generation		Decision Making		Question Generation	
	Micro	Macro	F1 _{BLEU1}	F1 _{BLEU4}	Micro	Macro	F1 _{BLEU1}	F1 _{BLEU4}
w/ DPR++								
MUDERN	79.7±1.2	80.1±1.0	50.2±0.7	42.6±0.5	75.6±0.4	75.8±0.3	48.6±1.3	40.7±1.1
OSCAR	80.5±0.5	80.9±0.6	51.3±0.8	43.1±0.8	76.5±0.5	76.4±0.4	49.1±1.1	41.9±1.8
w/ TF-IDF								
E ³	61.8±0.9	62.3±1.0	29.0±1.2	18.1±1.0	61.4±2.2	61.7±1.9	31.7±0.8	22.2±1.1
EMT	65.6±1.6	66.5±1.5	36.8±1.1	32.9±1.1	64.3±0.5	64.8±0.4	38.5±0.5	30.6±0.4
DISCERN	66.0±1.6	66.7±1.8	36.3±1.9	28.4±2.1	66.7±1.1	67.1±1.2	36.7±1.4	28.6±1.2
DP-RoBERTa	73.0±1.7	73.1±1.6	45.9±1.1	40.0±0.9	70.4±1.5	70.1±1.4	40.1±1.6	34.3±1.5
MUDERN	78.4±0.5	78.8±0.6	49.9±0.8	42.7±0.8	75.2±1.0	75.3±0.9	47.1±1.7	40.4±1.8
UniCMR _{base}	75.6±0.4	76.5±0.6	53.7±0.5	46.5±0.2	71.7±1.2	72.2±1.1	48.4±1.5	41.5±1.7
UniCMR _{large}	77.7±0.5	78.0±0.6	59.3±1.2	52.8±0.9	76.7±1.2	76.7±1.1	54.2±1.4	47.9±1.6

Table 1: Results on the validation and test set of OR-ShARC. The first block presents the results of public models with the DPR++ retrieval method, and the second block reports the results of TF-IDF retrieval-based public models and our SOTA model. Our average results with a standard deviation on 3 random seeds are reported.

Model	Dev Set			
	Decision Making		Question Gen.	
	Micro	Macro	BLEU1	BLEU4
OSCAR	70.1	75.6	63.3	48.1
UniCMR	72.6	78.0	66.3	53.9

Table 2: Results on the validation set of ShARC (with large models). Note that the test set of ShARC is not public hence only the evaluation on dev set is conducted.

	Discern	Oscar	UniCMR (base/large)
#Param.	330M	1100M	220M/770M

Table 3: The comparison of approximate number of parameters of some current models.

two RTX TITAN GPU’s with 24G memory³. In training stage, the model with best F1_{BLEU4} score on dev set is kept.

5.4 Results

Decision Making and Question Generation performance on OR-ShARC. Referring to our results reported in Table 1, our large unified model has achieved new SOTA question generation performance in both dev and test sets by a large margin. In terms of decision making results, our large model lacks behind in the dev set but prevails in the test set performance by maintaining a stable and consistent performance when transferring from dev set to test set.

³Average training run time for UniCMR_{large} is approximately 12 hours. Average inference run time for UniCMR_{large} is approximately 10 minutes on dev set and 21 minutes on test set.

Performance on ShARC. As a reference, the performance of the UNICMR_{large} together with the current SOTA model OSCAR on the dev set of ShARC is reported on Table 2. Note that, in contrast with OR-ShARC (Gao et al., 2021), ShARC benchmark (Saeidi et al., 2018) is in the closed-book setting with the evaluation metric of the question generation sub-task as BLEU. Based on the results in Table 2, it can be seen that UNICMR_{large} maintains a new SOTA performance on dev set by a large margin for both the decision making and the question generation sub-tasks. This shows our unified method is effective for the model’s performance beyond OR-ShARC.

Comparison of Model Parameter Numbers.

We have approximated total parameters of current high performance models. The information is shown in Table 3. By comparison of the parameter numbers used in current high performance models in Table 3, our UNICMR_{large} (based on T5-large) uses around 770M parameters which generally prevails the current SOTA model OSCAR using around 1100M parameters. Our UNICMR_{base} (based on T5-base) uses 220M parameters but prevails models like DISCERN which uses around 330M parameters. UNICMR_{base} also achieves a close performance to OSCAR in terms of question generation. The above observations verify that our method of unifying optimizing the two sub-tasks is effective, which enables each sub-task to benefit from the optimization of the other task.

Test Set	Decision Making								Question Generation							
	Micro				Macro				F1 _{BLEU1}				F1 _{BLEU4}			
	1	6	12	20	1	6	12	20	1	6	12	20	1	6	12	20
Full-Dataset	69.1	74.7	78.5	77.3	69.7	74.7	78.5	77.5	41.2	51.9	53.1	53.3	34.4	45.1	46.3	46.2
Seen	77.6	85.5	88.4	88.3	77.6	85.5	88.4	88.2	53.1	67.6	73.4	71.6	47.9	63.6	69.2	67.2
Unseen	63.0	66.8	71.2	69.3	63.8	66.8	71.0	69.5	29.3	36.9	32.9	36.1	20.5	27.4	23.1	26.2

Table 4: Comparison of our model under different number of retrieved rule texts on test set.

Test Set	Decision Making								Question Generation							
	Micro				Macro				F1 _{BLEU1}				F1 _{BLEU4}			
	10	20	50	70	10	20	50	70	10	20	50	70	10	20	50	70
Full-Dataset	75.6	77.1	77.0	77.0	75.9	77.1	77.0	77.1	35.5	52.2	54.3	54.3	30.3	45.9	47.8	47.8
Seen	87.7	88.2	88.2	88.2	87.7	88.2	88.2	88.2	41.9	67.5	72.2	72.2	39.0	63.7	68.4	68.4
Unseen	66.9	69.0	68.9	68.9	67.3	69.0	69.0	69.0	25.9	37.9	37.4	37.4	18.9	29.0	28.0	28.0

Table 5: Comparison of our model under different max generation length limit on test set.

6 Analysis

6.1 Number of Retrieved Rule Texts

The model performance under different choices of the number of retrieved rule texts is shown in Table 4. We see that generally, when the number of rule texts increases, there will be more information which improves our model while also introducing more noise which harms our model. In terms of decision making, our model is quite stable in seen test dataset when the number of rule texts varies. That means our model well captures the useful and trash conditions in rule texts and fulfillment states in dialogue history in the training stage. Besides, The unusual boost of question generation performance in the unseen test set might suggest that using more than the necessary number of rule texts possibly pushes the model to gain more power of generalization in the traing stage.

6.2 Maximum Generation Length

The model performance under the different choices of the maximum generation length is shown in Table 5.⁴

In terms of decision making and question generation, redundant max generation length will not affect the performance of the model but

⁴In Table 4, the hyperparameter m (number of retrieved rule texts) is varied to compare our model performance on the OR-ShARC test set, test set seen and test set unseen divisions respectively. In Table 5, the hyperparameter maximum generation length of the backbone encoder-decoder model is varied to compare our model performance on the same datasets. The corresponding performance of the above two experiments on dev set is shown by Table 6 and Table 7 for reference. Note in these experiments, all the hyperparameters remain the same unless explicitly stated.

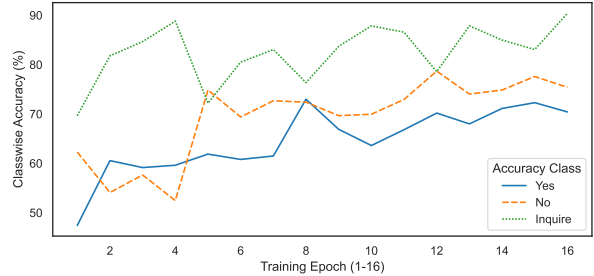


Figure 3: Classwise accuracy on dev set of each epoch.

insufficient max generation length will limit the model performance. This means the model well learns the difference between different forms of answers and is able to generate suitable answers accordingly.

6.3 Generation Quality Gain Across Training

The classwise accuracy evaluated in the training of the decision making sub-task is shown by Fig. 3. By the initial gap between the accuracy for “Inquire” and the accuracy for other decisions, our model tends to predict the decision as *Inquire* and generate question when not well fine-tuned. This is due to a gap between the length for the answer *Yes/No* and the length for the answer “*Inquire+Generated Question*”. And also the innate property of pre-trained T5 generation model before well fine-tuned at the beginning which is hence biased towards the longer answer. As the training continues, the accuracy for *Yes* and *No* gradually catches up with *Inquire* even though is slightly lower. This observation shows the existence of the bias of our backbone model and also the effectiveness of our training which large reduces such bias. This also suggests future improvements

Dev Set	Decision Making								Question Generation							
	Micro				Macro				F1 _{BLEU1}				F1 _{BLEU4}			
	1	6	12	20	1	6	12	20	1	6	12	20	1	6	12	20
Full-Dataset	65.4	76.6	77.8	77.6	66.3	76.7	78.2	78.2	36.6	58.2	58.9	58.8	29.5	51.6	53.3	51.8
Seen	78.4	88.2	88.8	90.6	78.2	88.1	88.8	90.5	52.7	71.8	74.6	72.6	47.5	66.8	70.7	68.4
Unseen	54.7	66.9	68.8	66.8	56.4	66.7	69.1	68.7	19.7	40.0	38.6	43.1	10.3	30.5	30.5	32.5

Table 6: Comparison of our model under different number of retrieved rule texts on dev set.

Dev Set	Decision Making								Question Generation							
	Micro				Macro				F1 _{BLEU1}				F1 _{BLEU4}			
	10	20	50	70	10	20	50	70	10	20	50	70	10	20	50	70
Full-Dataset	77.6	76.9	77.1	77.1	78.5	77.4	77.7	77.7	46.9	57.2	66.1	61.1	40.8	50.9	54.8	54.8
Seen	91.0	89.4	89.8	89.8	90.9	89.3	89.7	89.7	47.7	71.0	78.1	78.1	44.1	66.6	73.9	73.9
Unseen	66.5	66.6	66.6	66.6	68.5	67.7	67.7	67.7	36.3	40.6	40.7	40.1	27.6	32.2	31.6	31.6

Table 7: Comparison of our model under different max generation length limit on dev set.

on more targeted training to eliminate the bias and lessening the discontinuity between the length of output for *Yes/No* and the length of output for “*Inquire+Generate Questions*”.

6.4 Contribution of the Retriever Module

To quantify the contribution of the retriever module, we conducted an additional experiment where OR-ShARC is turned into a closed-book setting (see Closed-Book in Table 8). Also, we replaced the TF-IDF retriever with the DPR++ retriever introduced in UNICMR_{large} for your reference (see w/ DPR++ in Table 8). Performance of UNICMR_{large} without retriever is also shown (see w/o Retriever in Table 8). The results verify that using the retrieval is beneficial, which reduces the gap between the challenging open-retrieval task and the closed-book task with gold rule texts.

6.5 Discussions of Performance Improvement

To further investigate the source of performance improvement of our method, more comprehensive experimental results are shown here following the deduced conclusions.

First, UNICMR’s unified training format advances the performance of training T5 separately on decision making. See the performance of T5-large trained for decision making separately (DM-only in Table 10) compared with the original UNICMR_{large} (UNICMR in Table 10) performance. The comparison indicates that UNICMR’s stronger form of unified training improves the model’s decision making ability.

Second, UNICMR’s unified training format advances the performance of training T5 separately

on question generation in F1_{BLEU}. Ablation studies here include the T5-large trained with all examples (assign empty to examples with *Yes* and *No* decisions) for question generation only (QG-only whole-evaluation in Table 9), T5-large trained with examples with inquiry questions for questions generation only (QG-only partial-evaluation in Table 9), and T5-large-based UNICMR (UNICMR in Table 9). The results indicate that:

(i) In terms of F1_{BLEU}, UNICMR has dominantly higher performance than other separately trained models.

(ii) In terms of BLEU⁵, UNICMR is not the best, which shows its source of F1_{BLEU} dominance includes reduction of error propagation.

(iii) For T5-large backbone, UNICMR is higher in BLEU than QG-only partial-evaluation, which means UNICMR’s integration of decision making labels in training is effective.

6.6 Generalizability on Different Backbone Models

Replacing the T5-large backbone with BART-base, and repeating the same experiments as the previous section (see the same experimental settings but with BART-base as backbone models in Table 10 and Table 9), leads to same general conclusions. This shows the effectiveness of UNICMR’s unified format can well generalize to different end-to-end architectures.

⁵Note that BLEU is measured on samples with *Inquire* as gold labels only while F1_{BLEU} is measured on all samples considering both the BLEU when prediction is *Inquire* and the BLEU when gold label is *Inquire*. For F1_{BLEU} calculation of all QG-only settings, decision making predictions of model trained only on decision making sub-task are used.

Model	Dev Set				Test Set			
	Micro	Macro	F1 _{BLEU1}	F1 _{BLEU4}	Micro	Macro	F1 _{BLEU1}	F1 _{BLEU4}
Closed-Book	82.1	82.1	67.8	62.8	79.4	79.5	60.5	54.8
w/ DPR++	76.8	77.4	56.8	50.4	75.2	75.2	54.8	48.8
w/o Retriever	71.0	70.9	42.1	35.2	65.8	65.7	35.2	28.7

Table 8: Results of UniCMR_{large} with different retriever module setting on the dev and test sets of OR-ShARC benchmark. For Closed-Book setting, the OR-ShARC is turned into a closed-book setting by given the rule texts. For w/ DPR++ setting, the TF-IDF retriever is replaced with DPR++ retriever. For w/o Retriever setting, the OR-ShARC is approached without rule texts.

Model	Dev Set				Test Set			
	BLEU1	BLEU4	F1 _{BLEU1}	F1 _{BLEU4}	BLEU1	BLEU4	F1 _{BLEU1}	F1 _{BLEU4}
<i>w/ T5-large</i>								
UniCMR	67.5	59.1	59.3	52.8	55.8	48.3	54.2	47.9
QG-only whole-evaluation	53.3	47.5	49.5	43.1	45.2	40.1	47.0	39.7
QG-only partial-evaluation	71.1	61.0	47.9	40.8	69.4	59.5	45.8	38.9
<i>w/ BART-base</i>								
UniCMR	58.4	50.2	52.3	45.1	47.3	40.2	46.9	39.8
QG-only whole-evaluation	62.6	51.4	44.1	37.3	60.4	48.9	40.3	33.5
QG-only partial-evaluation	69.2	57.7	43.3	35.3	66.8	56.7	39.9	33.3

Table 9: Question generation performance of UNICMR compared with models trained only on question generation sub-task on OR-ShARC. For QG-only whole-evaluation setting, we use all samples by assigning empty generated question to samples with Yes/No decisions. For QG-only partial-evaluation setting, we use samples only with inquiry questions. The results are generally divided into two parts, one using T5-large as backbone model and one using BART-base as backbone model.

Model	Dev Set		Test Set	
	Micro	Macro	Micro	Macro
<i>w/ T5-large</i>				
UniCMR	77.7	78.0	76.7	76.7
DM-only	73.9	73.7	72.9	72.3
<i>w/ BART-base</i>				
UniCMR	74.8	75.7	71.5	71.8
DM-only	72.5	72.4	68.6	68.3

Table 10: Decision making performance of UNICMR compared with models trained only on decision making sub-task on OR-ShARC. For DM-only setting, we use all samples to train our model only on decision making sub-task. The results are generally divided into two parts, one using T5-large as backbone model and one using BART-base as backbone model.

7 Conclusion

In this paper, we study open-retrieval setting of the conversation machine reading task and promote a novel framework to first unify the optimizations of the two sub-tasks to achieve optimization synergy. With a retriever module and a parameter-efficient text-to-text encoder-decoder module, we have achieved new SOTA results in both the CMR and the OR-CMR benchmarks. Further experiments shows that our unified training form with an end-to-end optimization method largely contributes to

the advanced performance in decision making and reduces the error propagation to boost question generation performance. It’s also shown that our framework well generalize to other backbone models including BART-base.

Limitations

Under the challenging open-retrieval setting, a retrieval is required to find the related rules texts. However, the performance of our model may be hindered by the noise introduced by the irrelevant rule texts from the retrieval. To conquer this deficiency, it is beneficial to develop additional filtering methods to alleviate the influence of irrelevant rule texts.

References

- Wei Bi, Jun Gao, Xiaojiang Liu, and Shuming Shi. 2019. [Fine-grained sentence functions for short-text conversation](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3984–3993, Florence, Italy. Association for Computational Linguistics.
- Eunsol Choi, He He, Mohit Iyyer, Mark Yatskar, Wen-tau Yih, Yejin Choi, Percy Liang, and Luke Zettlemoyer. 2018. [QuAC: Question answering in context](#). In *Proceedings of the 2018 Conference on*

- Empirical Methods in Natural Language Processing*, pages 2174–2184, Brussels, Belgium. Association for Computational Linguistics.
- Leyang Cui, Yu Wu, Shujie Liu, Yue Zhang, and Ming Zhou. 2020. [MuTual: A dataset for multi-turn dialogue reasoning](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1406–1416, Online. Association for Computational Linguistics.
- Yifan Fan, Xudong Luo, and Pingping Lin. 2020. A survey of response generation of dialogue systems. *International Journal of Computer and Information Engineering*, 14(12):461–472.
- Yifan Gao, Jingjing Li, Michael R Lyu, and Irwin King. 2021. Open-retrieval conversational machine reading. *arXiv preprint arXiv:2102.08633*.
- Yifan Gao, Piji Li, Wei Bi, Xiaojiang Liu, Michael R. Lyu, and Irwin King. 2020a. [Dialogue generation on infrequent sentence functions via structured meta-learning](#).
- Yifan Gao, Chien-Sheng Wu, Shafiq Joty, Caiming Xiong, Richard Socher, Irwin King, Michael Lyu, and Steven C.H. Hoi. 2020b. [Explicit memory tracker with coarse-to-fine reasoning for conversational machine reading](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 935–945, Online. Association for Computational Linguistics.
- Yifan Gao, Chien-Sheng Wu, Jingjing Li, Shafiq Joty, Steven C.H. Hoi, Caiming Xiong, Irwin King, and Michael Lyu. 2020c. [Discern: Discourse-aware entailment reasoning network for conversational machine reading](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2439–2449, Online. Association for Computational Linguistics.
- Jia-Chen Gu, Chongyang Tao, Zhenhua Ling, Can Xu, Xiubo Geng, and Daxin Jiang. 2021. [MPC-BERT: A pre-trained language model for multi-party conversation understanding](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3682–3692, Online. Association for Computational Linguistics.
- Mikael Henaff, Jason Weston, Arthur Szlam, Antoine Bordes, and Yann LeCun. 2017. [Tracking the world state with recurrent entity networks](#). In *International Conference on Learning Representations*.
- Minlie Huang, Xiaoyan Zhu, and Jianfeng Gao. 2020. Challenges in building intelligent open-domain dialog systems. *ACM Transactions on Information Systems (TOIS)*, 38(3):1–32.
- Carolin Lawrence, Bhushan Kotnis, and Mathias Niepert. 2019. [Attending to future tokens for bidirectional sequence generation](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1–10, Hong Kong, China. Association for Computational Linguistics.
- Ilya Loshchilov and Frank Hutter. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*.
- Dan Moldovan, Sanda Harabagiu, Marius Pasca, Rada Mihalcea, Roxana Girju, Richard Goodrum, and Vasile Rus. 2000. [The structure and performance of an open-domain question answering system](#). In *Proceedings of the 38th Annual Meeting of the Association for Computational Linguistics*, pages 563–570, Hong Kong. Association for Computational Linguistics.
- Siru Ouyang, Zhuosheng Zhang, and Hai Zhao. 2021. Dialogue graph modeling for conversational machine reading. In *The Joint Conference of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (ACL-IJCNLP 2021)*.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, pages 311–318.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21(140):1–67.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. 2019. [CoQA: A conversational question answering challenge](#). *Transactions of the Association for Computational Linguistics*, 7:249–266.
- Marzieh Saeidi, Max Bartolo, Patrick Lewis, Sameer Singh, Tim Rocktäschel, Mike Sheldon, Guillaume Bouchard, and Sebastian Riedel. 2018. [Interpretation of natural language rules in conversational machine reading](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2087–2097, Brussels, Belgium. Association for Computational Linguistics.
- Zhouxing Shi and Minlie Huang. 2019. [A deep sequential model for discourse parsing on multi-party dialogues](#). In *The Thirty-Third AAAI Conference on Artificial Intelligence, AAAI 2019, The Thirty-First Innovative Applications of Artificial Intelligence Conference, IAAI 2019, The Ninth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2019, Honolulu, Hawaii, USA, January 27 - February 1, 2019*, pages 7007–7014. AAAI Press.

- Kai Sun, Dian Yu, Jianshu Chen, Dong Yu, Yejin Choi, and Claire Cardie. 2019. [DREAM: A challenge data set and models for dialogue-based reading comprehension](#). *Transactions of the Association for Computational Linguistics*, 7:217–231.
- Nikhil Verma, Abhishek Sharma, Dhiraj Madan, Danish Contractor, Harshit Kumar, and Sachindra Joshi. 2020. [Neural conversational QA: Learning to reason vs exploiting patterns](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7263–7269, Online. Association for Computational Linguistics.
- Ellen M. Voorhees and Dawn M. Tice. 2000. [The TREC-8 question answering track](#). In *Proceedings of the Second International Conference on Language Resources and Evaluation (LREC'00)*, Athens, Greece. European Language Resources Association (ELRA).
- Munazza Zaib, Quan Z Sheng, and Wei Emma Zhang. 2020. A short survey of pre-trained language models for conversational ai-a new age in nlp. In *Proceedings of the Australasian Computer Science Week Multiconference*, pages 1–4.
- Zhuosheng Zhang, Jiangtong Li, Pengfei Zhu, Hai Zhao, and Gongshen Liu. 2018. [Modeling multi-turn conversation with deep utterance aggregation](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 3740–3752, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Zhuosheng Zhang, Siru Ouyang, Hai Zhao, Masao Utiyama, and Eiichiro Sumita. 2021. [Smoothing dialogue states for open conversational machine reading](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3685–3696, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Victor Zhong and Luke Zettlemoyer. 2019. [E3: Entailment-driven extracting and editing for conversational machine reading](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2310–2320, Florence, Italy. Association for Computational Linguistics.
- Pengfei Zhu, Zhuosheng Zhang, Jiangtong Li, Yafang Huang, and Hai Zhao. 2018. [Lingke: a fine-grained multi-turn chatbot for customer service](#). In *Proceedings of the 27th International Conference on Computational Linguistics: System Demonstrations*, pages 108–112, Santa Fe, New Mexico. Association for Computational Linguistics.