Template-Based Conjecturing for Automated Induction in Isabelle/HOL

Yutaka Nagashima^[0000-0001-6693-5325], Zijin Xu^[0000-0001-7230-0131], Ningli Wang^[0000-0001-7775-436X], Daniel Sebastian Goc^[0000-0002-2347-8037], and James Bang^[0000-0001-9345-3479]

Huawei Cambridge Research Centre

Abstract. Proof by induction plays a central role in formal verification. However, its automation remains as a formidable challenge in Computer Science. To solve inductive problems, human engineers often have to provide auxiliary lemmas manually. We automate this laborious process with *template-based conjecturing*, a novel approach to generate auxiliary lemmas and use them to prove final goals. Our evaluation shows that our working prototype, TBC, achieved 40 percentage point improvement of success rates for problems at intermediate difficulty level.

1 Introduction

Consider the following definitions of add and even on natural numbers:

add		0	m	=	m				
add	(Suc	n)	m	=	Su	С	(add	n	<i>m</i>)
even				0		=	True		
even		(2	Suc	0)	=	False	Э	
even	(Suc	: (8	Suc	n))	=	even	n	

Intuitively, the following statement holds: even (add n n).

However, if we apply structural induction on n, the simplification based on the definitions of add and even gets stuck at even (add $n \ n$) \Rightarrow even (S (add $n \ (S \ n)$)) when attacking the induction step. This is due to the definition of add, which does not allow us to operate on its second argument. Hence, if we want to prove this statement, we need to introduce auxiliary lemmas.

What lemmas should we introduce? Empirically, we know various mathematical structures share well-known *algebraic properties* such as associativity and commutativity. For example, our example problem uses **add**, which satisfies the following properties:

add n	(add m k) = add (add n n)	k (add	is	associative)
$\texttt{add} \ n$	m = add m n	(add	is	commutative)

The commutative property of add allows us to operate on its second argument. Hence, if we prove this property, we can revert back to the original goal and finish its proof.

To automate this process, this paper introduces TBC, a tool that produces such <u>template-based</u> conjectures and attempts to prove them as well as the original proof goal in Isabelle/HOL [19]. For example, when applied to even (add n n), TBC first proves 10 conjectures then proves the original goal using two of them as shown in Program 4 in Appendix.

We chose Isabelle/HOL to exploit its powerful proof tactics and counterexample finders; however, the underlying idea of template-based conjecturing is not specific to Isabelle/HOL: we can build similar systems for other provers if they are equipped with equivalent tools. We developed TBC under the following research hypothesis:

We can improve the proof automation of inductive problems by producing and proving conjectures based on fixed but general properties about relevant functions.

Our contributions are:

- the working prototype of a powerful inductive prover based on templatebased conjecturing and newly developed default strategy (Section 2.1),
- the identification of useful properties (Section 2.2), and
- extensive evaluations of TBC to test our research hypothesis (Section 3).

2 System Description

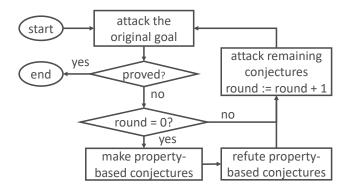


Fig. 1: Workflow of TBC

2.1 Overview

Figure 1 shows how TBC attacks inductive problems using template-based conjecturing. Given an induction problem, the tool first attempts to prove the goal using a default strategy, TBC_Strategy, written in the proof strategy language, PSL [17]. As shown in Program 1, TBC_Strategy combines Isabelle's proof tactics, such as auto and clarsimp, and other sub-tools, such as smart induction [13,14,15] and Sledgehammer [21] to prove the goal completely. That is, PSL uses Sledgehammer as a sub-tool, even though Sledgehammer itself is a metatool that uses external provers and Isabelle's tactics to prove given problems.

As PSL is a new meta-tool, we first explain the language constructs in Program 1. Ors is a combinator for deterministic choice, whereas Thens and PThenOne combine sub-strategies sequentially. Subgoal lets PSL focus on the first sub-goal, temporarily hiding other sub-goals from the scope, while IsSolved checks if all proof obligations are solved within the current scope. Auto, Clarsimp, and Fastforce correspond to Isabelle's default tactics of the same name, while Hammer calls Sledgehammer [21] and Smart_Induct applies 5 promising candidates of proof by induction [14,15]. Essentially, this strategy applies increasingly expensive sub-strategies to solve proof goals using backtracking search.

If TBC_Strategy fails to prove the goal, it produces conjectures based on properties specified in advance, following the process explained in Section 2.2. Then, the tool attempts to refute the conjectures using Isabelle's counter-example generators: Quickcheck [2] and Nitpick [1]. After filtering out refuted conjectures, TBC attempts to prove the remaining conjectures using the default strategy. While doing so, TBC registers proved conjectures as auxiliary lemmas, so that it can use them to prove other conjectures.

For example, TBC_Strategy finds the following proof script for the commutativity of add. To demonstrate how TBC_Strategy finds proofs using backtracking search, we highlighted the parts of Program 1 that were *not* backtracked but resulted in this script. We invite readers to compare these highlighted parts in Program 1 against the resulting script and to find out which proof tactic Sledgehammer used to prove the corresponding sub-goal.¹

```
lemma commutativity: "add var_1 var_2 = add var_2 var_1"
apply ( induct_tac "var_1" )
   apply ( simp add : identity )
   subgoal
      apply clarsimp
   subgoal
      apply ( induct_tac "var_2" )
      apply auto
      done
      done
      done
```

¹ Answer: Sledgehammer used the simp tactic with an auxiliary lemma about identity. Furthermore, IsSolved resulted in the done command in the script.

Program 1 TBC_Strategy: TBC's default strategy.

```
Ors [
 Thens [Auto, IsSolved],
 PThenOne [Smart_Induct, Thens [Auto, IsSolved]],
 Thens [Hammer, IsSolved],
 PThenOne [
    Smart_Induct,
    Ors
      [Thens [
         Repeat (
           Ors [
             Fastforce,
             Hammer,
             Thens [ Clarsimp, IsSolved ],
             Thens [
               Subgoal,
               Clarsimp,
               Repeat (
                 Thens [ Subgoal,
                          Ors [ Thens [Auto, IsSolved],
                                Thens [ Smart_Induct, Auto, IsSolved ] ] ]
               ),
               IsSolved
             ]
           ]
         ),
         IsSolved
       ]
    1
 ]
]
```

After processing the list of conjectures, TBC comes back to the original goal. This time, it attacks the goal, using proved conjectures as auxiliary lemmas. If TBC still fails to prove the original goal, it again attacks the remaining conjectures hoping that proved conjectures may help the strategy to prove remaining ones. By default, TBC gives up after the second round and shows proved conjectures and their proofs in Isabelle's standard editor's output pane, so that users can exploit them when attacking original goals manually.

The seamless integration of TBC into the Isabelle ecosystem lets users build TBC as an Isabelle theory using Isabelle's standard build command without installing additional software. Furthermore, when TBC finds a proof for the original goal, our tool shows the final proof as well as proved conjectures with their proofs in the output pane as shown in Fig. 2. Users can copy and paste them with a single click to the right location of their proof scripts. The produced scripts are human readable, and Isabelle can check them without TBC.

5

🖻 🖎	🗖 I 🚔 I 🕎 🥐 I 👗 🗊 📋 I 🔩 🖓 I 🚍 🖾 🐼 I 🖷 🐹 I 👘 I 🕲 I 🛊 🗼	
	%HOME%\Workplace\)	
	ype Nat = Z S "Nat"	
6		
	even :: "Nat => bool" where	
8 "e\		
	ren (S Z) = False"	
	(S(Sz)) = even z''	
1	ndd :: "Nat => Nat => Nat" where	
13 "ac		
	z - y = y - y - y - y - y - y - y - y - y - y	
15		
	<u>by conjecturing</u> property0 :	
۳e،	ren (add x x)	
	✓ Proof state ✓ Auto update Update Search:	1%
	Commutativity_5374366: "add var_1 var_2 = add var_2 var_1"	
	(induct_tac "var_1")	
	(simp add : Identity_5374226)	
subgo		
	clarsimp	
subgo	(induct tac "var 2")	
apply		
done		
done		
done		
	<pre>Idempotent_Element_5374518: "add Z Z = Z"</pre>	
	auto	
done		
lemma	Swap Unary 5375168: "add var 1 (S var 2) = add (S var 1) var 2"	
	(induct_tac "var_1")	
apply	auto	
done		
lommo	Composite Commutativity 5275220, "add (add yar 1 yar 2) - add (add yar 2 yar 1)"	
	<pre>Composite_Commutativity_5375320: "add (add var_1 var_2) = add (add var_2 var_1)" (simp add : Commutativity 5374366)</pre>	
done	(samp and , communicatively_sside)	
lemma	Composite_Commutativity_5375482: "S (add var_1 var_2) = S (add var_2 var_1)"	
	<pre>(simp add : Commutativity_5374366)</pre>	
done		
lemma	Composite Commutativity 5375634: "Demo.even (add var 1 var 2) = Demo.even (add var 2	Va
	(simp add : Commutativity 5374366)	Vd
done	(stub add : commandativity_sside)	
aone		
lemma	original_goal_5338684: "even (add x x)"	
	(induct_tac "x")	
	fastforce	
	(simp add : Swap_Unary_5375168)	
done		
	Search Results Output Query Sledgehammer Symbols	

Fig. 2: Screenshot of Isabelle/HOL with TBC. The upper pane shows the definition of a type and functions. The new command prove_by_conjecturing invokes TBC, which presents the proof script appearing in the lower pane.

Program 2 The Complete List of Template-Based Conjectures. We added the highlighted four conjectures after manually solving some benchmark problems. One can see that none of these conjectures are specific to particular problems.

o no can bee chat home of th	ese conjectures are specific to particular prostenis.
associativity	f(f(x, y), z) = f(x, f(y, z))
identity element	f (e, x) = x or f (x , e) = x for some e
commutativity	f(x, y) = f(y, x)
idempotent element	f (e, e) = e for some e
idempotency	f(x, x) = x
distributivity	f(x, g(y, z)) = g(f(x, y), f(x, z))
anti-distributivity	f(g(x, y)) = g(f y, f x)
homomorphism	f(g(x, y)) = g(f x, f y)
transitivity	$x \ \mathtt{R} \ y \ \rightarrow \ y \ \mathtt{R} \ z \ \rightarrow \ x \ \mathtt{R} \ z$
symmetry	$x \ \mathtt{R} \ y \ ightarrow \ y \ \mathtt{R} \ x$
connexity	$x \mathrel{\texttt{R}} y \lor y \mathrel{\texttt{R}} x \lor (x = y)$
reflexivity	$x \ {\tt R} \ x$
<mark>square</mark>	f(fx) = x
swap-unar	f(x, g y) = f(g x, y)
projection	f(f x) = f x
<pre>composite_commutativity</pre>	f(g(x, y)) = f(g(y, x))

2.2 Template-Based Conjecturing

As mentioned in Section 2.1, our tool produces conjectures based on 16 templates specified in advance. 12 of them are either well-known algebraic properties, such as associative template, or relational properties, such as transitivity. Note that we added the 4 highlighted templates based on the feedback from students who manually solved several benchmark problems. None of these templates are specific to particular functions.

To produce conjectures for such templates, TBC first collects functions appearing in the original proof goal. Then, it looks for the definitions of these functions and adds functions in these definitions into the list of functions for conjecturing. Then, TBC filters out functions defined within the standard library since the standard library already contains useful auxiliary lemmas for them. Finally, TBC creates conjectures by filling templates with these functions.

3 Evaluation

3.1 Benchmark and Environment

We evaluated our tool using Tons of Inductive Problems (TIP) [6], which is a benchmark consisting of 462 inductive problems. TIP consists of three main problem sets: 85 problems in Isaplanner, 50 in Prod, and 327 in TIP15. Isaplanner is the easiest, whereas Prod contains problems at the intermediate difficulty level, and TIP15 has difficult problems, such as Fermat's Last Theorem.

The advantage of using TIP is that each problem is complete within a single file. That is, data types and functions are defined afresh within each problem file, instead of using the standard definition. For example, our running example problem from Section 1 is formalised as an independent Isabelle theory file in the Prod set in TIP. The functions, **add** and **even**, are defined afresh in this file, instead of using the default ones from the standard library. This allowed us to ignore manually developed lemmas for similar functions in the standard library. This way, by using TIP, we focused on TBC's conjecturing capability to prove the final goal.

In this experiment, we set the following timeouts for the counter-example generators: one second for Quickcheck, two seconds for Nitpick. The timeout for Sledgehammer is more flexible: 10 seconds when attacking conjectures in n-th round where n is an odd number, whereas 30 seconds when attacking conjectures in n-th round where n is an even number or attacking the original goals.

However, when measuring the performance of TBC against TIP15 problems, we set the following short timeouts to process 327 problems using computational resources available to us: 5 seconds for Sledgehammer to prove produced conjectures, 10 seconds for Sledgehammer to attack the original goal. Furthermore, We use 15 minutes as the overall timeout for each problem in TIP15.

We ran our evaluations on consumer-grade laptops. Specifically, we used a Lenovo Thinkpad T490s, with Intel Core i7-8665U CPU and 16GB of RAM. We used Windows 10 Pro as our evaluation operating system.

3.2 Results

Success rates for different difficulty levels. Figure 3 shows the percentage of problems proved by each tool at each stage. We use an induction prover for Isabelle/HOL [16], TAP21, as our baseline prover. "Round0" represents the percentage of solved problems after the zeroth round of TBC, where TBC shows the percentage of solved problems after the second round for Isaplanner and Prod, but after the first round for TIP15 due to our limited computational resources.

The figure shows that TBC brought the largest improvement (40 percentage points) to the Prod category. On the other hand, we can prove 60% of problems in Isaplanner without producing conjectures, while TBC struggles at harder problems in the TIP15 category.

Program 3 TAP_2021 is the strategy used in the baseline prover introduced by Nagashima [16]. Since we added minor improvements to Smart_Induct, we represent their version of Smart_Induct as Old_Smart_Induct in this paper.

```
Ors [
  Auto_Solve,
  PThenOne [Old_Smart_Induct, Auto_Solve],
  PThenOne [Old_Smart_Induct,
   Thens [ Auto, RepeatN (Hammer), IsSolved ]
 ]
]
```

8 Y. Nagashima et al.




Fig. 3: Proof completion rates.

Proof completion rates and execution time. Fig. 4, Fig. 5, and Fig. 6 show the chances of solving a problem in each category relative to how long the program is run. For example, Fig. 5 illustrates that approximately 20% of the problems are solved within 5 minutes in the Prod category, and 60% of the problems are solved within 20 minutes of runtime. Beyond this time, the chances of producing a proof increase marginally, reaching 66% of problems after an hour.




Fig. 4: Success rates over time for Isaplanner.




Fig. 5: Success rates over time for Prod.




Fig. 6: Success rates over time for TIP15.

Refuting and proving. Fig. 7 and Fig. 8 show how many conjectures TBC produced for each problem in Isaplanner and Prod and how it handled them, respectively. As shown in the figure, TBC did not produce any conjectures for some problems, since it proved these problems even before producing conjectures. Furthermore, the number of conjectures does not blow up in TBC, since TBC

produces conjectures about commonly used properties only. Note that keeping the number of conjectures low is the main challenge in other conjecturing tools, as we discuss in Section 4. Moreover, these figures show that most conjectures are either proved or refuted for problems in Isaplanner and Prod, and only a few conjectures are left unsolved thanks to the strong default strategy and counterexample finders.




Fig. 7: Conjectures for Isaplanner.

4 Related Work

Conjecturing. We have two schools of conjecturing to automate inductive theorem proving: top-down approaches and bottom-up approaches. Top-down approaches [3,4,18] create auxiliary lemmas from an ongoing proof attempt, whereas bottom-up approaches [5,10] produce lemmas from available functions and data types to enrich the background theory [11]. TBC falls into the latter category. While most bottom-up tools, such as HipSpec [5] and Hipster[10], produce conjectures randomly, TBC makes conjectures based on a fixed set of templates. Furthermore, Hipster aims to discover new lemmas, TBC checks for known properties to keep the number of conjectures low. In this respect, RoughSpec [7] is similar to TBC: it produces conjectures based on templates, which describe important properties. Contrary to TBC, RoughSpec supports only equations as templates and is a tool for Haskell rather than a proof assistant.




Fig. 8: Conjectures for Prod.

Inductive theorem proving. TBC is an automatic tool developed for an interactive theorem prover (ITP) based on a higher-order logic. Others have introduced proof by induction for automatic theorem provers (ATPs) [12,22,9,23,20]. ATPs are typically based on less expressive logics and use different proof calculi compared to LCF-style provers. Moreover, ATPs are built for performance, whereas LCF-style provers are designed for high assurance and easy user-interaction. Such differences make a straightforward comparison difficult; however, we argue that a stronger automation of inductive proofs in ITPs helps users reason data types and functions they introduce to tackle unique problems.

5 Discussion and Conclusion

Careful investigations into generated proofs reveal that TBC proves conjectures that are not used to attack the original goal as shown in Appendix. Although such conjectures may serve as auxiliary lemmas when users prove other problems in the future, the time spent to prove these conjectures certainly slows down the execution speed of TBC. Furthermore, TBC fails to prove difficult problems since they require conjectures specific to them. We expect that combining TBC with other top-down approaches would result in more powerful automation, which remains as our future work.

This paper presented our template-based conjecturing tool, TBC. To the best of our knowledge, TBC is the only tool that achieved high proof completion rates for the TIP benchmarks while producing human readable proofs that are native to a widely used ITP.

In this work we used 12 commonly known algebraic properties and 4 manually identified useful conjectures as our templates. It remains our future work to incorporate templates that are found automatically by analysing large databases [8] into our framework.

References

- Blanchette, J.C., Nipkow, T.: Nitpick: A counterexample generator for higherorder logic based on a relational model finder. In: Kaufmann, M., Paulson, L.C. (eds.) Interactive Theorem Proving, First International Conference, ITP 2010, Edinburgh, UK, July 11-14, 2010. Proceedings. Lecture Notes in Computer Science, vol. 6172, pp. 131–146. Springer (2010). https://doi.org/10.1007/978-3-642-14052-5_11, https://doi.org/10.1007/978-3-642-14052-5_11
- Bulwahn, L.: The new quickcheck for Isabelle random, exhaustive and symbolic testing under one roof. In: Hawblitzel, C., Miller, D. (eds.) Certified Programs and Proofs - Second International Conference, CPP 2012, Kyoto, Japan, December 13-15, 2012. Proceedings. Lecture Notes in Computer Science, vol. 7679, pp. 92–108. Springer (2012). https://doi.org/10.1007/978-3-642-35308-6_10, https: //doi.org/10.1007/978-3-642-35308-6_10
- Bundy, A., Basin, D.A., Hutter, D., Ireland, A.: Rippling meta-level guidance for mathematical reasoning, Cambridge tracts in theoretical computer science, vol. 56. Cambridge University Press (2005)
- Bundy, A., van Harmelen, F., Horn, C., Smaill, A.: The Oyster-Clam system. In: Stickel, M.E. (ed.) 10th International Conference on Automated Deduction, Kaiserslautern, FRG, July 24-27, 1990, Proceedings. Lecture Notes in Computer Science, vol. 449, pp. 647–648. Springer (1990). https://doi.org/10.1007/3-540-52885-7_123, https://doi.org/10.1007/3-540-52885-7_123
- Claessen, K., Johansson, M., Rosén, D., Smallbone, N.: HipSpec: Automating inductive proofs of program properties. In: Fleuriot, J.D., Höfner, P., McIver, A., Smaill, A. (eds.) ATx'12/WInG'12: Joint Proceedings of the Workshops on Automated Theory eXploration and on Invariant Generation, Manchester, UK, June 2012. EPiC Series in Computing, vol. 17, pp. 16–25. EasyChair (2012). https://doi.org/10.29007/3qwr, https://doi.org/10.29007/3qwr
- Claessen, K., Johansson, M., Rosén, D., Smallbone, N.: TIP: tons of inductive problems. In: Kerber, M., Carette, J., Kaliszyk, C., Rabe, F., Sorge, V. (eds.) Intelligent Computer Mathematics - International Conference, CICM 2015, Washington, DC, USA, July 13-17, 2015, Proceedings. Lecture Notes in Computer Science, vol. 9150, pp. 333–337. Springer (2015). https://doi.org/10.1007/978-3-319-20615-8_23, https://doi.org/10.1007/978-3-319-20615-8_23
- Einarsdóttir, S.H., Smallbone, N., Johansson, M.: Template-based theory exploration: Discovering properties of functional programs by testing. In: Chitil, O. (ed.) IFL 2020: 32nd Symposium on Implementation and Application of Functional Languages, Virtual Event / Canterbury, UK, September 2-4, 2020. pp. 67–78. ACM (2020). https://doi.org/10.1145/3462172.3462192, https://doi.org/10.1145/3462172.3462192
- Einarsdóttir, S.H., Johansson, M., Smallbone, N.: LOL: A library of lemma templates for data-driven conjecturing. In: Buzzard, K., Kutsia, T. (eds.) Work-in-progress papers presented at the 15th Conference on Intelligent Computer Mathematics (CICM 2022) Informal Proceedings

13

(2022), http://www3.risc.jku.at/publications/download/risc_6584/ proceedings-CICM2022-informal.pdf#page=28

- Hajdú, M., Hozzová, P., Kovács, L., Voronkov, A.: Induction with recursive definitions in superposition. In: Formal Methods in Computer Aided Design, FMCAD 2021, New Haven, CT, USA, October 19-22, 2021. pp. 1–10. IEEE (2021). https://doi.org/10.34727/2021/isbn.978-3-85448-046-4_34, https://doi. org/10.34727/2021/isbn.978-3-85448-046-4_34
- Johansson, M.: Automated theory exploration for interactive theorem proving: an introduction to the hipster system. In: Ayala-Rincón, M., Muñoz, C.A. (eds.) Interactive Theorem Proving - 8th International Conference, ITP 2017, Brasília, Brazil, September 26-29, 2017, Proceedings. Lecture Notes in Computer Science, vol. 10499, pp. 1–11. Springer (2017). https://doi.org/10.1007/978-3-319-66107-0_1, https://doi.org/10.1007/978-3-319-66107-0_1
- Johansson, M.: Lemma discovery for induction A survey. In: Kaliszyk, C., Brady, E.C., Kohlhase, A., Coen, C.S. (eds.) Intelligent Computer Mathematics - 12th International Conference, CICM 2019, Prague, Czech Republic, July 8-12, 2019, Proceedings. Lecture Notes in Computer Science, vol. 11617, pp. 125–139. Springer (2019). https://doi.org/10.1007/978-3-030-23250-4_9, https://doi.org/10.1007/ 978-3-030-23250-4_9
- Matt Kaufmann, Panagiotis Manolios, J.S.M. (ed.): Computer-Aided Reasoning ACL2 Case Studies. Advances in Formal Methods, Springer New York, NY (2000). https://doi.org/https://doi.org/10.1007/978-1-4757-3188-0
- Nagashima, Y.: LiFtEr: Language to encode induction heuristics for Isabelle/HOL. In: Lin, A.W. (ed.) Programming Languages and Systems - 17th Asian Symposium, APLAS 2019, Nusa Dua, Bali, Indonesia, December 1-4, 2019, Proceedings. Lecture Notes in Computer Science, vol. 11893, pp. 266– 287. Springer (2019). https://doi.org/10.1007/978-3-030-34175-6_14, https:// doi.org/10.1007/978-3-030-34175-6_14
- Nagashima, Y.: Smart induction for Isabelle/HOL (tool paper). In: 2020 Formal Methods in Computer Aided Design, FMCAD 2020, Haifa, Israel, September 21-24, 2020. pp. 245–254. IEEE (2020). https://doi.org/10.34727/2020/isbn.978-3-85448-042-6_32, https://doi.org/10.34727/2020/isbn.978-3-85448-042-6_32
- Nagashima, Y.: Faster smarter proof by induction in Isabelle/HOL. In: Zhou, Z. (ed.) Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence, IJCAI 2021, Virtual Event / Montreal, Canada, 19-27 August 2021. pp. 1981–1988. ijcai.org (2021). https://doi.org/10.24963/ijcai.2021/273, https: //doi.org/10.24963/ijcai.2021/273
- 16. Nagashima, Y.: Definitional quantifiers realise semantic reasoning for proof by induction. In: Kovács, L., Meinke, K. (eds.) Tests and Proofs - 16th International Conference, TAP 2022, Held as Part of STAF 2022, Nantes, France, July 5, 2022, Proceedings. Lecture Notes in Computer Science, vol. 13361, pp. 48–66. Springer (2022). https://doi.org/10.1007/978-3-031-09827-7_4, https://doi.org/10.1007/ 978-3-031-09827-7_4
- Nagashima, Y., Kumar, R.: A proof strategy language and proof script generation for Isabelle/HOL. In: de Moura, L. (ed.) Automated Deduction - CADE 26 - 26th International Conference on Automated Deduction, Gothenburg, Sweden, August 6-11, 2017, Proceedings. Lecture Notes in Computer Science, vol. 10395, pp. 528-545. Springer (2017). https://doi.org/10.1007/978-3-319-63046-5_32, https://doi.org/10.1007/978-3-319-63046-5_32

- 14 Y. Nagashima et al.
- Nagashima, Y., Parsert, J.: Goal-oriented conjecturing for isabelle/hol. In: Rabe, F., Farmer, W.M., Passmore, G.O., Youssef, A. (eds.) Intelligent Computer Mathematics - 11th International Conference, CICM 2018, Hagenberg, Austria, August 13-17, 2018, Proceedings. Lecture Notes in Computer Science, vol. 11006, pp. 225-231. Springer (2018). https://doi.org/10.1007/978-3-319-96812-4_19, https: //doi.org/10.1007/978-3-319-96812-4_19
- Nipkow, T., Paulson, L.C., Wenzel, M.: Isabelle/HOL A Proof Assistant for Higher-Order Logic, Lecture Notes in Computer Science, vol. 2283. Springer (2002). https://doi.org/10.1007/3-540-45949-9, https://doi.org/10.1007/3-540-45949-9
- Passmore, G.O., Cruanes, S., Ignatovich, D., Aitken, D., Bray, M., Kagan, E., Kanishev, K., Maclean, E., Mometto, N.: The imandra automated reasoning system (system description). In: Peltier, N., Sofronie-Stokkermans, V. (eds.) Automated Reasoning - 10th International Joint Conference, IJCAR 2020, Paris, France, July 1-4, 2020, Proceedings, Part II. Lecture Notes in Computer Science, vol. 12167, pp. 464–471. Springer (2020). https://doi.org/10.1007/978-3-030-51054-1_30, https: //doi.org/10.1007/978-3-030-51054-1_30
- 21. Paulson, L.C., Blanchette, J.C.: Three years of experience with sledgehammer, a practical link between automatic and interactive theorem provers. In: Sutcliffe, G., Schulz, S., Ternovska, E. (eds.) The 8th International Workshop on the Implementation of Logics, IWIL 2010, Yogyakarta, Indonesia, October 9, 2011. EPiC Series in Computing, vol. 2, pp. 1–11. EasyChair (2010). https://doi.org/10.29007/36dt, https://doi.org/10.29007/36dt
- 22. Reger, G., Voronkov, A.: Induction in saturation-based proof search. In: Fontaine, P. (ed.) Automated Deduction - CADE 27 - 27th International Conference on Automated Deduction, Natal, Brazil, August 27-30, 2019, Proceedings. Lecture Notes in Computer Science, vol. 11716, pp. 477–494. Springer (2019). https://doi.org/10.1007/978-3-030-29436-6_28, https://doi. org/10.1007/978-3-030-29436-6_28
- Reynolds, A., Kuncak, V.: Induction for SMT solvers. In: D'Souza, D., Lal, A., Larsen, K.G. (eds.) Verification, Model Checking, and Abstract Interpretation -16th International Conference, VMCAI 2015, Mumbai, India, January 12-14, 2015. Proceedings. Lecture Notes in Computer Science, vol. 8931, pp. 80–98. Springer (2015). https://doi.org/10.1007/978-3-662-46081-8_5, https://doi.org/10.1007/ 978-3-662-46081-8_5

Appendix

```
Program 4 Generated Proof Script for Our Running Example
lemma associativity_5382114:
  "add var_1 (add var_2 var_3) = add (add var_1 var_2) var_3"
  apply ( induct "var_1" arbitrary : var_2 ) apply auto done
lemma associativity_5382286:
  "add (add var_1 var_2) var_3 = add var_1 (add var_2 var_3)"
  apply ( induct "var_1" arbitrary : var_2 ) apply auto done
lemma identity_5382450: "add 0 var_1 = var_1" apply auto done
lemma identity_5382590: "add var_1 0 = var_1"
  apply ( induct_tac "var_1" ) apply auto done
lemma commutativity_5382730:
  "add var_1 var_2 = add var_2 var_1" apply ( induct_tac "var_1" )
 apply ( simp add : identity_5382590 )
 subgoal apply clarsimp subgoal apply ( induct_tac "var_2" )
 apply auto done done done
lemma idempotent_Element_5382882: "add 0 0 = 0" apply auto done
lemma swap_Unary_5383532: "add var_1 (S var_2) = add (S var_1) var_2"
 apply ( induct_tac "var_1" ) apply auto done
lemma composite_Commutativity_5383684:
  "add (add var_1 var_2) = add (add var_2 var_1)"
 apply ( simp add : commutativity_5382730 ) done
lemma composite_Commutativity_5383846:
  "S (add var_1 var_2) = S (add var_2 var_1)"
  apply ( simp add : commutativity_5382730 ) done
lemma composite_Commutativity_5383998:
  "even (add var_1 var_2) = even (add var_2 var_1)"
  apply ( simp add : commutativity_5382730 ) done
lemma original_goal_5347090: "even (add x x)" apply ( induct_tac "x" )
 apply fastforce apply ( metis Nat.distinct ( 1 ) Nat.inject
 even.simps(3) commutativity_5382730 add.elims ) done
```

Program 4 shows the output of TBC for our running example. The original goal is proved using commutativity_5382730, which is in turn proved using identity_5382590. 8 out of 10 proved conjectures are not used to prove the final goal; however, TBC outputs them, so that users may exploit them in future.