## FairytaleCQA: Integrating a Commonsense Knowledge Graph into Children's Storybook Narratives

#### Jiaju Chen

East China Normal University

#### Yuxuan Lu Northeastern University

**Shao Zhang**Northeastern University

#### Bingsheng Yao

Rensselaer Polytechnic Institute

#### **Yuanzhe Dong**

Stanford University

#### Ying Xu

University of Michigan

#### Yunyao Li Apple

**Qianwen Wang** University of Minnesota

#### Dakuo Wang

Northeastern University

#### Yuling Sun\*

East China Normal University

#### **Abstract**

AI models (including LLM) often rely on narrative question-answering (QA) datasets to provide customized QA functionalities to support downstream children education applications; however, existing datasets only include QA pairs that are grounded within the given storybook content, but children can learn more when teachers refer the storybook content to realworld knowledge (e.g., commonsense knowledge). We introduce the FairytaleCOA dataset, which is annotated by children education experts, to supplement 278 storybook narratives with educationally appropriate commonsense knowledge. The dataset has 5,868 QA pairs that not only originate from the storybook narrative but also contain the commonsense knowledge grounded by an external knowledge graph (i.e., ConceptNet). A follow-up experiment shows that a smaller model (T5large) fine-tuned with FairytaleCQA reliably outperforms much larger prompt-engineered LLM (e.g., GPT-4) in this new QA-pair generation task (QAG). This result suggests that: 1) our dataset brings novel challenges to existing LLMs, and 2) human experts' data annotation are still critical as they have much nuanced knowledge that LLMs do not know in the children educational domain.

#### 1 Introduction

Interactive storytelling is a common parentchildren activity for preschool children's education (Wright, 1995; Isbell et al., 2004), where parents often sit with their children, read stories, and engage the children in guided conversation with story-related questions and responsive feedback (Xu et al., 2021). It offers multiple educational benefits such as enhancing children's natural language




Figure 1: An example of FairytaleCQA dataset. In each story section, human educational experts select a concept word, link it to a desired external knowledge, and manually write an appropriate QA pair. Human annotators always prioritize educational appropriateness at each of the three steps.

comprehension and communication skills, along with various facets of cognitive development (Kotaman, 2013; Xu et al., 2021), etc. Commonly, parents want to extend the conversation from stories to associated real-world knowledge, such as commonsense knowledge, to enrich children's real-world perception, good moral qualities, etc.

In recent years, with the significant advancement of natural language processing(NLP) technologies, AI-enabled storytelling systems (Shakeri et al., 2021; Zhang et al., 2022) have been increasingly utilized in supporting children's storytelling activities. Backed by State-of-the-art (SOTA) language models fine-tuned on datasets (Xu et al., 2022) targeting children's education for Question-Answering (QA) (Mou et al., 2021) and Question-Generation (QG) (Zhao et al., 2022; Yao et al., 2021) tasks, these systems can generate high-quality story-related QA-pairs and engage children in multi-turn story conversations.

Nevertheless, existing QA datasets are mostly not specifically designed for children's education (e.g. (Auer et al., 2023)), and the ones targeting children's education ground the QA-pairs in the

 $<sup>^{</sup>st}$  Corresponding Author. ylsun@cs.ecnu.edu.cn

textual content (e.g. (Xu et al., 2022)). Thus, models fine-tuned on such datasets have limited ability to generate appropriate content for children's education, which could not cater to parents' real-world needs for education through storytelling with associated external real-world knowledge.

To address this barrier, we present a novel experts-labeled, large-scale QA dataset, namely FairytaleCQA, a high-quality education-oriented dataset containing story-derived QA-pairs linked with external knowledge. To support experts' QApair annotation with external knowledge, we design and implement an annotation framework that retrieves and recommends commonsense knowledge from an external Knowledge Graph (KG) with carefully designed heuristics and recommendation algorithms. We recruit 11 children's education experts leveraging our annotation framework to extend the fairytale stories from FAIRYTALEQA dataset, a high-quality QA dataset targeting children's narrative comprehension. The resulting FairytaleCQA dataset comprises 5,868 story-inspired QA-pairs associated with external commonsense knowledge.

We demonstrate the utility of our FairytaleCQA and the difficulty of parents' real-world needs with a comprehensive analysis of QA-pair generation (QAG) experiments on different pipelines backed by SOTA large language models (LLMs). Specifically, we construct three QAG pipelines to emulate the annotation process, carefully design the prompts with clear and informative instructions, and compare the performance of a T5-Large model fine-tuned on FairytaleCQA with robust SOTA LLMs in both zero-shot and few-shot in-context learning settings, including FLAN-T5-XXL, GPT-3.5, and GPT-4. Evaluation of generated QA-pairs based on Rouge-L and sentence similarity scores using experts-annotated QA-pairs exhibits that the T5-Large model fine-tuned on our FairytaleCQA outperforms generic LLMs in QAG and commonsense triplet generation across all pipelines.

#### 2 Related Work

#### 2.1 QA Datasets in the Educational Domain

General-purpose QA datasets, such as NarrativeQA (Kočiský et al., 2018) and SQuAD2.0 (Rajpurkar et al., 2018), primarily focus on crowdsourced QA-pairs grounded in texts, lacking the incorporation of external knowledge for enhanced comprehension and expertise in children's education. General commonsense QA datasets (Talmor

Dataset	# books	# QA-pairs	External Knowledge	Question Type	Annotator	Document Source
StoryQA	148	38,703	Yes	Open-ended	Crowd-Sourced	Story books
FAIRYTALEQA	278	10,580	No	Open-ended	Expert	Story books
EduQG	13	5,018	No	Yes/No	Expert	Text books
FairytaleCQA	278	5,868	Yes	Open-ended	Expert	Story books

Table 1: Properties of existing datasets focusing on children's education compared with our FairytaleCQA.

et al., 2018; Auer et al., 2023) usually lack appropriate content, such as fairytale stories, for QA-pairs to anchor on. Thus, these datasets are not appropriate to a specific scenario like children's education or a specific age group like children aged 3 to 6.

Targeting children's education, Zhao et al. (2023) propose StoryQA, a QA dataset containing out-of-context questions. Annotated by crowd workers with limited knowledge of children's education and lacking structured external knowledge, this dataset potentially compromises the quality and consistency of generated QA-pairs for children's education. Experts-annotated QA datasets in the educational domain, such as FAIRY-TALEQA (Xu et al., 2022) and EduQG (Hadifar et al., 2023) primarily center on story context, lacking out-of-context questions or external knowledge.

To meet parents' needs with an experts-labeled, large-scale QA dataset containing structured external knowledge, we propose FairytaleCQA. We summarize key properties of education-oriented QA datasets and FairytaleCQA in Table 1.

#### 2.2 External Knowledge Source

Leveraging different external knowledge sources constructing commonsense-related QA datasets (Talmor et al., 2018; Auer et al., 2023) has been widely explored and adopted. However, these datasets have limited relevance to children's education beyond story context. In addition, external knowledge sources such as ATOMIC (Sap et al., 2019) and Wikidata (Vrandečić and Krötzsch, 2014) contain complex factual information, which might not be suitable for children's education. ConceptNet (Speer et al., 2017) is a vast graph widely used as an external knowledge source in NLP tasks (Bosselut et al., 2019; Xu et al., 2020). Knowledge in ConceptNet is represented in the simple triplet format ( $concept_1$ , relation,  $concept_2$ ) to support commonsense reasoning, aligning well with the need for children's education that the knowledge should be broad and not too tricky. This work follows prior literature to use ConceptNet as our external knowledge source to facilitate QA-pair annotation.

#### 2.3 QA-pair Annotation Frameworks

Existing annotation frameworks such as Potato (Pei et al., 2022), Piaf (Keraron et al., 2020), and Label Studio (Tkachenko et al., 2020-2022) mostly focus on facilitating extractive QA-pairs grounded in the text, which support QA-pair annotation by providing source texts and allowing annotators to highlight a span of text as an answer to a question. Zhao et al. (2023) design a data collection user interface that allows annotators to type in answers in their own words. These abovementioned annotation frameworks are sufficient for documentgrounded QA-pair annotation. However, without a structured form of external knowledge, annotators may have difficulty systematically incorporating external knowledge into anchored document text. Thus, an annotation framework that facilitates collecting a QA dataset with coherent and structured external knowledge is required.

#### 2.4 Question-answer Generation (QAG)

Existing QAG methods could be broadly categorized into heuristics-based and neural network-based methods. Heuristics-based models (Yao, 2010; Labutov et al., 2015; Das et al., 2016) have more control over the generated QA-pairs, yet often lack diversity. Neural network-based methods (Zhou et al., 2018; Zhao et al., 2022) are more prevalent recently, with the rapid development of pre-trained language models (Devlin et al., 2019; Liu et al., 2019). Yet, the generation qualities of neural network-based approaches highly depend on the training datasets, resulting in potential underperformance for domains requiring specific expertise, such as children's education.

Recent advances in large language models (LLM) (Chung et al., 2022; OpenAI, 2023) show exceptional natural language generation (NLG) capabilities. While conversational LLMs like GPT-3.5, GPT-4, and FLAN-T5 demonstrate superior zero-shot and few-shot in-context learning performance, their adaptability and performance in specialized domains, such as children's education, remain underexplored. We experiment with a series of QAG pipelines using SOTA LLMs to assess their performance thoroughly.

#### 3 FairytaleCQA

FairytaleCQA aims to bridge the gap between existing data resources for children's education and the parents' real-world needs. Our dataset consists of 5,868 QA-pairs annotated by children's

FairytaleCQA	Mean	St.D	Min	Max
# sections / story	14.7	9.2	2	60
# tokens per story	2196.7	1401.3	228	7577
# tokens / section	149.1	63.6	12	447
# questions / story	21.1	16.9	2	126
# questions / section	1.4	0.7	1	9
# tokens / question	5.4	1.7	3	19
# tokens / answer	4.9	2.3	1	20

Table 2: Core statistics of our FairytaleCQA dataset, which comprises 278 books and 5,868 QA-pairs.

education experts leveraging our specifically designed annotation framework. We present the core statistics of FairytaleCQA in Table 2 and show one example in Figure 1. Figure 2 illustrates the complete annotation process.

#### 3.1 Source Text

Plenty of excellent work (Xu et al., 2022; Zhao et al., 2023) has focused on creating high-quality text corpus for children's reading comprehension capabilities. Specifically, FairytaleQA (Xu et al., 2022) comprises 278 classic fairytale stories originating from diverse backgrounds. Sourced from the Project Gutenberg website, the stories are evaluated and filtered for suitability for 10<sup>th</sup>-grade children and below. Afterward, the stories are parsed by children's education experts into shorter sections, each section containing around 150 words, which lead the FairytaleQA dataset to a unique and high-quality text corpus for children's reading comprehension. We build on prior work and take the story sections from FairytaleQA as the source text for FairytaleCQA.

#### 3.2 Annotation Framework

The ultimate goal of our annotation framework is to provide QA-pairs that **originate from the concepts in the stories and ask for associated external commonsense knowledge suitable for preschool children.** To better cater to parents' real-world needs, we take the process of parent-children storytelling into account and approach the annotation process by decomposing it into three steps:

- 1. **Concept Selection**: identify a concept from the story that meets the following criteria: tier 1 or tier 2 vocabulary and a concrete noun, verb, or adjective.
- 2. **Knowledge Matching**: generate commonsense knowledge based on the identified concept but goes beyond the story text.
- 3. **QA-pair Annotation**: create a QA-pair with either the question or answer containing the

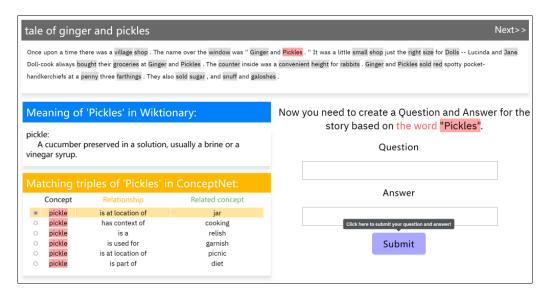


Figure 2: The user interface to facilitate our annotation task. The words highlighted in grey are candidate concepts. The blue block shows the Wiktionary explanation, and the yellow block lists our recommended triplets.

selected concept. The question should go beyond the stories' context and focus on the generated common-sense, fact-based knowledge.

To facilitate the annotation process by providing recommendations for external commonsense knowledge, we design our annotation framework by retrieving and recommending commonsense knowledge triplets from ConceptNet (Speer et al., 2017), a publicly available, large-scale commonsense Knowledge Graph.

We recruit 11 children's education experts experienced in preschool education for the annotation task. To ensure the created QA-pairs suit parents' real-world needs, annotators are asked to mimic parents' habits during storytelling. Thus, for each story section, they are asked to choose one or two concepts that are most beneficial for children's education from the text, according to parents' habit of asking questions in this storytelling scenario. Other concepts that are available but not as suitable were not selected. When selecting commonsense triplets and creating QA-pairs, experts are asked to take children's cognitive and emotional levels into account and write QA-pairs that are most appropriate for their age. Aligned with the user interface design that is demonstrated in Figure 2, the workflow of QA-pair annotation follows the same steps as QA-pair annotation process above (Figure 3).

#### 3.2.1 Step 1. Concept Selection

We develop a collection of heuristics to filter candidate concepts that meet the requirement for subtask 1 described in Section 3.2. First, we leverage the spaCy (Honnibal and Montani, 2017) English

model to filter auxiliary words and punctuation <sup>1</sup> from the original text. Then, we use AllenNLP's semantic role labeling tool (Gardner et al., 2017) to tag the latent structure of each sentence in the story content. This process identifies and retains key elements represented by semantic roles, including agents, goals, and results, which are subsequently treated as potential candidate concepts.

#### 3.2.2 Step 2. Knowledge Matching

Inspired by Xu et al. (2020)'s work of combining Wiktionary <sup>2</sup> and ConceptNet (Speer et al., 2017) for commonsense question answering, as well as filtering out weak relations in ConceptNet, we implement a knowledge matching module that can retrieve and rank the knowledge associated with each candidate concept in the source text.

More specifically, once the annotator selects a candidate concept, our knowledge matching module (1) retrieves a list of commonsense triplets, with the format of (source concept, relation, target concept) from ConceptNet as external knowledge; (2) filters out weak relations in ConceptNet, leaving 13 relation types for annotation (Complete relation list in Appendix B). In addition to the commonsense knowledge retrieval, we retrieve a sentence explanation from Wiktionary for each candidate concept to support experts' annotations.

The second step in our knowledge matching module is to rank and select diverse and representa-

<sup>&</sup>lt;sup>1</sup>tagged by 'auxiliary', 'adposition', 'determiner', 'particle', 'punctuation', 'symbol', and 'other'

https://www.wiktionary.org/




Figure 3: Workflow of the experts' annotation process. tive triplets from all retrieved commonsense triplets

associated with the selected concept. We use the concatenation of the relation and related concept in each triplet to calculate the average similarity between every other retrieved triplet using the Term Frequency-Inverse Document Frequency (TF-IDF).

We rank all retrieved triplets with

$$1 - similarity_{avg} + weight_{significance}$$
 (1)

where the weight of a triplet is provided by ConceptNet, reflecting the combined influence and credibility of the triplet across various sources by summing up the weights coming from all the sources that support it. We recommend the top six ranked triplets to annotators to balance providing a sufficient selection and avoiding excessive distractions during the annotation task.

#### 3.2.3 Step 3. QA-pair Annotation

We develop the annotation system with carefully designed user interfaces backed by the abovementioned modules for the QA-pair annotation. Specifically, the first interface (Figure 5) displays one fairytale story section, and candidate concepts are highlighted in grey to select. Once a concept is selected, the annotators are brought to the second interface (Figure 6), where the retrieved explanations and candidate commonsense triplets are shown on the left. Annotators can click on a triplet they think is the most beneficial for children's education and create a QA-pair based on the selected triplet in the last interface (Figure 2). After a QA-pair is created, the annotator can submit the QA-pair and decide either to continue annotating the current section or to move on to the next story section.

#### 3.3 Cross-Validation

We assess the consistency between annotators' triplet selection and QA-pair creation through cross-validation. Details of our cross-validation

are explained in Appendix A. Out of 100 randomly selected sections in the validation and test splits, 86% of the triplets appear in the top-3 list selector by the validator, and 56% of the triplets ranked top by the validator, indicating very high consistency between education experts for triplet selection.

We evaluate the similarity of two QA-pairs (the question and answer are concatenated for the evaluation) created by two annotators based on the identical triplet with Rouge-L and sentence similarity scores. The sentence similarity score of QA-pair creation between annotators is 79.7%, and the Rouge-L F1 score is 0.533. The results show a shared tendency among experts when it comes to selecting commonsense knowledge and creating a QA-pair that is both beneficial and appropriate for children's education, which reinforces the necessity of experts' annotation in constructing a high-quality QA dataset for children's education.

#### 3.4 Statistics of FairytaleCQA

Figure 4 shows the distribution of commonsense relations in the dataset, and Table 2 shows detailed statistics of the dataset. On average, each section in the entire dataset is annotated with approximately 1.4 QA-pairs. In FairytaleCQA, the top 3 commonsense relations selected by experts are is a, has subevent and is the antonym of, respectively constituting 35.5%, 16.2% and 15.2% of all commonsense relations. is used for, is at location of and is capable of each constitute 8.8%, 7.5%, and 5.2% of all commonsense relations. The proportion of other relations is less than 5%. The distribution of question types in FairytaleCQA is shown in Table 4 in Appendix C. In FairytaleCQA, questions start with 'what', the most common question type, constituting 86.0%. Questions starting with 'why' and 'how' constitute about 7.2% and 2.4%, respectively.

According to experts' annotation, commonsense relation *is a* and 'what' questions have a much higher proportion than other relations and questions. Children aged 3-6, in the exploration stage and highly curious about the world (Chouinard et al., 2007; Jirout and Klahr, 2012), naturally tend to ask questions to satisfy their curiosity. Accordingly, parents are more inclined to use 'what' questions to inspire children's thinking and promote active knowledge acquisition (Yu et al., 2019). Consistent with parents' preferences, the fact that experts' annotated questions share a high consensus

of 'what' questions is more in line with children's learning and cognitive characteristics.




Figure 4: Distribution of commonsense relations annotated by experts in the FairytaleCQA dataset

#### 4 Experiment

We aim to illustrate the intricacies of parents' real-world needs as well as the utility of our FairytaleCQA through a comprehensive evaluation of the QA-pair generation (QAG) task on FairytaleCQA. The evaluation comprises three SOTA LLMs (GPT-3.5, GPT-4 (OpenAI, 2023), and FLAN-T5-XXL (Chung et al., 2022)) and a T5-Large (Raffel et al., 2019) model fine-tuned on our FairytaleCQA across three deliberately designed QAG pipelines simulating the experts' annotation process. GPT-3.5 and GPT-4 are SOTA conversation-oriented LLMs, and FLAN-T5 was explicitly designed for task-solving. It is worth noting that all three SOTA LLMs consist of more than 10 billion parameters (11b FLAN-T5-XXL, 175b for GPT-3.5, and over 1,000b for GPT-4), whereas the T5-large model fine-tuned on FairytaleCQA only contains 770 million parameters.

#### 4.1 Experimental Setup

To establish robust LLMs baselines and harness the full potential of their reasoning and natural language generation capabilities, we carefully design three distinct QAG pipelines:

**End-to-end QAG pipeline** The system generates the QA pairs directly from a story section. To utilize LLMs' comprehensive generation ability and simulate experts' annotation process, we conduct end-to-end pipeline experiments in two ways:

- 1. Directly generate QA-pairs from the input text without generating a commonsense triplet.
- 2. Generate a commonsense triplet alongside the QA-pair to mimic experts' annotation process.

For each setting, we employ both **zero-shot** and **few-shot in-context learning (ICL)** (Wei et al., 2022) approaches to thoroughly examine the QAG performance of SOTA LLMs for our specific QAG

task. With carefully designed prompts (Table 10, 11) for GPT with clear and informative instructions including 13 relation types (Appendix B) in ConceptNet, we try to harness GPT's generative capabilities to generate diverse triplets similar to the triplets used by human annotators based on these relations types. Random annotations from the validation split are sampled for the few-shot ICL approaches.

**2-step QAG pipeline** The system generates a commonsense triplet first and leverages the generated triplet for QAG in the second step.

We provide GPT with carefully designed prompts (Table 12, 13) and fine-tune a T5-Large model for each step on our FairytaleCQA to constitute the fine-tuned pipeline.

**3-step QAG pipeline** Mimicking the experts' annotation process, this pipeline (1) selects a concept from the story first, (2) creates the corresponding commonsense triplet based on the selected concept, and (3) conducts the QAG task eventually.

Based on the previous performance of LLMs, we conduct our 3-step pipeline through GPT-3.5 with a 1-shot ICL setting and strictly limit the number of QA-pairs generated in each section in the prompt (Table 14, 15). We also fine-tuned a T5-Large model for each step by providing the same ConceptNet triplets used in the experts' annotation process. Given the strong QAG capability shown in Step 2 for the 2-step pipeline, we combine T5-Large models fine-tuned on FairytaleCQA for the first two steps, with GPT-3.5 for the third step as a complete QAG pipeline to further explore the performance of 3-step QAG pipeline.

#### 4.2 Experiment Results

We discuss the results with two reference-based metrics: Rouge-L (Lin, 2004) and sentence similarity score using Sentence Transformer (Reimers and Gurevych, 2019). Each QA-pair is concatenated for evaluation, and we record the higher score of each generated QA-pair between two expertannotated ground-truth QA-pairs. We experiment with generic LLMs (GPT-3.5 and GPT-4) for each setting three times and calculate the averaged score to get robust results. All the experiment results are organized in Table 3, with further pipeline observations discussed below. Examples of generated results across all pipelines and experts' annotations on the same section can be found in Table 5, 6, 7, 8 and 9 in Appendix.

		Commonsense Triplet		QAG		System Evaluation	
Model	Category	Rouge-L	Semantic Similarity	Rouge-L	Semantic Similarity	Rouge-L	Semantic Similarity
End2End QAG Pipeline (generate QA-pairs only)							
GPT-3.5	zero-shot	-	-	0.194	0.233	0.194	0.233
GPT-4	zero-shot	-	-	0.277	0.252	0.277	0.252
T5-Large fine-tuned	zero-shot	-	-	<b>0.332</b> 0.289		0.332	0.289
GPT-3.5	1-shot	-	-	0.239 0.262		0.239	0.262
GPT-3.5	5-shot	-	-	0.262 0.279		0.262	0.279
GPT-4	GPT-4 1-shot		-	0.272			0.279
GPT-4	GPT-4 5-shot		-	0.287	0.311	0.287	0.311
Flan-T5-XXL	1-shot	-	-	0.264	0.246	0.264	0.246
End2End QAG pipeline (generate triplets and QA-pairs)							
GPT-3.5	zero-shot	0.219	0.373	0.220	0.252	0.220	0.252
GPT-4	zero-shot	0.286	0.385	0.243	0.261	0.243	0.261
T5-Large fine-tuned	zero-shot	0.206	0.318	0.279	0.263	0.279	0.263
GPT-3.5	1-shot	0.249	0.386	0.252	0.271	0.252	0.271
GPT-3.5	5-shot	0.274	0.384	0.264	0.266	0.264	0.266
GPT-4	1-shot	0.289	0.413	0.251	0.292	0.251	0.292
GPT-4	5-shot	0.285	0.398	0.248	0.283	0.248	0.283
Flan-T5-XXL	Flan-T5-XXL 1-shot		0.375	0.194	0.209	0.194	0.209
2-step QAG Pipeline							
GPT-3.5	10-shot	0.276	0.394	0.541	0.821	0.279	0.293
GPT-4	10-shot	0.287	0.403	0.527	0.818	0.271	0.293
T5-Large fine-tuned	zero-shot	0.331	0.402	0.510	0.834	0.279	0.263
3-step QAG Pipeline							
GPT-3.5	1-shot	0.703	0.837	0.485	0.795	0.282	0.247
T5-Large fine-tuned zero-shot		0.729	0.864	0.510	0.834	0.290	0.289
T5-Large fine-tuned (step1&2) and GPT-3.5		0.729	0.864	0.485	0.795	0.290	0.293

Table 3: QAG performance of the end2end, 2-step, and 3-step QAG pipelines with LLMs. Column 2 and 3 separately shows the results of the model during each step, and column 4 shows the performance of the entire pipeline.

The performance of the **end-to-end pipeline** is shown in the top half of Table 3. Generally, zeroshot QAG performance on these models falls short of the few-shot ICL QAG performance. Remarkably, models utilizing 5-shot demonstrations outperform those using 1-shot demonstrations. For the setting of generating triplets along with QApairs, the results do not indicate an improvement in QAG through generating commonsense triplets. Worth noting that T5-Large fine-tuned on our FairytaleCQA has a relatively better performance than conversational LLMs like GPT-3.5 (220 times larger) and GPT-4 (2, 200 times larger) by Rouge-L. Overall, the end-to-end pipeline has a relatively limited upper bound in both Rouge-L score and sentence similarity.

In the **2-step pipeline**, the performance of each step for each system separately and the overall system is shown in the 2-step QAG pipeline section in Table 3. In the first step of generating commonsense knowledge, T5-Large Fine-tuned on FairytaleCQA outperforms both GPT-3.5 and GPT-4. Nevertheless, GPT is superior in generating QA-pairs according to commonsense triplets, which is reasonable because the task of the second step is relatively easy, and generic LLM should behave reliably well. Owing to the simplicity of generating QA-pairs directly from commonsense triplets as opposed to story sections, the overall system's performance exhibits a slight enhancement compared to the end-to-end pipeline. We attribute this to the challenge of generating commonsense

triplets as proper and accurate as experts' annotations in the first step, as annotators rely on structured external knowledge source ConceptNet to create QA-pairs. Such observation and hypothesis lead us to further explore the generative potential of these LLMs on a 3-step QAG pipeline that mimics the experts' annotation process more closely.

The step-wise and overall performance of the **3-step pipeline** is displayed at the bottom of Table 3. The performance of GPT-3.5 slightly improves in the 3-step QAG pipeline. Here, both results are better than those of the 2-step pipeline, indicating that using structured external knowledge like human annotators does assist the model in performing better on both identifying a concept and selecting a commonsense triplet. The 3-step QAG pipeline of T5-Large fine-tuned on FairytaleCQA also performs slightly better than both GPT-3.5 3-step pipelines when generating a QA-pair and T5-Large fine-tuned 2-step pipeline.

#### 4.3 Discussion

To explore LLMs' performance in terms of addressing parents' real-world needs in the educational domain, we conduct a series of QAG experiments and decompose the QAG task into three pipelines with multiple steps to simulate the annotation process for human experts to a greater extent.

The 3-step pipeline that simulates the same experts' annotation process tends to perform better in QA-pair generation, disregarding model differences, by comparing the System Evaluation column in Table 3. By asking the 3-step pipeline to select a commonsense triplet from the recommended list provided by our retrieval and ranking module, we can observe significant improvement in triplet selection compared with the end-to-end and 2-step pipelines, where the models generate commonsense triplets without assistance. This observation justifies the importance and helpfulness of our carefully designed annotation framework for experts by decomposing the QA-pair annotation into sub-steps that can lead to more appropriate commonsense triplet selection for children.

Comparing the best-performing SOTA LLMs in each pipeline with the corresponding fine-tuned T5-Large, we can observe the fine-tuned T5-Large can reliably generate better QA-pairs in terms of Rouge-L score from the system evaluation. This observation justifies the utility of our FairytaleCQA to support training a task-specific model that

may cater to parents' real-world needs. In addition, when we decompose the QAG task by asking the models to first generate concepts from the story and then generate commonsense triplets given the selected concepts, a T5-Large fine-tuned on FairytaleCQA exhibits a better performance than much larger LLMs in both pipelines.

Worth mentioning that T5-Large only consists of 770 million parameters, whereas FLANT5-XXL consists of 11 billion parameters (14 times larger), GPT-3.5 consists of 175 billion parameters (220 times larger), and GPT-4 consists of 1.76 trillion parameters (2, 200 times larger).

We observe that the overall Rouge-L and sentence similarity of QAG system evaluation is relatively low across all pipelines, even with GPT-4. Specifically, all the SOTA LLMs in the end-to-end QAG pipeline have limited performance even with carefully carved prompts and in-context few-shot demonstrations. This illustrates the highly challenging nature of the parents' real-world needs given SOTA language models, leaving significant space for future improvement.

#### **5** Conclusion and Future Work

In summary, we propose a QA dataset for children's education, named FairytaleCQA, by leveraging a novel annotation process that facilitates scalable expert annotations using structured external knowledge. FairytaleCQA integrates external knowledge into children's story-based learning texts. We conduct an exploratory study on various LLMs of generating QA-pairs catering to parents' needs and demonstrate the utility of FairytaleCQA.

One possible future work entails refining the structure of the QAG model, using LLMs to generate QA pairs that align more closely with the actual needs of parents. The other future direction involves using FairytaleCQA and model to develop a human-AI education system that aids parents and early educators in formulating questions during story readings, addressing their constraints in language, knowledge, time, or motivation.

#### 6 Limitations

There are certain limitations in our work: 1) In the knowledge matching module of our annotation framework, we only consider commonsense that can be represented as two concepts and a relation. How to incorporate meta-paths between multiple concepts is still to be studied. 2) We can further refine our QAG pipeline based on our 3-step pipeline by experimenting with more LLMs to generate QA-pairs that are more appropriate for children's education.

#### References

- Sören Auer, Dante A. C. Barone, Cassiano Bartz, Eduardo G. Cortes, Mohamad Yaser Jaradeh, Oliver Karras, Manolis Koubarakis, Dmitry Mouromtsev, Dmitrii Pliukhin, Daniil Radyush, Ivan Shilin, Markus Stocker, and Eleni Tsalapati. 2023. The sciqa scientific question answering benchmark for scholarly knowledge. *Scientific Reports*, 13(1):7240.
- Antoine Bosselut, Hannah Rashkin, Maarten Sap, Chaitanya Malaviya, Asli Celikyilmaz, and Yejin Choi. 2019. COMET: Commonsense Transformers for Automatic Knowledge Graph Construction. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4762–4779, Florence, Italy. Association for Computational Linguistics.
- Michelle M. Chouinard, P. L. Harris, and Michael P. Maratsos. 2007. Children's Questions: A Mechanism for Cognitive Development. *Monographs of the Society for Research in Child Development*, 72(1):i–129. Publisher: [Society for Research in Child Development, Wiley].
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. Scaling Instruction-Finetuned Language Models.
- Rubel Das, Antariksha Ray, Souvik Mondal, and Dipankar Das. 2016. A rule based question generation framework to deal with simple and complex sentences. 2016 International Conference on Advances in Computing, Communications and Informatics (ICACCI), pages 542–548. Conference Name: 2016 International Conference on Advances in Computing, Communications and Informatics (ICACCI) ISBN: 9781509020294 Place: Jaipur, India Publisher: IEEE.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. *Proceedings of the 2019 Conference of the North*, pages 4171–4186.
- Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew

- Peters, Michael Schmitz, and Luke S. Zettlemoyer. 2017. Allennlp: A deep semantic natural language processing platform.
- Amir Hadifar, Semere Kiros Bitew, Johannes Deleu, Chris Develder, and Thomas Demeester. 2023. EduQG: A Multi-Format Multiple-Choice Dataset for the Educational Domain. *IEEE Access*, 11:20885–20896.
- Matthew Honnibal and Ines Montani. 2017. spaCy 2: Natural language understanding with Bloom embeddings, convolutional neural networks and incremental parsing. To appear.
- Rebecca Isbell, Joseph Sobol, Liane Lindauer, and April Lowrance. 2004. The Effects of Storytelling and Story Reading on the Oral Language Complexity and Story Comprehension of Young Children. *Early Childhood Education Journal*, 32(3):157–163.
- Jamie Jirout and David Klahr. 2012. Children's scientific curiosity: In search of an operational definition of an elusive concept. *Developmental Review*, 32(2):125–160.
- Rachel Keraron, Guillaume Lancrenon, Mathilde Bras, Frédéric Allary, Gilles Moyse, Thomas Scialom, Edmundo-Pavel Soriano-Morales, and Jacopo Staiano. 2020. Project PIAF: Building a Native French Question-Answering Dataset. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 5481–5490, Marseille, France. European Language Resources Association.
- Huseyin Kotaman. 2013. Impacts of Dialogical Storybook Reading on Young Children's Reading Attitudes and Vocabulary Development. *Reading Improvement*, 50(4):199–204. Publisher: Project Innovation, Inc ERIC Number: EJ1023501.
- Tomáš Kočiský, Jonathan Schwarz, Phil Blunsom, Chris Dyer, Karl Moritz Hermann, Gábor Melis, and Edward Grefenstette. 2018. The NarrativeQA Reading Comprehension Challenge. *Transactions of the Association for Computational Linguistics*, 6:317–328. Place: Cambridge, MA Publisher: MIT Press.
- Igor Labutov, Sumit Basu, and Lucy Vanderwende. 2015. Deep Questions without Deep Understanding. In Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 889–898, Beijing, China. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. ROUGE: A Package for Automatic Evaluation of Summaries. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. *arXiv:1907.11692 [cs]*.

- Xiangyang Mou, Chenghao Yang, Mo Yu, Bingsheng Yao, Xiaoxiao Guo, Saloni Potdar, and Hui Su. 2021. Narrative question answering with cutting-edge opendomain QA techniques: A comprehensive study. *Transactions of the Association for Computational Linguistics*, 9:1032–1046.
- OpenAI. 2023. GPT-4 Technical Report. ArXiv.
- Jiaxin Pei, Aparna Ananthasubramaniam, Xingyao Wang, Naitian Zhou, Apostolos Dedeloudis, Jackson Sargent, and David Jurgens. 2022. POTATO: The Portable Text Annotation Tool. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 327–337, Abu Dhabi, UAE. Association for Computational Linguistics.
- Colin Raffel, Noam M. Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2019. Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer. *ArXiv*.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. Know What You Don't Know: Unanswerable Questions for SQuAD. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, Melbourne, Australia. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Maarten Sap, Ronan Le Bras, Emily Allaway, Chandra Bhagavatula, Nicholas Lourie, Hannah Rashkin, Brendan Roof, Noah A. Smith, and Yejin Choi. 2019. ATOMIC: An Atlas of Machine Commonsense for If-Then Reasoning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 33(01):3027–3035.
- Hanieh Shakeri, Carman Neustaedter, and Steve Di-Paola. 2021. SAGA: Collaborative Storytelling with GPT-3. In Companion Publication of the 2021 Conference on Computer Supported Cooperative Work and Social Computing, CSCW '21, pages 163–166, New York, NY, USA. Association for Computing Machinery.
- Robyn Speer, Joshua Chin, and Catherine Havasi. 2017. ConceptNet 5.5: An Open Multilingual Graph of General Knowledge. *Proceedings of the AAAI Conference on Artificial Intelligence*, 31(1).
- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. 2018. Commonsenseqa: A question answering challenge targeting commonsense knowledge. *arXiv preprint arXiv:1811.00937*.

- Maxim Tkachenko, Mikhail Malyuk, Andrey Holmanyuk, and Nikolai Liubimov. 2020-2022. Label Studio: Data labeling software. Open source software available from https://github.com/heartexlabs/label-studio.
- Denny Vrandečić and Markus Krötzsch. 2014. Wikidata: a free collaborative knowledgebase. *Communications of the ACM*, 57(10):78–85.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, E. Chi, F. Xia, Quoc Le, and Denny Zhou. 2022. Chain of Thought Prompting Elicits Reasoning in Large Language Models. ArXiv.
- Andrew Wright. 1995. Storytelling with Children. Oxford University Press. Google-Books-ID: IuQOKN63TCwC.
- Yichong Xu, Chenguang Zhu, Ruochen Xu, Yang Liu, Michael Zeng, and Xuedong Huang. 2020. Fusing Context Into Knowledge Graph for Commonsense Reasoning. *ArXiv*.
- Ying Xu, Dakuo Wang, Penelope Collins, Hyelim Lee, and Mark Warschauer. 2021. Same benefits, different communication patterns: Comparing Children's reading with a conversational agent vs. a human partner. *Computers & Education*, 161:104059.
- Ying Xu, Dakuo Wang, Mo Yu, Daniel Ritchie, Bingsheng Yao, Tongshuang Wu, Zheng Zhang, Toby Li, Nora Bradford, Branda Sun, Tran Hoang, Yisi Sang, Yufang Hou, Xiaojuan Ma, Diyi Yang, Nanyun Peng, Zhou Yu, and Mark Warschauer. 2022. Fantastic Questions and Where to Find Them: FairytaleQA An Authentic Dataset for Narrative Comprehension. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 447–460, Dublin, Ireland. Association for Computational Linguistics.
- Bingsheng Yao, Dakuo Wang, Tongshuang Sherry Wu, T. Hoang, Branda Sun, Toby Jia-Jun Li, Mo Yu, and Ying Xu. 2021. It is AI's Turn to Ask Human a Question: Question and Answer Pair Generation for Children Storybooks in FairytaleQA Dataset. *ArXiv*.
- Xuchen Yao. 2010. Question Generation with Minimal Recursion Semantics.
- Yue Yu, Elizabeth Bonawitz, and Patrick Shafto. 2019. Pedagogical questions in parent–child conversations. *Child Development*, 90(1):147–161.
- Zheng Zhang, Ying Xu, Yanhao Wang, Bingsheng Yao, Daniel Ritchie, Tongshuang Wu, Mo Yu, Dakuo Wang, and Toby Jia-Jun Li. 2022. StoryBuddy: A Human-AI Collaborative Chatbot for Parent-Child Interactive Storytelling with Flexible Parental Involvement. *CHI Conference on Human Factors in Computing Systems*, pages 1–21. Conference Name: CHI '22: CHI Conference on Human Factors in Computing Systems ISBN: 9781450391573 Place: New Orleans LA USA Publisher: ACM.

- Sanqiang Zhao, Seokhwan Kim, Yang Liu, Robinson Piramuthu, and Dilek Hakkani-Tür. 2023. Storyqa: Story grounded question answering dataset. In *AAAI* 2023 Workshop on Knowledge Augmented Methods for NLP.
- Zhenjie Zhao, Yufang Hou, Dakuo Wang, Mo Yu, Chengzhong Liu, and Xiaojuan Ma. 2022. Educational Question Generation of Children Storybooks via Question Type Distribution Learning and Eventcentric Summarization. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 5073–5085, Dublin, Ireland. Association for Computational Linguistics.
- Qingyu Zhou, Nan Yang, Furu Wei, Chuanqi Tan, Hangbo Bao, and Ming Zhou. 2018. Neural Question Generation from Text: A Preliminary Study. *Natural Language Processing and Chinese Computing*, 10619:662–671. Book Title: Natural Language Processing and Chinese Computing ISBN: 9783319736174 9783319736181 Place: Cham Publisher: Springer International Publishing.

#### **Appendix**

#### A Cross-Validation

To validate and ensure the quality of annotated QA-pairs across annotators and to assess the agreement of triplet selection and QA-pair creation between annotators, we implement additional user interfaces for the cross-validation process. We randomly selected 50 QA-pairs in each test and validation split (100 QA-pairs in total), and two annotators were asked to cross-validate each other's annotation (denoted by  $annotator_A$  and  $annotator_B$ , correspondingly):

- 1. Shown in Figure 7,  $annotator_A$  is provided the story section and the concept selected by  $annotator_B$ . For each selected concept,  $annotator_A$  is asked to rank the top 3 triplets from the same recommended triplet list given to  $annotator_B$ , verifying the triplet selection agreement between annotators (Figure 8).
- 2. In the next step,  $annotator_A$  is asked to create a QA-pair based on the word and triplet selected by  $annotator_B$ , evaluating the similarity of QA-pairs between annotators given the identical triplet (Figure 9).
- 3. After submitting the QA-pair in Step 2,  $annotator_A$  is provided with the question created by  $annotator_B$  based on the same triplet, and  $annotator_A$  is asked to write an answer to the question to cross-validate the question-answering agreement (Figure 10).

#### **B** ConceptNet Relations

We follow Xu et al. (2020)'s work to filter out weak relations in ConceptNet, and our ranking algorithm uses the following 13 relations in our annotation framework as well as GPT prompts: causes, desires, has context of, has property, has subevent, is a, is at location of, is capable of, is created by, is made of, is part of, is the antonym of, is used for.

#### C Distribution of Question Type

The distribution of question type in FairytaleCQA is shown in Table 4.

#### D Examples of Generated QA-pairs

We randomly sample a section, and the generated QA-pairs of each pipeline can be found in Table 5, 6, 7, 8, 9. For the end-to-end pipeline, only the generation results of models with the best automatic evaluation results are demonstrated here.

Interrogative	Train split	Val split	Test split	Total percentage (%)
what	3779	628	641	86.01
why	227	93	105	7.24
who	76	10	14	1.70
where	41	3	7	0.87
when	20	12	8	0.68
how	112	13	15	2.39
other	42	10	9	1.04

Table 4: Distribution of question types in FairytaleCQA.

#### **Story section:**

At the time when the Tang dynasty reigned over the Middle Kingdom, there were master swordsmen of various kinds.

Those who came first were the saints of the sword. They were able to take different shapes at will, and their swords were like strokes of lightning.

...

They wore a hidden <u>dagger</u> at their side and carried a leather <u>bag</u> at their belt.

By magic means they were able to turn human heads into flowing water.

• • •

#### **Human annotated QA-pairs**

Commonsense triplet: (<u>bag</u>, is used for, carrying things)

Question: What is a bag used for?

**Answer:** A bag is used for carrying things.

Commonsense triplet: (<u>dagger</u>, *is a*, short sword)

Question: What is a short sword called?

Answer: A dagger.

Table 5: A randomly selected story section and two experts annotated QA-pairs.

#### **E GPT** Prompts

In order to utilize GPT's strong reasoning and generation capability as well as control GPT-generated questions as much as possible meets the needs of parents, we carefully design our prompts for GPT-3.5 and GPT-4.

For end-to-end pipeline, there are two variations based on the system: (1) Directly generate a QA-pair based on a provided story section. (2) From a story section, generate a commonsense triplet and

## End-to-end QAG pipeline (generate QA-pairs only)

GPT-4 5-shot

**Question:** What is a dagger used for?

**Answer:** Cutting.

T5-Large Fine-tuned

**Question:** What is a sword?

**Answer:** A sword is a long-bladed weapon.

Table 6: Generated QA-pairs using end-to-end QAG pipeline on GPT-4 and T5-Large without generating commonsense triplets. The QA-pairs are generated based on the story section in Table 5

## **End-to-end QAG pipeline** (generate triplets and QA-pairs)

GPT-4 5-shot

Commonsense triplet: (dagger, is used for,

protection)

**Question:** What can a dagger be used for?

Answer: Protection.

T5-Large Fine-tuned

**Commonsense triplet:** (dagger, is a, knife)

**Question:** What is a dagger? **Answer:** A dagger is a knife.

Table 7: Generated QA-pairs and commonsense triplets using end-to-end QAG pipeline on GPT-4 and T5-Large. The QA-pairs are generated based on the story section in Table 5

a QA-pair based on the triplet.

Table 10, 11 list our prompts for GPT in the two abovementioned approaches.

For 2-step pipeline, we first ask GPT to generate a commonsense triplet from a provided story section, and then we ask GPT to generate a QA-pair based on a triplet. Table 12, 13 show our prompts for the two steps, respectively.

We add an additional step before commonsense triplet generation in 3-step pipeline. For a provided story section, we ask GPT to identify a keyword in the text, then generate a commonsense triplet based on that keyword. Our prompts for the two steps are shown in Table 14 and 15. The final step is the same as the second step in 2-step pipeline.

#### 2-step QAG pipeline

GPT-3.5 10-shot

Commonsense triplet: (sword, is used for,

fighting)

**Question:** What is a sword used for?

**Answer:** Fighting.

GPT-4 10-shot

**Commonsense triplet:** (sword, is used for, protection) **Question:** What might someone use

a sword for?

Answer: Protection.

T5-Large Fine-tuned

**Commonsense triplet:** (dagger, is a, knife)

**Question:** What is a dagger? **Answer:** A dagger is a sharp knife.

Table 8: Generated QA-pairs and commonsense triplets using 2-step QAG pipeline on GPT-3.5, GPT-4 and T5-Large. The QA-pairs are generated based on the story section in Table 5

#### 3-step QAG pipeline

GPT-3.5 1-shot

Commonsense triplet: (lightning, is a,

electrical discharge)

**Question:** What is lightning? **Answer:** Electrical discharge.

T5-Large Fine-tuned

Commonsense triplet: (bag, is used for,

carrying things)

**Question:** What do people use bags for? **Answer:** People use bags for carrying things.

T5-Large Fine-tuned - step1&2

GPT-3.5 - step3

Commonsense triplet: (bag, is used for,

carrying things)

Question: What is a bag used for?

**Answer:** Carrying things.

Table 9: Generated QA-pairs and commonsense triplets using 3-step QAG pipeline on GPT-3.5 and T5-Large. The QA-pairs are generated based on the story section in Table 5

#### **F** User Interface for Annotation System

We implement an annotation system to facilitate QA-pair annotation with associated external knowledge. Figure 5, 6 and 2 show the annotation inter-

face for human experts.

We also conduct cross-validation to assess the agreement among annotators. Figure 7, 8, 9 and 10 demonstrate user interfaces for each step to support the cross-validation process.

# tale of ginger and pickles Once upon a time there was a village shop. The name over the window was " Ginger and Pickles." It was a little small shop just the right size for Dolls -Lucinda and Jane Doll-cook always bought their groceries at Ginger and Pickles. The counter inside was a convenient height for rabbits. Ginger and Pickles sold red spotty pocket-handkerchiefs at a penny three farthings. They also sold sugar, and snuff and galoshes.

## Start by selecting a word that you think is BENEFICIAL for **children's education**.

\*This annotation task is to create QA pairs beneficial for children's education, with the help of external knowledge from ConceptNet.

Figure 5: Annotation process1: Browse a displayed section, with candidate words highlighted in grey.

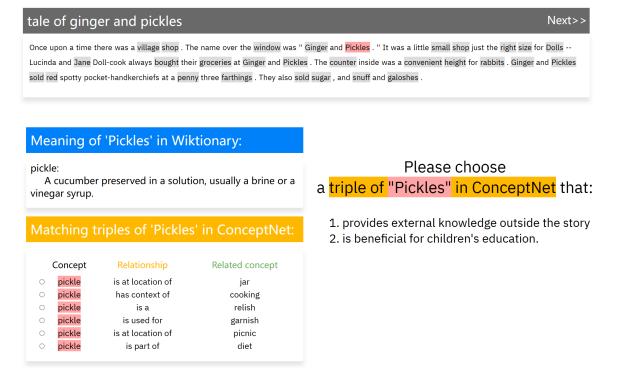


Figure 6: Annotation process2: After selecting a word (highlighted in red), related explanation in Wiktionary and candidate commonsense triplets in ConceptNet will display.

## Prompt for GPT in end-to-end pipeline generate QA-pairs only

I need you to help generate a question and answer pair for young children aged three to six. I will provide you with a short section of a story delimited by triple quotes. Please follow these steps:

- 1. For each sentence, identify one key word that meets the following criteria: it is relatively complex, it is considered tier 1 or tier 2 vocabulary, and it is a concrete noun, verb, or adjective.
- 2. After this, you need to completely forget about the story that I gave you, remembering only the words you identified.
- 3. Based on each selected word, generate a question and answer pair that either the question or the answer contains that word.

For example, if your identified word is 'apple', your question could be: where do apples grow?; what do apples taste like? What color are apples? These questions should go beyond the context of the stories.

Each question should have one single correct answer that would be the same regardless of the children's experiences. The questions should be focused on common-sense, fact-based knowledge. The common-sense, fact-based knowledge should be based on the selected word and is in the form of a triple such as A relation B, where A and B are two concepts and the selected word can be either A or B. You should use one of the following relations for the common-sense knowledge:

```
causes
desires
has context of
has property
has subevent
is a
is at location of
is capable of
is created by
is made of
is part of
is the antonym of
is used for
```

4. After this, select one question-answer pair that you think best meets my criteria. Please note that the question should be answerable without reading the story.

The answer should only be a concrete noun, verb, or adjective.

Return the selected question-answer pair in the following format:

```
question: ...
answer: ...

The following text is for few-shot prompting:

\( \story \):
\{ story 1 \ for \ few-shot \}

\( \text{response } \):
\{ response 1 \ for \ few-shot \}

... ...

\( \story \):
\{ story \ for \ the \ current \ data \}

\( \text{response } \):
```

## Prompt for GPT in end-to-end pipeline generate triplets and QA-pairs

I need you to help generate a question and answer pair for young children aged three to six. I will provide you with a short section of a story delimited by triple quotes. Please follow these steps:

- 1. For each sentence, identify one key word that meets the following criteria: it is relatively complex, it is considered tier 1 or tier 2 vocabulary, and it is a concrete noun, verb, or adjective.
- 2. After this, you need to completely forget about the story that I gave you, remembering only the words you identified.
- 3. Based on each selected word, generate one common-sense relation based on the selected word. This common-sense relation should go beyond the context of the stories.

For example, if your identified word is 'apple', your common-sense relation could be: apple grows on trees; apples are red.

The common-sense, fact-based knowledge should be based on the selected word and is in the form of a triple such as 'A relation B', where A and B are two concepts and the selected word can be either A or B

You should use one of the following relations for the common-sense knowledge:

causes
desires
has context of
has property
has subevent
is a
is at location of
is capable of
is created by
is made of
is part of
is the antonym of
is used for

- 4. After this, generate a question and answer pair based on the common-sense, fact-based knowledge you generated. Either the question or the answer should contain that identified word. Each question should have one single correct answer that would be the same regardless of the children's experiences.
- 5. After this, select one question-answer pair that you think best meet my criteria. Please note that the question should be answerable without reading the story.

The answer should only be a concrete noun, verb, or adjective.

Return the generated common-sense knowledge and selected question-answer pair in the following format:

```
commonsense: (A, relation, B)
question: ...
answer: ...

The following text is for few-shot prompting:
\( \story \):
\{ story 1 for few-shot \}
\( \text{response } \):
\{ response 1 for few-shot \}
\( \text{...} \)
\( \story \) \( \text{?} \)
\( \text{story for the current data} \)
\( \text{response } \):
```

#### Prompt for GPT in 2-step pipeline: Step 1

I need you to help generate commonsense knowledge for young children aged three to six. The commonsense knowledge you should write can be seen as a relation about two concepts. I will provide you with a short section of a story delimited by triple quotes. Please follow these steps:

- 1. For each sentence, identify one key word that meets the following criteria: it is relatively complex, it is considered tier 1 or tier 2 vocabulary, and it is a concrete noun, verb, or adjective.
- 2. After this, you need to completely forget about the story that I gave you, remembering only the words you identified.
- 3. Based on each selected word, generate a common-sense, fact-based knowledge.

For example, if your identified word is 'apple', your commonsense relation could be: apple is a fruit; apple is used for eating.

The common-sense, fact-based knowledge should be based on the selected word and is in the form of a triple such as 'A relation B', where A and B are two concepts and the selected word can be either A or B. You should use one of the following relations for the common-sense knowledge:

```
causes
  desires
  has context of
  has property
  has subevent
  is a
  is at location of
  is capable of
  is created by
  is made of
  is part of
  is the antonym of
  is used for
Return the generated common-sense knowledge in the following format:
commonsense: (A, relation, B)
⟨story⟩:
{story1 for few-shot}
⟨response⟩:
{response1 for few-shot}
... ...
```

⟨story⟩:

⟨response⟩:

{story for the current data}

Table 12: Prompt for step 1 in GPT 2-step QAG approach.

#### Prompt for GPT in 2-step pipeline: Step 1

I need you to help generate a question and answer pair for young children aged three to six. I will provide you with a piece of commonsense knowledge. Please follow these steps:

1. Based on provided commonsense knowledge, generate a question and answer pair that either the question or the answer contains a concept in the commonsense knowledge.

The questions should be focused on commonsense, fact-based knowledge.

For example, given the commonsense knowledge of 'apple is used for eating', your question could be: what is apple used for?

Each question should have one single correct answer that would be the same regardless of the children's experiences. The answer should only be a concrete noun, verb, or adjective.

Return the generated question-answer pair in the following format:

```
question: ...

\(\langle \text{commonsense knowledge} \rangle :
\{\langle \text{commonsense knowledge1 for few-shot}\} \\
\(\text{response} \rangle :
\{\text{response1 for few-shot}\} \\
\(\text{...} \text{...} \\
\(\text{commonsense knowledge} \rangle :
\{\text{commonsense knowledge generated by GPT in Step 1 for the current data}\} \\
\(\text{response} \rangle :
```

Table 13: Prompt for step 2 in GPT 2-step QAG approach.

golden goose Next>>

Again Dullhead started off to the forest, and there he found the little old grey man with whom he had shared his cake, and who said: 'I have eaten and I have drunk for you, and now I will give you the ship. I have done all this for you because you were kind and merciful to me.' Then he gave Dullhead a ship which could sail on land or water, and when the King saw it he felt he could no longer refuse him his daughter. So they celebrated the wedding with great rejoicings; and after the King 's death Dullhead succeeded to the kingdom, and lived happily with his wife for many years after.

Please click on the purple highlighted words one by one and select a triple for each of them.

Figure 7: Cross-validation process1: Browse a displayed section, with candidate words highlighted in grey.

<sup>\*</sup>This annotation task is to create QA pairs beneficial for children's education, with the help of external knowledge from ConceptNet.

#### Prompt for GPT in 3-step pipeline: Step 1

I need you to help identify a key word from a story text for young children aged three to six. The key word should be able to expand as commonsense knowledge. I will provide you with a short section of a story delimited by triple quotes, and candidate words in this section. Please follow these steps:

1. For all the candidate words in this section, identify a key word that meets the following criteria: it is relatively complex, it is considered tier 1 or tier 2 vocabulary, and it is a concrete noun, verb, or adjective.

Return three identified key word in the following format:

```
key word:

\( \story \):
\{ story I for few-shot} \\
\( \candidate words \) \tag{candidate words I for few-shot} \\
\( \text{response} \):
\{ response I for few-shot} \\
\( \text{...} \tag{candidate words} \) \tag{candidate words} \\
\( \text{candidate words} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \\
\( \text{response} \) \tag{candidate words for the current data} \)
```

Table 14: Prompt for step 1 in GPT 3-step QAG approach.

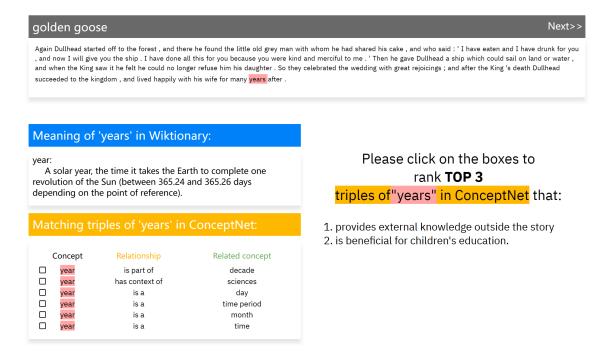


Figure 8: Cross-validation process2: Select a word annotated by others and rank the candidate triplets.

#### Prompt for GPT in 3-step pipeline: Step 2

I need you to help generate commonsense knowledge based on a key word for young children aged three to six. The commonsense knowledge you should write can be seen as a relation about two concepts.

I will provide you with one key word identified in a story, and for each key word, I will provide you with six commonsense knowledge as candidate triples in the form of a triple such as 'A relation B', where A and B are two concepts and the key word can be either A or B. Please follow these steps:

1. Based on each selected word and candidate triples, choose one triple as a common-sense, fact-based knowledge that is best for children's education.

For example, if your key word is 'apple', your commonsense relation could be: (apple, is a, fruit); (apple, is used for,eating); (apple, is, sweet); (apple, has property, red); (apple, is at location of, trees); (apple, is used for, apple\_pie).

Return one generated common-sense knowledge in the following format:

```
commonsense: (A, relation, B)

\( \text{key word1 for few-shot} \)

\( \text{candidate triples } \):

\{ candidate triples1 for few-shot} \)

\( \text{response } \):

\{ response1 for few-shot} \)

\( \text{...} \)

\( \text{key word } \) \):

\{ key word for the current data} \}

\( \text{candidate triples for the current data} \)

\( \text{response } \):
```

Table 15: Prompt for step 2 in GPT 3-step QAG approach.

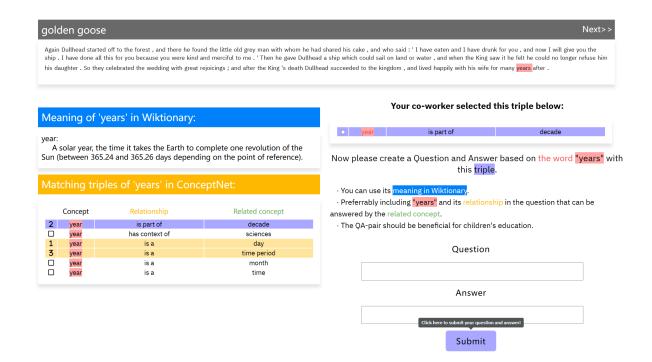


Figure 9: Cross-validation process3: After ranking top3 triplets, the triplet selected originally by the other annotator is displayed, the validator should create a QA-pair based on the original triplet.

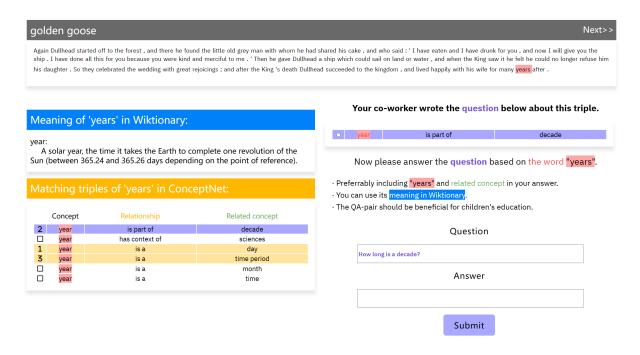


Figure 10: Cross-validation process4: Validator is asked to answer the question created by the other annotator using the triplet originally selected by the other annotator.