

Hierarchical Continual Reinforcement Learning via Large Language Model

Chaofan Pan¹, Xin Yang^{1*}, Hao Wang², Wei Wei³, Tianrui Li⁴

¹ Southwestern University of Finance and Economics, China ² Nanyang Technological University, Singapore ³ Shanxi University, China ⁴ Southwest Jiaotong University, China
pan.chaofan@foxmail.com, yangxin@swufe.edu.cn, cshaowang@gmail.com, weiwei@sxu.edu.cn, trli@swjtu.edu.cn

Abstract

The ability to learn continuously in dynamic environments is a crucial requirement for reinforcement learning (RL) agents applying in the real world. Despite the progress in continual reinforcement learning (CRL), existing methods often suffer from insufficient knowledge transfer, particularly when the tasks are diverse. To address this challenge, we propose a new framework, **Hierarchical Continual reinforcement learning via large language model (Hi-Core)**, designed to facilitate the transfer of high-level knowledge. Hi-Core orchestrates a two-layer structure: high-level policy formulation by a large language model (LLM), which represents and generates a sequence of goals, and low-level policy learning that closely aligns with goal-oriented RL practices, producing the agent’s actions in response to the goals set forth. The framework employs feedback to iteratively adjust and verify high-level policies, storing them along with low-level policies within a skill library. When encountering a new task, Hi-Core retrieves relevant experience from this library to help to learning. Through experiments on Minigrid, Hi-Core has demonstrated its effectiveness in handling diverse CRL tasks, which outperforms popular baselines.

1 Introduction

Reinforcement learning (RL) is a powerful paradigm in artificial intelligence (AI) that enables agents to learn optimal behaviors through interactions with environments. The capacity to continuously adapt and learn from new tasks without starting from scratch is a defining characteristic of human learning [Kudithipudi *et al.*, 2022] and a desirable trait for RL agents deployed in the dynamic and unpredictable real world. To achieve this, the research of continual reinforcement learning (CRL, a.k.a. lifelong reinforcement learning) has emerged [Rolnick *et al.*, 2019; Wolczyk *et al.*, 2022; Kessler *et al.*, 2022]. It extends traditional RL by empowering agents with the ability to learn from a sequence of tasks, preserving knowledge from previous tasks, and using this knowledge to enhance learning efficiency and performance on future tasks. CRL aims to emulate the human capacity for

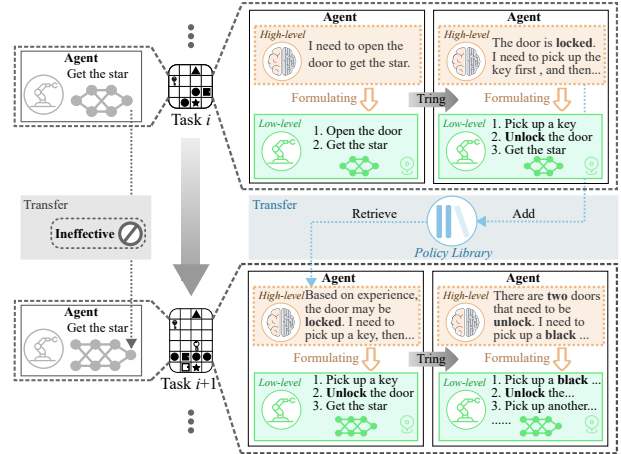


Figure 1: A simple illustration of our idea. The text has been simplified and modified for a better understanding. Traditional RL agents (**left**) primarily focus on low-level knowledge transfer, such as sharing the policy network, which may be ineffective across diverse tasks, particularly when the tasks have disparate state spaces. In contrast, our agent (**right**) leverages high-level knowledge transfer within a hierarchical structure to improve adaptability.

lifelong learning and represents an ambitious field of research that tackles the challenges of long-term, real-world applications by addressing problems of increasing scale, diversity, and non-stationarity [Khetarpal *et al.*, 2022].

Despite progress in CRL, the field continues to face a critical challenge: insufficient transfer of knowledge across diverse tasks. Sufficient knowledge transfer is essential for a robust CRL system, yet many existing methods struggle to achieve this, leading to suboptimal performance and a failure to fully exploit the benefits of continual learning (CL) [Wang *et al.*, 2023c]. A primary reason for this shortfall is the neglect of the sophisticated hierarchical structure of human cognitive control, which is primarily located in the prefrontal cortex and is complemented by the cerebellum for precise action control, enabling high-level cognition for envisioning the future and planning [D’Mello *et al.*, 2020; Friedman and Robbins, 2022]. This structure enhances humans’ ability to tackle complex tasks, and crucially, transfer skills and high-level knowledge across significantly diverse

tasks. In contrast, as shown on the left side of Figure 1, existing CRL methods often focus only on transferring low-level knowledge, such as sharing the policy network. This limits them to sequences of highly similar tasks with slight variations only in goals or parameters [Kessler *et al.*, 2022; Gaya *et al.*, 2023], and results in ineffective transfer across diverse tasks.

To take advantage of abstract similarities between diverse tasks, it is essential to represent high-level knowledge effectively and then employ robust models capable of extracting and transferring this knowledge. Human language, with its inherent abstraction, is a natural fit for representing high-level knowledge. Furthermore, recent breakthroughs in large-scale language research have demonstrated the impressive reasoning and in-context learning abilities of the large language model (LLM) [Zhao *et al.*, 2023; Xi *et al.*, 2023; Wang *et al.*, 2023b]. Based on these insights, we propose a new framework named Hi-Core (**H**ierarchical knowledge transfer for **C**ontinual reinforcement learning), which integrates the powerful capabilities of an LLM into the CRL paradigm to enhance high-level knowledge transfer and eventually improve learning performance.

The right side of Figure 1 illustrates the idea of Hi-Core. Hi-Core is structured in two layers: the high-level policy formulation and the low-level policy learning. At the high level, Hi-Core utilizes the powerful reasoning ability of a LLM to formulate a high-level policy, which is represented as a temporally extended sequence of goals. Each goal consists of a descriptive component and an intrinsic reward function that outlines the intermediate states the agent needs to reach. The high-level policy is evaluated based on feedback from the low-level learning process, allowing the LLM to refine its policy. Following this process, the high-level policy along with the corresponding information is stored in a policy library. Upon encountering a new task, Hi-Core can retrieve this policy from the library as a context of the LLM for enhancing high-level knowledge transfer. At the low level, Hi-Core employs goal-oriented RL to learn a policy that is guided by the formulated high-level policy. The verified policy can be stored in the policy library to reduce the risk of catastrophic forgetting when encountering old tasks. Experiments are conducted in simple yet challenging MiniGrid environments. The results demonstrate that Hi-Core significantly outperforms popular baselines in terms of overall performance and transfer performance. The main contributions of the work are as follows:

- We proposed Hi-Core, a novel framework that leverages hierarchical knowledge transfer for CRL, which aligns with human cognitive control, enhancing the effectiveness and generalization of agents.
- To the best of our knowledge, Hi-Core is the first work to integrate the powerful reasoning ability of LLM into the CRL paradigm, facilitating high-level policy formulation and knowledge transfer across diverse tasks.
- Extensive experiments in MiniGrid provide empirical evidence of Hi-Core’s effectiveness. Specifically, the results indicate that Hi-Core can be applied to heterogeneous tasks, achieving comparable transfer perfor-

mance.

2 Background

2.1 Preliminaries

The continual reinforcement learning process can be formulated as a series of related Markov decision processes (MDPs) $\{< \mathcal{S}^i, \mathcal{A}^i, P^i, R^i >\}$. Each MDP represents a different task or problem instance that an agent needs to solve over its lifetime. Here, \mathcal{S}^i and \mathcal{A}^i denote the state and action space of task i , respectively, while $P^i : \mathcal{S}^i \times \mathcal{S}^i \times \mathcal{A}^i \rightarrow [0, 1]$ is the transition probability function, and $R^i : \mathcal{S}^i \times \mathcal{A}^i \rightarrow [r^{\min}, r^{\max}]$ is the reward function. At each time step, the learning agent perceives the current state $s_t^i \in \mathcal{S}^i$ and selects an action $a_t^i \in \mathcal{A}^i$ according to its policy $\pi_\theta : \mathcal{S}^i \times \mathcal{A}^i \rightarrow [0, 1]$ with parameters θ . The agent then transitions to the next state $s_{t+1}^i \sim P^i(s_t^i, a_t^i)$ and receives a reward $r_t^i = R^i(s_t^i, a_t^i, s_{t+1}^i)$. The target of an agent on the task i is to maximize the expected return $\mathbb{E} \left[\sum_{t=0}^H \gamma^t R^i(s_t^i, a_t^i, s_{t+1}^i) \right]$, where γ is the discount factor of the reward, and H is the horizon.

2.2 Related works

Continual Reinforcement Learning

CRL focuses on training RL agents to learn multiple tasks sequentially without prior knowledge, garnering significant interest due to its relevance to real-world AI applications [Khetarpal *et al.*, 2022]. A central issue in CRL is catastrophic forgetting, which has led to various strategies for knowledge retention. PackNet and related pruning methods [Mallya and Lazebnik, 2018; Schwarz *et al.*, 2021] preserve model parameters but often require knowledge of task count. Experience replay techniques such as CLEAR [Rolnick *et al.*, 2019] use buffers to retain past experiences, but face memory scalability challenges. In addition, some methods prevent forgetting by maintaining multiple policies or a subspace of policies [Schöpf *et al.*, 2022; Gaya *et al.*, 2023]. Furthermore, task-agnostic CRL research indicates that rapid adaptation can also help prevent forgetting [Caccia *et al.*, 2023].

Another issue in CRL is transfer learning, which is crucial for efficient policy adaptation. Naive approaches, like fine-tuning, that train a single model on each new task provide good scalability and transferability but suffer from catastrophic forgetting. Regularization-based methods, such as EWC [Kirkpatrick *et al.*, 2017; Wang *et al.*, 2023c], have been proposed to prevent this side effect, but often reduce plasticity. Some architectural innovations have been proposed to balance the trade-off between plasticity and stability [Rusu *et al.*, 2016; Berseth *et al.*, 2022]. Furthermore, methods like OWL [Kessler *et al.*, 2022] and MAXQINIT [Abel *et al.*, 2018] leverage policy factorization and value function transfer, respectively, for improved learning across tasks.

Most existing methods perform well when applied to sequences of tasks that exhibit high environmental similarity, such as tasks where only specific parameters within the environment are altered or the objectives within the same environment are different. However, their effectiveness is greatly diminished when dealing with a sequence of diverse tasks.

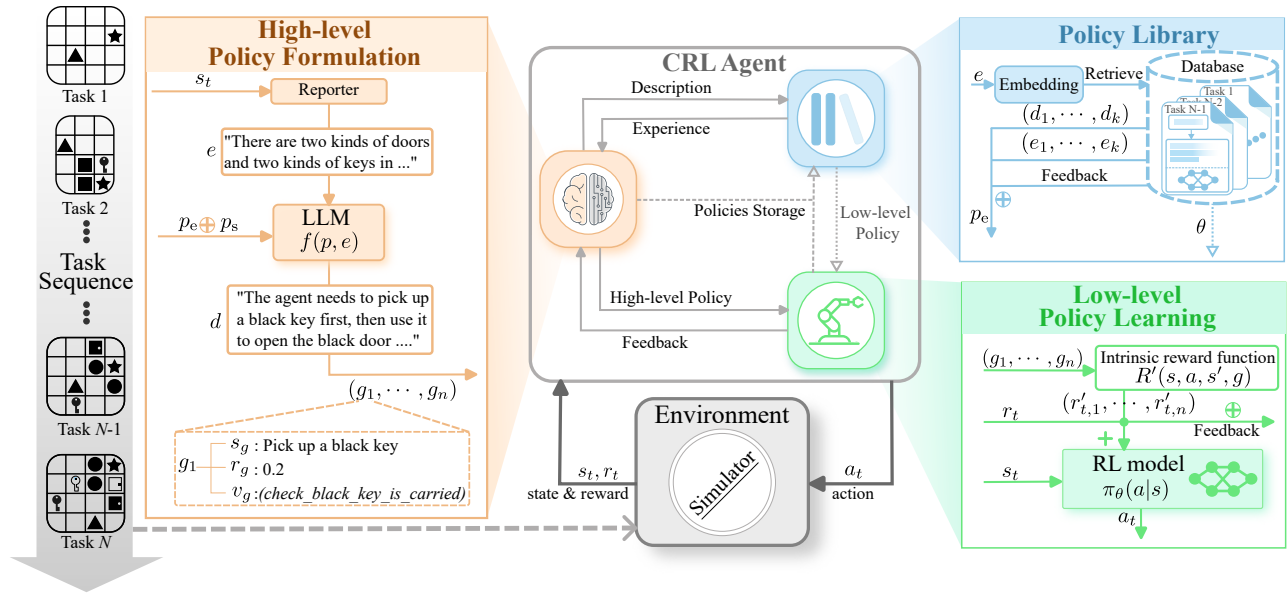


Figure 2: The illustration of the proposed framework. The middle section depicts the internal interactions (**light gray line**) and external interactions (**dark gray line**) in Hi-Core. Internally, the CRL agent is structured in two layers: the high-level policy formulation (**orange**) and the low-level policy learning (**green**). Furthermore, the policy library (**blue**) is constructed to store and retrieve policies. The three surrounding boxes illustrate their internal workflow when the agent encounters new tasks.

Our proposed framework aims to overcome this limitation by leveraging hierarchical knowledge transfer.

Reinforcement Learning with the LLM

Recent advancements have combined the large language model with reinforcement learning to address reinforcement learning challenges such as sample efficiency and generalization. These integrations utilize LLM’s vast knowledge and reasoning ability to improve agents’ performance. For instance, studies have developed methods for efficient agent-LLM interactions [Hu *et al.*, 2023] and unified agent foundations with language models for better experience reuse [Palo *et al.*, 2023].

Frameworks that merge LLMs with RL have also emerged, such as LAMP, which pretrains RL agents with Vision-Language Models [Adeniji *et al.*, 2023], and HiP, which uses foundation models for long-horizon tasks [Ajay *et al.*, 2023]. In addition, the RAFA framework offers a principled approach with guarantees to optimize reasoning and actions [Liu *et al.*, 2023]. Research into LLM-guided skill learning and reward shaping is also gaining traction. The BOSS method [Zhang *et al.*, 2023] and the work on LLM-based reward structures for robotics [Yu *et al.*, 2023] exemplify this trend, with studies like [Kwon *et al.*, 2023] focusing on LLM-driven reward design.

Our proposed framework extends these studies to continual learning in RL by leveraging LLM’s powerful reason ability for high-level policy formulation, thus enhancing high-level knowledge transfer.

3 Method

In this section, we clarify the research problem and describe the framework.

Problem Formalization. We formalize the CRL problem in the goal-oriented RL framework [Chen and Luo, 2022; Colas *et al.*, 2022]. The agent perceives not only the current state of the environment but is also provided with a specific goal $g \in \mathcal{G}$, where \mathcal{G} represents the space of possible goals. For task i and its corresponding goal sequence $\mathbf{g}^i = (g_1^i, \dots, g_m^i)$, the agent’s objective is to learn a policy $\pi^i(s^i)$ that effectively maps each state s^i to an appropriate action a^i . The aim is to maximize the expected cumulative reward over time, guided by the sum of the extrinsic reward $R^i(s^i, a^i, s'^i)$ and the intrinsic rewards $(R'^i(s^i, a^i, s'^i, g_1^i), \dots, R'^i(s^i, a^i, s'^i, g_m^i))$ [Dilokthanakul *et al.*, 2019], where s'^i represents the next state in the task i . The former is determined by the environment and is usually sparse. The latter is typically defined so that the agent receives a reward if it achieves the given goal.

Overview. Hi-Core is illustrated in Figure 2. For simplicity, we have omitted the task-indexed superscript in the description. The framework orchestrates the interaction between the CRL agent and the environment simulator for each task in the task sequence, aligning with standard RL protocols. For each task, the corresponding environment simulator provides the current state s_t to the agent at each timestep, which then selects an action a_t to perform, resulting in a reward r_t and the next state. Internally, the CRL agent is structured in two layers: the high-level policy formulation and the low-level policy learning. Additionally, a policy library is maintained for the storage and retrieval of policies. The formulation of the high-level policy is initiated when the agent

interacts first with the environment. If the policy library is not empty, related experiences (including high-level policies, corresponding environment descriptions and feedback) will be retrieved through the description of the environment to assist in the formulation. Once the high-level policy is established, it guides the learning of the low-level policy. Provided that there is sufficient storage, the most similar low-level policy can be retrieved from the policy library to serve as an advantageous initial point. Through feedback from the RL learning process, the LLM gradually refines its high-level policy to improve performance. Upon completion of a task, the successful policies are stored in the policy library.

3.1 High-level Policy Formulation

To integrate LLM into the goal-oriented RL framework, we conceptualize LLM as a function $\mathcal{F} : \mathcal{P} \times \mathcal{E} \rightarrow \mathcal{D}$, where \mathcal{P} is the set of all prompts, \mathcal{E} is the set of textual descriptions of the environment, and \mathcal{D} is the set of textual descriptions of the sequence of goals. The description of the environment $e \in \mathcal{E}$ can be automatically obtained through a hard-coded reporter [Dasgupta *et al.*, 2022]. The prompt $p \in \mathcal{P}$ is a concatenation of two parts: p_s and p_e , where p_s is the system prompt and p_e is the experience retrieved from the policy library. Description of each high-level policy, that is, textual output $d \in \mathcal{D}$ is mapped to the corresponding goal sequence $\mathbf{g} \in \mathcal{G}^*$ through a defined parsing function. In order to improve the stability of LLM’s output, we structure the goal into a tuple: $g = (s_g, v_g, r_g)$, where $s_g \in \mathcal{E}$ is the textual description of the goal state, v_g is a verification function $v_g : \mathcal{E} \times \mathcal{S} \rightarrow \{0, 1\}$, $r_g \in \mathbb{R}$ is a intrinsic reward value after achieving the goal. Optional validation functions are provided in p_s .

Intrinsic reward can not only guide the agent to learn to achieve the corresponding goal but also serve as a metric for evaluating whether the agent has achieved the goal. This metric is continuously monitored during the interactions of the CRL agent with the environment. When this average exceeds a predefined threshold, it is taken as an indication that the agent has successfully achieved the goals. The iterative process of high-level policy formulation, validation, and improvement draws inspiration from the concept of Reflexion [Shinn *et al.*, 2023]. In instances where the agent fails to meet the threshold, indicating that the goal has not been met, the LLM is prompted to adjust the high-level policy. This adjustment is informed by feedback from the agent’s performance. The LLM first analyzes the feedback to pinpoint the reasons behind the shortfall in the previous policy. Then it leverages the powerful reasoning ability to hypothesize potential solutions. With this insight, the LLM formulates a new high-level policy aimed at overcoming the identified challenges.

3.2 Low-level Policy Learning

The low-level policy learning is guided by the formulated high-level policy. The RL model learns the low-level policy using raw state input s_t and total intrinsic reward r'_t based on the goal sequence $\mathbf{g} = (g_1, \dots, g_m)$. The agent’s intrinsic reward function is defined as:

$$R'(s, a, s', g) = \begin{cases} r_g, & \text{if } v_g(s_g, s') = 1 \\ 0, & \text{otherwise} \end{cases}. \quad (1)$$

This reward structure provides a more granular view into the effectiveness of goal-related actions, encouraging the agent to learn a policy that is aligned with the goal more efficiently. Furthermore, the state-dependent design of this function improves the generalizability of high-level policies. Then, the internal rewards for each goal $\{r'_{t,l} = R'(s_i, a_i, s_{i+1}, g_l) | l = 1, \dots, m\}$ and the external reward r_t from the environment will be textual and will be concatenated as the feedback. The total intrinsic reward is $r'_t = \sum_{l=1}^m r'_{t,l}$. Therefore, the aim of RL agent with goal sequence g can be expressed as

$$\max_{\theta} J(\theta, g) = \mathbb{E}_{\pi_{\theta}} \left[\sum_{t=0}^H \gamma^t (r_t + r'_t) \right]. \quad (2)$$

3.3 Policy library

Recent studies [Wang *et al.*, 2023a; Zhang *et al.*, 2023] have highlighted the potential of LLMs’ reasoning and planning ability in facilitating CL for agents, which involves continuous acquisition and update of skills [Wang *et al.*, 2023c]. One method to address the core challenges in CL is to design a knowledge base [Li *et al.*, 2023] or a skill library [Wang *et al.*, 2023a]. By using validated successful experiences, agents can not only reduce catastrophic forgetting but also rapidly enhance their capabilities.

Based on the above findings, Hi-Core maintains a policy library to store the policies that solve tasks successfully. The description of each high-level policy d and the corresponding feedback is indexed by the embedding of the environment description e of its corresponding task, which can be retrieved in similar tasks in the future. The policy library can be continuously extended throughout the life of the CRL agent. Given a new environment description e , Hi-Core use embedding to retrieve the first k similar environment descriptions and concatenate them with goal descriptions and corresponding feedback as experience p_e . In addition, for each environment description e , Hi-Core also stores the parameter of the low-level policy θ that has been learned. This can accelerate learning on similar tasks and further reduce catastrophic forgetting if storage space is sufficient. By storing both high-level and low-level learning policies in the policy library, the agent’s capabilities for diverse tasks can be enhanced over time.

4 Experiments

In this section, we evaluate our framework in several continual reinforcement learning tasks.

4.1 Environment

For our experiments, we utilized a suite of MiniGrid environments [Chevalier-Boisvert *et al.*, 2023] to evaluate the efficacy of Hi-Core in addressing CRL tasks. These environments feature image-based state observations, a discrete set of possible actions, and various objects characterized by their color and type. We intentionally simplified the state and action spaces to streamline the policy learning process, enabling more rapid experimental iterations. This approach allowed us to focus on the core objective of this study: leveraging hierarchical knowledge transfer for CRL. We crafted a sequence of four distinct tasks within the MiniGrid framework. Visual

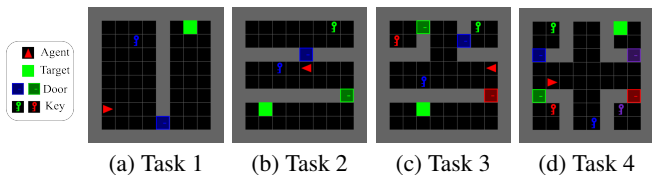


Figure 3: The examples of environments for our tasks. The agents in these environments must locate and pick up a key in order to unlock a door and enter a room. The targets and agents are always initialized in random positions in different rooms separated by the locked door. There are multiple doors and keys of different colors in Task 2, Task 3, and Task 4. The agents need to unlock the doors one by one in order to finally move to the target position. These four tasks are very challenging and put forward higher requirements for the reasoning ability of agents.

representations of each task environment are provided in Figure 3. This sequence is arranged in ascending order of difficulty and aligns with the human learning process, facilitating better tracking of knowledge transfer throughout the learning process.

4.2 Experiment Setup

Implementation. We use OpenAI’s GPT as the LLM, which can be accessed through their API. To improve the language model’s reasoning ability, we introduce the Chain of Thought (COT) [Wei *et al.*, 2022] in the prompt. This approach also aids the LLM in addressing complex tasks. Moreover, we add a few-shot example at the end of the prompt to guide the output towards the desired format. Note that this example contains only the foundational knowledge of all tasks, requiring the LLM to engage in additional reasoning to comprehend the specifics of the current task. For the low-level policy learning in Hi-Core, we chose the Proximal Policy Optimization (PPO) algorithm as the underlying RL algorithm due to its excellent and stable performance [Schulman *et al.*, 2017; Raffin *et al.*, 2021]. For the policy library, we build a vector database based on FAISS, which is a library for efficient similarity search and clustering of dense vectors [Johnson *et al.*, 2019]. Due to the small total number of tasks, the number of experiences to be retrieved k can be set as the total number of tasks N . In addition, the policy library in our experiments does not store low-level policies for fair comparison with limited storage space.

Baselines. We consider the following baselines, for comparison with our approach in experiments:

- **Single-Task (SG):** This baseline represents a traditional RL setup where a distinct agent is trained exclusively on each task. This serves as a foundational comparison point to underscore the advantages of CL, as it lacks any mechanism for knowledge retention or transfer.
- **Fine-Tuning (FT):** Building upon the standard RL algorithm, this baseline differs from SG by using a single agent that is sequentially fine-tuned across different tasks. This baseline provides a basic measure of an agent’s capacity to maintain knowledge of earlier tasks while encountering new tasks.

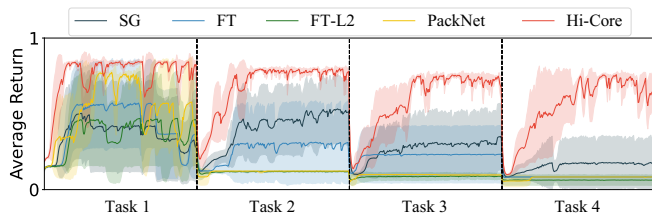


Figure 4: Performance during training across four tasks (smoothed with exponential moving average). The x-axis represents the training progress for each task. The y-axis represents the normalized average return of each task. The shaded area depicts the means \pm the standard deviation over five random seeds.

- **Fine-Tuning with L2 Regularization (FT-L2):** Based on FT, this baseline incorporates L2 regularization during the fine-tuning process. FT-L2 can be viewed as the simplest implementation of regularization-based CRL methods [Kirkpatrick *et al.*, 2017; Wang *et al.*, 2023c].
- **PackNet** [Mallya and Lazebnik, 2018]: This baseline is a representative CRL method based on parameter isolation [Wang *et al.*, 2023c]. It utilizes the network pruning technique to efficiently allocate the neural network’s capacity throughout the continual learning of tasks.

Note that our method is not directly comparable with certain methods, such as CLEAR [Rolnick *et al.*, 2019] and ClonExSAC [Wolczyk *et al.*, 2022], as they require access to the data from previous tasks for training. Our framework can continually learn without the need to revisit past task data, which is a common constraint in real-world applications.

Metrics. To evaluate the effectiveness of Hi-Core, we use the normalized average return to measure the performance of the trained agents. Following standard practice in supervised continual learning literature [Díaz-Rodríguez *et al.*, 2018; Wolczyk *et al.*, 2021], we define a suite of metrics based on the agent’s performance throughout different phases of its training process. These metrics include average performance A_N , forward transfer FW and forgetting FG .

4.3 Competitive Results

To evaluate our framework, we compare Hi-Core with other baselines across four challenging tasks that have the same state and action space (Figure 3). The underlying RL algorithm of all baselines is PPO. Each experiment is trained in 5M steps and replicated with five random seeds of environments to ensure reliability.

Overall Performance. As illustrated in Figure 4, the baselines perform well on the first Task. However, their performance gets worse progressively as the difficulty of the tasks increases. A common trend of performance degradation in the transition between tasks is evident across all methods. Specifically, the SG baseline, while effective on the first task, is unable to maintain its performance due to its inherent limitation. Other baselines, such as FT, FT-L2, and PackNet, also start strong on the first task but encounter difficulties in the subsequent tasks. This phenomenon suggests that a singular shared policy may not be robust enough to handle a sequence

Table 1: CL performance of Hi-Core and four baselines.

Metric	SG	FT	FT-L2	PackNet	Hi-Core
$A_N(\uparrow)$	0.30	0.25	0.16	0.20	0.65
$FW(\uparrow)$	0.00	-0.05	-0.14	-0.09	0.17
$FG(\downarrow)$	0.12	0.09	0.05	0.06	0.12

of highly varied tasks. The balance between policy stability and plasticity is critical, with higher stability often leading to reduced adaptability, as observed in the performance degradation of these baselines. In contrast, Hi-Core consistently surpasses the other baselines, showcasing remarkable performance across all tasks. Although it is not immune to performance degradation when transitioning between tasks with significant differences, it demonstrates a rapid recovery in performance. This can be attributed to its hierarchical structure, which leverages the powerful capabilities of LLM and promotes the transfer of high-level policy knowledge, thereby enhancing the agent’s ability to adapt to new and diverse tasks.

Continual Learning Performance. Table 1 shows the evaluation results in terms of CL metrics. The average performance metric clearly demonstrates Hi-Core’s superiority in task sequence with diverse tasks, significantly outperforming other baseline methods. The forward transfer metric is particularly important, as it measures the capacity of an agent to utilize knowledge from previous tasks. All baselines, with the exception of Hi-Core, present forward transfer metrics of less than or equal to zero. This suggests that traditional approaches struggle to transfer previously acquired knowledge to new and diverse tasks effectively. Baselines that rely on regularization strategies, such as FT-L2, or parameter isolation techniques, like PackNet, may even hinder the learning of new tasks.

In contrast, Hi-Core exhibits robust transfer performance, underscoring the benefits of transferring high-level policies. When examining the forgetting metrics, FT, FT-L2, and PackNet show relatively low scores. This can be attributed, in part, to their emphasis on model stability. However, a more critical factor is their inherently lower performance on subsequent tasks, such as Task 2, Task 3, and Task 4. Although Hi-Core does not achieve the lower score in the forgetting metric, its exceptional forward transfer capability and strong average performance accentuate its proficiency in handling diverse task sequences. Note that Hi-Core does not resort to fine-tuning strategy in this experiment, although it could be employed in situations where minimizing forgetting is a priority. The above findings highlight Hi-Core’s potential to markedly enhance the adaptability and longevity of reinforcement learning agents, positioning it as a highly viable solution for dynamic and diverse tasks.

4.4 Heterogeneous Tasks Experiments

Most existing works have focused on the transfer ability of CRL agents in environments that have the same state space. In contrast, our study explores the application of CRL agents to heterogeneous tasks, where environments have different state spaces or action spaces. For the simplification of the

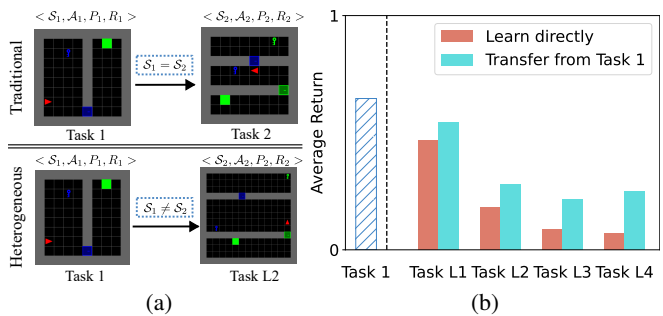


Figure 5: Heterogeneous tasks experiments. (a) A simple illustration. The setting of traditional CRL requires the same state spaces of the tasks (above). In our heterogeneous task experiments, the state space of each task may be different (below). (b) Experiment results. The left side of the dashed line represents the performance on the original Task 1. The right side of the dashed line represents the performances on tasks with larger state space.

Table 2: CL performance of the variants of Hi-Core

	$A_N(\uparrow)$	$FW(\uparrow)$	$FG(\downarrow)$
SG	0.30	0.00	0.10
Hi-Core	0.65	0.17	0.12
Hi-Core-FT	0.33	-0.14	0.09
Hi-Core-SG	0.47	0.00	0.19
Hi-Core-Once	0.62	0.15	0.13

problem, we only concentrate on tasks with differing state spaces.

As depicted in Figure 5a, heterogeneous tasks present a unique challenge. While it is possible to accommodate differences in the size of the state space during knowledge transfer by employing a masking technique, this approach necessitates prior knowledge of the maximum state space size, which is impractical for RL agents expected to learn continually in dynamic environments. On the contrary, the high-level policy transfer of Hi-Core can be applied to heterogeneous tasks without the need for masking.

In our experiments, we evaluate the effectiveness of Hi-Core across two heterogeneous tasks. The first task has a relatively small state space, as shown in the left below of Figure 5a. In contrast, the second task has a larger state space, such as the right below of the same figure. Figure 5b reports the results of these experiments. The first task is Task 1, while the second task is Task L1, Task L2, Task L3, or Task L4, each representing a larger state space variant of Task 1 through Task 4. Direct learning agents who are exposed to tasks with large state spaces from the outset may struggle to learn effective policies within the set number of steps, resulting in poor performance. This phenomenon is more obvious on more difficult tasks, such as Task L3 and Task L4. However, agents that are learned on Task 1 can transfer high-level knowledge to subsequent tasks. Despite the increasing difficulty of these tasks, the agents still demonstrate comparable performance. This evidence suggests that Hi-Core retains transfer ability even when applied to heterogeneous tasks.

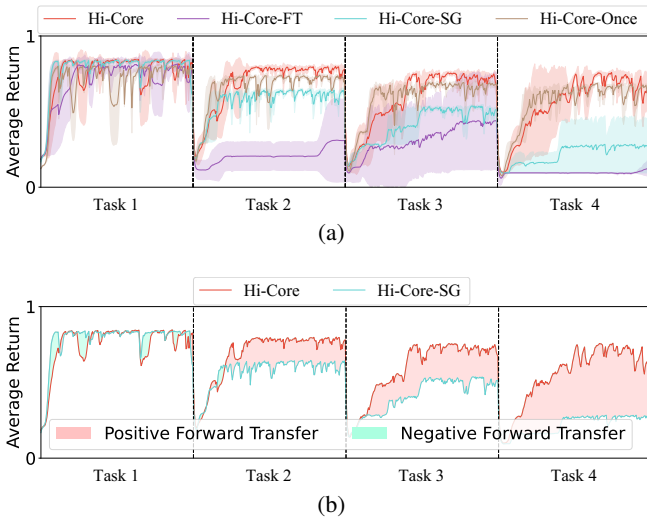


Figure 6: Ablation study results. **(a)** Performance of Hi-Core and its variants during training. **(b)** Forward transfer performance of Hi-Core during training. The red areas between the curves represent positive forward transfer and green represent negative forward transfer.

4.5 Ablation Study

In this part, we conduct an ablation study to investigate what affects Hi-Core’s performance in CRL. We consider several variants of Hi-Core to understand the effects:

- Hi-Core-FT: Hi-Core fine-tuning the policy from the previous task when encountering a new task.
- Hi-Core-SG: Hi-Core without policy library. This variant treats each task as an isolated learning problem, akin to training single agents for each task.
- Hi-Core-Once: Hi-Core without feedback mechanisms. In this variant, the high-level policy formulation of LLM is performed only once for each task.

The results of our study are presented in Table 2 and Figure 6. For better comparison, we also include the performance of the SG baseline in the Table. Our findings are as follows: Firstly, Hi-Core-SG shows superior performance compared to the SG baseline, which confirms that the LLM’s powerful capabilities can help RL. An RL agent can take advantage of reasoning ability in the LLM to significantly reduce the difficulties in solving these tasks. Secondly, while Hi-Core-SG outperforms the baseline, it falls short of the average performance and forward transfer metrics achieved by the Hi-Core. As shown in Figure 6b, this gap emphasizes the value of the policy library in facilitating knowledge transfer, ultimately boosting the agent’s overall performance. Furthermore, Hi-Core-Once exhibits slightly lower performance on Task 2, Task 3 and Task 4 than Hi-Core. This phenomenon suggests that feedback can improve the performance of LLM in dealing with these challenging tasks. Lastly, the Hi-Core-FT variant underperforms on all tasks except Task 1. This observation aligns with the previous finding in competitive results that methods designed to enhance policy stability may

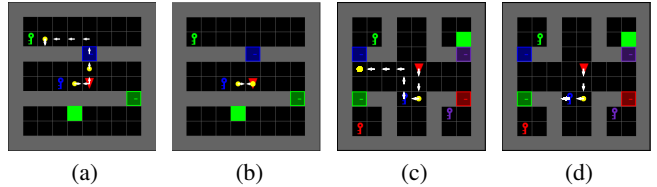


Figure 7: Early-stage policy visualization for agents on Task 2 (0.5M steps) and Task 4 (1M steps), following learning on Task 1 (5M steps). **(a)** and **(c)** depict the policies learned by Hi-Core for Task 2 and Task 4 respectively, while **(b)** and **(d)** represent the policies by Hi-Core-SG for the same tasks. The forward actions of agents are denoted by white arrows, while the yellow dots denote interactive actions such as pickup and toggle. For the clearness, steering actions are omitted from these visual representations.

decrease the agent’s performance on subsequent tasks when those tasks differ significantly from one another.

Policy Visualization. Figure 7 further illustrates the difference between Hi-Core and Hi-Core-SG on Task 2 and Task 4. As shown in Figure 7a, the agent of Hi-Core demonstrates the capability to swiftly learn to pick up the blue key and unlock the corresponding door. In contrast, the agent of Hi-Core-SG struggles to progress beyond the initial room (Figure 7b). This performance gap can be attributed to the previous learning of the Hi-Core agent on Task 1, which shares common elements with Task 2, such as the blue key and door. By drawing on previous experience, Hi-Core formulate relevant initial goals, accelerating learning on Task 2. Similarly, when comparing Figure 7c and Figure 7d for Task 4, we observe a consistent pattern. Although Task 4 presents a higher level of difficulty, the agent with pre-acquired high-level knowledge exhibits more effective behaviors than the agent learning from scratch. These findings demonstrate the effectiveness of Hi-Core in facilitating the transfer of knowledge across diverse tasks.

5 Conclusion

In this work, we have presented Hi-Core, a novel framework that aligns with the hierarchical structure of human cognitive control, enhancing the high-level knowledge transfer of CRL. Hi-Core leverages a LLM for high-level policy formulation, employs goal-oriented RL for low-level policy learning, and constructs the policy library to store and retrieve policies. It addresses the challenge of learning across a sequence of diverse tasks by transferring high-level knowledge, which has been demonstrated in our experiments. Further results indicate that Hi-Core can be applied to heterogeneous tasks and achieves comparable transfer performance.

We believe that this work constitutes the first step toward the use of hierarchical knowledge transfer to enhance the effectiveness and generalization of CRL agents. There are still some limitations of Hi-Core, such as an unsatisfactory solution to catastrophic forgetting and room for improvement in the transferability of low-level policies. These directions provide opportunities for future work, with the potential to refine and extend Hi-Core.

References

- [Abel *et al.*, 2018] David Abel, Yuu Jinnai, Sophie Yue Guo, George Dimitri Konidaris, and Michael L. Littman. Policy and value transfer in lifelong reinforcement learning. In *ICML*, pages 20–29, 2018.
- [Adeniji *et al.*, 2023] Ademi Adeniji, Amber Xie, Carmelo Sferrazza, Younggyo Seo, Stephen James, and Pieter Abbeel. Language reward modulation for pretraining reinforcement learning. *arXiv preprint arXiv:2308.12270*, 2023.
- [Ajay *et al.*, 2023] Anurag Ajay, Seungwook Han, Yilun Du, Shaung Li, Abhi Gupta, Tommi Jaakkola, Josh Tenenbaum, Leslie Kaelbling, Akash Srivastava, and Pulkit Agrawal. Compositional foundation models for hierarchical planning. *arXiv preprint arXiv:2309.08587*, 2023.
- [Berseth *et al.*, 2022] Glen Berseth, Zhiwei Zhang, Grace Zhang, Chelsea Finn, and Sergey Levine. Comps: Continual meta policy search. In *ICLR*, 2022.
- [Caccia *et al.*, 2023] Massimo Caccia, Jonas Mueller, Taesup Kim, Laurent Charlin, and Rasool Fakoor. Task-Agnostic Continual Reinforcement Learning: Gaining Insights and Overcoming Challenges. In *CoLLAs*, 2023.
- [Chen and Luo, 2022] Liyu Chen and Haipeng Luo. Near-optimal goal-oriented reinforcement learning in non-stationary environments. *Advances in Neural Information Processing Systems*, 35:33973–33984, 2022.
- [Chevalier-Boisvert *et al.*, 2023] Maxime Chevalier-Boisvert, Bolun Dai, Mark Towers, Rodrigo de Lazcano, Lucas Willems, Salem Lahlou, Suman Pal, Pablo Samuel Castro, and Jordan Terry. Minigrid & miniworld: Modular & customizable reinforcement learning environments for goal-oriented tasks. *arXiv preprint arXiv:2306.13831*, 2023.
- [Colas *et al.*, 2022] Cédric Colas, Tristan Karch, Olivier Sigaud, and Pierre-Yves Oudeyer. Autotelic agents with intrinsically motivated goal-conditioned reinforcement learning: A short survey. *Journal of Artificial Intelligence Research*, 74:1159–1199, 2022.
- [Dasgupta *et al.*, 2022] Ishita Dasgupta, Christine Kaeser-Chen, Kenneth Marino, Arun Ahuja, Sheila Babayan, Felix Hill, and Rob Fergus. Collaborating with language models for embodied reasoning. In *LaReL*, 2022.
- [Díaz-Rodríguez *et al.*, 2018] Natalia Díaz-Rodríguez, Vincenzo Lomonaco, David Filliat, and Davide Maltoni. Don’t forget, there is more than forgetting: New metrics for continual learning. *arXiv preprint arXiv:1810.13166*, 2018.
- [Dilokthanakul *et al.*, 2019] Nat Dilokthanakul, Christos Kaplanis, Nick Pawlowski, and Murray Shanahan. Feature control as intrinsic motivation for hierarchical reinforcement learning. *IEEE Transactions on Neural Networks and Learning Systems*, 30(11):3409–3418, 2019.
- [D’Mello *et al.*, 2020] Anila M. D’Mello, John D.E. Gabrieli, and Derek Evan Nee. Evidence for hierarchical cognitive control in the human cerebellum. *Current Biology*, 30(10):1881–1892.e3, 2020.
- [Friedman and Robbins, 2022] Naomi P Friedman and Trevor W Robbins. The role of prefrontal cortex in cognitive control and executive function. *Neuropsychopharmacology*, 47(1):72–89, 2022.
- [Gaya *et al.*, 2023] Jean-Baptiste Gaya, Thang Doan, Lucas Caccia, Laure Soulier, Ludovic Denoyer, and Roberta Raileanu. Building a Subspace of Policies for Scalable Continual Learning. In *ICLR*, 2023.
- [Hu *et al.*, 2023] Bin Hu, Chenyang Zhao, Pu Zhang, Zihao Zhou, Yuanhang Yang, Zenglin Xu, and Bin Liu. Enabling intelligent interactions between an agent and an llm: A reinforcement learning approach. *arXiv preprint arXiv:2306.03604*, 2023.
- [Johnson *et al.*, 2019] Jeff Johnson, Matthijs Douze, and Hervé Jégou. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2019.
- [Kessler *et al.*, 2022] Samuel Kessler, Jack Parker-Holder, Philip J. Ball, Stefan Zohren, and Stephen J. Roberts. Same state, different task: Continual reinforcement learning without interference. In *AAAI*, pages 7143–7151, 2022.
- [Khetarpal *et al.*, 2022] Khimya Khetarpal, Matthew Riemer, Irina Rish, and Doina Precup. Towards continual reinforcement learning: A review and perspectives. *Journal of Artificial Intelligence Research*, 75:1401–1476, 2022.
- [Kirkpatrick *et al.*, 2017] James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017.
- [Kudithipudi *et al.*, 2022] Dhireesha Kudithipudi, Mario Aguilar-Simon, Jonathan Babb, Maxim Bazhenov, Douglas Blackiston, Josh Bongard, Andrew P Brna, Suraj Chakravarthi Raja, Nick Cheney, Jeff Clune, et al. Biological underpinnings for lifelong learning machines. *Nature Machine Intelligence*, 4(3):196–210, 2022.
- [Kwon *et al.*, 2023] Minae Kwon, Sang Michael Xie, Kalesha Bullard, and Dorsa Sadigh. Reward Design with Language Models. In *ICLR*, 2023.
- [Li *et al.*, 2023] Miaomiao Li, Jiaqi Zhu, Xin Yang, Yi Yang, Qiang Gao, and Hongan Wang. Cl-wstc: Continual learning for weakly supervised text classification on the internet. In *WWW*, pages 1489–1499, 2023.
- [Liu *et al.*, 2023] Zhihan Liu, Hao Hu, Shenao Zhang, Hongyi Guo, Shuqi Ke, Boyi Liu, and Zhaoran Wang. Reason for Future, Act for Now: A Principled Framework for Autonomous LLM Agents with Provable Sample Efficiency. *arXiv preprint arXiv:2309.17382*, 2023.

- [Mallya and Lazebnik, 2018] Arun Mallya and Svetlana Lazebnik. Packnet: Adding multiple tasks to a single network by iterative pruning. In *CVPR*, pages 7765–7773, 2018.
- [Palo *et al.*, 2023] Norman Di Palo, Arunkumar Byravan, Leonard Hasenclever, Markus Wulfmeier, Nicolas Heess, and Martin Riedmiller. Towards A Unified Agent with Foundation Models. In *ICLR*, 2023.
- [Raffin *et al.*, 2021] Antonin Raffin, Ashley Hill, Adam Gleave, Anssi Kanervisto, Maximilian Ernestus, and Noah Dormann. Stable-baselines3: Reliable reinforcement learning implementations. *The Journal of Machine Learning Research*, 22(1):12348–12355, 2021.
- [Rolnick *et al.*, 2019] David Rolnick, Arun Ahuja, Jonathan Schwarz, Timothy P. Lillicrap, and Gregory Wayne. Experience replay for continual learning. In *NeurIPS*, pages 348–358, 2019.
- [Rusu *et al.*, 2016] Andrei A. Rusu, Neil C. Rabinowitz, Guillaume Desjardins, Hubert Soyer, James Kirkpatrick, Koray Kavukcuoglu, Razvan Pascanu, and Raia Hadsell. Progressive Neural Networks. *arXiv preprint arXiv:1606.04671*, 2016.
- [Schöpf *et al.*, 2022] Philemon Schöpf, Sayantan Auddy, Jakob Hollenstein, and Antonio Rodriguez-sanchez. Hypernetwork-PPO for Continual Reinforcement Learning. In *NeurIPS DeepRL Workshop*, 2022.
- [Schulman *et al.*, 2017] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [Schwarz *et al.*, 2021] Jonathan Schwarz, Siddhant M. Jayakumar, Razvan Pascanu, Peter E. Latham, and Yee Whye Teh. Powerpropagation: A sparsity inducing weight reparameterisation. In *NeurIPS*, pages 28889–28903, 2021.
- [Shinn *et al.*, 2023] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik R Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. In *NeurIPS*, 2023.
- [Wang *et al.*, 2023a] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An Open-Ended Embodied Agent with Large Language Models. *arXiv preprint arXiv:2305.16291*, 2023.
- [Wang *et al.*, 2023b] Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, et al. A survey on large language model based autonomous agents. *arXiv preprint arXiv:2308.11432*, 2023.
- [Wang *et al.*, 2023c] Liyuan Wang, Xingxing Zhang, Hang Su, and Jun Zhu. A comprehensive survey of continual learning: Theory, method and application. *arXiv preprint arXiv:2302.00487*, 2023.
- [Wei *et al.*, 2022] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems*, 35:24824–24837, 2022.
- [Wolczyk *et al.*, 2021] Maciej Wolczyk, Michał Zajac, Razvan Pascanu, Lukasz Kucinski, and Piotr Milos. Continual world: A robotic benchmark for continual reinforcement learning. In *NeurIPS*, pages 28496–28510, 2021.
- [Wolczyk *et al.*, 2022] Maciej Wolczyk, Michał Zajac, Razvan Pascanu, Łukasz Kuciński, and Piotr Miłoś. Disentangling transfer in continual reinforcement learning. *NeurIPS*, 35:6304–6317, 2022.
- [Xi *et al.*, 2023] Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. The rise and potential of large language model based agents: A survey. *arXiv preprint arXiv:2309.07864*, 2023.
- [Yu *et al.*, 2023] Wenhao Yu, Nimrod Gileadi, Chuyuan Fu, Sean Kirmani, Kuang-Huei Lee, Montserrat Gonzalez Arenas, Hao-Tien Lewis Chiang, Tom Erez, Leonard Hasenclever, Jan Humplik, Brian Ichter, Ted Xiao, Peng Xu, Andy Zeng, Tingnan Zhang, Nicolas Heess, Dorsa Sadigh, Jie Tan, Yuval Tassa, and Fei Xia. Language to Rewards for Robotic Skill Synthesis. In *CoRL*, 2023.
- [Zhang *et al.*, 2023] Jesse Zhang, Jiahui Zhang, Karl Pertsch, Ziyi Liu, Xiang Ren, Minsuk Chang, Shao-Hua Sun, and Joseph J. Lim. Bootstrap Your Own Skills: Learning to Solve New Tasks with Large Language Model Guidance. In *CoRL*, 2023.
- [Zhao *et al.*, 2023] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023.