

Euclid preparation. Measuring detailed galaxy morphologies for Euclid with Machine Learning

Euclid Collaboration: B. Aussel¹, S. Kruk², M. Walmsley³, M. Huertas-Company^{4,5,6,7}, M. Castellano⁸, C. J. Conselice³, M. Delli Veneri⁹, H. Domínguez Sánchez¹⁰, P.-A. Duc¹¹, U. Kuchner¹², A. La Marca^{13,14}, B. Margalef-Bentabol¹³, F. R. Marleau¹⁵, G. Stevens¹⁶, Y. Toba¹⁷, C. Tortora¹⁸, L. Wang^{13,14}, N. Aghanim¹⁹, B. Altieri², A. Amara²⁰, S. Andreon²¹, N. Auricchio²², M. Baldi^{23,22,24}, S. Bardelli²², R. Bender^{25,26}, C. Bodendorf²⁵, D. Bonino²⁷, E. Branchini^{28,29,21}, M. Brescia^{30,18,9}, J. Brinchmann³¹, S. Camera^{32,33,27}, V. Capobianco²⁷, C. Carbone³⁴, J. Carretero^{35,36}, S. Casas³⁷, S. Cavuoti^{18,9}, A. Cimatti³⁸, G. Congedo³⁹, L. Conversi^{40,2}, Y. Copin⁴¹, F. Courbin⁴², H. M. Courtois⁴³, M. Cropper⁴⁴, A. Da Silva^{45,46}, H. Degaudenzi⁴⁷, A. M. Di Giorgio⁴⁸, J. Dinis^{46,45}, F. Dubath⁴⁷, X. Dupac², S. Dusini⁴⁹, M. Farina⁴⁸, S. Farrens⁵⁰, S. Ferriol⁴¹, S. Fotopoulou⁵¹, M. Frailis⁵², E. Franceschi²², P. Franzetti³⁴, M. Fumana³⁴, S. Galeotta⁵², B. Garilli³⁴, B. Gillis³⁹, C. Giocoli^{22,53}, A. Grazian⁵⁴, F. Grupp^{25,55}, S. V. H. Haugan⁵⁶, W. Holmes⁵⁷, I. Hook⁵⁸, F. Hormuth⁵⁹, A. Hornstrup^{60,61}, P. Hudelot⁶², K. Jahnke⁶³, E. Keihänen⁶⁴, S. Kermiche⁶⁵, A. Kiessling⁵⁷, M. Kilbinger⁶⁶, B. Kubik⁴¹, M. Kümmel²⁶, M. Kunz⁶⁷, H. Kurki-Suonio^{68,69}, R. Laureijs⁷⁰, S. Ligori²⁷, P. B. Lilje⁵⁶, V. Lindholm^{68,69}, I. Lloro⁷¹, E. Maiorano²², O. Mansutti⁵², O. Marggraf⁷², K. Markovic⁵⁷, N. Martinet⁷³, F. Marulli^{74,22,24}, R. Massey⁷⁵, S. Maurogordato⁷⁶, E. Medinaceli²², S. Mei⁷⁷, Y. Mellier^{78,62}, M. Meneghetti^{22,24}, E. Merlin⁸, G. Meylan⁴², M. Moresco^{74,22}, L. Moscardini^{74,22,24}, E. Munari⁵², S.-M. Niemi⁷⁰, C. Padilla³⁵, S. Paltani⁴⁷, F. Pasian⁵², K. Pedersen⁷⁹, W. J. Percival^{80,81,82}, V. Pettorino⁸³, S. Pires⁵⁰, G. Polenta⁸⁴, M. Poncel⁸⁵, L. A. Popa⁸⁶, L. Pozzetti²², F. Raison²⁵, R. Rebolo^{4,87}, A. Renzi^{88,49}, J. Rhodes⁵⁷, G. Riccio¹⁸, E. Romelli⁵², M. Roncarelli²², E. Rossetti²³, R. Saglia^{26,25}, D. Saponi⁸⁹, B. Sartoris^{26,52}, M. Schirmer⁶³, P. Schneider⁷², A. Secroun⁶⁵, G. Seidel⁶³, S. Serrano^{90,91,92}, C. Sirignano^{88,49}, G. Sirri²⁴, L. Stanco⁴⁹, J.-L. Starck⁶⁶, P. Tallada-Crespi^{93,36}, A. N. Taylor³⁹, H. I. Teplitz⁹⁴, I. Tereno^{45,95}, R. Toledo-Moreo⁹⁶, F. Torradeflot^{36,93}, I. Tutusaus⁹⁷, E. A. Valentijn¹⁴, L. Valenziano^{22,98}, T. Vassallo^{26,52}, A. Veropalumbo^{21,29}, Y. Wang⁹⁴, J. Weller^{26,25}, A. Zacchei^{52,99}, G. Zamorani²², J. Zoubian⁶⁵, E. Zucca²², A. Biviano^{52,99}, M. Bolzonella²², A. Boucaud⁷⁷, E. Bozzo⁴⁷, C. Burigana^{100,98}, C. Colodro-Conde⁴, D. Di Ferdinando²⁴, R. Farinelli²², J. Graciá-Carpio²⁵, G. Mainetti¹⁰¹, S. Marcin¹⁰², N. Mauri^{38,24}, C. Neissner^{35,36}, A. A. Nucita^{103,104,105}, Z. Saki^{106,97,107}, V. Scottez^{78,108}, M. Tenti²⁴, M. Viel^{99,52,109,110,111}, M. Wiesmann⁵⁶, Y. Akrami^{112,113}, V. Allevalo¹⁸, S. Anselmi^{88,49,114}, C. Baccigalupi^{109,52,110,99}, M. Ballardini^{115,116,22}, S. Borgani^{117,99,52,110}, A. S. Borlaff^{118,119,120}, H. Bretonnière¹²¹, S. Bruton¹²², R. Cabanac⁹⁷, A. Calabro⁸, A. Cappi^{22,76}, C. S. Carvalho⁹⁵, G. Castignani^{74,22}, T. Castro^{52,110,99,111}, G. Cañas-Herrera^{70,123}, K. C. Chambers¹²⁴, J. Coupon⁴⁷, O. Cucciati²², S. Davini²⁹, G. De Lucia⁵², G. Desprez¹²⁵, S. Di Domizio^{28,29}, H. Dole¹⁹, A. Díaz-Sánchez¹²⁶, J. A. Escartin Vigo²⁵, S. Escoffier⁶⁵, I. Ferrero⁵⁶, F. Finelli^{22,98}, L. Gabarra^{88,49}, K. Ganga⁷⁷, J. García-Bellido¹¹², E. Gaztanaga^{91,90,20}, K. George²⁶, F. Giacomini²⁴, G. Gozaliasl^{127,68}, A. Gregorio^{117,52,110}, D. Guinet⁴¹, A. Hall³⁹, H. Hildebrandt¹²⁸, A. JIMENEZ MUNOZ¹²⁹, J. J. E. Kajava^{130,131}, V. Kansal^{132,133,134}, D. Karagiannis¹³⁵, C. C. Kirkpatrick⁶⁴, L. Legrand⁶⁷, A. Loureiro^{136,137}, J. Macias-Perez¹²⁹, M. Magliocchetti⁴⁸, R. Maoli^{138,8}, M. Martinelli^{8,139}, C. J. A. P. Martins^{140,31}, S. Matthew³⁹, M. Maturi^{106,141}, L. Maurin¹⁹, R. B. Metcalf^{74,22}, M. Migliaccio^{142,143}, P. Monaco^{117,52,110,99}, G. Morgante²², S. Nadathur²⁰, Nicholas A. Walton¹⁴⁴, A. Peel⁴², A. Pezzotta²⁵, V. Popa⁸⁶, C. Porciani⁷², D. Potter¹⁴⁵, M. Pöntinen⁶⁸, P. Reimberg⁷⁸, P.-F. Rocci¹⁹, A. G. Sánchez²⁵, A. Schneider¹⁴⁵, E. Sefusatti^{52,110,99}, M. Sereno^{22,24}, P. Simon⁷², A. Spurio Mancini⁴⁴, S. A. Stanford¹⁴⁶, J. Steinwagner²⁵, G. Testera²⁹, M. Tewes⁷², R. Teyssier¹⁴⁷, S. Toft^{61,148,149}, S. Tosi^{28,29,21}, A. Troja^{88,49}, M. Tucci⁴⁷, C. Valieri²⁴, J. Valiviita^{68,69}, D. Vergani²², and I. A. Zinchenko²⁶

(Affiliations can be found after the references)

Received —; accepted —

ABSTRACT

The *Euclid* mission is expected to image millions of galaxies with high resolution, providing an extensive dataset to study galaxy evolution. Because galaxy morphology is both a fundamental parameter and one that is hard to determine for large samples, we investigate the application of deep learning to predict the detailed morphologies of galaxies in *Euclid*, using Zoobot, a convolutional neural network pretrained with 450 000 galaxies from the Galaxy Zoo project. We adapted Zoobot for emulated *Euclid* images, generated based on *Hubble* Space Telescope COSMOS

images, and with labels provided by volunteers in the Galaxy Zoo: Hubble project. We experimented with different numbers of galaxies and various magnitude cuts during the training process. We demonstrate that the trained Zoobot model successfully measures detailed morphology for emulated *Euclid* images. It effectively predicts whether a galaxy has features and identifies and characterises various features such as spiral arms, clumps, bars, disks, and central bulges. When compared to volunteer classifications, Zoobot achieves mean vote fraction deviations of less than 12% and an accuracy above 91% for the confident volunteer classifications across most morphology types. However, the performance varies depending on the specific morphological class. For the global classes such as disk or smooth galaxies, the mean deviations are less than 10%, with only 1000 training galaxies necessary to reach this performance. On the other hand, for more detailed structures and complex tasks like detecting and counting spiral arms or clumps, the deviations are slightly higher, around 12% with 60 000 galaxies used for training. In order to enhance the performance on complex morphologies, we anticipate that a larger pool of labelled galaxies is needed, which could be obtained using crowdsourcing. We estimate that with our model the detailed morphology for approximately 800 million galaxies of the Euclid Wide Survey could be reliably measured and that approximately 230 million of these galaxies will display features. Finally, our findings imply that the model can be effectively adapted to new morphological labels. We demonstrate this adaptability by applying Zoobot to peculiar galaxies. In summary, our trained Zoobot CNN can readily predict morphological catalogues for *Euclid* images.

Key words. galaxies: structure - galaxies: evolution - techniques: image processing - methods: data analysis - methods: observational

1. Introduction

Euclid is a space-based mission of the European Space Agency (ESA) launched in 2023, operating in the optical and near-infrared with the primary goal to achieve a better understanding of the accelerated expansion of the Universe and the nature of dark matter (Laureijs et al. 2011) and a broad range of secondary goals. The Euclid Wide Survey (Euclid Collaboration; Scaramella et al. 2022) will cover approximately 15 000 deg² of the extragalactic sky, corresponding to 36% of the celestial sphere. The angular resolution of 0''.2 of the *Euclid* visible imager (VIS, Cropper et al. 2016) is comparable to that of the Hubble Space Telescope (HST) Advanced Camera for Surveys (ACS), while the field of view of 0.53 deg² is 175 times larger. *Euclid* is expected to image billions of galaxies to $z \approx 2$ and a depth of 24.5 mag at 10σ for extended sources (galaxy sizes of $\sim 0''.3$) in the VIS band (Laureijs et al. 2011). It will therefore resolve the internal morphologies of an unprecedented number of galaxies, estimated at approximately 250 million (Euclid Collaboration; Bretonnière et al. 2022). Many will display complex features such as clumps, bars, spiral arms or bulges.

Large samples of galaxies with measured detailed morphologies are crucial to understand galaxy evolution and its impact on galaxy structure (Masters 2019). For example, bars are believed to funnel gas inwards from the spiral arms and may lead to the growth of a central bulge (Sakamoto et al. 1999; Masters et al. 2010; Kruk et al. 2018). *Euclid* will provide an unprecedentedly large dataset of galaxy images with resolved morphology (Euclid Collaboration; Bretonnière et al. 2022) which is essential for studies in galaxy evolution. This includes studying the evolution of morphology with redshift and environment, where *Euclid* will offer the necessary statistics for analyzing trends in stellar mass, color, etc., thereby enabling the distinction of complex correlations. However, accurately measuring the morphologies and structures of galaxies will be a challenge.

Numerous methods for diverse applications have been developed to quantify galaxy morphologies from imaging data. These include visual classifications (Hubble 1926; de Vaucouleurs 1959; Lintott et al. 2008; Bait et al. 2017), non-parametric morphologies (Conselice 2003; Lotz et al. 2004), galaxy profile fitting (Sérsic 1968; Peng et al. 2002), and machine learning techniques (Huertas-Company et al. 2015; Vega-Ferrero et al. 2021). Many approaches perform measurements in an automated or semi-automated manner, while some facilitate the decomposition of galaxies into multiple constituents, such as bulges and disks, or combine several parameters to scrutinise current models. In a recent study, Euclid Collaboration; Bretonnière et al.

(2023) compared the performance of five modern morphology fitting codes on simulated galaxies mimicking incoming *Euclid* images. These galaxies were generated as simplified models with single-Sérsic and double-Sérsic profiles and as neural network-generated galaxies with more detailed morphologies. This *Euclid* Morphology Challenge primarily aimed to quantify galaxy structures using analytic functions that describe the shape of the surface brightness profile. However, it also highlighted the necessity for additional efforts to fully capture the richness of the detailed morphologies that *Euclid* will uncover on a larger scale.

Expert visual classifications have been proven to be successful for measuring detailed morphology for several decades (Hubble 1926; de Vaucouleurs 1959; Sandage 1961; van den Bergh 1976; de Vaucouleurs et al. 1991; Baillard et al. 2011; Bait et al. 2017). However, they do not scale well to large surveys and reproducibility is challenging.

The Galaxy Zoo project (Lintott et al. 2008) was set up to harness the collective efforts of thousands of volunteers to classify galaxies from the Sloan Digital Sky Survey (SDSS). With Galaxy Zoo, the number of classified galaxies has significantly increased, with more than 1 million galaxies classified so far. The capability of humans to collectively recognize detailed and faint features in galaxies is unrivalled. However, the number of volunteers on the citizen science platform does not scale well with the sizes of the next generation of surveys, i.e., by the Large Synoptic Survey Telescope (LSST, Ivezić et al. 2019) of the Vera Rubin Observatory and by *Euclid*. *Euclid* will image more than a billion galaxy images (Laureijs et al. 2011). It is unfeasible to classify such a large sample with citizen science alone.

This problem can be solved with machine learning. Using machine learning in classifying galaxy morphology is well established (Dieleman et al. 2015; Huertas-Company et al. 2015; Domínguez Sánchez et al. 2018, 2019; Cheng et al. 2020; Vega-Ferrero et al. 2021; Walmsley et al. 2022a). Supervised approaches using convolutional neural networks (CNN) have proven to be effective for this task. Walmsley et al. (2022a) showed that the Galaxy Zoo volunteer responses can be used to train a deep learning model, called Zoobot (Walmsley et al. 2023a), which is able to automatically predict the volunteer labels and therefore the detailed morphologies of galaxies.

The goal of this study is to evaluate the feasibility of predicting detailed morphologies for emulated *Euclid* galaxy images with Zoobot and to test the performance. For this, we used emulated *Euclid* images based on the Cosmic Evolution Survey (COSMOS, Scoville et al. 2007b). We trained Zoobot and assessed its performance on these images using morphology labels provided by volunteers in the Galaxy Zoo: Hubble (GZH, Willett et al. 2017) citizen science project. Ultimately, the goal is

* e-mail: ausse1.ben@uni-muenster.de

to apply Zoobot to the future *Euclid* galaxy images to generate automated detailed morphology predictions.

This paper is structured as follows: In Sect. 2, the volunteer morphology classifications from GZH and their corresponding HST COSMOS images are introduced. We explain how these images were converted to emulated *Euclid* images. The Zoobot CNN and the process of fine-tuning is presented in Sect. 3. In Sect. 4, we describe the training of Zoobot for the GZH labels and emulated *Euclid* images. We also describe the different experiments that we conducted in this study. In Sect. 5, we present and discuss our results. First, we show comparisons of the model trained with different data. We then evaluate the model predictions of the best performing model in detail. Furthermore, we compare the performance on emulated *Euclid* images and on the original *Hubble* images. An example of fine-tuning Zoobot to a new morphology class (finding peculiar galaxies) is presented in Sect. 6. Finally, we summarize our results and discussions and give an outlook towards the real *Euclid* images in Sect. 7.

2. Data

In this study, we aim to generate automated detailed morphology predictions on emulated *Euclid* images, test our pipeline, and evaluate its performance to be able to estimate the quality of future predictions.

To emulate the future *Euclid* images from existing galaxy images, these need to have at least the same spatial resolution and depth at approximately the same wavelength range as VIS (Cropper et al. 2016). As we are following a supervised deep learning approach, these existing galaxy images need to have reliable morphology labels to train our model and evaluate our results. All these requirements are fulfilled with the COSMOS (Scoville et al. 2007b) galaxy images labelled by volunteers in the GZH (Willett et al. 2017) project.

2.1. Images

2.1.1. Hubble Space Telescope COSMOS images

We utilized COSMOS galaxy images (Scoville et al. 2007b). For the COSMOS survey, an area of 1.64 deg^2 was observed with the ACS Wide Field Channel of HST in the F814W filter with an angular resolution of $0''.09$ (Scoville et al. 2007a; Koekemoer et al. 2007). We used the publicly available mosaics in the FITS format with a final drizzle pixel scale of $0''.03$. The limiting point source depth at 5σ is 27.2 mag . Therefore, the depth and resolution are better than those estimated for *Euclid* (24.5 mag at 10σ for sources with $\sim 0''.3$ extent and $0''.2$, Cropper et al. 2016). The wavelength range of the *Euclid* VIS band (550–900 nm) includes the F814W band of Hubble. While ideally, data from other HST filters such as F606W could be combined to emulate the *Euclid* VIS observations, the extensive COSMOS survey provides only single-band F814W images. We utilized the same dataset from COSMOS that was used in GZH (Willett et al. 2017). For the morphological classifications by the volunteers, Willett et al. (2017) applied a magnitude restriction of $m_{F814W} < 23.5$, yielding a total of 84 954 galaxies.

2.1.2. Emulated *Euclid* COSMOS images

We used available emulated *Euclid* images generated from the previously described COSMOS images that were created as part of the *Euclid* Data Challenge 2, with the goal of testing the steps

of the data processing for *Euclid*. The area covered by these images is $1''.2 \times 1''.2$, thus, smaller than the original COSMOS field. Therefore, only 76 176 images from the GZH COSMOS set were available. The images are emulated to be *Euclid* VIS-like and are expected to match the properties of *Euclid* data, on a reduced scale.

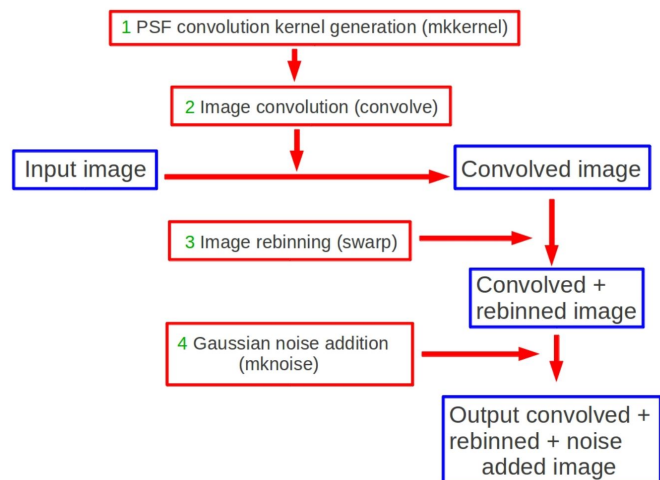


Fig. 1. Data pipeline scheme for the emulated *Euclid* VIS images created as part of the *Euclid* Data Challenge 2. The green numbers correspond to the numbers of the description of the pipeline given in the text.

The original HST COSMOS images were rebinned and smoothed to the *Euclid* pixel scale ($0''.1$, Laureijs et al. 2011), convolved with a kernel of the difference between the HST ACS and *Euclid* VIS point spread function (PSF) to emulate the resolution of *Euclid* ($0''.2$) and with random Gaussian noise added in order to match the *Euclid* VIS depth (24.5 mag for galaxy sizes of $\sim 0''.3$, Cropper et al. 2016). The emulation software takes as input a high-resolution image (HST COSMOS image in this case) and processes it to emulate a VIS-like image, taking the following steps (see Fig. 1):

1. generate an analytical kernel according to the input image PSF of HST ACS and the PSF of the *Euclid* VIS instrument,
2. convolve the input image according to the previously generated kernel,
3. perform the rebinning of the convolved image to the required pixel scale ($0''.1$), and
4. add Gaussian noise in each pixel to reproduce the desired depth in output.

For all galaxies of our dataset, we extracted cutouts from the available emulated *Euclid* greyscale FITS files with the galaxy in the centre. The sizes of the cutouts were based on the sizes of the galaxies, using 3 times the Kron radius ($3 \times \text{KRON_RADIUS_HI}$ in Griffith et al. 2012) for each galaxy in order to appear large enough to identify features, but not exceeding the image boundaries. We chose the Kron radius as a measure of galaxy size as it is least sensitive to the galaxy type. With this, the influence of relatively smaller galaxy sizes at higher redshifts on the performance of the network was taken out. The size of the images varies between $10''.5$ and $38''.3$, with a median of $12''.5$. As in Willett et al. (2017), we applied an arcsinh intensity mapping to the images to avoid a saturation of galaxy centres, while increasing the appearance of faint features. We saved the resulting cutouts as 300×300 pixel images in the JPG format to reduce the required memory. To conclude, the images have different pixel

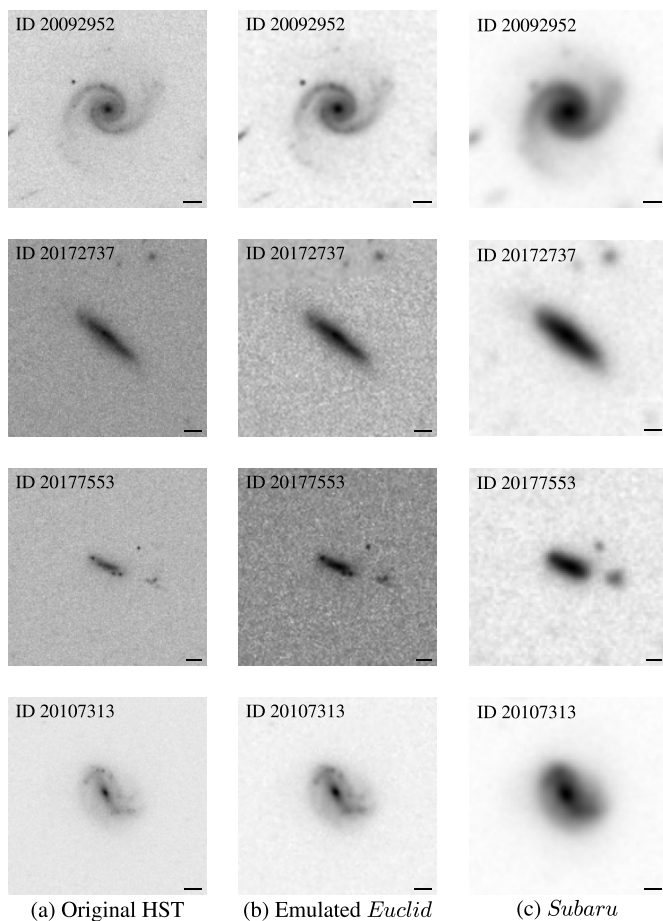


Fig. 2. Examples of galaxy images (inverted greyscale) of different morphological types (image IDs 20092952, 20172737, 20177553, 20107313): (a) from the original HST COSMOS dataset, (b) from the emulated *Euclid* VIS dataset, and (c) from the *Subaru* dataset. The images are scaled with galaxy size using 3 times the Kron radius. The black bars represent a length of 1". The image IDs are the unique identifiers for the galaxies of the COSMOS survey (Griffith et al. 2012).

scales, but approximately the same relative galaxy size compared to the background.

To measure the impact of the lower resolution and noise of the *Euclid* images on the galaxy classifications, we also created 300×300 pixel JPG cutouts for the original HST COSMOS images with an arcsinh intensity mapping. Additionally, we created similar cutouts for the same galaxies imaged by the ground-based *Subaru* telescope (Kaifu et al. 2000; Taniguchi et al. 2007). To illustrate the effect of the emulation, we show in Fig. 2 example galaxy images with different morphologies (a) from the original HST COSMOS dataset, (b) from the emulated *Euclid* dataset and (c) from the *Subaru* dataset. These examples demonstrate that although the morphology is still identifiable, in general, the *Euclid* images have a lower resolution, potentially leading to different classifications, especially for faint galaxies.

2.2. Volunteer labels

We utilized the GZH volunteer classifications (Willett et al. 2017) for the same galaxies for which the previously described emulated *Euclid* images were created. Volunteers on the citizen science project answered a series of questions about the morphology of a set of galaxy images. GZH used COSMOS images

with ‘pseudo-colour’. The I_{814W} data was used as an illumination map and the colour information was provided from the B_J , r^+ , and i^+ filters of the Subaru telescope (Griffith et al. 2012). Thus, the galaxy images shown to the volunteers had HST’s angular resolution for the intensity, but the colour gradients were at ground-based resolution. The size of the cutouts corresponded to the galaxy size. Thus, the galaxies had different resolutions but relatively the same size, similar to our emulated *Euclid* images. An arcsinh intensity mapping was applied before the images were shown as 424×424 pixels PNGs to the volunteers.

The series of questions, asked to the volunteers, was structured as a decision tree (Willett et al. 2017) shown in Fig A.1. Some questions were only asked if for the previous question a certain answer was selected. The decision tree was designed similarly to that used in Galaxy Zoo 2 (GZ2, Willett et al. 2013) with some differences, involving questions for clumpiness, as expected for the high-redshift galaxies in the COSMOS dataset. We used the published dataset from Willett et al. (2017), which contains for every galaxy and for every classification the number of volunteers that answered the question and the respective vote fractions for each answer. It also provides metadata such as photometric redshifts and magnitudes. As mentioned before, the publicly available dataset has a restriction of $m_{J814W} < 23.5$, meaning that no labels are available for fainter galaxies. We used the GZH volunteer classifications for all available 76 176 emulated *Euclid* galaxy images.

3. Zoobot

The newly developed and publicly released Python package Zoobot (Walmsley et al. 2023a) is a CNN trained for predicting detailed galaxy morphology, such as bars, spiral arms, and disks. In this section, we describe the Zoobot CNN and how we adapted it to the emulated *Euclid* images with the corresponding GZH volunteer labels.

3.1. Bayesian neural network: Zoobot

Zoobot was initially developed to automatically predict detailed morphology for Dark Energy Camera Legacy Survey (DECaLS) (Dey et al. 2019) DR5 galaxy images (Walmsley et al. 2022a). It was trained on the corresponding volunteer classifications from the Galaxy Zoo: DECaLS (GZD) GZD-5 campaign. The 249 581 GZD-5 volunteer classifications were used for training Zoobot on the questions in the GZD-5 decision tree. The volunteer responses for the different questions had different uncertainties, depending on how many volunteers answered a question for a specific galaxy image.

The Bayesian Zoobot CNN learns from all volunteer responses while taking the corresponding uncertainty into account (Walmsley et al. 2022a). Thus, all GZD-5 galaxies could be included in the training. Zoobot was trained on all classification tasks (i.e., all questions of the GZD-5 decision tree) simultaneously, leading to shared representations of the galaxies and to increased performance for all tasks. The base architecture of Zoobot is the EfficientNet B0 model (Tan & Le 2019) with a modified final output layer (Walmsley et al. 2022a). The layer consists of one output unit per answer of the decision tree, giving predictions between 1 and 100 using softmax or sigmoid activation. Zoobot does not predict discrete classes, but Dirichlet-Multinomial posteriors that can be transformed into predicted vote fractions. This is achieved by utilizing a Dirichlet-

Multinomial loss function for each question q

$$\mathcal{L}_q = \sum_q \int \text{Multinomial}(\mathbf{k}_q | \boldsymbol{\rho}, N_q) \text{Dirichlet}(\boldsymbol{\rho} | \boldsymbol{\alpha}) d\boldsymbol{\rho}, \quad (1)$$

with the total number of responses N_q to the question q , \mathbf{k}_q the ground truth number of votes for each answer, and $\boldsymbol{\rho}$ the probabilities of a volunteer giving each answer. The model predicts the Dirichlet parameters $\boldsymbol{\alpha} = \mathbf{f}_q$ to the answers measured via the values of the output units of the final layer. Each vector has one element per answer. The integral is analytic as Multinomial and Dirichlet distributions are conjugates. The loss is then applied by summing over all questions of the decision tree

$$\ln \mathcal{L} = \sum_q \mathcal{L}_q, \quad (2)$$

with the assumption that answers to different questions are independent. The loss naturally handles volunteer votes with different uncertainties (i.e., different number of responses), as e.g., questions with no answers do not influence the gradients in training, since $\partial L_q(\mathbf{k}_q = 0, N_q = 0, \boldsymbol{\alpha}) / \partial \boldsymbol{\alpha} = 0$. We refer the reader to Walmsley et al. (2022a) and Walmsley et al. (2022c) for further details.

Zoobot is therefore well suited for our goal of automatically predicting detailed morphology for *Euclid* galaxy images. With Zoobot, we can train on all available emulated *Euclid* galaxies with their GZH labels, since it takes the uncertainty of the volunteer answers into account. We have to train only one model for all galaxy morphology types, since Zoobot is trained on all questions simultaneously. Rather than just discrete classifications, we generate posteriors.

3.2. Transfer learning

The trained Zoobot models can be adapted (‘fine-tuned’) to solve a new task for galaxy images (Walmsley et al. 2023a). This adaption of a previously trained machine learning model to a new problem is called transfer learning (Lu et al. 2015). Instead of retraining all model parameters, the original model architecture and the corresponding parameters (weights) learned from the previous training can be re-used. Far fewer new labels for the same performance are required using transfer learning compared to training from scratch (Domínguez Sánchez et al. 2019; Walmsley et al. 2022b). In Walmsley et al. (2022b) the adaption of Zoobot to the new problem of finding ring galaxies is described. The pretrained Zoobot models outperformed models built from scratch, especially when the number of images involved in the training was limited. Pretraining on all GZD-5 tasks, i.e., using shared representations, also leads to higher accuracy for finding ring galaxies than pretraining on only a single task.

In Walmsley et al. (2022c) the GZ-Evo dataset was introduced, which is a combined dataset from all major Galaxy Zoo campaigns. The included campaigns were Galaxy Zoo 2 (GZ2, Willett et al. 2013) trained on galaxy images from the Sloan Digital Sky Survey (SDSS) Data Release 7, Galaxy Zoo: CANDELS (GZC, Simmons et al. 2017) trained on galaxy images from the COSMIC Assembly Near-infrared Deep Extragalactic survey (CANDELS) also involving HST images (Grogin et al. 2011), and the previously described GZD-5 (Walmsley et al. 2022a) and GZH (Willett et al. 2017). Additionally, Galaxy Zoo labels from the Mayall z -band Legacy Survey (MzLS) and the Beijing-Arizona Sky Survey (BASS, Dey et al. 2019) were used, which

are part of Galaxy Zoo DESI (Walmsley et al. 2023b). Zoobot was trained on all 206 possible morphology classifications of the different campaigns simultaneously, with the involved Dirichlet loss naturally handling unknown answers from different decision trees (Walmsley et al. 2022c). Pretraining with GZ-Evo shows further improvements for the task of finding ring galaxies compared to direct training. With training from different campaigns, Walmsley et al. (2022c) hypothesize that because the model was trained on all galaxy images from different campaigns (having different redshifts and magnitudes) and on all possible questions, the model builds a galaxy representation of high generalization. Therefore, we expect this model to be best suited to be adapted to our new tasks.

We thus used a version of Zoobot pretrained on a modified GZ-Evo catalogue, i.e., pretrained on all major Galaxy Zoo campaigns with the exception of GZH in order to not influence our results when training to the GZH decision tree. In total, 450 000 galaxy images with volunteer classifications were involved in the pretraining. We also conducted experiments with versions of Zoobot pretrained with different datasets (pretrained on GZD-5 galaxies and without pretraining). The results for these models are presented in Appendix B. We adapted the pretrained Zoobot model to our new problem. This involved two new tasks simultaneously: (i) training on new images, namely the emulated *Euclid* VIS images, and (ii) training on a new decision tree.

4. Training

In this section, we present how we used the GZH volunteer labels to train Zoobot (Sect. 4.1). Furthermore, we describe the experiments we conducted for the training, i.e., restricting the magnitude and number of examples used for training (Sect. 4.2). Lastly, we present how each model was trained in more detail (Sect. 4.3).

4.1. Preparing the datasets

Unlike the GZD-5 decision tree used in Walmsley et al. (2022a), the GZH decision tree incorporates questions that have multiple possible answers, although not all leading to the same subsequent question (see Fig. A.1 and Willett et al. 2017). Since Zoobot does not support this type of structure, we simply excluded the subsequent questions associated with such cases. The remaining questions and their corresponding answers used in this study can be found in Table 1. Moreover, similar to Walmsley et al. (2022a), we utilized the raw vote counts as we fine-tuned previously trained Zoobot models that have already been trained on the raw vote counts. Moreover, the utilized Dirichlet-Multinomial loss (see Eq. 1) is statistically only valid when using raw vote counts. Assessing Zoobot’s performance when considering votes weighted by user performance or debiased for observational effects is beyond the scope of this research.

Additionally, we provide the average number of volunteer responses for each question in Table 1. Furthermore, we list the fraction f_{rel} of galaxies for which the question is deemed relevant. We define a galaxy to be relevant for a specific question when at least half of the volunteers answered that question (e.g., measuring the number of spiral arms is only meaningful if the majority of volunteers classified the galaxy as spiral in the previous question), similar to the approach taken by Walmsley et al. (2022a). Since every volunteer responded to the initial question of ‘smooth-or-featured’, this question has the highest number of responses. However, with the exception of the ‘how-rounded’ question, all subsequent questions were asked only if

the answer to the first question was ‘featured’. Consequently, the number of responses decreases substantially as one progresses in the decision tree, resulting in greater uncertainty. As previously mentioned, Zoobot is able to learn from uncertain volunteer responses.

Table 1. The questions and corresponding answers from GZH used for training Zoobot. Additionally, we list the mean number of volunteer responses N for every question and the fraction of relevant galaxies f_{rel} , i.e., where at least half of the volunteers answered the question.

| Question | Answers | N | f_{rel} |
|--------------------|--|------|------------------|
| smooth-or-featured | smooth, features, artifact | 46.1 | 100.0% |
| disk-edge-on | yes, no | 8.1 | 6.1% |
| has-spiral-arms | yes, no | 6.5 | 4.9% |
| bar | yes, no | 7.1 | 6.1% |
| bulge-size | none, just-noticeable, obvious, dominant | 7.1 | 6.1% |
| how-rounded | completely, in-between, cigar-shaped | 7.1 | 63.4% |
| bulge-shape | rounded, boxy, none | 1.6 | 0.4% |
| spiral-winding | tight, medium, loose | 3.6 | 4.8% |
| spiral-arm-count | 1, 2, 3, 4, 5-plus, can’t-tell | 3.6 | 4.8% |
| clumpy-appearance | yes, no | 13.1 | 13.9% |
| clump-count | 1, 2, 3, 4, 5-plus, can’t-tell | 5.0 | 1.9% |
| galaxy-symmetrical | yes, no | 4.4 | 1.2% |
| clumps-embedded | yes, no | 4.4 | 1.2% |

Our dataset contains 76 176 greyscale galaxy images with detailed morphology labels. This dataset, referred to as the ‘complete set’, encompasses all available images. It has a magnitude range of $10.5 < m_{J814W} < 23.5$ and a redshift range of $0 < z < 4.1$. In order to ensure an unbiased evaluation of the model, we divided this set into two distinct subsets: one for training and validation, and another independent test set for evaluation purposes. To accomplish this, we performed a random split of 80% for training and validation, and the remaining 20% for the test set. Subsequently, we further split the training and validation set using another random 80/20 percent split. The resulting datasets are listed in Table 2.

Table 2. The datasets of *Euclid* images with GZH labels used in this study.

| Dataset | Type of set | Restriction | Number of galaxies |
|----------|-------------|--------------------|--------------------------|
| complete | train / val | - | 60 940 (48 752 / 12 188) |
| complete | test | - | 15 236 |
| bright | train / val | $m_{J814W} < 22.5$ | 27 882 (22 306 / 5576) |

4.2. Experiments

The *Euclid* mission is anticipated to generate an unparalleled number of galaxy images with approximately 250 million having resolved internal morphology (Euclid Collaboration: Bretonnière et al. 2022), but humans will only have limited capacity to label them. Consequently, it is important to assess the number of labelled galaxies required to achieve satisfactory performance in morphology predictions (Sect. 4.2.1). Additionally, we aim to investigate the selection criteria for which galaxies to label (Sect. 4.2.2). Suppose a person has the capacity to label 1000 galaxy images. Will the automated predictions get better if those

1000 galaxies are selected randomly, or if 1000 bright galaxies are used instead?

4.2.1. Restricting the training set size

Our goal is to assess the performance of Zoobot based on a limited number of galaxies used for training. Hence, we randomly chose a specific number N_{train} of galaxy images from the training and validation sets (refer to Table 2). These selected images were then used for training. To ensure a fair comparison between all models, we consistently evaluated the performance on the complete test set, without excluding any images.

4.2.2. Restricting the magnitude

Typically, assessing the morphology of brighter galaxies is more straightforward compared to fainter ones. Our goal here is to investigate whether our automated morphology predictions have a better performance when trained on bright galaxies or on randomly selected galaxies from the complete dataset, especially when the number of examples is limited. We therefore created, from our complete training and validation set, a subset which we refer to as the ‘bright set’, by applying a magnitude restriction of $m_{J814W} < 22.5$. This resulted in a bright training and validation set comprising 27 882 images. Similar to the complete set, we then performed an 80/20 percent split for training and validation purposes (see Table 2).

4.3. Training Zoobot

We utilized the TensorFlow (Abadi et al. 2016) implementation of Zoobot (Walmsley et al. 2023a). We trained Zoobot on the datasets shown in Table 2 by using the fine-tuning procedure described in the code of Walmsley et al. (2023a). For this, we replaced the original model head with a single dense layer with the number of neurons corresponding to the number of GZH answers used, i.e., 40 neurons for 40 answers to 13 questions (see Table 1). As in Walmsley et al. (2022c), we selected the sigmoid activation function for the final layer to predict scores between 1 and 100 corresponding to the Dirichlet parameters (see Eq. 1). The JPG images with the applied arcsinh intensity mapping (see Sect. 2.1.2) were normalized to values between 0 and 1 before feeding them into the network. Additionally, we applied similar augmentations as Walmsley et al. (2022a) to all images during training, i.e., a random vertical flip of the image with a probability of 0.5 and a rotation by a random angle. As in the code of Walmsley et al. (2023a), the training process was divided into two parts: at first, we only trained the new head, and in a second step the entire model, as soon as the validation loss was not decreasing for more than 20 consecutive epochs. Furthermore, we reduced the learning rate by a factor of 0.25 when the validation loss did not decrease for ten consecutive epochs. The chosen hyperparameters were selected as they lead to the best model performance in comparison to multiple other tested values. We used the Adam optimizer (Kingma & Ba 2015) for training. We trained the pretrained model with the bright and complete training sets with different numbers of images ranging between 5 and all the available images (see Table 2). To evaluate how *Euclid*’s lower resolution and noise affect the performance of our model, we conducted separate training using the original HST COSMOS images for the same set of galaxies (see Sect. 2). This approach allows us to analyse the impact independently of training with a new decision tree.

5. Results: Zoobot for *Euclid* images

We trained Zoobot to emulate *Euclid* VIS images with GZH labels. In Sect. 5.1, we compare the various models trained in this study, i.e., trained with different number of images from the bright or complete sets. We then evaluate the model with the best performance on *Euclid* images in detail in Sect. 5.2.

5.1. Comparing models – The impact of number of training galaxies and magnitude restriction

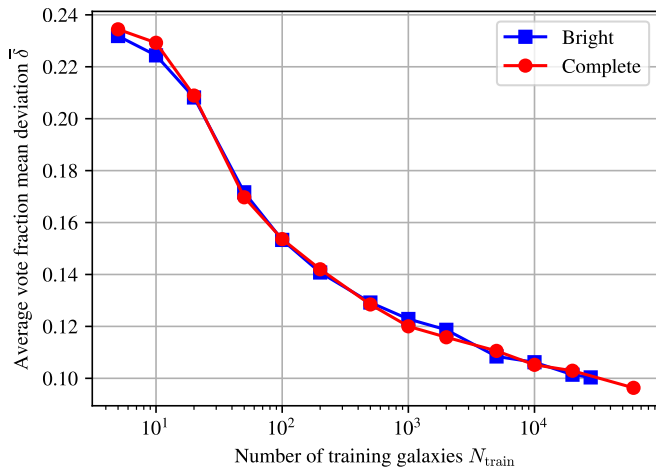


Fig. 3. The vote fraction mean deviation averaged over all morphology answers $\bar{\delta}$ as a function of the number of galaxies N_{train} from the bright and complete set used for training. To ensure consistent comparison, the predictions were done on the complete test set. Lower values indicate better performance

Zoobot is not predicting discrete classes, but rather posteriors that can be converted into vote fractions (values between 0 and 1). This is accomplished by dividing the predicted Dirichlet parameter for a particular answer by the sum of the parameters of all answers to the corresponding question. To evaluate the performance of Zoobot, we utilize the predicted vote fractions and compare them with the corresponding volunteer vote fractions (considered to be ‘ground truth’ vote fractions). This allows for a comprehensive assessment of Zoobot’s performance. To ensure the inclusion of only relevant galaxies for a specific question, we consider galaxies for which at least half of the volunteers provided an answer (see Table 1). Following the method described in Walmsley et al. (2022a), for a given answer i to a morphology question j , we calculate the absolute difference between the predicted vote fraction f_{pred} and the volunteer vote fraction f_{gt} for each relevant galaxy in the test set. We then average these differences over all relevant galaxies n_j as

$$\delta_i := \overline{|f_{\text{pred}} - f_{\text{gt}}|}. \quad (3)$$

To allow for easier comparison among different models, while considering the performance on all answers, we calculate the unweighted average of all δ_i values. This aggregated measure, referred to as the averaged vote fraction mean deviation $\bar{\delta}$, serves as our primary metric for comparison, with lower values indicating better performance. For consistency, we evaluate the models using predictions on the same complete test set consisting of 15 236 images (see Table 2).

5.1.1. Overview

We show in Fig. 3 the model performance (given by the averaged mean vote fraction deviations $\bar{\delta}$) depending on the number of training galaxy images used, N_{train} , for the models trained on galaxies from the bright and complete set. The figure summarizes our experiments with different magnitude restrictions and number of training images.

As expected, with increasing number of training galaxies, the average mean deviation $\bar{\delta}$ is decreasing: the more galaxy examples (of different types) are used for training, the better the model predictions get for all answers. Notably, no substantial discrepancies are observed between training on bright galaxies or randomly selected galaxies from the complete set. The model trained on all available galaxy images from the complete set yields the best performance, characterized by the lowest $\bar{\delta}$ of approximately 9.5 % (analysed in Sect. 5.2).

5.1.2. Zoobot trained on only 1000 galaxy images

Next, we compare the model performance in more detail for the models trained on 1000 galaxies from the bright and complete set by showing the vote fraction mean deviations δ_i for all morphology answers i in Fig. 4. We selected 1000 galaxies as a reasonably small quantity that a single expert could potentially label, while still achieving satisfactory performance for most questions.

All answers reach a mean deviation below 22 % indicating that training with only 1000 galaxies already leads to high model performance in general. For most answers, there is no substantial difference between training on bright or complete galaxies.

In particular, for the ‘disk-edge-on’ and ‘bar’ questions, the model shows approximately the same performance when trained on bright and random 1000 galaxies. Thus, the relevant features that the model learns do not change qualitatively with different magnitudes. Additionally, the ‘disk-edge-on’ task seems to be easier to learn because the deviations δ_i are well below 10 %.

For the ‘clumpy-appearance’, ‘galaxy-symmetrical’ and ‘clumps-embedded’ questions, Zoobot performs slightly better (by about 1 %) when trained on random galaxies from the complete set than when trained on bright galaxies. The better performance for these clump-related questions can thus be explained with the higher number of relevant examples in the complete set compared to the bright set, as clumpiness is more frequent among fainter galaxies. On the other hand, identifying spiral arms seems to be more effective (by about 2 %) when training on bright galaxies. This suggests that the examples included in the bright training set provide clearer and more reliable labels to learn to identify spiral arms.

5.1.3. Number of training galaxies for different morphology types

We show in Fig. 5 the dependence of the model performance (vote fraction mean deviation $\bar{\delta}_j$) on the number of training galaxies N_{train} for the different morphology questions j . Here, the vote fraction mean deviation is provided as the average of all answers for a particular morphology question and the models were trained on galaxies randomly selected from the complete set.

An increase in the number of training galaxies generally leads to improved performance, characterized by a decrease in the vote fraction mean deviation. This means that in general for all morphology tasks, performance can be improved with train-

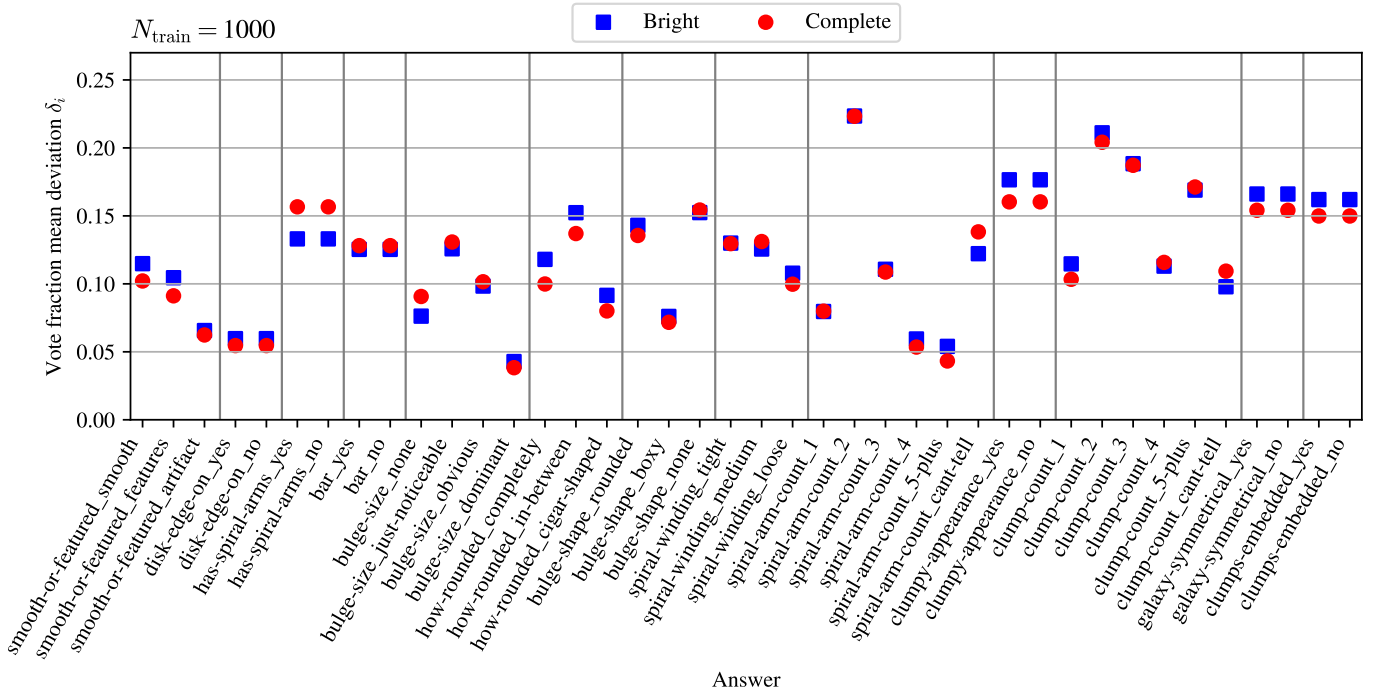


Fig. 4. Vote fraction mean deviations δ_i of the model predictions and the volunteer labels for the different morphology answers i (see Eq. 3), for models trained on 1000 bright or random galaxies from the complete set. Lower δ_i indicates better performance.

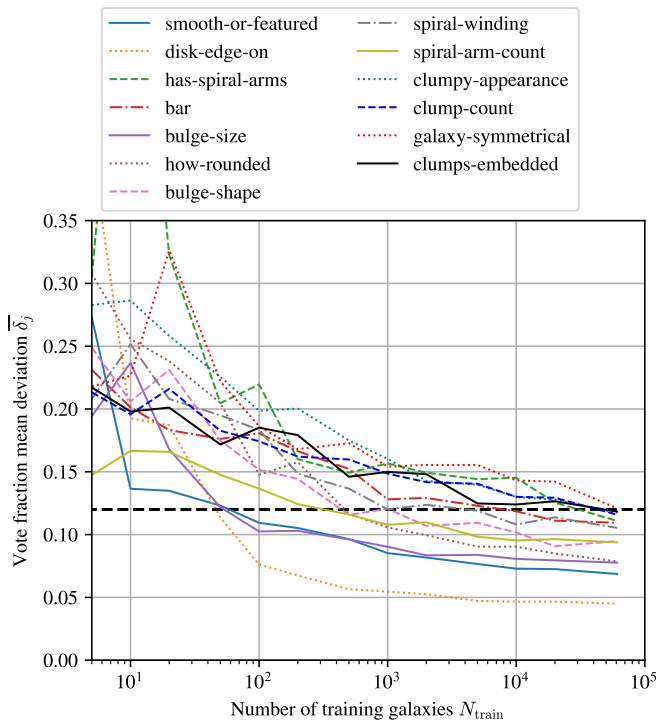


Fig. 5. Vote fraction mean deviations of the model predictions δ_j for the different morphology questions j of the decision tree, as a function of number of galaxies included in training N_{train} . This is illustrated for the model trained on galaxies from the complete dataset. All questions reach a mean deviation of less than 12% (dashed black line) after being trained with all available galaxies.

ing on more labelled examples. All questions reach an averaged vote fraction mean deviation below 12% (highlighted in Fig. 5)

when trained with all available galaxies from the complete set. They show different dependencies on the number of training galaxies.

Although in general more training examples increase the quality of the predictions, there are instances where a larger number of galaxies leads to slightly worse performance. These fluctuations in vote fraction mean deviation are particularly noticeable in the low-number regime, for example for the ‘how-rounded’ question with 200 training galaxies. They can be attributed to the model’s sensitivity to the specific galaxies randomly selected for training. Nevertheless, these variations do not alter the overall observable trends for the different questions.

When comparing the various questions, the ‘disk-edge-on’ task not only has the lowest mean deviation (as discussed in Sect. 5.2) when trained with the complete set, but it also achieves a deviation below 10% after training with just 100 galaxies. This is even more impressive as only 6.1% of the galaxies are relevant (see Table 1), although Zoobot learns from all galaxies. This further indicates that identifying disk galaxies is easier to learn than other tasks of the decision tree. Similarly for the ‘bulge-size’ question, the model achieves a deviation below 12% after training with only 100 images. Since these tasks were included in all GZ decision trees, this outcome can be interpreted as a demonstration of the effectiveness of fine-tuning. Furthermore, training on only 100 random galaxies leads for the ‘smooth-or-featured’ question to deviations below 12%. This question was included in all GZ decision trees as the first question and was thus answered by all volunteers, therefore requiring fewer new examples compared to other tasks.

In contrast, for the ‘has-spiral-arms’ question, 60 000 galaxies are required to achieve deviations below 12%. Despite the inclusion in all GZ decision trees, a substantial number of examples are still necessary to accurately predict the corresponding vote fractions. This observation suggests that detecting spiral arms might pose a greater challenge for *Euclid* images com-

pared to the galaxies in the pretraining datasets. Additionally, questions related to clumps in galaxies exhibit similar patterns, requiring a range of 10 000 to 60 000 random galaxies to achieve a deviation below 12%. From the campaigns involved in the pretraining of Zoobot, these clump-related questions were exclusively included in the GZC campaign. Consequently, the impact of this pretraining is likely less effective for these tasks. Moreover, given that spiral arms and clumps involve finer structures, the associated tasks are inherently more complex and need a larger number of training examples.

5.2. Analysis of the best performing model

In this section, we analyse the performance of Zoobot for emulated *Euclid* VIS images with the lowest averaged vote fraction mean deviation $\bar{\delta}$, i.e., the best performing model, as derived in Sect. 5.1. We show examples of Zoobot’s output, then investigate the performance with standard classification metrics after discretizing the vote fractions (Sect. 5.2.1) and demonstrate how our model can be used to find spiral galaxies in a given dataset (Sect. 5.2.2). Next, we analyse the predicted vote fractions directly by looking at the mean (Sect. 5.2.3) and the histograms (Sect. 5.2.4) of the deviations from their respective volunteer vote fractions, and by investigating their redshift and magnitude dependence (Sect. 5.2.5). Finally, we compare the model performance between HST and *Euclid* images (Sect. 5.2.6).

To verify the quality of the predictions, four examples of Zoobot’s output on different galaxies from the complete test set are shown in Fig. 6. The selected answer for every question is the one with the highest predicted vote fraction, while the asked questions follow the structure of the GZH decision tree (see Table 1 and Fig. A.1). In Fig. 7, we show four galaxies from the complete test set with the highest predicted vote fractions for five example answers, i.e., (a) spiral, (b) completely rounded, (c) disk, (d) bar and (e) clumpy, to demonstrate the quality of Zoobot’s predictions.

5.2.1. Discrete classifications

To get an intuitive sense of Zoobot’s performance for the different morphology tasks, we convert the predicted vote fractions into discrete values by binning them to the class with the highest predicted vote fraction. However, it is important to note that these metrics only provide a basic indication of Zoobot’s performance and do not fully capture its ability to predict morphology, as the information is simplified and reduced.

We evaluate the discretized predictions with standard classification metrics for the different classes. Accuracy A is the fraction of correct predictions for both the positive and negative class among the total number of galaxy images N_{total} . It is calculated as

$$A = \frac{N_{\text{TP}} + N_{\text{TN}}}{N_{\text{total}}}, \quad (4)$$

where N_{TP} is the number of true positives and N_{TN} the number of true negatives.

Precision P is the fraction of correct classifications among the galaxies predicted to belong to a particular class. It is calculated as

$$P = \frac{N_{\text{TP}}}{N_{\text{TP}} + N_{\text{FP}}}, \quad (5)$$

where N_{FP} is the number of false positives.

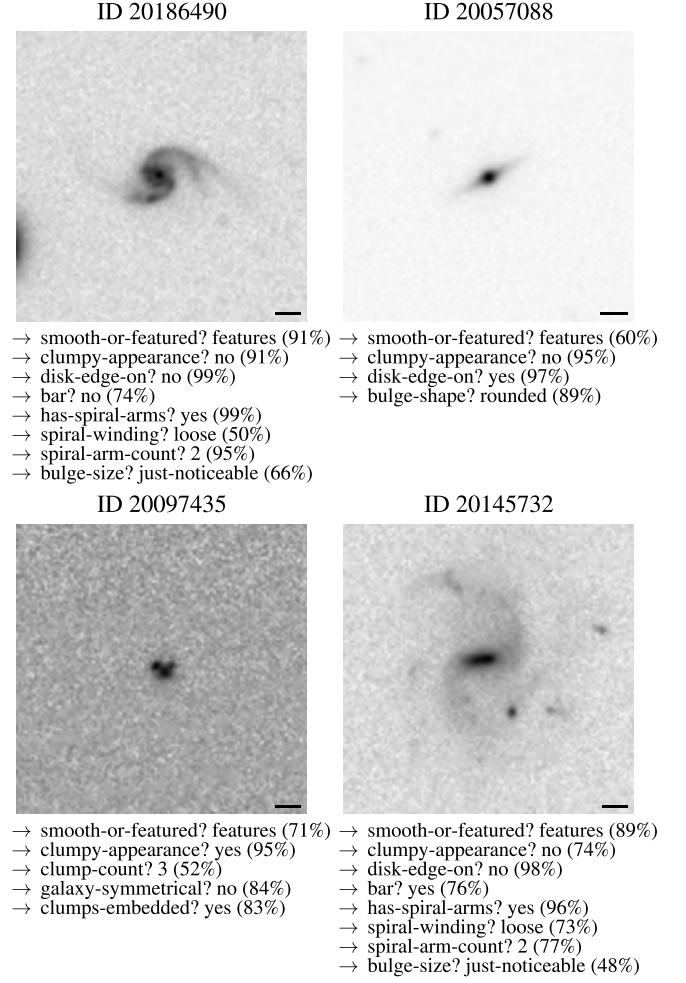


Fig. 6. Four examples of the predictions of Zoobot following the structure of the GZH decision tree (see Table 1 and Fig. A.1) for galaxies (inverted greyscale, image ID given above each image) from the complete test set. For every question, the answer with the highest predicted vote fraction (denoted in the parenthesis) is selected. The black bars represent a length of 1″.

Recall R is defined as the fraction of correct classifications among the galaxies of a certain class and calculated as

$$R = \frac{N_{\text{TP}}}{N_{\text{TP}} + N_{\text{FN}}}, \quad (6)$$

where N_{FN} is the number of false negatives.

The F_1 -score combines precision and recall by taking their harmonic mean. Thus, it is a more general measure for evaluating model performance. It is calculated as

$$F_1 = 2 \frac{P R}{P + R}. \quad (7)$$

All of these metrics have values between 0 and 1. Some classification tasks have an imbalanced number of galaxies for the different classes. Moreover, there are some morphology tasks with more than two answers (see Table 1). Therefore, we calculate the above metrics by treating each class as the positive class and averaging over the results. We also provide the F_1 -score weighted by the number of galaxies for the different classes, F_1^* , similar to Walmsley et al. (2022a).

The performance of the model for a particular classification task can be summarized by a confusion matrix. The rows of

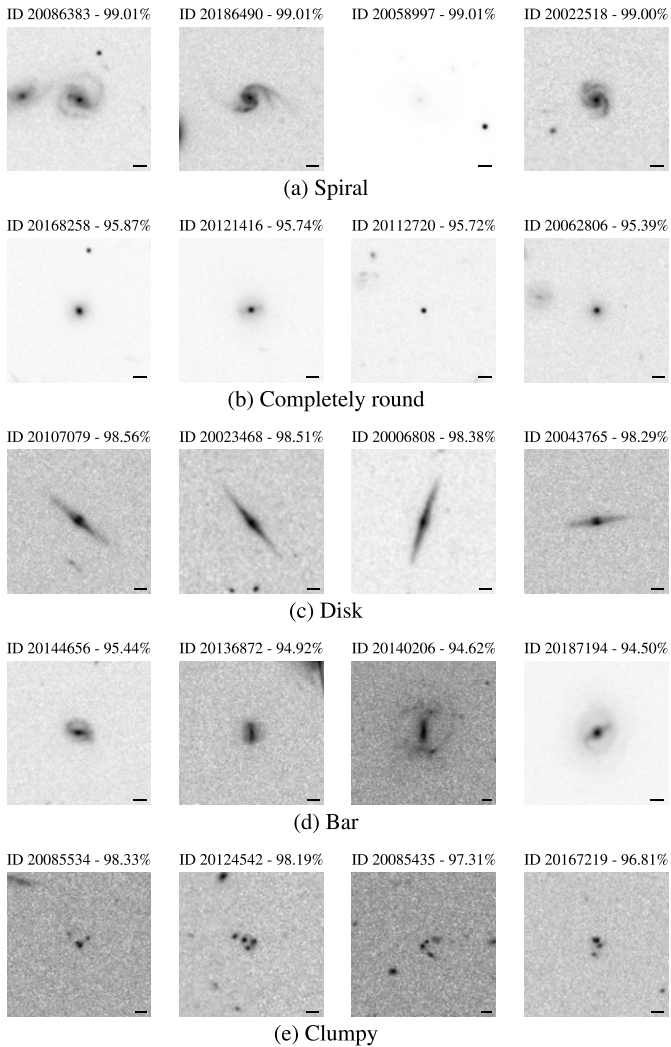


Fig. 7. Examples of galaxies with the highest predicted vote fractions of Zoobot for (a) spiral, (b) completely round, (c) disk, (d) barred and (e) clumpy galaxies from the complete test set. Above each galaxy image, the corresponding image ID and the predicted vote fraction in percent is given. The black bars represent a length of 1''.

this two-dimensional matrix correspond to the predicted classes, while the columns correspond to the ground truth classes. The diagonal elements are the fraction of correct classifications, while the other elements correspond to false classifications.

The resulting metrics are listed in Table 3. For five selected morphology tasks, we show the corresponding confusion matrices in Fig. 8a. We calculate the same metrics for galaxies from the complete test set where the volunteers are confident, e.g., one answer has a vote fraction higher than 0.8. Through this procedure, we can analyse the model performance against confident labels (Domínguez Sánchez et al. 2019; Walmsley et al. 2022a). The results are shown in Table 4. The corresponding confusion matrices for selected questions are shown in Fig. 8b. We present all confusion matrices for the remaining tasks in Appendix C.

For the majority of the morphology questions, the accuracy is higher than 97%. For all other questions the accuracy is above 91% except for the question of the ‘clump-count’ where it is only 82.8%. The F_1 -scores are all above 89% except for the ‘has-spiral-arms’, ‘spiral-arm-count’ and ‘clump-count’ questions.

The accuracy for all galaxies, as shown in Table 3, is generally lower compared to confidently classified galaxies, rang-

Table 3. Classification metrics of the model on the complete test set for all galaxies corresponding to Fig. 8a. Precision P , recall R and F_1 -score are calculated using the unweighted average of all classes. We also show the weighted F_1 -score in the F_1^* column. For ‘has-spiral-arms’, we also provide the metrics for finding spiral galaxies in the complete test set (printed in *italics*), corresponding to the confusion matrix in Fig. 9a.

| Question | N_{total} | A | P | R | F_1 | F_1^* |
|--------------------|---------------|--------------|--------------|--------------|--------------|--------------|
| smooth-or-featured | 15 236 | 0.885 | 0.835 | 0.811 | 0.822 | 0.884 |
| disk-edge-on | 986 | 0.982 | 0.963 | 0.957 | 0.960 | 0.982 |
| has-spiral-arms | 764 | 0.916 | 0.584 | 0.725 | 0.614 | 0.935 |
| | <i>10 746</i> | <i>0.965</i> | <i>0.864</i> | <i>0.936</i> | <i>0.896</i> | <i>0.966</i> |
| bar | 974 | 0.878 | 0.822 | 0.744 | 0.774 | 0.869 |
| bulge-size | 975 | 0.822 | 0.542 | 0.563 | 0.549 | 0.823 |
| how-rounded | 9915 | 0.874 | 0.872 | 0.868 | 0.869 | 0.874 |
| bulge-shape | 84 | 0.893 | 0.866 | 0.875 | 0.870 | 0.894 |
| spiral-winding | 746 | 0.709 | 0.683 | 0.672 | 0.677 | 0.709 |
| spiral-arm-count | 745 | 0.678 | 0.450 | 0.353 | 0.375 | 0.653 |
| clumpy-appearance | 2265 | 0.874 | 0.867 | 0.850 | 0.857 | 0.873 |
| clump-count | 328 | 0.546 | 0.516 | 0.413 | 0.390 | 0.539 |
| galaxy-symmetrical | 225 | 0.880 | 0.884 | 0.690 | 0.737 | 0.860 |
| clumps-embedded | 226 | 0.850 | 0.791 | 0.819 | 0.803 | 0.853 |

Table 4. Same classification metrics as in Table 3, but for galaxies with confident volunteer responses (i.e., one answer has a vote fraction above 0.8) corresponding to Fig. 8b. For ‘has-spiral-arms’, we also provide the metrics for finding spiral galaxies in the complete test set (printed in *italics*), corresponding to the confusion matrix in Fig. 9b.

| Question | N_{total} | A | P | R | F_1 | F_1^* |
|--------------------|---------------|--------------|--------------|--------------|--------------|--------------|
| smooth-or-featured | 1963 | 0.995 | 0.995 | 0.993 | 0.994 | 0.995 |
| disk-edge-on | 907 | 0.998 | 0.994 | 0.994 | 0.994 | 0.998 |
| has-spiral-arms | 666 | 0.950 | 0.542 | 0.975 | 0.564 | 0.971 |
| | <i>10 553</i> | <i>0.970</i> | <i>0.859</i> | <i>0.952</i> | <i>0.899</i> | <i>0.971</i> |
| bar | 511 | 0.977 | 0.968 | 0.907 | 0.935 | 0.976 |
| bulge-size | 85 | 0.976 | 0.905 | 0.991 | 0.940 | 0.978 |
| how-rounded | 5119 | 0.979 | 0.979 | 0.977 | 0.978 | 0.979 |
| bulge-shape | 36 | 0.917 | 0.864 | 0.946 | 0.893 | 0.921 |
| spiral-winding | 46 | 0.978 | 0.933 | 0.982 | 0.954 | 0.979 |
| spiral-arm-count | 202 | 0.941 | 0.396 | 0.534 | 0.402 | 0.943 |
| clumpy-appearance | 1307 | 0.970 | 0.967 | 0.959 | 0.963 | 0.970 |
| clump-count | 64 | 0.828 | 0.540 | 0.513 | 0.525 | 0.868 |
| galaxy-symmetrical | 115 | 0.974 | 0.986 | 0.850 | 0.905 | 0.972 |
| clumps-embedded | 85 | 0.941 | 0.844 | 0.966 | 0.890 | 0.946 |

ing from 54.6% (‘clump-count’) to 98.2% (‘disk-edge-on’). This outcome is expected, since the ground truth labels themselves carry inherent uncertainty. Considering that volunteers may not reach a consensus in these cases, it can be inferred that answering morphology questions for such galaxies could be challenging. Particularly for complex morphologies such as the number and winding of spiral arms, the size of the bulge and the number of clumps, the performance of the model is lower than for other questions that are less complex, such as determining whether a galaxy is a disk viewed edge-on. This can be attributed to several factors: the limited number of examples for these classes included in the training dataset, making them less represented, and the inherent difficulty associated with accurately identifying these morphological features.

Furthermore, counting spiral arms and clumps are especially difficult classification tasks, as there are in both cases six classes that can be selected and some arms or clumps might be difficult to identify. Moreover, the distributions of the answers are imbalanced, with classes containing only one (‘5-plus’ spiral arms) or no examples (one clump) that contribute equally to the averaged metrics. Thus, the F_1 -scores for confident volunteer responses

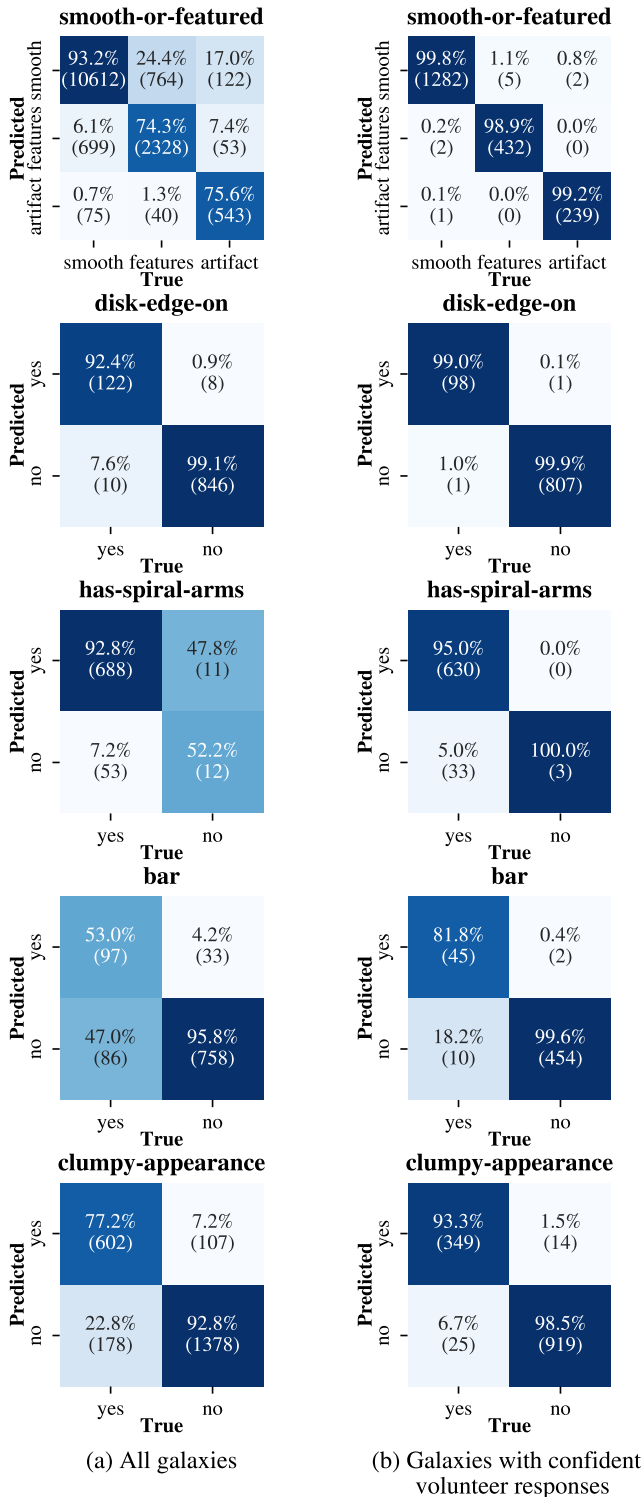


Fig. 8. Confusion matrices for five selected morphology questions after binning to the class with the highest predicted vote fraction. The confusion matrices for the other questions are shown in the Appendix. The colour map corresponds to the fraction of the ground truth values for the different classes (also denoted in the confusion matrices).

are substantially lower than compared to other questions. In numerous instances, the predicted count for spiral arms and clumps is off by just one number from the ground truth count. Consequently, the discrete metrics provided do not fully capture the

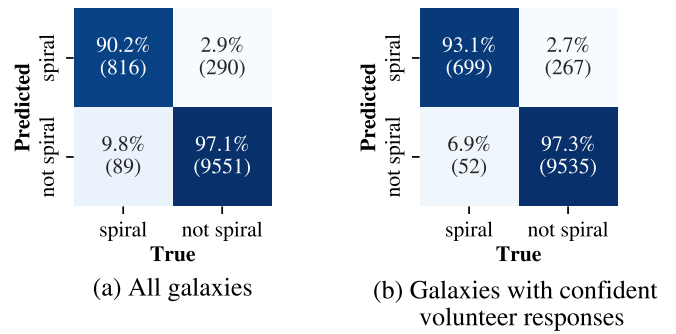


Fig. 9. Confusion matrices for the task of finding spiral galaxies in the complete test set by applying the selection cuts suggested in Willett et al. (2017).

capabilities of Zoobot. Instead, the predicted vote fractions are preferable for assessing the number of spiral arms or clumps.

For the ‘has-spiral-arms’ question, there are only three confident ‘no’ examples, while there are 663 galaxies confidently classified as spiral in the test set (see Fig. 8b). Thus, the test set in this binary case is extremely unbalanced and the derived metrics are therefore not reflecting Zoobot’s overall ability of finding spiral galaxies in a given dataset. We demonstrate this in the following section by not only utilizing the ‘has-spiral-arms’ question, but the whole decision tree to utilize the full ability of Zoobot.

5.2.2. Finding spiral galaxies in the test set

We demonstrate how Zoobot can be used to find spiral galaxies in a given dataset. Similar to the approach used for volunteer vote fractions f , we applied the suggested criteria from Willett et al. (2017) for selecting spiral galaxies in the complete test set. These criteria were: $f_{\text{edge-on,no}} > 0.25$, $f_{\text{clumpy,no}} > 0.3$, and $f_{\text{features}} > 0.23$. Additionally, we excluded galaxies where the conditions mentioned above apply, but the number of volunteers was insufficient (as Zoobot is only predicting vote fractions), using the suggested cutoff of $N_{\text{spiral}} \geq 20$. For the final catalogue, we chose a vote fraction of $f_{\text{spiral}} > 0.5$ to identify spiral galaxies. Thus, all galaxies for which the conditions were fulfilled were classified as spiral, while all the others were classified as not spiral. For the predicted vote fractions, we applied the same cuts. Once more, we measure the performance for confident labels (volunteer vote fraction for the final answer greater than 0.8 or smaller than 0.2).

Zoobot achieves an accuracy of 96.5% for finding spiral galaxies in the complete test set, with an F_1 -score of 89.6%. The corresponding confusion matrix is shown in Fig. 9a and the corresponding metrics listed in Table 3. On confident labels, Zoobot achieves an accuracy of 97.0% with an F_1 -score of 89.9% as shown in Fig. 9b and in Table 4. These values demonstrate that Zoobot is indeed well suited for identifying spiral galaxies in a given dataset.

5.2.3. Vote fraction mean deviations

Next, we evaluate the model performance by analysing the predicted vote fractions directly. We show the vote fraction mean deviations δ_i for all answers i corresponding to different morphology types in Fig. 10. Moreover, we display how the perfor-

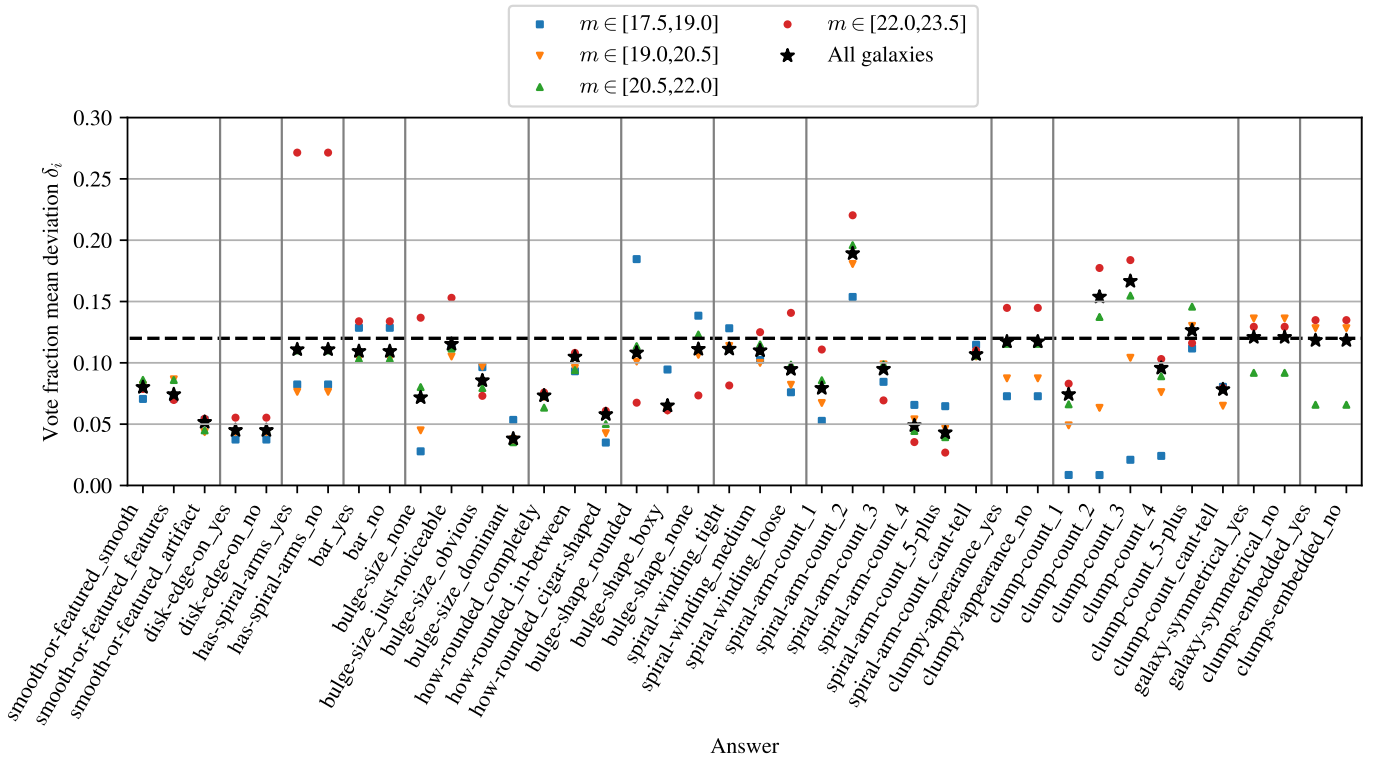


Fig. 10. Vote fraction mean deviations δ_i of the model predictions and the volunteer labels for the different morphology answers i (see Eq. 3). The model was trained with all galaxies from the complete set. The deviations are displayed for all galaxies of the test set and for galaxies within a magnitude interval with $m = m_{I814W}$. Lower δ_i indicates better performance. The black dashed line marks 12 % vote fraction mean deviation.

mance varies with magnitude by selecting only galaxies from different magnitude intervals.

For almost all answers (36 of 40 answers), the vote fraction mean deviation is below 12 %, while the performance varies between different answers. As before, the question with the lowest deviation for all answers is ‘disk-edge-on’. This can be attributed to the fact that it represents a less intricate feature, making it relatively easy to discern and learn. Conversely, questions related to spiral arms and clumps consistently yield the highest deviations. Once again, this can be explained with the inherent complexity of these questions, as they involve finer and more intricate structural details. We expect the quality of the morphological predictions to be better if more relevant labels for these morphology types were available, as indicated in Fig. 5.

The dependence of the vote fraction mean deviation on the magnitude differs between answers. The mean deviation shows no substantial dependence on the magnitude for the ‘smooth-or-features’, ‘disk-edge-on’ and ‘how-rounded’ questions. For the ‘has-spiral-arms’ question, on the other hand, the differences between the deviations are the largest. While the model performs better for brighter galaxies ($m < 20.5$) with a mean deviation below 10 %, for faint galaxies ($m > 22$) the deviations are the largest overall ($\sim 27\%$). This indicates that identifying spiral arms in faint galaxies is a relatively difficult task. This is not surprising, as spiral arms are a finer structure. Once spiral arms are identified, the other tasks related to spiral arms, i.e., determining the winding of the spiral arms and counting them, do not show such a strong magnitude dependence. Finally, although clumps appear more frequently for faint galaxies, the model performs better in the case of bright galaxies.

5.2.4. Histograms of the vote fraction deviations

While we already investigated the mean of the (absolute) vote fraction deviations $f_{\text{pred}} - f_{\text{gt}}$, we now analyse the corresponding histograms for five selected questions in Fig. 11. Positive values indicate that Zoobot predicts a higher vote fraction than the volunteers, and negative that the volunteer vote fraction is higher.

For most answers, the distributions are centred at 0, indicating that for most galaxies the vote fraction deviations are relatively small. The distributions are symmetrical around the centre, indicating that the model does not have a substantial bias. The widths of the distributions correspond to the mean vote fraction deviations (see Fig. 10), as expected.

In contrast, for the ‘has-spiral-arms’ answers, the distributions are not symmetrical. While the maximum of the distribution is at 0, indicating that most deviations are small, the volunteers’ vote fractions for a galaxy to be spiral are higher than predicted from Zoobot. This can be explained by the high imbalance (mean vote fraction for ‘yes’ is 90.7 %) of the relevant ‘has-spiral-arms’ answers (see Sect. 5.2.1) in combination with the intrinsic difficulty of this task.

The ‘disk-edge-on’ question also has an imbalance that is slightly less extreme (mean vote fraction for ‘no’ is 83.9 %). As it is easier to learn, the vote fraction mean deviation is much smaller ($\sim 4\%$) than for ‘has-spiral-arms’ ($\sim 11\%$). Thus, the imbalance does not lead to a substantial asymmetry of the distribution.

5.2.5. Magnitude and redshift dependence

Next, we investigate the magnitude and redshift dependence of the mean deviations δ_i between the predicted and the volunteer

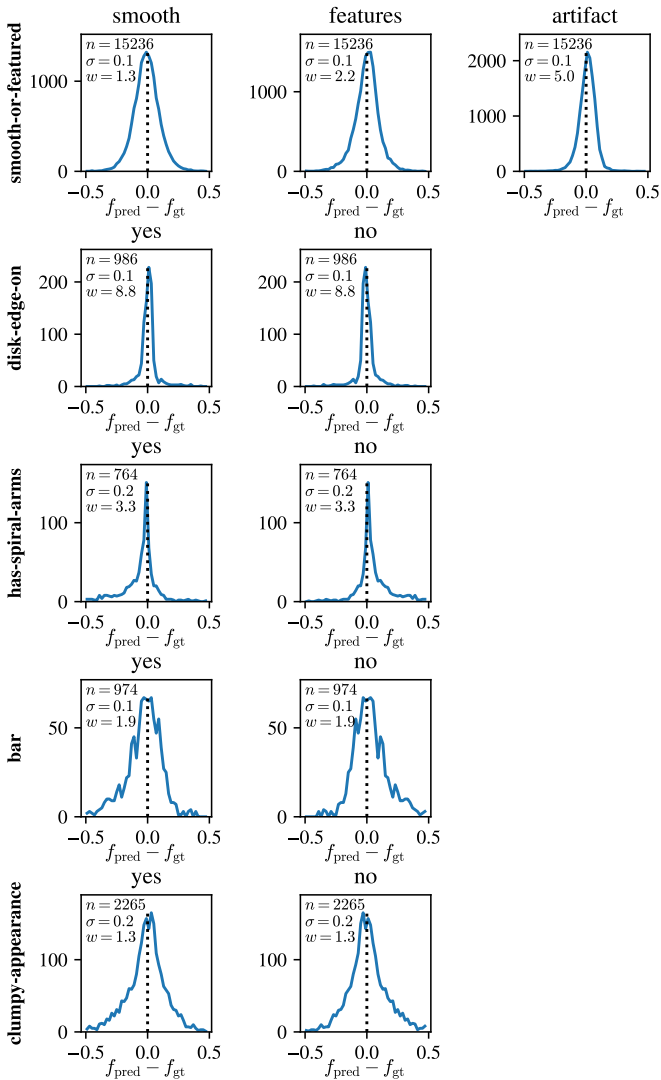


Fig. 11. Histograms of the vote fraction deviations $f_{\text{pred}} - f_{\text{gt}}$ between the predicted f_{pred} and volunteer vote fractions f_{gt} for five selected questions. For each answer, the number of galaxies n , the standard deviation σ and the kurtosis w is given.

vote fractions. These are shown in Figs. 12 and 13 for the different questions. For some galaxies, there was no redshift information available. Thus, these galaxies were excluded.

In general, the vote fraction mean deviation shows no substantial dependence on magnitude and redshift. For relatively easier morphology tasks (e.g., ‘disk-edge-on’ and ‘smooth-or-featured’) the deviations are smaller than for more complex ones such as tasks related to spiral arms, bars and clumps.

For the ‘has-spiral-arms’ question, the vote fraction mean deviation shows a strong increase for $z > 1$ up to almost 50%. The same effect can be observed for fainter galaxies ($m_{F814W} > 21.5$ in Fig. 13), although the deviation is smaller. This indicates again that the difficulty of identifying spiral arms for high redshift and faint galaxies is substantially higher than other morphology tasks.

In Fig. 14, we investigate the volunteer and model vote fraction for the ‘yes’ answer of the ‘has-spiral-arms’ question in a histogram for high-redshift and faint galaxies. For the majority of the galaxies, the volunteer vote fraction is above 90%, meaning that the volunteers are confidently classifying most galaxies

to be spiral. Zoobot, on the other hand, shows a wider range of predicted vote fractions, with most being above 70%. While there are no galaxies (for high redshifts) or only one (for faint galaxies) galaxy to be confidently classified to have no spiral arms (vote fraction below 20%), Zoobot is confidently predicting that only two galaxies have no spiral arms. Therefore, Zoobot is not misclassifying galaxies, it is just not as confident as the volunteers. This could be explained with the lower resolution and the additional noise for the emulated *Euclid* images compared to the original HST images.

To check this, we looked at the redshift and magnitude dependence for Zoobot trained on the original HST images in Fig. 15. The vote fraction mean deviations are, although still present, substantially smaller than for *Euclid* images supporting our interpretation. For a practical use, to identify spiral galaxies in high-redshift and high m ranges, the selection cuts can be lowered when applying Zoobot.

5.2.6. Comparing performance to original HST images

While we already investigated the influence of the lower resolution and the additional noise of the *Euclid* images for identifying spiral arms, we show in Fig. 16 the performance of the models trained on all galaxies of the complete dataset on the same *Euclid* and original HST images (see Sect. 2) for all answers. The results are very similar for HST and *Euclid* images, indicating that in general, the lower resolution and noise in the *Euclid* images do not lead to a substantial change in performance.

For many questions, such as ‘smooth-or-features’, ‘disk-edge-on’, or ‘how-rounded’, the vote fraction mean deviation for HST and *Euclid* images is almost the same, supporting the previous discussion that these features depend less on the resolution. On the other hand, for the questions related to spiral arms, bars and clumps, the performance of Zoobot trained on HST images is better than for Zoobot trained on *Euclid* images. This is in agreement with the previous discussion that detecting spiral arms, bars, and clumps are finer features and their detection depends on resolution (which is approximately two times poorer for *Euclid* compared to HST).

6. Adapting Zoobot to a new morphology type

We trained Zoobot to emulated *Euclid* images with the GZH decision tree (see Table 1). Therefore, our model could be directly used for real *Euclid* images, but is restricted to answering only the questions of the GZH decision tree. However, for *Euclid*, there might be additional or other galaxy morphology tasks that are currently not included in our Zoobot model. We show that Zoobot can be easily adapted to a new morphology task that is not included in the GZH tasks with the example of peculiar galaxies.

6.1. Adaption procedure

Peculiar galaxies are a type of irregular galaxy, with disorganised structure, often at high redshifts that do not typically fall into smooth, spheroid, or disk classes. The class of peculiar galaxies was not included in the GZH questions. Instead, we used labels for the same emulated *Euclid* VIS images (see Sect. 2) from a different source, namely expert classification from the *Euclid* Zoo project¹. *Euclid* Zoo was an internal classification project in the *Euclid* Consortium, with astronomers as classifiers. In total,

¹ <https://www.zooniverse.org/projects/sandorkruk/euclid-zoo/>

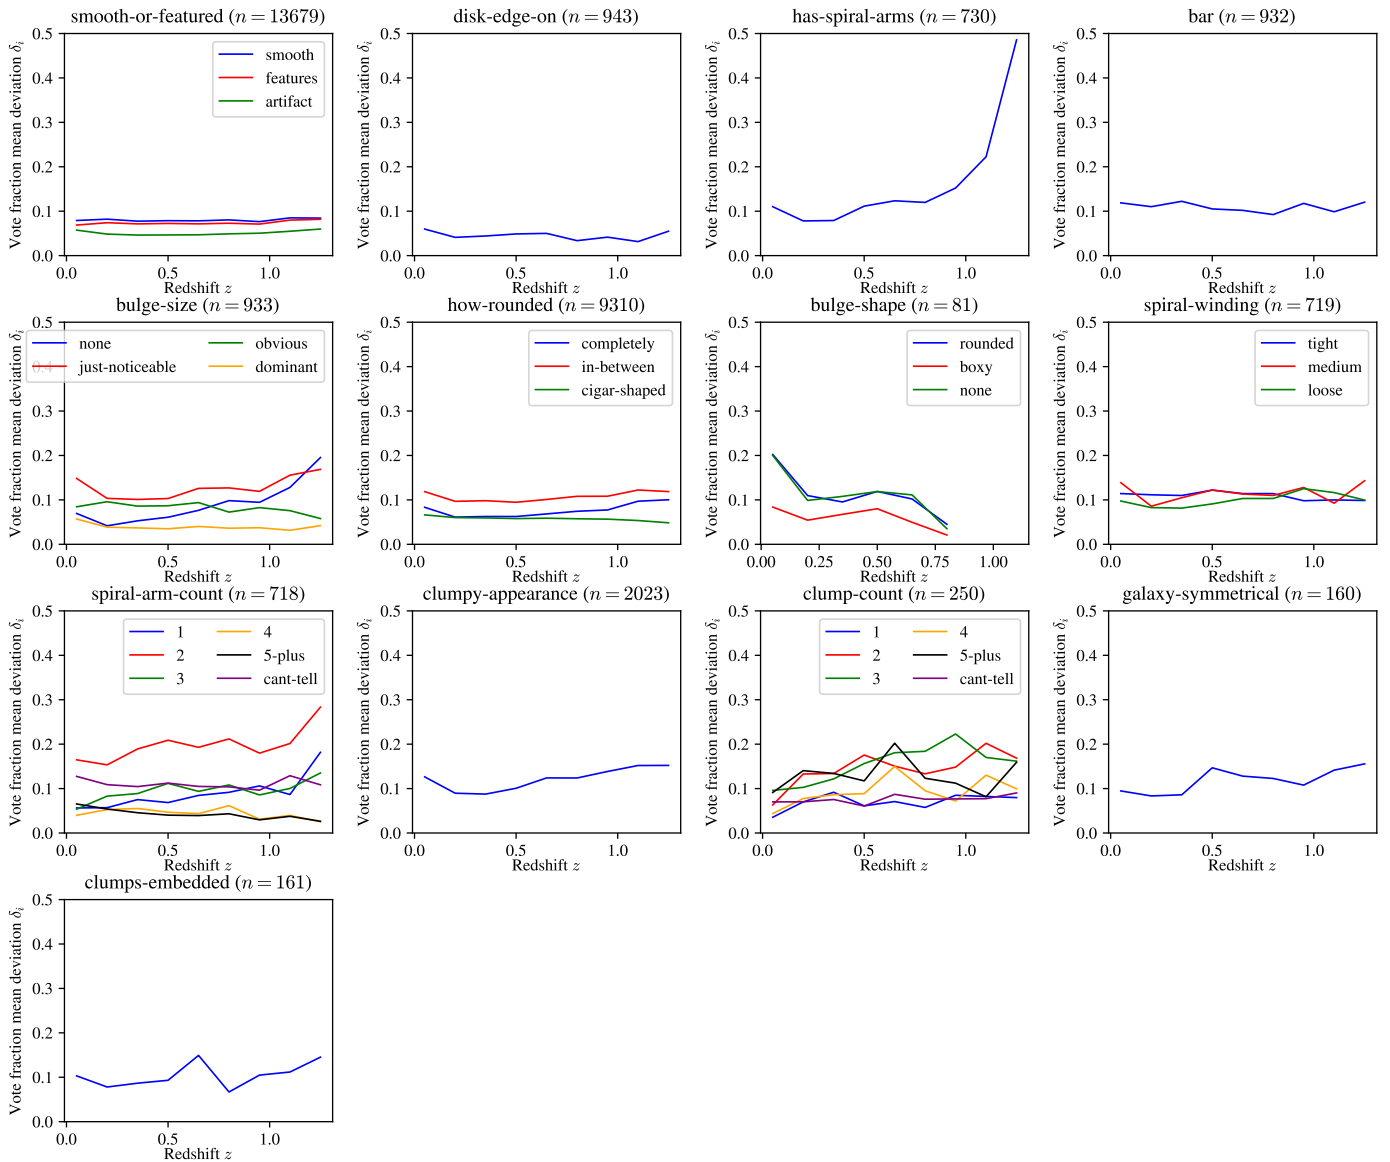


Fig. 12. Vote fraction mean deviations δ_i for all corresponding answers i (different colours, denoted in legend) of the different GZH questions (see Table 1) as a function of redshift z for the relevant galaxies of the complete test set (where at least half of the volunteers voted).

2006 galaxies were classified with $N = 1$ to $N = 3$ expert classifications per galaxy image. We selected a galaxy from the dataset to be classified as peculiar if the vote fraction for the peculiar class is larger than 50 %, resulting in 231 galaxy images for the peculiar class. In Fig. 17, we show examples of galaxy images and their corresponding labels. We then applied a 70/10/20 percent train/validation/test split, leading to 1404 images for training, 200 for validation and 402 for testing. Next, we balanced our train and validation set by randomly dropping galaxy images that are not peculiar, leading to the same number of ‘not peculiar’ and ‘peculiar’ galaxy images. In total, 308 galaxy images were used for training and 54 for validation.

Similar to Walmsley et al. (2022b), we used our best performing model (trained on all images from the complete set) and replaced the final output layer by a new model ‘head’, simply consisting of a final dense layer with a sigmoid activation function. We utilized the Adam optimizer (Kingma & Ba 2015). We then trained the new model with the dataset of peculiar galaxies while applying the same augmentation as before, i.e., random

flips and rotations. To avoid overfitting, we stopped training as soon as the validation loss was not decreasing for 20 consecutive epochs. After training, Zoobot calculated predictions for the 402 images of the test set.

6.2. Performance of the adapted Zoobot

Table 5. The classification metrics accuracy A , precision P , recall R and the unweighted and weighted F_1 -scores F_1 and F_1^* for identifying peculiar galaxies in the test set with different confidence thresholds c_{th} . The corresponding confusion matrices are shown in Fig. 18.

| c_{th} | N_{total} | A | P | R | F_1 | F_1^* |
|----------|-------------|-------|-------|-------|-------|---------|
| 0.5 | 402 | 0.791 | 0.670 | 0.829 | 0.689 | 0.823 |
| 0.75 | 402 | 0.915 | 0.803 | 0.823 | 0.812 | 0.917 |

The performance of the model is listed in Table 5 when evaluated with the classification metrics introduced in Sect. 5.2.1.

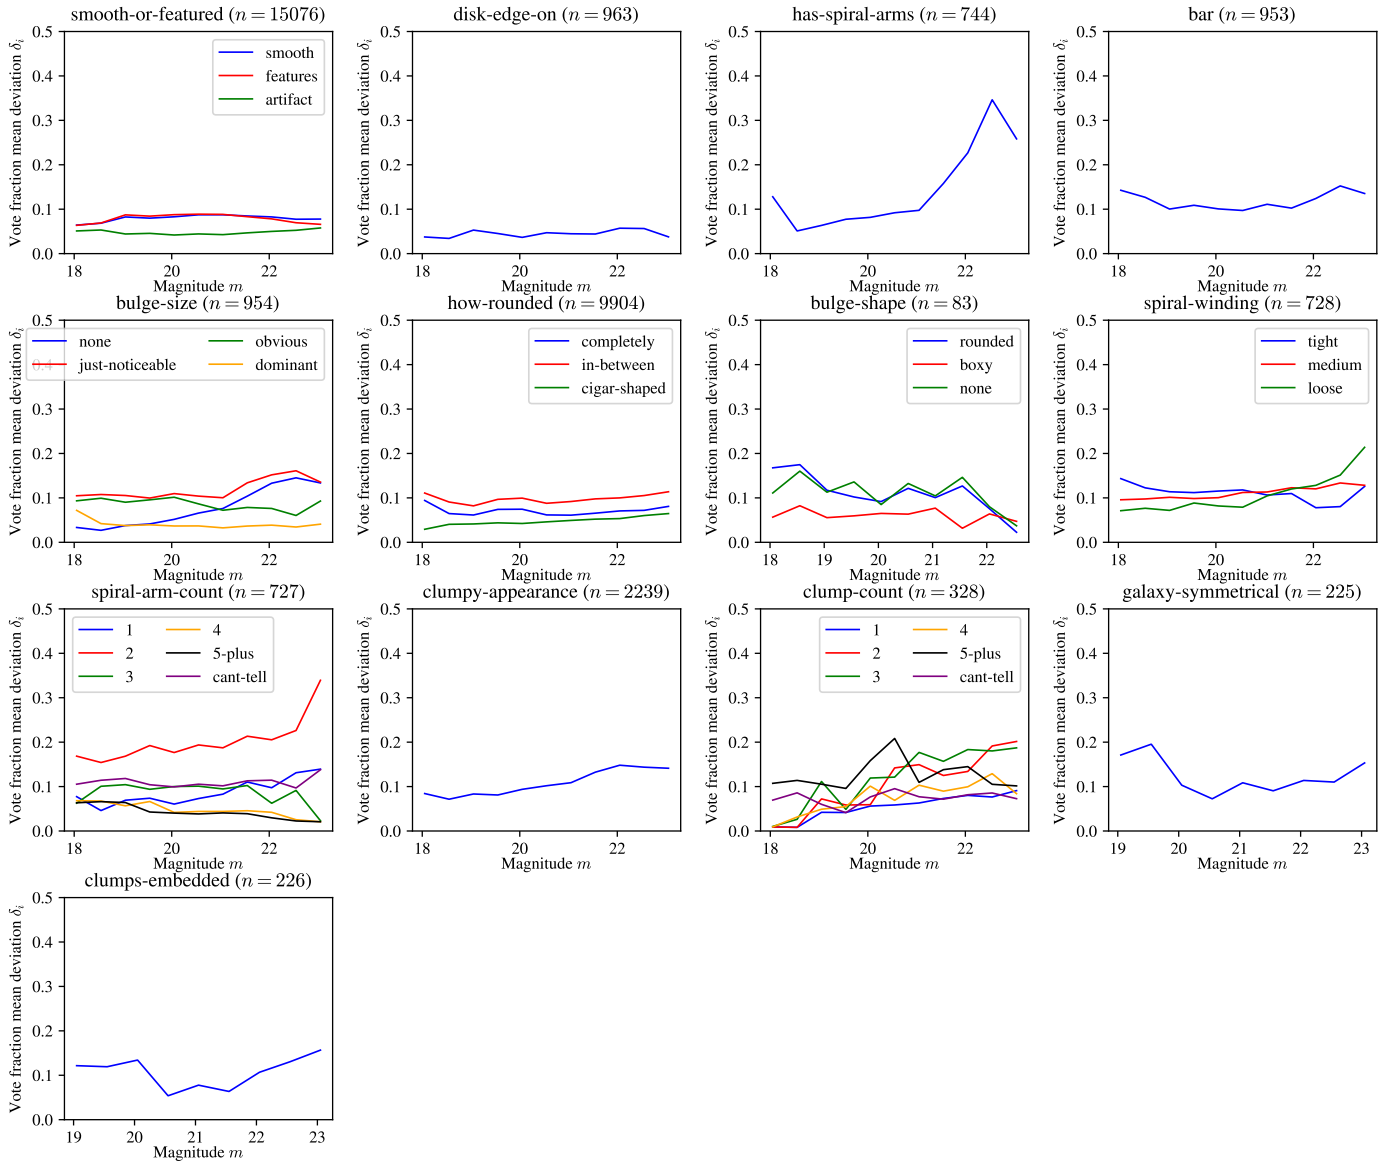


Fig. 13. Similar as Fig. 12, but with the vote fraction mean deviations δ_i depending on the magnitude m .

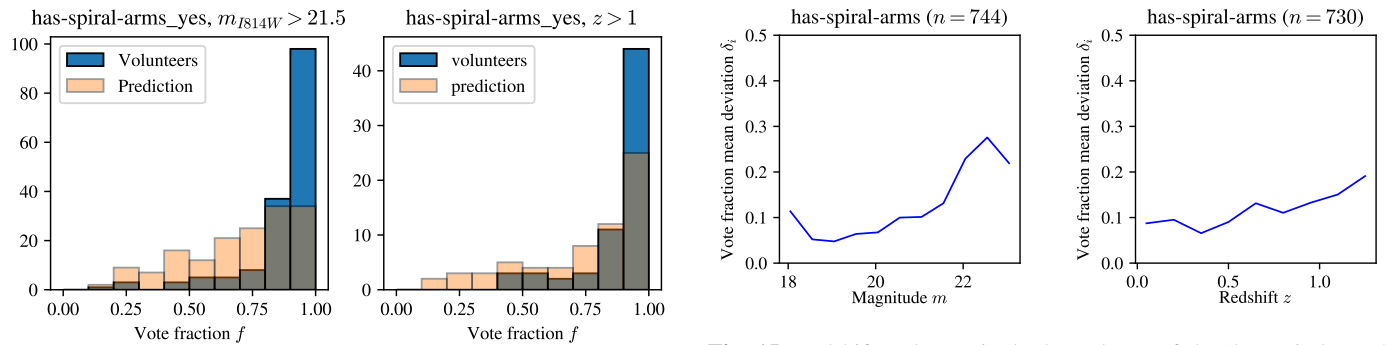


Fig. 14. Histograms of the predicted and volunteer vote fractions for the ‘has-spiral-arms’ ‘yes’ answer for faint and high redshift galaxies.

Fig. 15. Redshift and magnitude dependence of the ‘has-spiral-arms’ vote fraction mean deviations δ_i for the model trained on the original HST COSMOS images. Compared to the *Euclid* images (Figs. 12 and 13), the deviations for high redshift and faint galaxies are substantially smaller.

The corresponding confusion matrices are displayed in Fig. 18. The model achieves an accuracy of 79.1% for a model confidence threshold of $c_{th} = 0.5$ for selecting a galaxy to be peculiar. By applying $c_{th} = 0.75$ for our model predictions, we obtain a

higher accuracy of 91.5% and a higher F_1 -score of 81.2% due to

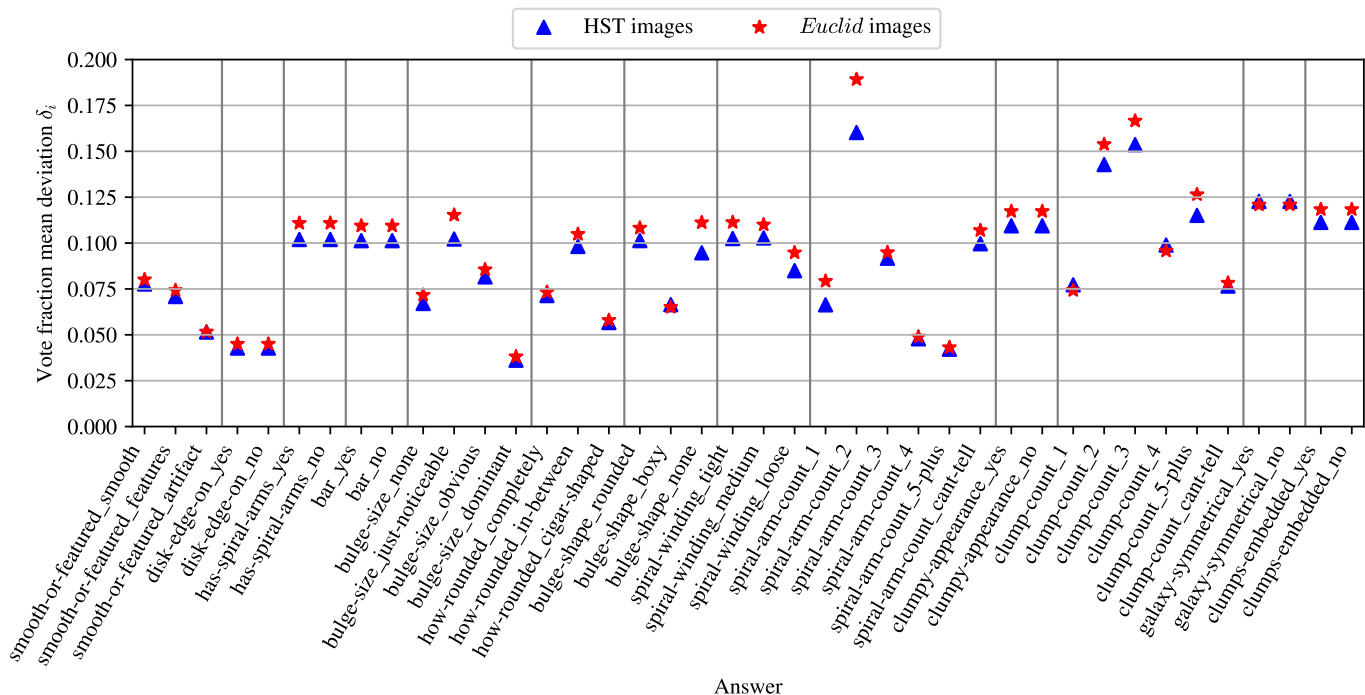


Fig. 16. Vote fraction mean deviations of the model predictions and the volunteer labels for the different answers of the decision tree for the emulated *Euclid* images and original HST images for the models trained on 60 940 galaxies from the complete set.

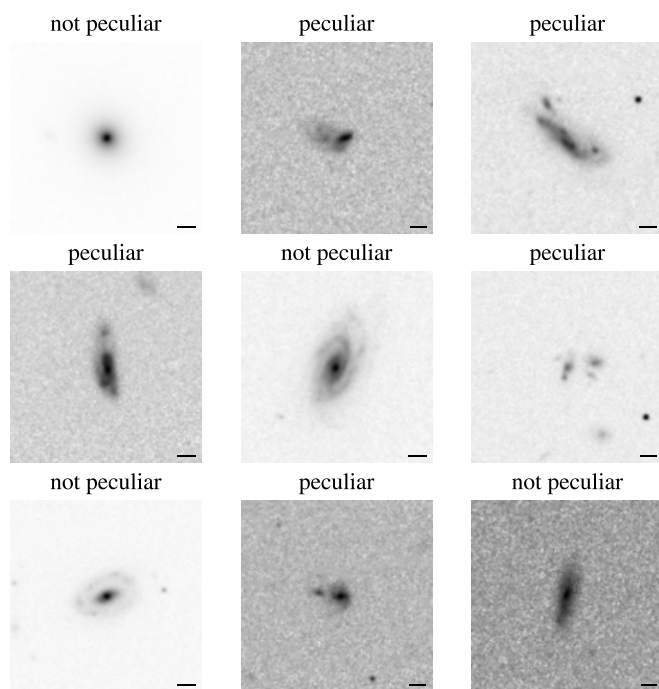


Fig. 17. Examples of galaxies and their expert labels to be a peculiar galaxy or not. The black bars represent a length of 1". There are no distinct morphological features that characterize peculiar galaxies, making this classification task rather difficult.

significantly higher precision. The values indicate that Zoobot performs well at the task of finding peculiar galaxies.

The accurate identification of peculiar galaxies is particularly impressive, considering that it is a relatively challenging task even for an expert, due to the lack of clear morphological fea-

tures. In addition to the inherent difficulty, there were only 231 examples of peculiar galaxies, of which 20 % were not included in the training dataset. This underscores our earlier discussion regarding the effectiveness of fine-tuning. Our Zoobot model was initially trained on all major GZ campaigns (as described in Sect. 3) and subsequently on GZH using emulated *Euclid* images, making it well-suited for adaptation to a new *Euclid* morphology task.

This shows that Zoobot can easily be adapted to new problems, even if these are difficult and do not have many examples. For the application to *Euclid*, our trained model can be used as a first step to predict detailed morphology for *Euclid* with the GZH questions and can then be adapted to a new task in an effective way without requiring large labelled sets of galaxy images. Thus, in practice, if an astronomer is interested in finding all examples of a particular galaxy morphological type that is not included in the GZH questions for a given set of real *Euclid* images, the following steps can be applied. First, a dataset needs to be labelled that is then used to fine-tune the trained Zoobot model to the new galaxy morphology task. Once the model is fine-tuned, it can be used to classify all images of a given set of *Euclid* images.

7. Summary and conclusions

This paper introduces automated and detailed predictions of galaxy morphology for emulated *Euclid* images. These emulated images were generated by converting HST COSMOS images to *Euclid* VIS images, considering the *Euclid* PSF and adjusting them to match the expected noise level of *Euclid*. The automated predictions were created using Zoobot, a Python package for creating deep learning models that classify galaxy morphology and adapting ('fine-tuning') those models to new surveys and tasks. We fine-tuned a pre-existing Zoobot model (trained on 450 000 non-*Euclid* galaxies from Galaxy Zoo) using emulated

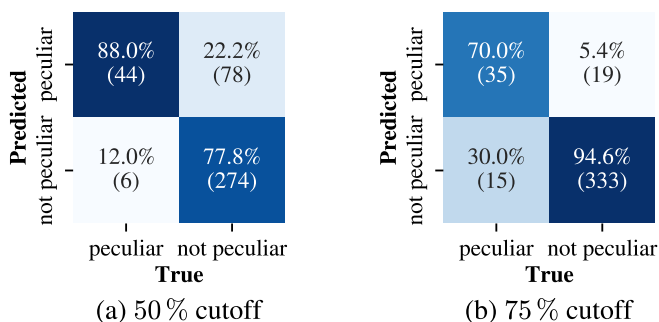


Fig. 18. Confusion matrices for finding peculiar galaxies for Zoobot pretrained on the emulated *Euclid* images and the GZH tasks at (a) 50 % and (b) 75 % cutoff thresholds c_{th} for selecting peculiar galaxies.

Euclid images and labels derived from the Galaxy Zoo: Hubble (GZH) volunteer responses.

The model is able to accurately predict the detailed morphologies for emulated *Euclid* galaxy images. It predicts various aspects, including the presence and quantity of clumps, detection, and counting of spiral arms, measurement of their winding, identification of disk galaxies, detection of bars, and determination of the presence, shape, and size of the central bulge, as well as measurement of the shape of featureless galaxies (refer to Table 1).

The Zoobot model fine-tuned on 60 000 available emulated *Euclid* images with GZH labels achieves a mean deviation of the predicted vote fraction from the volunteer classifications averaged over all answers of 9.5 % and below 12 % for nearly all answers individually (36 out of 40, as depicted in Fig. 10). Additionally, it achieves an accuracy above 91% for 12 of 13 questions when considering confident volunteer responses (refer to Table 4). However, the model’s performance varies across different morphology classes.

For the top questions of the decision tree (global morphology type – ‘smooth-or-features’, disc orientation – ‘disk-edge-on’ or ‘bulge-size’) the model is able to predict within 10 % of the volunteers’ vote fraction, after being trained with only 1000 randomly selected galaxies. For other questions, such as ‘how-rounded’, ‘spiral-arm-count’ or ‘bulge-shape’, 10 000 training galaxies are needed, while questions related to the more complex morphologies such as ‘has-spiral-arms’, ‘bar’, ‘spiral-winding’ or ‘clumpy-appearance’ the full training set of 60 000 galaxies is required to reach 12 % deviation from the volunteer classifications. This suggests that more examples for complex morphology classes improves the performance of the model. Finally, our investigations of using the complete sample of available galaxies for training ($m_{I814W} < 23.5$), or a subset of the brightest galaxies ($m_{I814W} < 22.5$), suggests that the difference in performance is minimal; the number of galaxies with complex morphologies used for training has a higher impact.

What do our results imply for *Euclid*?

- Zoobot, trained on emulated *Euclid* galaxies using volunteer labels from GZH, shows accurate predictions (within 10% of human classifications) for global morphology (smooth versus featured), disk orientation (edge-on versus face-on), and bulge size.
- To enhance the model’s performance in predicting more complex detailed morphologies, such as bars, spiral arms, and clumps, additional labels are required. Based on Fig. 5, approximately 60 000 randomly selected galaxies would be

needed to achieve a global vote fraction deviation below 10% and maintain deviations below 12% for all labels. These additional labels could be obtained by initiating a Galaxy Zoo project for *Euclid*, utilizing *Euclid* Q1 data.

- Our experiments indicate minimal performance differences when selecting galaxies with $m_{I814W} < 23.5$ or brighter galaxies with $m_{I814W} < 22.5$. Therefore, we suggest expanding the pool of explored galaxies for *Euclid*, with a restriction of $I_E < 23.5$ (assuming VIS magnitudes are reasonably similar to I814W magnitudes). Fainter galaxies were not tested as no morphological labels were available for these galaxies. We expect the fraction of galaxies with features to decrease at higher magnitudes and smaller sizes, as observational effects cause these galaxies to appear smoother.
- Zoobot can be adapted to new *Euclid* morphology tasks using a few new labels. We demonstrated this adaptability by successfully training Zoobot for a new class of peculiar galaxies, consisting of only 261 examples, achieving an accuracy of 91.5% (Fig. 18). Consequently, for new classes, it is feasible to set up a dedicated Galaxy Zoo-style workflow where volunteers are asked simple binary questions related to the morphology of the specific class of interest. The exact number of required labelled galaxies depends on the specific morphology class (Fig. 5).
- The proposed morphology classification scheme for *Euclid* is outlined in a companion paper (Euclid Collaboration: OUMER, in prep.).

Currently, the generation of structural parameters describing galaxy morphology with a morphology fitting code is included in the *Euclid* data pipeline (Euclid Collaboration: Bretonnière et al. 2023). The algorithm generates morphological parameters for single and double Sérsic components, and the measurements are reliable up to $I_E = 23$ for one component and $I_E < 21$ for two components. Euclid Collaboration: Bretonnière et al. (2023) concludes that for at least 400 million galaxies, robust structural parameters will be delivered by the *Euclid* Data Releases.

We estimate the number of galaxies for which detailed morphologies could be measured with our deep learning model. With $m_{I814W} < 23.5$, there are approximately 70 000 galaxies in an area of $(1.2 \times 1.2) \text{ deg}^2 = 1.44 \text{ deg}^2$ of the HST COSMOS survey. Scaling up to the total sky area measured by the Euclid Wide Survey, $15\,000 \text{ deg}^2$, and assuming that VIS magnitudes are similar to the I814W magnitudes of HST, there would be approximately 800 million galaxies with reliably measured morphologies up to $I_E = 23.5$ (focusing on the brighter magnitudes, $I_E < 22.5$, the estimated count would be approximately 300 million galaxies). This is close to the 400 million galaxies estimated by Euclid Collaboration: Bretonnière et al. (2023) for $I_E < 23$. Accounting for an average vote fraction of 29 % for galaxies to display features, we conclude that of the 800 million measured galaxies from the Euclid Wide Survey approximately 230 million galaxies will display complex morphology. This closely matches the 250 million galaxies estimated to have complex structures by Euclid Collaboration: Bretonnière et al. (2022) for the Euclid Wide Survey and the Euclid Deep Survey.

In conclusion, we have successfully showcased the feasibility of generating high-quality and detailed morphology predictions for future *Euclid* images. Our trained Zoobot model is readily deployable in the *Euclid* pipeline to produce morphological catalogues for *Euclid* images with Q1 data. As additional labels for more complex morphologies are obtained, the performance of Zoobot will improve for the upcoming Data Release 1 (DR1). Moreover, the model can be easily adapted to new mor-

phology classes that are of interest to astronomers as new labels are gathered through crowd-sourcing projects.

Acknowledgements. The Euclid Consortium acknowledges the European Space Agency and a number of agencies and institutes that have supported the development of *Euclid*, in particular the Academy of Finland, the Agenzia Spaziale Italiana, the Belgian Science Policy, the Canadian Euclid Consortium, the French Centre National d'Etudes Spatiales, the Deutsches Zentrum für Luft- und Raumfahrt, the Danish Space Research Institute, the Fundação para a Ciência e a Tecnologia, the Ministerio de Ciencia, Innovación y Universidades, the National Aeronautics and Space Administration, the National Astronomical Observatory of Japan, the Nederlandse Onderzoekschool voor Astronomie, the Norwegian Space Agency, the Romanian Space Agency, the State Secretariat for Education, Research and Innovation (SERI) at the Swiss Space Office (SSO), and the United Kingdom Space Agency. A complete and detailed list is available on the *Euclid* web site (<http://www.euclid-ec.org>).

References

- Abadi, M., Barham, P., Chen, J., et al. 2016, in Proceedings of the 12th USENIX Symposium on Operating Systems Design and Implementation, OSDI'16
- Baillard, A., Bertin, E., de Lapparent, V., et al. 2011, *A&A*, 532, A74
- Bait, O., Barway, S., & Wadadekar, Y. 2017, *MNRAS*, 471, 2687
- Cheng, T.-Y., Conselice, C. J., Aragón-Salamanca, A., et al. 2020, *MNRAS*, 493, 4209
- Conselice, C. J. 2003, *ApJS*, 147, 1
- Cropper, M., Pottinger, S., Niemi, S., et al. 2016, in Space Telescopes and Instrumentation 2016: Optical, Infrared, and Millimeter Wave, 99040Q
- de Vaucouleurs, G. 1959, *Handbuch der Physik*, 53, 275
- de Vaucouleurs, G., de Vaucouleurs, A., Corwin, Jr., H. G., et al. 1991, Third Reference Catalogue of Bright Galaxies (Springer, New York)
- Dey, A., Schlegel, D. J., Lang, D., et al. 2019, *AJ*, 157, 168
- Dieleman, S., Willett, K. W., & Dambre, J. 2015, *MNRAS*, 450, 1441
- Domínguez Sánchez, H., Huertas-Company, M., Bernardi, M., et al. 2019, *MNRAS*, 484, 93
- Domínguez Sánchez, H., Huertas-Company, M., Bernardi, M., Tuccillo, D., & Fischer, J. L. 2018, *MNRAS*, 476, 3661
- Euclid Collaboration: Bretonnière, H., Huertas-Company, M., Boucaud, A., et al. 2022, *A&A*, 657, A90
- Euclid Collaboration: Bretonnière, H., Kuchner, U., Huertas-Company, M., et al. 2023, *A&A*, 671, A102
- Euclid Collaboration: Scaramella, R., Amiaux, J., Mellier, Y., et al. 2022, *A&A*, 662, A112
- Griffith, R. L., Cooper, M. C., Newman, J. A., et al. 2012, *ApJS*, 200, 9
- Grogin, N. A., Kocevski, D. D., Faber, S. M., et al. 2011, *ApJS*, 197, 35
- Hubble, E. P. 1926, *ApJ*, 64, 321
- Huertas-Company, M., Gravet, R., Cabrera-Vives, G., et al. 2015, *ApJS*, 221, 8
- Ivezić, Ž., Kahn, S. M., Tyson, J. A., et al. 2019, *ApJ*, 873, 111
- Kaifu, N., Usuda, T., Hayashi, S. S., et al. 2000, *PASJ*, 52, 1
- Kingma, D. P. & Ba, J. 2015, in 3rd International Conference on Learning Representations, ICLR 2015 - Conference Track Proceedings
- Koekemoer, A. M., Aussel, H., Calzetti, D., et al. 2007, *ApJS*, 172, 196
- Kruk, S. J., Lintott, C. J., Bamford, S. P., et al. 2018, *MNRAS*, 473, 4731
- Laureijs, R., Amiaux, J., Arduini, S., et al. 2011 [[arXiv:1110.3193](https://arxiv.org/abs/1110.3193)]
- Lintott, C. J., Schawinski, K., Slosar, A., et al. 2008, *MNRAS*, 389, 1179
- Lotz, J. M., Primack, J., & Madau, P. 2004, *AJ*, 128, 163
- Lu, J., Behbood, V., Hao, P., et al. 2015, *Knowledge-Based Systems*, 80, 14
- Masters, K. L. 2019, Proceedings of the International Astronomical Union, 14, 205
- Masters, K. L., Mosleh, M., Romer, A. K., et al. 2010, *MNRAS*, 405, 783
- Peng, C. Y., Ho, L. C., Impey, C. D., & Rix, H.-W. 2002, *AJ*, 124, 266
- Sakamoto, K., Okumura, S. K., Ishizuki, S., & Scoville, N. Z. 1999, *ApJ*, 525, 691
- Sandage, A. 1961, *The Hubble Atlas of Galaxies* (Washington: Carnegie Institution)
- Scoville, N., Abraham, R. G., Aussel, H., et al. 2007a, *ApJS*, 172, 38
- Scoville, N., Aussel, H., Brusa, M., et al. 2007b, *ApJS*, 172, 1
- Sérsic, J. L. 1968, *Atlas de galaxies australes* (Cordoba, Argentina: Observatorio Astronomico, 1968)
- Simmons, B. D., Lintott, C., Willett, K. W., et al. 2017, *MNRAS*, 464, 4420
- Tan, M. & Le, Q. V. 2019, 36th International Conference on Machine Learning, ICML 2019 [[arXiv:1905.11946](https://arxiv.org/abs/1905.11946)]
- Taniguchi, Y., Scoville, N., Murayama, T., et al. 2007, *ApJS*, 172, 9
- van den Bergh, S. 1976, *ApJ*, 206, 883
- Vega-Ferrero, J., Domínguez Sánchez, H., Bernardi, M., et al. 2021, *MNRAS*, 506, 1927
- Walmsley, M., Allen, C., Aussel, B., et al. 2023a, *Journal of Open Source Software*, 8, 5312
- Walmsley, M., Géron, T., Kruk, S., et al. 2023b, *MNRAS*, 526, 4768
- Walmsley, M., Lintott, C., Géron, T., et al. 2022a, *MNRAS*, 509, 3966
- Walmsley, M., Scaife, A. M. M., Lintott, C., et al. 2022b, *MNRAS*, 513, 1581
- Walmsley, M., Slijepcevic, I. V., Bowles, M., & Scaife, A. M. M. 2022c, Machine Learning for Astrophysics Workshop at the 39th International Conference on Machine Learning, ICML 2022 [[arXiv:2206.11927](https://arxiv.org/abs/2206.11927)]
- Willett, K. W., Galloway, M. A., Bamford, S. P., et al. 2017, *MNRAS*, 464, 4176
- Willett, K. W., Lintott, C. J., Bamford, S. P., et al. 2013, *MNRAS*, 435, 2835

¹ Institut für Planetologie, Westfälische Wilhelms-Universität Münster, Wilhelm-Klemm-Str. 10, 48149 Münster, Germany

² ESAC/ESA, Camino Bajo del Castillo, s/n., Urb. Villafranca del Castillo, 28692 Villanueva de la Cañada, Madrid, Spain

³ Jodrell Bank Centre for Astrophysics, Department of Physics and Astronomy, University of Manchester, Oxford Road, Manchester M13 9PL, UK

⁴ Instituto de Astrofísica de Canarias, Calle Vía Láctea s/n, 38204, San Cristóbal de La Laguna, Tenerife, Spain

⁵ Instituto de Astrofísica de Canarias (IAC); Departamento de Astrofísica, Universidad de La Laguna (ULL), 38200, La Laguna, Tenerife, Spain

⁶ Université PSL, Observatoire de Paris, Sorbonne Université, CNRS, LERMA, 75014, Paris, France

⁷ Université Paris-Cité, 5 Rue Thomas Mann, 75013, Paris, France

⁸ INAF-Osservatorio Astronomico di Roma, Via Frascati 33, 00078 Monteporzio Catone, Italy

⁹ INFN section of Naples, Via Cinthia 6, 80126, Napoli, Italy

¹⁰ Centro de Estudios de Física del Cosmos de Aragón (CEFCA), Plaza San Juan, 1, planta 2, 44001, Teruel, Spain

¹¹ Université de Strasbourg, CNRS, Observatoire astronomique de Strasbourg, UMR 7550, 67000 Strasbourg, France

¹² University of Nottingham, University Park, Nottingham NG7 2RD, UK

¹³ SRON Netherlands Institute for Space Research, Landleven 12, 9747 AD, Groningen, The Netherlands

¹⁴ Kapteyn Astronomical Institute, University of Groningen, PO Box 800, 9700 AV Groningen, The Netherlands

¹⁵ Universität Innsbruck, Institut für Astro- und Teilchenphysik, Technikerstr. 25/8, 6020 Innsbruck, Austria

¹⁶ School of Computer Science, Merchant Venturers Building, University of Bristol, Woodland Road, Bristol, BS8 1UB, UK

¹⁷ National Astronomical Observatory of Japan, 2-21-1 Osawa, Mitaka, Tokyo 181-8588, Japan

¹⁸ INAF-Osservatorio Astronomico di Capodimonte, Via Moiriello 16, 80131 Napoli, Italy

¹⁹ Université Paris-Saclay, CNRS, Institut d'astrophysique spatiale, 91405, Orsay, France

²⁰ Institute of Cosmology and Gravitation, University of Portsmouth, Portsmouth PO1 3FX, UK

²¹ INAF-Osservatorio Astronomico di Brera, Via Brera 28, 20122 Milano, Italy

²² INAF-Osservatorio di Astrofisica e Scienza dello Spazio di Bologna, Via Piero Gobetti 93/3, 40129 Bologna, Italy

²³ Dipartimento di Fisica e Astronomia, Università di Bologna, Via Gobetti 93/2, 40129 Bologna, Italy

²⁴ INFN-Sezione di Bologna, Viale Berti Pichat 6/2, 40127 Bologna, Italy

²⁵ Max Planck Institute for Extraterrestrial Physics, Giessenbachstr. 1, 85748 Garching, Germany

²⁶ Universitäts-Sternwarte München, Fakultät für Physik, Ludwig-Maximilians-Universität München, Scheinerstrasse 1, 81679 München, Germany

²⁷ INAF-Osservatorio Astrofisico di Torino, Via Osservatorio 20, 10025 Pino Torinese (TO), Italy

²⁸ Dipartimento di Fisica, Università di Genova, Via Dodecaneso 33, 16146, Genova, Italy

²⁹ INFN-Sezione di Genova, Via Dodecaneso 33, 16146, Genova, Italy

³⁰ Department of Physics "E. Pancini", University Federico II, Via Cinthia 6, 80126, Napoli, Italy

- ³¹ Instituto de Astrofísica e Ciências do Espaço, Universidade do Porto, CAUP, Rua das Estrelas, PT4150-762 Porto, Portugal
- ³² Dipartimento di Fisica, Università degli Studi di Torino, Via P. Giuria 1, 10125 Torino, Italy
- ³³ INFN-Sezione di Torino, Via P. Giuria 1, 10125 Torino, Italy
- ³⁴ INAF-IASF Milano, Via Alfonso Corti 12, 20133 Milano, Italy
- ³⁵ Institut de Física d'Altes Energies (IFAE), The Barcelona Institute of Science and Technology, Campus UAB, 08193 Bellaterra (Barcelona), Spain
- ³⁶ Port d'Informació Científica, Campus UAB, C. Albareda s/n, 08193 Bellaterra (Barcelona), Spain
- ³⁷ Institute for Theoretical Particle Physics and Cosmology (TTK), RWTH Aachen University, 52056 Aachen, Germany
- ³⁸ Dipartimento di Fisica e Astronomia "Augusto Righi" - Alma Mater Studiorum Università di Bologna, Viale Berti Pichat 6/2, 40127 Bologna, Italy
- ³⁹ Institute for Astronomy, University of Edinburgh, Royal Observatory, Blackford Hill, Edinburgh EH9 3HJ, UK
- ⁴⁰ European Space Agency/ESRIN, Largo Galileo Galilei 1, 00044 Frascati, Roma, Italy
- ⁴¹ University of Lyon, Univ Claude Bernard Lyon 1, CNRS/IN2P3, IP2I Lyon, UMR 5822, 69622 Villeurbanne, France
- ⁴² Institute of Physics, Laboratory of Astrophysics, Ecole Polytechnique Fédérale de Lausanne (EPFL), Observatoire de Sauverny, 1290 Versoix, Switzerland
- ⁴³ UCB Lyon 1, CNRS/IN2P3, IUF, IP2I Lyon, 4 rue Enrico Fermi, 69622 Villeurbanne, France
- ⁴⁴ Mullard Space Science Laboratory, University College London, Holmbury St Mary, Dorking, Surrey RH5 6NT, UK
- ⁴⁵ Departamento de Física, Faculdade de Ciências, Universidade de Lisboa, Edifício C8, Campo Grande, PT1749-016 Lisboa, Portugal
- ⁴⁶ Instituto de Astrofísica e Ciências do Espaço, Faculdade de Ciências, Universidade de Lisboa, Campo Grande, 1749-016 Lisboa, Portugal
- ⁴⁷ Department of Astronomy, University of Geneva, ch. d'Ecogia 16, 1290 Versoix, Switzerland
- ⁴⁸ INAF-Istituto di Astrofisica e Planetologia Spaziali, via del Fosso del Cavaliere, 100, 00100 Roma, Italy
- ⁴⁹ INFN-Padova, Via Marzolo 8, 35131 Padova, Italy
- ⁵⁰ Université Paris-Saclay, Université Paris Cité, CEA, CNRS, AIM, 91191, Gif-sur-Yvette, France
- ⁵¹ School of Physics, HH Wills Physics Laboratory, University of Bristol, Tyndall Avenue, Bristol, BS8 1TL, UK
- ⁵² INAF-Osservatorio Astronomico di Trieste, Via G. B. Tiepolo 11, 34143 Trieste, Italy
- ⁵³ Istituto Nazionale di Fisica Nucleare, Sezione di Bologna, Via Irnerio 46, 40126 Bologna, Italy
- ⁵⁴ INAF-Osservatorio Astronomico di Padova, Via dell'Osservatorio 5, 35122 Padova, Italy
- ⁵⁵ University Observatory, Faculty of Physics, Ludwig-Maximilians-Universität, Scheinerstr. 1, 81679 Munich, Germany
- ⁵⁶ Institute of Theoretical Astrophysics, University of Oslo, P.O. Box 1029 Blindern, 0315 Oslo, Norway
- ⁵⁷ Jet Propulsion Laboratory, California Institute of Technology, 4800 Oak Grove Drive, Pasadena, CA, 91109, USA
- ⁵⁸ Department of Physics, Lancaster University, Lancaster, LA1 4YB, UK
- ⁵⁹ von Hoerner & Sulger GmbH, Schloßplatz 8, 68723 Schwetzingen, Germany
- ⁶⁰ Technical University of Denmark, Elektrovej 327, 2800 Kgs. Lyngby, Denmark
- ⁶¹ Cosmic Dawn Center (DAWN), Denmark
- ⁶² Institut d'Astrophysique de Paris, UMR 7095, CNRS, and Sorbonne Université, 98 bis boulevard Arago, 75014 Paris, France
- ⁶³ Max-Planck-Institut für Astronomie, Königstuhl 17, 69117 Heidelberg, Germany
- ⁶⁴ Department of Physics and Helsinki Institute of Physics, Gustaf Hällströmin katu 2, 00014 University of Helsinki, Finland
- ⁶⁵ Aix-Marseille Université, CNRS/IN2P3, CPPM, Marseille, France
- ⁶⁶ AIM, CEA, CNRS, Université Paris-Saclay, Université de Paris, 91191 Gif-sur-Yvette, France
- ⁶⁷ Université de Genève, Département de Physique Théorique and Centre for Astroparticle Physics, 24 quai Ernest-Ansermet, CH-1211 Genève 4, Switzerland
- ⁶⁸ Department of Physics, P.O. Box 64, 00014 University of Helsinki, Finland
- ⁶⁹ Helsinki Institute of Physics, Gustaf Hällströmin katu 2, University of Helsinki, Helsinki, Finland
- ⁷⁰ European Space Agency/ESTEC, Keplerlaan 1, 2201 AZ Noordwijk, The Netherlands
- ⁷¹ NOVA optical infrared instrumentation group at ASTRON, Oude Hoogeveensedijk 4, 7991PD, Dwingeloo, The Netherlands
- ⁷² Universität Bonn, Argelander-Institut für Astronomie, Auf dem Hügel 71, 53121 Bonn, Germany
- ⁷³ Aix-Marseille Université, CNRS, CNES, LAM, Marseille, France
- ⁷⁴ Dipartimento di Fisica e Astronomia "Augusto Righi" - Alma Mater Studiorum Università di Bologna, via Piero Gobetti 93/2, 40129 Bologna, Italy
- ⁷⁵ Department of Physics, Institute for Computational Cosmology, Durham University, South Road, DH1 3LE, UK
- ⁷⁶ Université Côte d'Azur, Observatoire de la Côte d'Azur, CNRS, Laboratoire Lagrange, Bd de l'Observatoire, CS 34229, 06304 Nice cedex 4, France
- ⁷⁷ Université Paris Cité, CNRS, Astroparticule et Cosmologie, 75013 Paris, France
- ⁷⁸ Institut d'Astrophysique de Paris, 98bis Boulevard Arago, 75014, Paris, France
- ⁷⁹ Department of Physics and Astronomy, University of Aarhus, Ny Munkegade 120, DK-8000 Aarhus C, Denmark
- ⁸⁰ Centre for Astrophysics, University of Waterloo, Waterloo, Ontario N2L 3G1, Canada
- ⁸¹ Department of Physics and Astronomy, University of Waterloo, Waterloo, Ontario N2L 3G1, Canada
- ⁸² Perimeter Institute for Theoretical Physics, Waterloo, Ontario N2L 2Y5, Canada
- ⁸³ Université Paris-Saclay, Université Paris Cité, CEA, CNRS, Astrophysique, Instrumentation et Modélisation Paris-Saclay, 91191 Gif-sur-Yvette, France
- ⁸⁴ Space Science Data Center, Italian Space Agency, via del Politecnico snc, 00133 Roma, Italy
- ⁸⁵ Centre National d'Etudes Spatiales – Centre spatial de Toulouse, 18 avenue Edouard Belin, 31401 Toulouse Cedex 9, France
- ⁸⁶ Institute of Space Science, Str. Atomistilor, nr. 409 Măgurele, Ilfov, 077125, Romania
- ⁸⁷ Departamento de Astrofísica, Universidad de La Laguna, 38206, La Laguna, Tenerife, Spain
- ⁸⁸ Dipartimento di Fisica e Astronomia "G. Galilei", Università di Padova, Via Marzolo 8, 35131 Padova, Italy
- ⁸⁹ Departamento de Física, FCFM, Universidad de Chile, Blanco Encalada 2008, Santiago, Chile
- ⁹⁰ Institut d'Estudis Espacials de Catalunya (IEEC), Carrer Gran Capitá 2-4, 08034 Barcelona, Spain
- ⁹¹ Institute of Space Sciences (ICE, CSIC), Campus UAB, Carrer de Can Magrans, s/n, 08193 Barcelona, Spain
- ⁹² Atlantis, University Science Park, Sede Bld 48940, Leioa-Bilbao, Spain
- ⁹³ Centro de Investigaciones Energéticas, Medioambientales y Tecnológicas (CIEMAT), Avenida Complutense 40, 28040 Madrid, Spain
- ⁹⁴ Infrared Processing and Analysis Center, California Institute of Technology, Pasadena, CA 91125, USA
- ⁹⁵ Instituto de Astrofísica e Ciências do Espaço, Faculdade de Ciências, Universidade de Lisboa, Tapada da Ajuda, 1349-018 Lisboa, Portugal
- ⁹⁶ Universidad Politécnica de Cartagena, Departamento de Electrónica y Tecnología de Computadoras, Plaza del Hospital 1, 30202 Cartagena, Spain

- 97 Institut de Recherche en Astrophysique et Planétologie (IRAP), Université de Toulouse, CNRS, UPS, CNES, 14 Av. Edouard Belin, 31400 Toulouse, France
- 98 INFN-Bologna, Via Irnerio 46, 40126 Bologna, Italy
- 99 IFPU, Institute for Fundamental Physics of the Universe, via Beirut 2, 34151 Trieste, Italy
- 100 INAF, Istituto di Radioastronomia, Via Piero Gobetti 101, 40129 Bologna, Italy
- 101 Centre de Calcul de l'IN2P3/CNRS, 21 avenue Pierre de Coubertin 69627 Villeurbanne Cedex, France
- 102 University of Applied Sciences and Arts of Northwestern Switzerland, School of Engineering, 5210 Windisch, Switzerland
- 103 Department of Mathematics and Physics E. De Giorgi, University of Salento, Via per Arnesano, CP-I93, 73100, Lecce, Italy
- 104 INAF-Sezione di Lecce, c/o Dipartimento Matematica e Fisica, Via per Arnesano, 73100, Lecce, Italy
- 105 INFN, Sezione di Lecce, Via per Arnesano, CP-193, 73100, Lecce, Italy
- 106 Institut für Theoretische Physik, University of Heidelberg, Philosophenweg 16, 69120 Heidelberg, Germany
- 107 Université St Joseph; Faculty of Sciences, Beirut, Lebanon
- 108 Junia, EPA department, 41 Bd Vauban, 59800 Lille, France
- 109 SISSA, International School for Advanced Studies, Via Bonomea 265, 34136 Trieste TS, Italy
- 110 INFN, Sezione di Trieste, Via Valerio 2, 34127 Trieste TS, Italy
- 111 ICSC - Centro Nazionale di Ricerca in High Performance Computing, Big Data e Quantum Computing, Via Magnanelli 2, Bologna, Italy
- 112 Instituto de Física Teórica UAM-CSIC, Campus de Cantoblanco, 28049 Madrid, Spain
- 113 CERCA/ISO, Department of Physics, Case Western Reserve University, 10900 Euclid Avenue, Cleveland, OH 44106, USA
- 114 Laboratoire Univers et Théorie, Observatoire de Paris, Université PSL, Université Paris Cité, CNRS, 92190 Meudon, France
- 115 Dipartimento di Fisica e Scienze della Terra, Università degli Studi di Ferrara, Via Giuseppe Saragat 1, 44122 Ferrara, Italy
- 116 Istituto Nazionale di Fisica Nucleare, Sezione di Ferrara, Via Giuseppe Saragat 1, 44122 Ferrara, Italy
- 117 Dipartimento di Fisica - Sezione di Astronomia, Università di Trieste, Via Tiepolo 11, 34131 Trieste, Italy
- 118 NASA Ames Research Center, Moffett Field, CA 94035, USA
- 119 Kavli Institute for Particle Astrophysics & Cosmology (KIPAC), Stanford University, Stanford, CA 94305, USA
- 120 Bay Area Environmental Research Institute, Moffett Field, California 94035, USA
- 121 Department of Astronomy and Astrophysics, University of California, Santa Cruz, 1156 High Street, Santa Cruz, CA 95064, USA
- 122 Minnesota Institute for Astrophysics, University of Minnesota, 116 Church St SE, Minneapolis, MN 55455, USA
- 123 Institute Lorentz, Leiden University, PO Box 9506, Leiden 2300 RA, The Netherlands
- 124 Institute for Astronomy, University of Hawaii, 2680 Woodlawn Drive, Honolulu, HI 96822, USA
- 125 Department of Astronomy & Physics and Institute for Computational Astrophysics, Saint Mary's University, 923 Robie Street, Halifax, Nova Scotia, B3H 3C3, Canada
- 126 Departamento Física Aplicada, Universidad Politécnica de Cartagena, Campus Muralla del Mar, 30202 Cartagena, Murcia, Spain
- 127 Department of Computer Science, Aalto University, PO Box 15400, Espoo, FI-00 076, Finland
- 128 Ruhr University Bochum, Faculty of Physics and Astronomy, Astronomical Institute (AIRUB), German Centre for Cosmological Lensing (GCCL), 44780 Bochum, Germany
- 129 Univ. Grenoble Alpes, CNRS, Grenoble INP, LPSC-IN2P3, 53, Avenue des Martyrs, 38000, Grenoble, France
- 130 Department of Physics and Astronomy, Vesilinnantie 5, 20014 University of Turku, Finland
- 131 Serco for European Space Agency (ESA), Camino bajo del Castillo, s/n, Urbanizacion Villafranca del Castillo, Villanueva de la Cañada, 28692 Madrid, Spain
- 132 ARC Centre of Excellence for Dark Matter Particle Physics, Melbourne, Australia
- 133 Centre for Astrophysics & Supercomputing, Swinburne University of Technology, Victoria 3122, Australia
- 134 W.M. Keck Observatory, 65-1120 Mamalahoa Hwy, Kamuela, HI, USA
- 135 Department of Physics and Astronomy, University of the Western Cape, Bellville, Cape Town, 7535, South Africa
- 136 Oskar Klein Centre for Cosmoparticle Physics, Department of Physics, Stockholm University, Stockholm, SE-106 91, Sweden
- 137 Astrophysics Group, Blackett Laboratory, Imperial College London, London SW7 2AZ, UK
- 138 Dipartimento di Fisica, Sapienza Università di Roma, Piazzale Aldo Moro 2, 00185 Roma, Italy
- 139 INFN-Sezione di Roma, Piazzale Aldo Moro, 2 - c/o Dipartimento di Fisica, Edificio G. Marconi, 00185 Roma, Italy
- 140 Centro de Astrofísica da Universidade do Porto, Rua das Estrelas, 4150-762 Porto, Portugal
- 141 Zentrum für Astronomie, Universität Heidelberg, Philosophenweg 12, 69120 Heidelberg, Germany
- 142 Dipartimento di Fisica, Università di Roma Tor Vergata, Via della Ricerca Scientifica 1, Roma, Italy
- 143 INFN, Sezione di Roma 2, Via della Ricerca Scientifica 1, Roma, Italy
- 144 Institute of Astronomy, University of Cambridge, Madingley Road, Cambridge CB3 0HA, UK
- 145 Department of Astrophysics, University of Zurich, Winterthurerstrasse 190, 8057 Zurich, Switzerland
- 146 Department of Physics and Astronomy, University of California, Davis, CA 95616, USA
- 147 Department of Astrophysical Sciences, Peyton Hall, Princeton University, Princeton, NJ 08544, USA
- 148 Niels Bohr Institute, University of Copenhagen, Jagtvej 128, 2200 Copenhagen, Denmark
- 149 Cosmic Dawn Center (DAWN)

Appendix A: The GZH decision tree

We show the original GZH decision tree (Willett et al. 2017) in Fig. A.1.

Appendix B: Experimenting with different initial weights

We also conducted the experiment described in the main paper with different initial weights, i.e., Zoobot pretrained on different data. The weights described in the main text are denoted as weights B. Additionally, we tested with Zoobot pretrained on only GZD-5 (Walmsley et al. 2022a, weights A) and Zoobot without pretraining (random weights, weights C). We show the dependence of the averaged vote fraction mean deviation $\bar{\delta}$ on the number of galaxies N_{train} in Fig. B.1. To compare the models, we use in all cases the predictions on the same complete test set of 15 236 images (see Table 2). Additionally, we show for all answers the deviations for all models trained on 100, 1000 and 10 000 galaxies in Figs. B.2, B.3 and B.4.

With increasing number of training galaxies, the average mean deviation $\bar{\delta}$ is decreasing: The more galaxy examples (of different types) are used for training, the better the model predictions get for all answers. In the regime with $N_{\text{train}} < 20$, the models perform similarly. With more training galaxies, the performance of the model is for all numbers of training galaxies best with initial weights B, followed by weights A and then weights C. The model pretrained on all Galaxy Zoo campaigns except GZH leads, for the same number of galaxies, to a better performance than for a pretraining with only GZD labels. This is due to the better generalization of the model in the pretraining. The model without pretraining (weights C) shows the worst performance of the three, as expected.

Especially, for 100 to 10 000 galaxies, the difference between pretrained models and models used from scratch is most evident. Thus, for a limited number of labelled galaxies, transfer learning is substantially more effective for training to a new problem than training from scratch. In comparison to weights A and B, for weights C, there is a difference between training with bright and with random (complete) galaxies, i.e., bright galaxies lead to a better model performance especially between 100 and 10 000 galaxies. This difference could be explained with the pretraining for the models with weights A and B. While these have seen many types of galaxies with different magnitudes, they are more reliable and the magnitude cut does not have such a big impact. For weights C, the model was not trained before and thus, learns the galaxies morphologies for the first time. Bright galaxies with morphology that is easier accessible in general seem to be more effective when training from scratch.

More details of the differences between models are shown in Figs. B.2, B.3 and B.4. The impact of pretraining can be best seen for the ‘disk-edge-on’ question. For the pretrained models (weights A and B), 100 galaxy images are enough in training to get below a deviation of 10%. This deviation is reached for the model from scratch (weights C) at 10 000 galaxies. In contrast, for the questions related to clumps, the differences between the models for 100, 1000, and 10 000 training galaxies are relatively similar, indicating that the influence of pretraining is smaller for these questions. Only for weights B questions regarding clumps were included in the pretraining, supporting this interpretation.

Appendix C: Further confusion matrices

We show all confusion matrices for the different GZH questions that were not included in the main paper on all galaxies and on galaxies with confident volunteer responses in Figs. C.1 and C.2, respectively corresponding to the metrics in Tables 3 and 4.

Appendix D: Volunteer uncertainty

We show in Fig. D.1 the mean vote fraction deviation δ_i for the ‘features’ answer of the ‘smooth-or-features’ question, depending on the volunteer vote fraction f_{gt} . In general, the deviations are smaller for confident volunteer responses (vote fraction lower than 0.2 or greater than 0.8) compared to more uncertain volunteer responses (vote fraction between 0.2 and 0.8). As expected, the model performs better for confident volunteer responses and with increasing uncertainty in the volunteer responses the deviations also increase. Moreover, an asymmetry of the deviations can be observed, as deviations are substantially smaller for vote fractions below 0.2 compared to vote fractions above 0.8. This could be explained with the fact that most galaxies of the dataset do not display features. Additionally, the deviations for the lowest volunteer vote fractions are higher than for vote fractions of ~ 0.1 . This is due to the characteristic of Zoobot to predict for the most extreme volunteer vote fractions (close to 0 or 1) less extreme vote fractions (Walmsley et al. 2022a), which should not affect practical use.

Appendix E: Reproducibility

The Zoobot CNN is publicly available at <https://github.com/mwalmsley/zoobot>. The code for the creation of the images, the training of the Zoobot CNN and for the analysis of the results is publicly available at <https://github.com/baussel/ZoobotEuclid>.

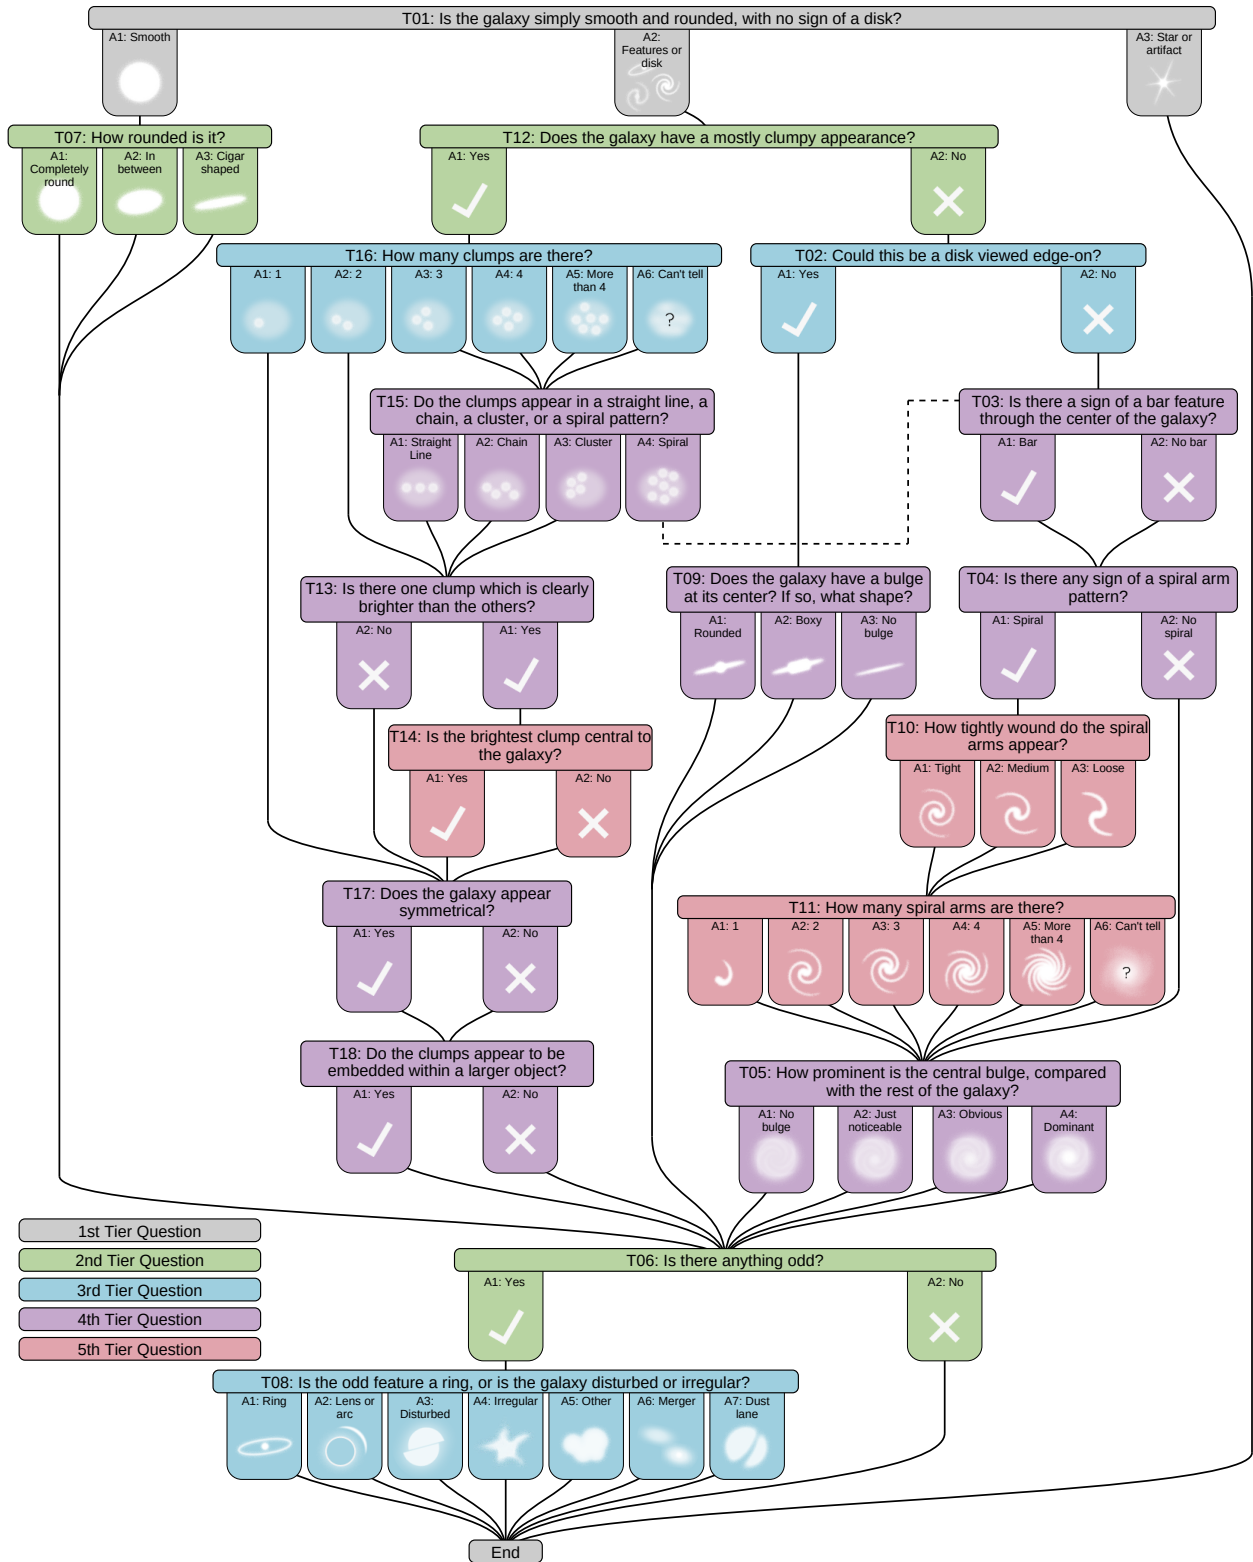


Fig. A.1. GZH decision tree (Willett et al. 2017). The questions T06, T08, T13, T14 and T15 were not included in this study (see Sect. 2).

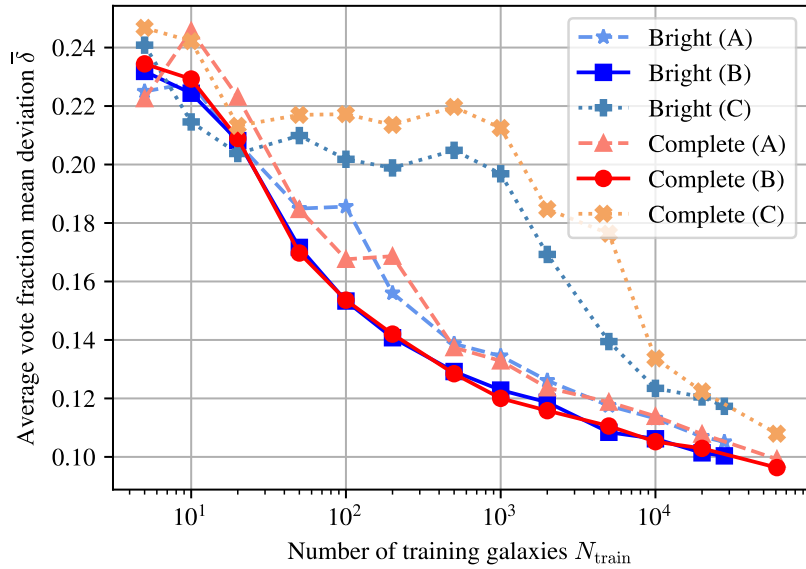


Fig. B.1. The vote fraction mean deviation averaged over all answers depending on the number of galaxies used for training for initial weights A (pretraining on GZD-5), B (pretraining on all major GZ campaigns except GZH) and C (no pretraining) and training on the bright and complete training set. In all cases, the predictions were done on the complete test set. Lower values indicate better performance.

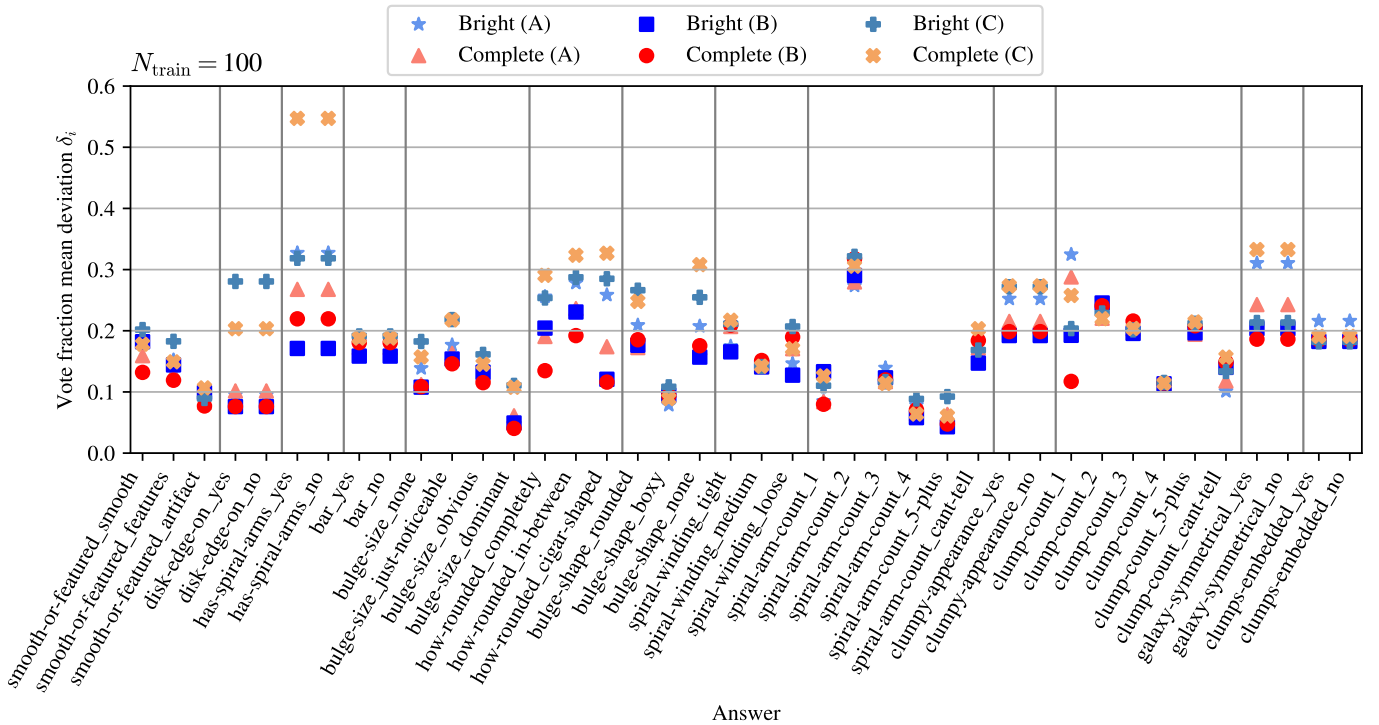


Fig. B.2. Vote fraction mean deviations of the model predictions and the volunteer labels for the different answers of the decision tree for the models trained on 100 galaxies of the different datasets (bright and complete) and with different initial weights (weights A, B and C). Lower δ_i indicates better performance.

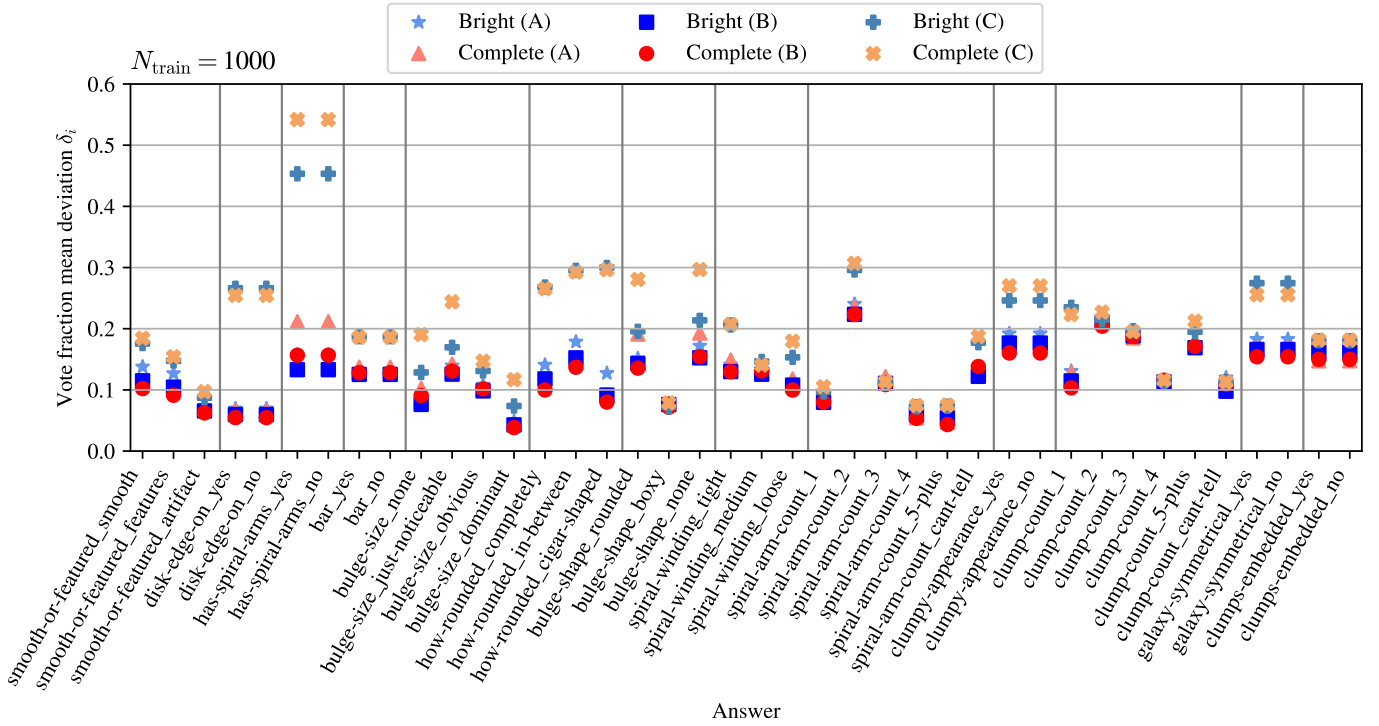


Fig. B.3. Similar to Fig. B.2 with $N_{\text{train}} = 1000$ galaxies.

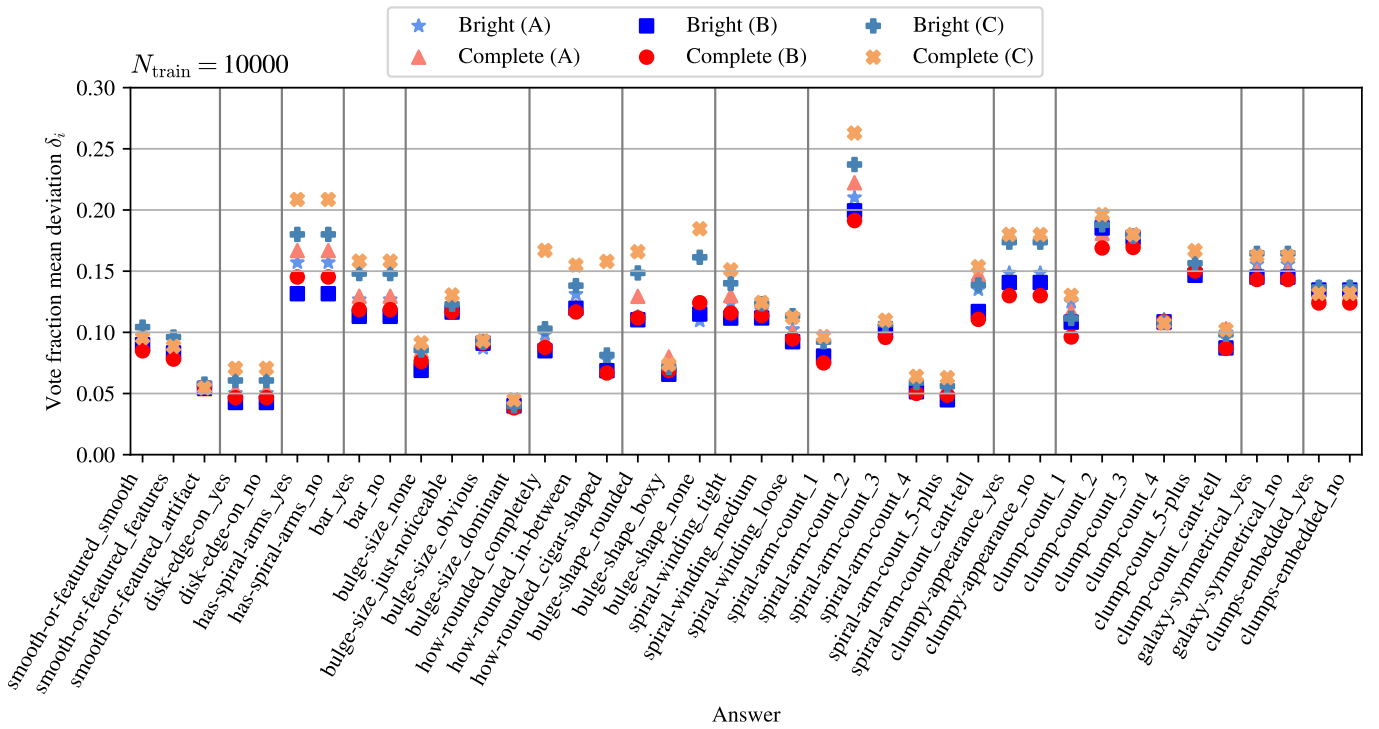


Fig. B.4. Similar to Fig. B.2 with $N_{\text{train}} = 10000$ galaxies.

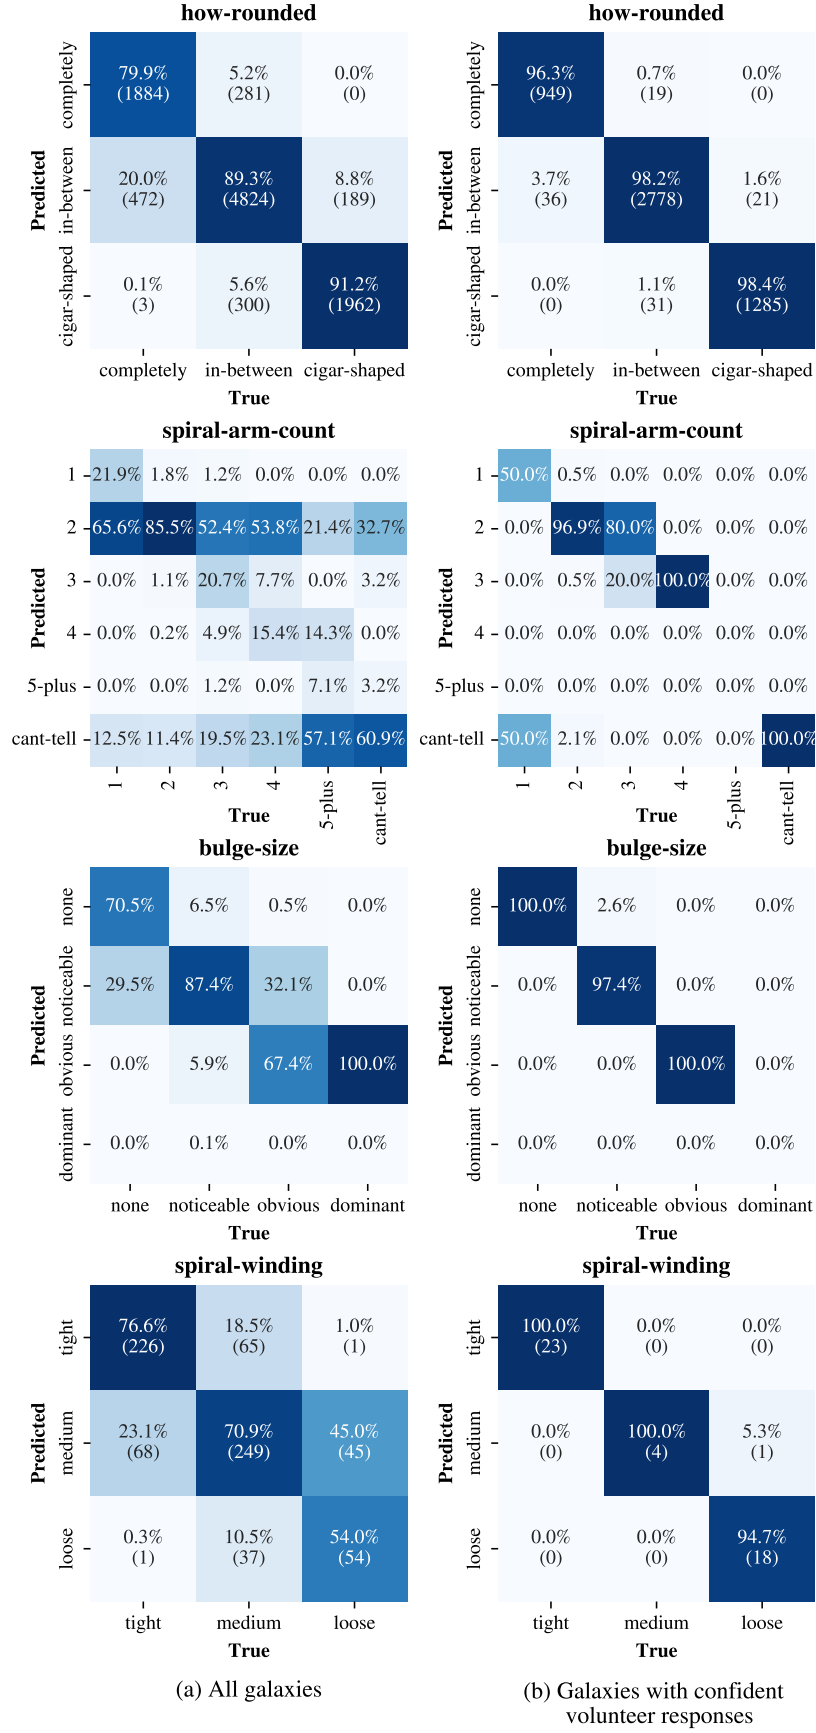


Fig. C.1. Confusion matrices continued from Fig. 8 after binning to the class with the highest predicted vote fraction. The colour map corresponds to the fraction of the ground truth values for the different classes. To improve the readability, for the tasks with more than three answers, only the percentage is stated.

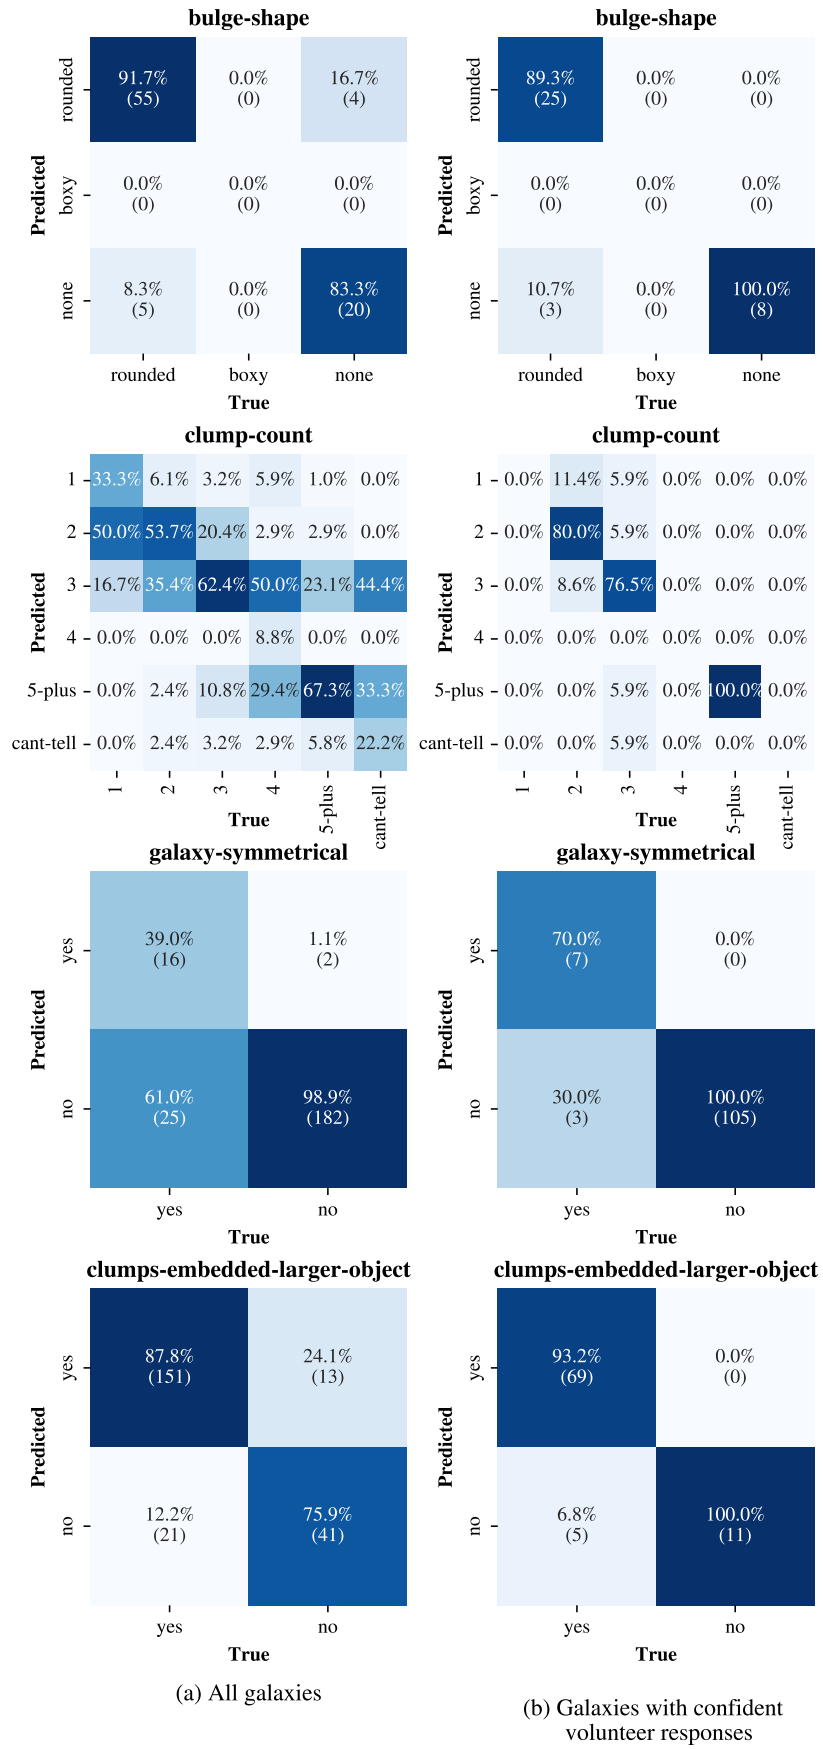


Fig. C.2. Fig. C.1 continued.

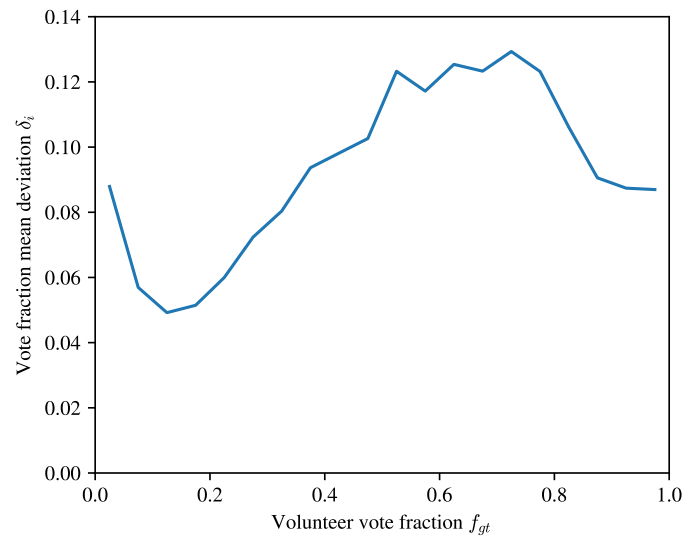


Fig. D.1. Vote fraction mean deviations δ_i of the model predictions and the volunteer labels for the ‘smooth-or-features_features’ answer depending on the volunteer vote fraction f_{gt} .