

Leveraging Biomolecule and Natural Language through Multi-Modal Learning: A Survey

Qizhi Pei, Lijun Wu*, Kaiyuan Gao, Jinhua Zhu, Yue Wang, Zun Wang,
Tao Qin, and Rui Yan*

Abstract—The integration of biomolecular modeling with natural language (NL) has emerged as a promising interdisciplinary area at the intersection of artificial intelligence, chemistry and biology. This approach leverages the rich, multifaceted descriptions of biomolecules contained within textual data sources to enhance our fundamental understanding and enable downstream computational tasks such as biomolecule property prediction. The fusion of the nuanced narratives expressed through natural language with the structural and functional specifics of biomolecules described via various molecular modeling techniques opens new avenues for comprehensively representing and analyzing biomolecules. By incorporating the contextual language data that surrounds biomolecules into their modeling, NL aims to capture a holistic view encompassing both the symbolic qualities conveyed through language as well as quantitative structural characteristics. In this review, we provide an extensive analysis of recent advancements achieved through cross modeling of biomolecules and natural language. **(1)** We begin by outlining the **technical representations** of biomolecules employed, including sequences, 2D graphs, and 3D structures. **(2)** We then examine in depth the **rationale and key objectives** underlying effective **multi-modal integration of language and molecular data sources**. This includes exploration of machine learning frameworks like GPT-based pre-training and multi-stream neural networks, as well as facets of **representation learning** such as network architectures, training tasks and strategies. **(3)** We subsequently survey the **practical applications** enabled to date in this developing research area, with a focus on use cases for property prediction, generation of molecular descriptions, and retrieval of biomolecular data from text. **(4)** We also compile and summarize the **available resources** and datasets to facilitate future work. **(5)** Looking ahead, we identify several **promising research directions** worthy of further exploration and investment to continue advancing the field. Ultimately, through this comprehensive analysis, we aim to provide interdisciplinary researchers across biology, chemistry and AI with a thorough grounding in both the current state and future potential of NL. The related resources and contents are updating in <https://github.com/QizhiPei/Awesome-Biomolecule-Language-Cross-Modeling>.

Index Terms—Biomolecule-Language; Cross Modeling; Language Models

1 INTRODUCTION

The field of biological research has long recognized the vital importance of a thorough understanding of biomolecules, such as molecules and proteins¹, in advancing drug discovery, human understanding, and other biomolecule related applications. Molecules, as the basic units of chemical substances, play a significant role in biochemical reactions and cellular functions, while proteins are crucial for their diverse functions in structural support, enzyme catalysis, signal transduction, and more. These entities are, therefore, the cornerstone of modern biological research.

Biomolecules can be represented in various forms to model their structures and properties computationally. One common representation is biological sequences, which encode biomolecules as linear chains of monomers like nucleotides or amino acids. For example, molecules can be

represented by Simplified Molecular- Input Line-Entry System (SMILES) [1], [2] and protein is usually denoted by FASTA sequence [3]. Sequence-based approaches such as ChemBERTa [4], ProtTrans [5], and ESM [6] have achieved success in modeling these sequence properties. Additionally, biomolecules can be modeled as 2D graphs by representing atoms as nodes and chemical bonds as edges. Graph-based methods like MolCLR [7] and Graphormer [8] leverage graph neural networks (GNNs) to learn functional mappings from graph structures. Beyond sequential and graph-based encoding, 3D structures/conformations for molecule and protein determined via experiments or prediction can also serve as input for deep learning techniques. For instance, AlphaFold [9], ProteinMPNN [10], and Uni-Mol [11] utilize 3D coordinate data to model structural properties.

While powerful for capturing intrinsic biomolecular features from different levels of abstraction, these deep learning-based representation methods often overlook rich sources of external knowledge such as biomedical literature and databases. For example, PubMed [12] contains vast amounts of publications annotating biomolecules and detailing experimental findings. Resources like PubChem [13] and UniProtKB [14] likewise compile myriad properties, functions and interactions for known biomolecules. Intuitively, such external knowledge sources offer extensive multi-faceted textual descriptions of biomolecules, providing linguistic context missing from isolated molecular representations. However, current biomolecular modeling paradigms have

- Qizhi Pei and Rui Yan are with Gaoling School of Artificial Intelligence, Renmin University of China (qizhipei@ruc.edu.cn, ruiyan@ruc.edu.cn).
- Lijun Wu, Yue Wang, Zun Wang and Tao Qin are with Microsoft Research (lijuwu@microsoft.com, yuwang5@microsoft.com, zunwang@microsoft.com, taoqin@microsoft.com).
- Kaiyuan Gao is with Huazhong University of Science and Technology (im_kai@hust.edu.cn).
- Jinhua Zhu is with University of Science and Technology of China (teslazhu@mail.ustc.edu.cn).
- Lijun Wu and Rui Yan are the corresponding authors.

1. In this paper, “molecule” refers to a micromolecule consisting of two or more atoms chemically bonded together, while “protein” represents a biological macromolecule made up of amino acids.

limited ability to systematically leverage this wealth of language data to build more comprehensive models.

There have been significant advances in multi-modal modeling with the convergence of computer vision (CV) and natural language processing (NLP) techniques. Models such as PaLM [15], BLIP2 [16], and LLaVA [17] have effectively integrated diverse data types like images and text to develop a richer understanding of complex real-world domains. Building upon this momentum, the development of powerful language models, particularly large pre-trained language models (LLMs) like GPT-4 [18], LLaMA [19] and Alpaca [20], have spurred new interest in jointly modeling biomolecules and natural language.

Recently developed models in this area, such as MolT5 [21], BioT5 [22] and KEDD [23], incorporate textual descriptions of biomolecules directly into their pretraining objectives. This allows the models to learn multifaceted representations that capture biomolecules from both structural and linguistic perspectives. The integrated modeling facilitated by these advanced techniques provides deeper insights into biological functions, properties, and activities. For example, downstream tasks in areas like property prediction, biomedical natural language processing, and molecular retrieval have benefited from these joint representations. In particular, the KV-PLM model [24], which is based on the powerful BERT [25] architecture, excels at learning molecule-text alignments and has demonstrated improved performance over traditional methods on relevant tasks through its integrated biomolecular-linguistic representations.

While significant advances have been made in jointly modeling biomolecules and natural language via approaches like BioT5 [22] and KV-PLM [24], the field currently lacks a unifying resource that comprehensively surveys the progress and various approaches under development. To address this gap, we present an extensive review of the cross-modal integration of biomolecules and language, which we refer to as cross Biomolecular-Language (BL) modeling.

Through this survey, our aim is to equip interdisciplinary and AI4Science researchers at the intersection of biology, chemistry and artificial intelligence with a deep understanding of both current techniques, challenges, and future directions within this rapidly evolving area of study. We provide an exhaustive analysis of biomolecular representation methods, algorithms for multi-modal integration, frameworks for representation learning, and diverse application domains that have benefited from BL. We also discuss available biomolecular and language datasets to facilitate further progress. The hierarchical tree diagram in Figure 1 facilitates a structured understanding of the diverse methods employed in the BL field.

Additionally, we identify prospective research avenues and open challenges that warrant further exploration. By consolidating insights from existing works on BL, we aim to serve as a foundational reference for the scientific community. It is our hope that this comprehensive review will help guide and catalyze new investigations that move the field forward, ultimately supporting enhanced biomolecular characterization, discovery and understanding through multi-modal integration of structural and linguistic knowledge.

This comprehensive survey is structured as follows: In Section 2, we begin by providing an in-depth examination of

common biomolecular representation techniques used in the field, including 1D sequences, 2D graphs, and 3D structures. Section 3 then empirically analyzes the relationships between different data modalities and explores the underpinnings motivating their integration from both knowledge representation and machine learning perspectives. Section 4 delves into prominent machine learning frameworks employed, such as GPT-based pre-training and multi-stream neural network architectures. Section 5 discusses representation learning methodology in further detail, analyzing facets like network architecture design, training objectives, and learning strategies. We next survey practical applications enabled to date in Section 6, focusing on areas like predictive modeling, generative modeling, and information retrieval. Section 7 provides a compilation of publicly available datasets, models, and benchmark results. In Section 8, we identify open challenges and future directions, such as improving model interpretability and generalization. Finally, in Section 9 we summarize our findings and conclude by outlining several promising research avenues. Through this systematic articulation of past work, current techniques and future outlook, our aim is to serve as a comprehensive resource for the AI and scientific community.

2 BIOMOLECULE REPRESENTATION

In this section, we concisely review the various representations of biomolecules and the associated modeling methods. Generally speaking, the modalities of language text, molecule and protein can be viewed in different representations, such as 1D sequence, 2D graph and 3D structure. An overall summary of different modalities and their representation methods are presented in Figure 3. Besides, a chronological overview of existing BL models development with different modalities introduced in this section is presented in Figure 2. Introductions of these models and more details are along the whole survey.

2.1 Sequence

Sequence representation is the most prevalent method for characterizing biomolecules. The Simplified Molecular-Input Line-Entry System (SMILES) [1] is the most frequently used one in molecular representations. SMILES encodes molecules as strings, with atoms represented by elemental symbols, bonds by specific characters, and branches and rings by numerical indices. However, the syntax of SMILES lacks robustness, as SMILES is surjective onto the joint space of molecular graph, non-molecular graph, and invalid graphs. Minor variations in a valid SMILES string can result in invalid molecular structures (*i.e.*, non-molecular graph or invalid graphs), leading to challenges in generating valid molecule for generative models. This has prompted the development of more robust molecular representations like DeepSMILES [109] and SELFIES [110]. SELFIES, in particular, has gained increasing popularity in recent works due to its syntax that guarantees the generation of 100% valid molecular structures. In other words, SELFIES is surjective onto the space of molecular graphs. Besides, molecule can also be represented by IUPAC (International Union of Pure and Applied Chemistry) name and InChI (International

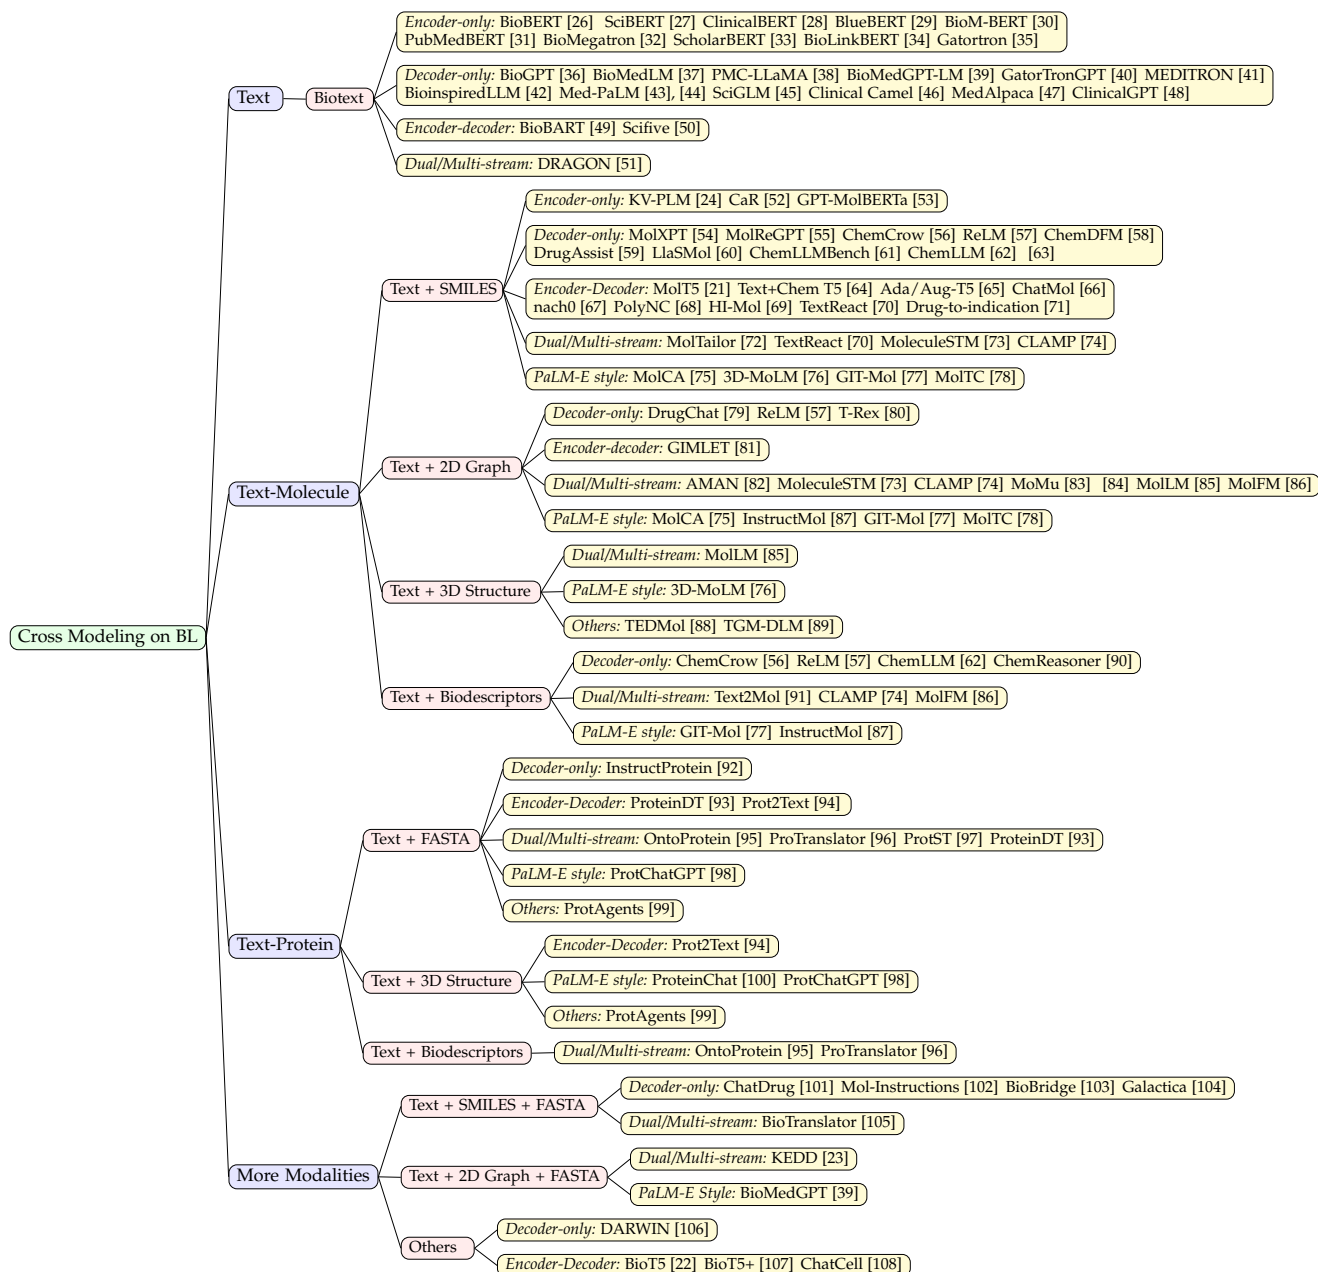


Fig. 1: Overview of cross modeling methods on BL. We systematically categorize various methods based on the modality, biorepresentation, and model framework. The modalities considered include text, text-molecules, text-protein, and more modalities. For biorepresentations, we delineate between biotext and biomolecules, categorizing the latter into 1D sequences, 2D graphs, and 3D structures, with details discussed in Section 2. The model frameworks are classified into encoder-only, decoder-only, encoder-decoder, dual/multi-stream, and PaLM-E-style configurations, and more details are introduced in Section 4. A minority of works that do not neatly fit into these categories are classified into “others”.

Chemical Identifier) [111]. IUPAC is a systematic method for naming chemical compounds, which ensures consistency and clarity in chemical communication. InChI [111] is a textual identifier that provides a unique and machine-readable representation of the structure of molecule. One molecule may correspond to multiple SMILES and SELFIES, but only one unique IUPAC name or InChI. However, the uniqueness of SMILES and SELFIES can be enforced by canonicalization via tools like RDKit [112].

For macromolecules such as proteins, DNA, and RNA, the FASTA format [3] is commonly used, representing amino

acids or nucleotides with single-letter codes for a concise and standardized approach.

Recurrent neural networks (RNNs) were among the earliest deep learning architectures applied to model biomolecular sequences. RNNs can process variable-length input sequences by iterating calculations over each position. However, standard RNNs suffer from gradient vanishing/exploding issues when learning long-term dependencies. More advanced LSTMs [113] and GRUs [114] were developed with gating mechanisms that allow them to better preserve error signals through time. More recently, the Transformer architec-

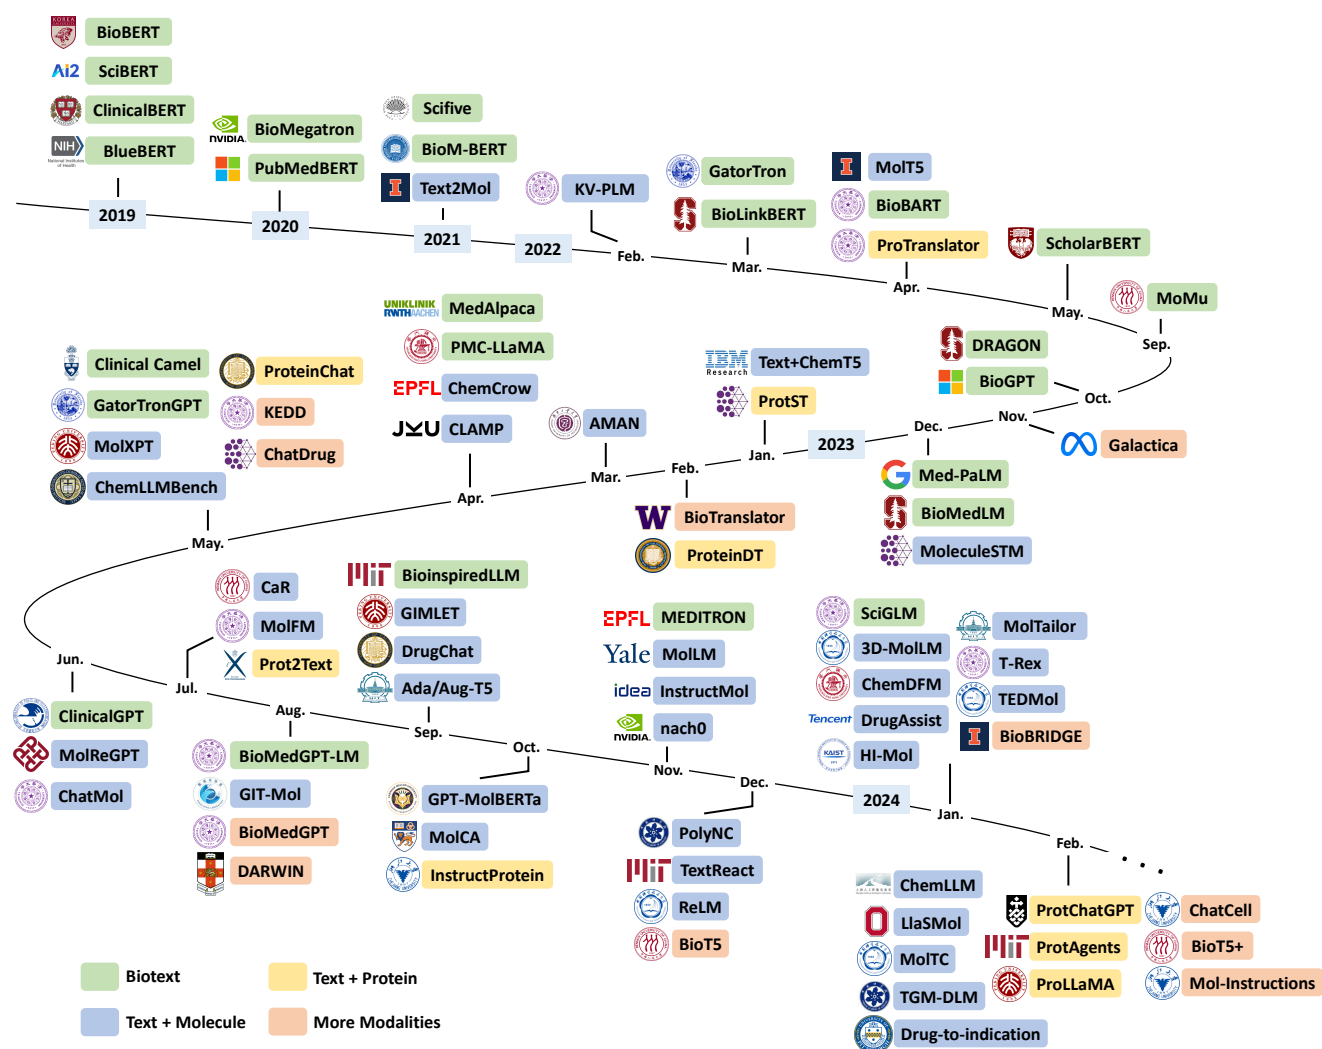


Fig. 2: A chronological overview of BL models proposed in recent years. Different colored rectangles correspond to different input modalities of the model. Along the timeline, we can observe the cross modeling with more modalities are becoming more popular, from biotext, to text + molecule/protein, and now more modalities integration.

ture [115] has emerged as a powerful alternative to RNNs for modeling sequential data. At the core of the Transformer lies the attention mechanism [116], which enables interactions between all tokens simultaneously rather than relying on proximity in the input sequence. This affords Transformers an advantage in capturing fine-grained relationships across long sequences. In the biomolecular domain, Transformer-based models like MolT5 [21] and BioT5 [22] have effectively applied the architecture to process atoms, bonds or amino acids as tokens, utilizing attention to learn intricate interactions between tokenized components of biomolecular structures. The modeling flexibility of Transformers has contributed significantly to representational advances for sequential biomolecular data.

2.2 2D Graph

Molecules are inherently represented as 2D graphs, with atoms as nodes and chemical bonds as edges, each defined by attributes like type, mass, charge for atoms, and type, length, direction for bonds. While proteins do not naturally

lend themselves to characterization as 2D graphs in the same manner as molecules, several methodologies facilitate their indirect representation in this format. These approaches often involve the transformation of a 1D amino acid sequences or 3D structures into a 2D graphs. One common technique predicts pair-wise residue contact maps from either the 1D amino acid sequence or 3D structures with distance thresholds to delineate interactions. This contact map then serves as a basis for constructing a graph, where each node represents an amino acid, and edges reflect the predicted spatial or evolutionary proximity between residues. Another method employs the protein secondary structure [117] for graph construction, where nodes correspond to amino acids, and edges represent both peptide bonds that link these amino acids linearly and hydrogen bonds crucial for the formation and stability of secondary structures.

Graph Neural Networks (GNNs) [118], [119], [120] have become a prominent approach for modeling 2D molecular or protein graphs, exploiting their ability to process graph-structured data efficiently [83], [121], [122]. These GNNs have





Modality	Representations		
Text Aa	1D	<i>The crystal structure of calmodulin (CaM) bound to trifluoperazine (TFP) has been determined and refined to a resolution of 2.45 Å. Only one TFP is bound to CaM, but that is sufficient to cause distortion of the central alpha-helix and juxtaposition of the N- and C-terminal domains similar to that seen in CaM-polypeptide complexes.</i>	[Language Description]
Molecule	1D	<chem>C1CC1N2C=C(C(=O)C3=CC(=C(C=C3)N4CCNCC4)F)C(=O)O</chem> [SMILES] 1-cyclopropyl-6-fluoro-4-oxo-7-piperazin-1-ylquinoline-3-carboxylic acid [IUPAC] <chem>[F][C][=C][C][=C][Branch1][=N][C][=C][Ring1...][C][C][Ring1][Ring1]</chem> [SELFIES]	2D  [Molecule Graph] 3D  [Molecular Conformation]
Protein	1D	<code>ADQLTEEQIAEFKEAFSLFDKDGDTITTKELGT VMRSLGQNPTEAELQDMINEVDADGNGTIDF PEFLTMMARKMKDSDSEEIREFRVFDKGN GYISAAELRHVMTNLGEKLTDEEVDEMIREADI DGGDQGVNYEEFVQMMTAK</code> [FASTA]	2D*  [Secondary Structure] 3D  [3D Structure]

Fig. 3: The different representations for text, molecule and protein modalities. For language text, the natural representation is the 1D sequence with tokens. For molecule, there are various kinds of 1D representations, including SMILES, IUPAC name, SELFIES and so on. The 2D molecule graph contains the atom as node and bond as edge. The 3D representation is the molecular conformation in the structural space, where each molecule exists many conformations. For protein, FASTA sequence is the widely adopted 1D representation. The 2D representation is not a well-defined term for protein, here we acknowledge the secondary structure as the 2D representation since the secondary structure can be viewed as a simplified representation in 2D structure space, which is a local description and has strong relation with protein’s 3D structure representation. The 3D structure of protein is the most crucial one when we consider protein’s function.

shown strong empirical performance through information propagation and aggregation over neighboring nodes and edges. Some efforts have focused on enhancing GNN architectures to better represent unique graph substructures prevalent in molecular domains. Certain studies [123], [124] focus on designing GNNs specifically for unique substructures in molecules, such as rings, to enhance the representation of molecular 2D graphs. They incorporate specialized modules to encode cyclic rings that are biologically important motifs. Additionally, recent works have explored adapting the Transformer architecture for graph-based problems. Some studies [8], [85] employ the *Graph Transformer*, which encodes graph connectivity directly into the self-attention mechanism [116], allowing long-range interactions on graph-structured inputs through biased attention flows. These approaches indicate promising directions for advancing graph-based biomolecular modeling.

2.3 3D Structure

The 3D structural representation of biomolecules encodes valuable spatial information by modeling atoms as nodes with associated coordinate positions. Both molecules and proteins exist as ensembles of conformations differing in energy levels, with the stable conformation of lowest energy typically being the most biologically relevant. In molecular 3D representations, the spatial coordinates of each individual atom serve as the fundamental representation units. Meanwhile, protein structures can be encoded using the positions

of $C\alpha$ carbons, four backbone atoms (N, $C\alpha$, C, O) per amino acid, or a full atomic representation. Incorporating precise 3D spatial data is critical due to biomolecules inherently existing in 3D configurations within biological systems. Accurately capturing biomolecular 3D structure has proven important for a variety of real-world applications. 3D structural data is key for modeling quantum mechanical properties and simulating complex biomolecular interactions that occur in the 3D space of living systems. Computational methods that effectively leverage 3D coordinates have demonstrated success in tasks such as molecular property prediction, protein structure prediction and molecular docking simulations. Therefore, 3D representation plays an indispensable role in advancing biomolecular modeling.

GNNs employing message passing techniques have been widely adopted for modeling 3D biomolecular structures. Methods such as ProteinMPNN [10] and GVP [125] extend traditional GNN message passing to 3D space, allowing nodes to communicate with neighbors within a spatial distance cutoff. More recently, the Transformer architecture has also been adapted for 3D biomolecular modeling. Models like TransformerM [126] and others [76], [85] integrate 3D distance information directly into the self-attention mechanism. This enables position-aware interactions while retaining the advantages of Transformer representations. Some works have also explored hierarchical approaches to capture biomolecular structure at multiple levels of detail. For instance, H-SRN [127] uses a two-level graph network

to jointly model a coarse protein structure at the residue level (via $C\alpha$ positions) along with a fine-grained atom-level representation encompassing side chain data. Such multi-scale techniques aim to leverage interactions across structural hierarchies for improved 3D biomolecular modeling performance. Overall, message passing, Transformer adaptations, and hierarchical modeling have proven effective techniques for representation learning on 3D biomolecular data, pushing the boundaries of structural modeling via graph-based and self-attentive deep neural networks.

2.4 Biodescriptors

In addition to the above 1D, 2D, and 3D biomolecule representations, specialized biodescriptors offer alternative characterization methods. For molecules, these include biodescriptors such as fingerprints [128], Mol2vec [129], etc. Fingerprints [128] are computational representations that encode molecular structure into a binary or vector format, allowing for the rapid comparison and analysis of molecular similarities and differences. Mol2vec [129] is an approach that transforms molecules into vector representations based on their structural characteristics. Molecular formula also provides a simple representation of the composition of molecule, indicating the types and quantities of atoms present. Some works [77], [130] even model the molecular image. For proteins, biodescriptors can be protein names, Gene Ontology (GO) terms [131], domains, etc. Protein names offer a straightforward identifier, typically reflecting their function or discovered role. Gene Ontology (GO) terms provide a standardized vocabulary for describing the biological processes, cellular components, and functions associated with proteins, facilitating a unified understanding across research disciplines. Domains refer to distinct structural or functional units within proteins, often conserved across different proteins, indicating a common evolutionary origin or similar biological function. Despite their less frequent usage compared to sequence, 2D graph, and 3D structure representations, these biodescriptors still play a pivotal role in specific contexts [62], [75], [91], [102].

3 STORY BEHIND INTEGRATION

3.1 Intuition for Cross Modeling

The cross modeling of biomolecules and natural language is designed to overcome the limitations inherent in traditional biomolecular representations. While existing representation methods can effectively capture the inherent attributes of biomolecules, they often overlook the wealth of external knowledge that can further enrich the understanding. This external knowledge, accessible in various formats such as biological literature, databases, and knowledge graphs, provides comprehensive descriptions and insights into the broader biological context and functional aspects of biomolecules. For instance, consider a molecule \mathcal{M} , whose toxicity profile is detailed in scientific texts. Models pre-trained on such texts are equipped to infer the potential toxicity of a novel, similar molecule \mathcal{M}' . Furthermore, language offers a more flexible medium for biomolecule design. Through the integrated modeling of biomolecules and language, the model can

harness extensive biological knowledge for biomolecule-related tasks, enabling more nuanced control over the generation and editing of molecules. This integration facilitates the exploration of vast molecular spaces, allowing for the creation of novel biomolecules with desired properties. For a better illustration, we put an example of the sequential representation of these modalities that integrated in the cross modeling in Figure 4. Instead of the single modality modeling, the sequence representations of molecule (SMILES) and protein (FASTA) are integrated to make up a wrapped sentence that contains the natural language description, which provides more enriched contextual information for a better understanding of molecule and protein.

3.2 Goals for Cross Modeling

The principal objective of integrating biomolecules with external knowledge sources is to develop models capable of understanding and predicting the complex behaviors and interactions of biomolecules within biological contexts. By combining intrinsic molecular features with external textual information, these models can attain a more comprehensive representation of biomolecules. We explore three distinct approaches that embody the goals of integration: representation learning, instruction following, and agent/assistant models, each contributing uniquely to the field (see Figure 5 for a visual understanding).

3.2.1 Representation Learning.

The representation learning model typically adheres to the “pre-training then fine-tuning” paradigm. In the pre-training phase, the model is self-supervised trained on a vast corpus that includes texts, molecules, proteins, and other modalities, enabling it to learn general representations across these different modalities. Subsequently, the model is fine-tuned for specific downstream tasks related to biomolecules, such as property prediction, interaction prediction, and biomolecule-text generation tasks. Representation learning is one of the most important aspects that exists in current works. A good representation gives large opportunity for molecule, protein, and also language understanding and generation. For instance, MolT5 [21] is initially pre-trained on a large number of molecule SMILES and texts, and then fine-tuned for molecule captioning (molecule \rightarrow text) and text-based molecule generation (text \rightarrow molecule) tasks, demonstrating impressive performance. This paradigm exemplifies how transfer learning can significantly enhance model performance on specialized tasks by leveraging learned patterns from a broad dataset. The fine-tuning phase allows for the adaptation of the model to the nuances of specific biomolecular functions or interactions, resulting in highly accurate predictions and generation capabilities.

3.2.2 Instruction Following.

Instruction tuning [132], [133] has gained significant attention as a powerful paradigm for fine-tuning large language models in NLP [134], [135]. The approach involves constructing multi-task datasets consisting of natural language instructions or prompts that describe different tasks. By fine-tuning LLMs on these instruction-guided examples, models learn to perform tasks by following similar language

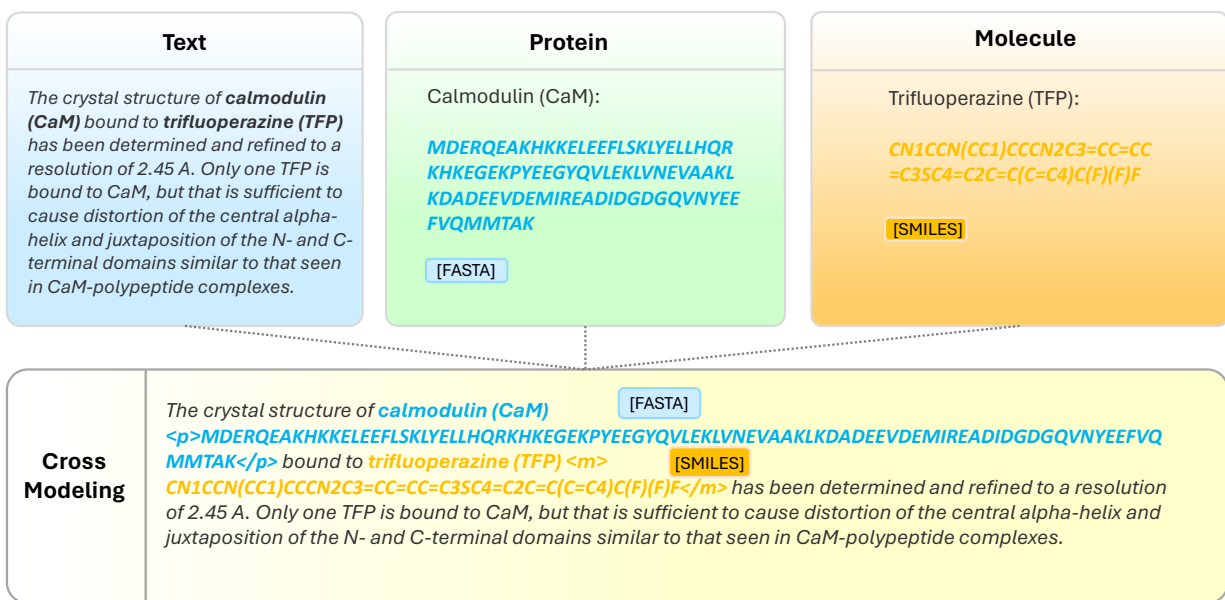


Fig. 4: The intuition behind the cross modeling. Take the 1D sequence representation as an illustration, the different modalities of text, protein, and molecule can be integrated together to make up a wrapped sentence that contains the natural language description, protein FASTA sequence and the SMILES sequence for molecule. Therefore, for the cross modeling, the understanding of the protein sequence and molecule sequence will be enhanced by the natural language’s description with rich contextual information. Besides, the mapping of textual name of the molecule and its SMILES sequence, also the protein name and its FASTA sequence can be learned through the wrapped structural data. Ideally, the representations of all the three modalities are better captured.

descriptions at inference. Crucially, instruction tuning has proven effective at enabling LLMs to handle completely new tasks in a "zero-shot" manner, without any direct training examples for that task. If provided with an instruction written in the same format seen during fine-tuning, models can infer the necessary steps to complete the unseen task. This zero-shot capability has made instruction tuning particularly appealing for dynamically expanding model abilities.

Notably, instruction tuning has also been successfully applied to biological domains by fine-tuning pre-trained LLMs on instruction sets covering problems like protein function prediction, molecular design, and biomedical question answering. For instance, as shown in Figure 9, tasks from the BBBP dataset [136] can be posed via language prompts. Models fine-tuned in this way can then profile new molecules by understanding instructions at test time. Models such as PMC-LLaMA [38] further demonstrate how instruction tuning can develop specialized skills. By first immersing in biomedical literature and then fine-tuning LLaMA [19] model on medical language prompts, PMC-LLaMA attained an in-depth, clinically oriented set of abilities like aiding doctors via medical conversations.

3.2.3 Agent/Assistant.

Beyond task-specific training, leveraging pre-trained LLMs as intelligent agents holds promise for broadening biotechnology applications. Due to their self-supervised pre-training on diverse knowledge, LLMs demonstrate strong understanding and reasoning skills directly transferable to new domains. Framing LLMs as automated assistants provides an accessi-

ble, programming-free interface for non-experts to utilize their pre-existing capabilities. This facilitates expediting research, aiding clinical decision making, and disseminating biomedical insights. LLMs show potential as "interactive encyclopedias" that retrieve and reason about molecular concepts without additional fine-tuning. For example, MolReGPT [55] introduces a retrieval approach leveraging LLMs for molecule captioning and generation without fine-tuning. ChemCrow [56] develops an LLM-based chemistry assistant integrating expert tools to solve various tasks, demonstrating direct application of LLMs as trainable yet self-supervised agents. Furthermore, DrugAssist [59] equips LLMs with interactive molecule optimization abilities through instruction tuning, indicating their skill customizability. In summary, agent/assistant paradigms provide a training-free avenue to maximize utilization of LLMs’ knowledge while circumventing specialized model development. With growing pre-training sizes, LLMs’ transferability to biotech applications holds transformative potential through interactive interfaces.

4 LEARNING FRAMEWORK

The Transformer architecture [115] has become a cornerstone for the majority of contemporary model frameworks in BL domain. In this section, we first introduce the traditional Transformer models for BL, including encoder/decoder-only and encoder-decoder architectures. Furthermore, we explore innovative Transformer variants for BL, including the PaLM-E-style [15] model, which leverages base LLMs with external encoders and modality projector, and the

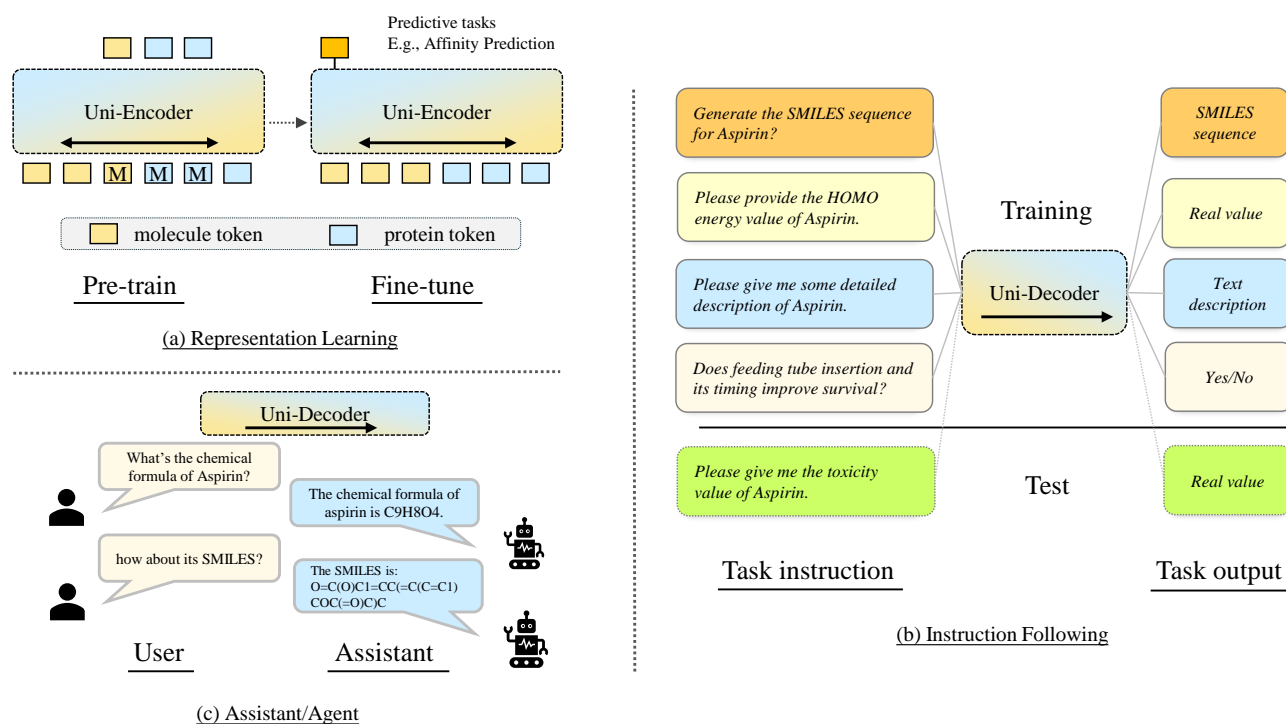


Fig. 5: The different objectives of the models that are trained with cross modeling. We list three goals here. (a) The basic utilization of the cross modeling is to build a strong representation model that can be used for different tasks. The common way is to pre-train a strong representation model and then fine-tune on various downstream tasks, such as biomolecule property prediction. (b) Instruction following is to make the cross integrated model have a strong generalization ability, it requires the model to first trained on multiple diverse tasks with instructions and then with new tasks and task instructions, the model can have a good understanding and solve the new task without further training. (c) One important goal is to make the model serve as a smart assistant or agent in biomolecule domain that can interact with users and have dialogue conversation to help solve users' questions. This kind of chatbot requires the model to have strong knowledge of biomolecules and texts through effective cross modeling methods.

dual/multi-stream model, which employs multiple encoders for distinct modalities. An overview of these architectures is shown in Figure 6. Subsequent sections will elaborate on these models in detail.

4.1 Transformer Model

4.1.1 Encoder/Decoder-only

The Transformer model can be specialized into encoder-only (Figure 6a) and decoder-only (Figure 6c) designs to suit different purposes. Encoder-only models [25] specialize in processing input sequences of biomolecules and text through bi-directional self-attention, making them highly effective for tasks that require an in-depth understanding of the input, such as sentiment analysis and feature extraction in NLP. Thereby in biomolecule domain, encoder-only models establish a bi-directional association between biotokens and text tokens for predictive tasks [24]. Encoder-only models are typically designed for representation learning objective obtain strong representations for text and biomolecule. In contrast, decoder-only models [18], [138] employ causal attention to focus on the sequence of previous tokens. This architecture is typically utilized in generative tasks, such as

generating text descriptions that match the given molecule or for the reverse task [54]. Thanks to the autoregressive generation property, decoder-only models are well suitable for instruction following and assistant/agent objectives.

4.1.2 Encoder-decoder

The standard Transformer [115] and its variants [139], [140] adopt the encoder-decoder framework (Figure 6d), where the encoder processes and contextualize the input sequences, and the decoder subsequently generates output based on this encoded context with encoder-decoder attention. Models such as BART [139] and T5 [140] are with this architecture and demonstrating its effectiveness across a broad spectrum of applications. In biomolecule and text cross modeling scenario, this framework makes the encoder utilize bi-directional attention to enable more comprehensive interaction between biotokens and text tokens compared to the causal attention of the decoder-only models. This enriched interaction allows for a deeper understanding of the input sequences. Subsequently, the encoder-decoder attention mechanism empowers the decoder to generate outputs tailored for specific biological tasks. For example, MolT5 [21] shows strong retrieval and generation abilities between molecule and text on several

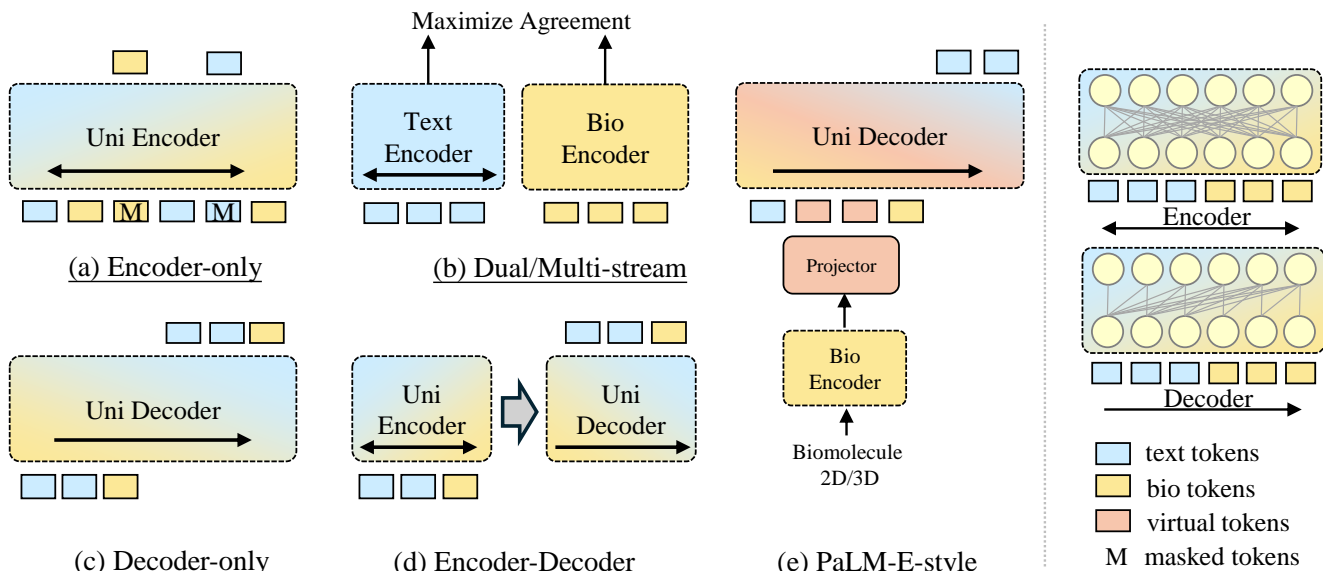


Fig. 6: Model architectures for different learning frameworks. (a) and (c) are uni-encoder and uni-decoder models that take the Transformer encoder/decoder structure for understanding and generation tasks, respectively. (d) is the general encoder-decoder structure, which usually adopts the T5 [137] framework for modeling and training. (b) is the dual/multi-stream framework that utilize two or more encoders to conduct representation training, e.g., contrastive training between text encoder and biomolecule encoder. (e) is PaLM-E-style that first introduced by Google, which integrates the biomolecule encoder and the uni-decoder in a hierarchical way with help of an internal projector.

downstream tasks. Similarly, the advanced BioT5 [22] and BioT5+ [107] also take the T5 framework and achieve much superior performances on both biomolecule understanding and generation tasks.

4.2 Dual/Multi-stream Model

The dual/multi-stream model (Figure 6b) is different from the previous Transformer encoder/decoder based models. It is a combination of different encoders with specialized encoding from different modalities, which usually incorporates multiple specialized encoders to handle different data modalities, each encoder with one modality, such as text, biomolecules, or Knowledge Graph (KG) embeddings. The objective for this framework is to do well in representation learning. This design capitalizes on uni-modal pre-trained models, which excel at capturing modality-specific characteristics. For instance, Transformer-based backbones effectively encode textual semantics, while GNN-variants adeptly embed molecular structures. By embedding modalities independently with experts before fusion, multi-stream models preserve this captured modality-specific information [73], [86]. DVMP [141] is a representative work that takes the Transformer encoder to encode the molecular sequence and the GNN encoder to model the molecular graph under a dual-stream framework, which achieves a strongly competitive performance on molecular property prediction tasks. The dual/multi-stream models effectively capture modality nuances through uni-modal experts, while still learning mappings between modal spaces. This provides a flexible framework for downstream multi-modal tasks by facilitating cross-pollination of different domain knowledges.

4.3 PaLM-E-style Model

The "PaLM-E-style" (Figure 6e) model represents a notable advancement in the Vision-Language (VL) multi-modal field, as demonstrated by BLIP-2 [16], PaLM-E [15], and LLaVA [17]. This model incorporates a modality projector to align LMs with visual models, enhancing the capability of LMs to understand images and show superior performance in tasks like Visual Question Answering (VQA) and visual captioning. Extending this paradigm, the PaLM-E-style model is adapted to the biological domain, where visual encoders are replaced with biomolecule encoders. By aligning biomolecule and text spaces with biomolecule-text pairs, the cross-modal projector is trained to extract text-related molecule features (virtual tokens in Figure 6e) from the biomolecule encoder, thus enabling the LMs to understand biomolecules. Given that biomolecules inherently possess 1D sequence representations, the uni-decoder can also process these sequence tokens alongside virtual tokens, thereby enriching the comprehension of biomolecules from multiple dimensions. Therefore, the PaLM-E-style model can not only effectively leverage pre-trained biological models but also enable LMs to process complex 2D/3D biomolecular graphs/structures [39], [87].

5 REPRESENTATION LEARNING

Due to the huge efforts taken on the representation learning in the research committee, in this section, we discuss prevalent tasks and strategies in representation learning for BL pre-training using biomolecules and text data. This includes single-modal pre-training and cross-modal pre-training. Single-modal pre-training focuses on enhancing the comprehension of individual modalities, including molecules,

proteins, and textual data, to improve model performance within a specific domain. In contrast, cross-modal pre-training aims to forge interconnections among these distinct modalities, fostering a more integrated understanding across domains. Herein, we elaborate on the training tasks and strategies that have gained widespread acceptance within the research community. Additionally, we enumerate various pre-training data resources in Section 7.1.

5.1 Training Tasks

We summarize the widely-used training tasks in this section and a visualization for each task is in Figure 7. Now, we present the details in the following content.

5.1.1 Masked Language Modeling (MLM).

Initially introduced by BERT [25], the MLM task plays a pivotal role in enhancing models’ understanding of language by masking specific tokens within input sequences and prompting the model to predict these masked tokens using the context provided by the surrounding unmasked tokens. Extending this concept, the T5 framework [140] incorporates MLM into an encoder-decoder architecture. It innovates by substituting consecutive token spans in the input with sentinel tokens and constructing the output from these masked spans, delineated by the sentinel tokens and an appended final sentinel token. In single-modal applications, especially within the context of biomedical texts (biotext), MLM serves as a crucial mechanism for enabling models to decipher the intricate relationships between mentions of biomolecules (e.g., entity names) and their contextual narratives. An exemplary application of this is PubMedBERT [31], which, through MLM pre-training on the extensive PubMed [12] dataset, demonstrates exceptional capability in extracting drug-drug interaction relations from sentence-level annotations and answering biological questions. Scifive [50] adopts similar pre-training with T5 model and show superior performance on various biomedical NLP tasks. Moreover, the versatility of MLM extends beyond single-modal data processing, proving to be equally effective in cross-modal scenarios where it can bridge the gap between disparate modalities, such as textual and biomolecular sequences. Unlike in the VL domain, where models like PALM [15], BLIP2 [16], and LLaVA [17] operate, biomolecules are inherently sequential, allowing for a more seamless integration with textual data. MolT5 [21] exemplifies this approach by applying MLM separately to molecular SMILES and textual sequences, thus proficiently capturing the essence of each modality independently without delving into their inter-modal interactions. Taking a step further, models such as KV-PLM [24], MolXPT [54], and BioT5 [22] transcend the conventional boundaries of MLM by not only applying it to single-modal data but also extending its application to mixed data, wherein textual and biomolecular sequences are interwoven. This innovative approach fosters a more nuanced understanding of the complex interplays between modalities, significantly enhancing the model’s ability to align biomolecular and textual data. Such advancements have shown to markedly improve performance across a spectrum of downstream tasks.

The MLM objective is formally defined as:

$$\mathcal{L}_{\text{MLM}} = -\mathbb{E}_{W \sim \mathcal{D}} \sum_{w_m \in m(W)} \log p(w_m | C(w_{\setminus m})), \quad (1)$$

where $m(W)$ represents the set of masked biotokens or text tokens from a sample W , $C(w_{\setminus m})$ denotes the context of unmasked tokens (with slight variations between BERT and T5 implementations), and $W \sim \mathcal{D}$ signifies a data sample W drawn from the dataset \mathcal{D} .

5.1.2 Next Token Prediction (NTP).

NTP stands as a cornerstone task in NLP, epitomized by the success of GPT models. In this task, models are trained to predict the likelihood of a subsequent sequence of words. NTP shares commonalities with the MLM task in its applicability to both single-modal and multi-modal contexts, offering a versatile framework for enhancing language models’ comprehension across various domains. For instance, BioGPT [36], pre-trained solely on biotext sourced from PubMed [12], focuses on understanding the intricate lexicon and conceptual relationships prevalent in biomedical literature and show enhanced performance in biomedical NLP downstream tasks. In contrast, MolXPT [54] is pre-trained on both single-modal data (molecule SMILES and biotext) and cross-modal mixed data, where molecule SMILES is integrated within textual contexts, providing a rich context for the model to learn from. This dual-modal training approach equips MolXPT with a nuanced comprehension of molecular contexts, significantly enhancing its ability to perform a variety of tasks such as molecule property prediction and molecule-text bi-directional generation. The NTP objective is formally defined as:

$$\mathcal{L}_{\text{NTP}} = -\mathbb{E}_{W \sim \mathcal{D}} \sum_i \log p(w_i | w_{<i}), \quad (2)$$

where w_i represents the i^{th} biotoken or text token in the sequence, and $w_{<i}$ denotes all preceding tokens.

5.1.3 Cross-Modal Alignment (CMA).

Cross-Modal Contrastive Learning (CMCL) and Cross-Modal Matching (CMM) are two common methods in cross-modal learning to align distinct modalities. In BL, CMCL aims to learn universal representations for biomolecules and text within a shared semantic space. Its primary goal is to closely align biomolecule representations with related texts, and simultaneously differentiate them from unrelated texts, thus enhancing the ability to understand and integrate information across modalities. The general form of the contrastive loss for biomolecule-to-text (b2t) alignment is:

$$\mathcal{L}_{\text{CMCL-b2t}} = -\mathbb{E}_{(B,W) \in \mathcal{D}} \left[\log \frac{s(\mathbf{h}_B, \mathbf{h}_W)}{\sum_i s(\mathbf{h}_B, \mathbf{h}_{W'_i})} \right], \quad (3)$$

where \mathbf{h}_B , \mathbf{h}_W , and $\mathbf{h}_{W'_i}$ denote the representations of a biomolecule, related text, and unrelated text with biomolecule B , respectively. The function $s(\cdot|\cdot)$ represents a similarity metric, and $(B, W) \in \mathcal{D}$ denotes a biomolecule-text pair from dataset \mathcal{D} . The text-to-biomolecule (t2b) contrastive loss, $\mathcal{L}_{\text{CMCL-t2b}}$, mirrors $\mathcal{L}_{\text{CMCL-b2t}}$. Different from CMCL, CMM focuses on learning fine-grained alignment between biomolecule and text representations. Unlike CMCL,

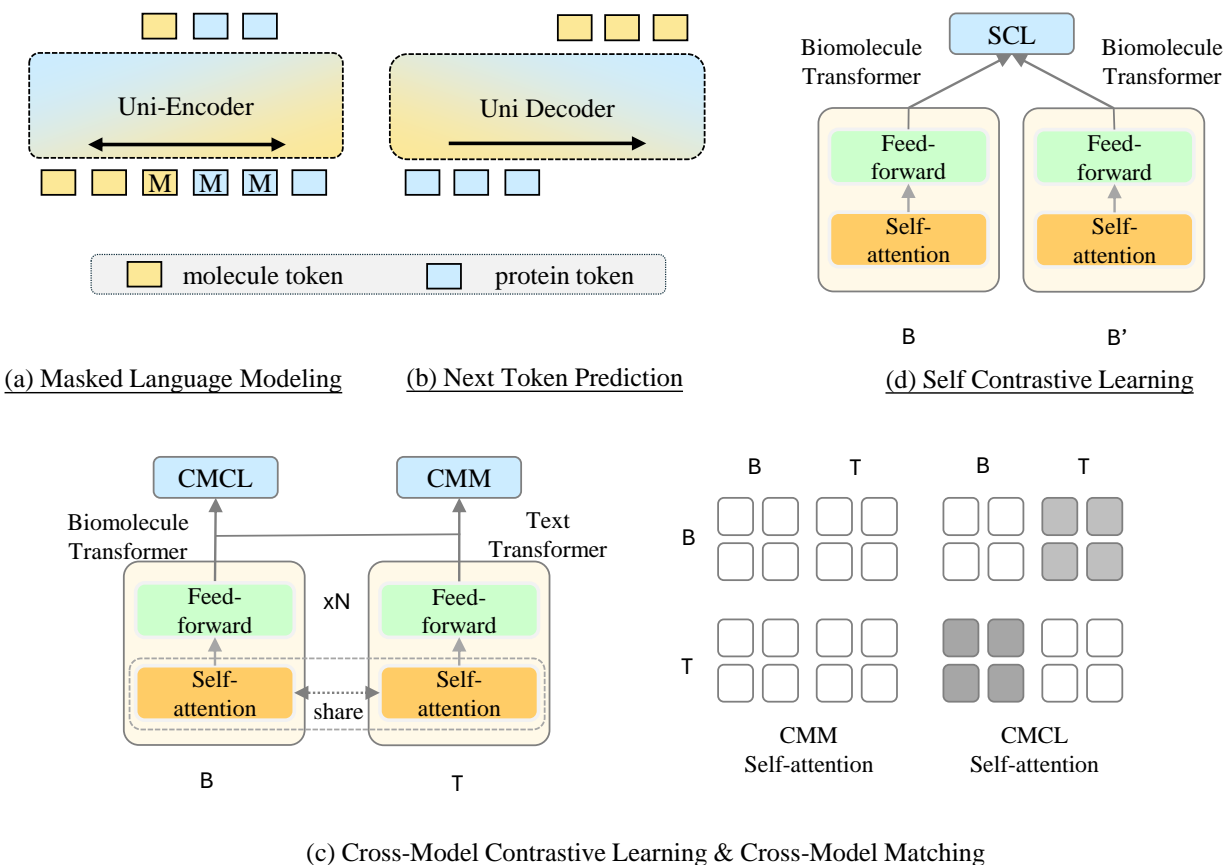


Fig. 7: The different training tasks in representation learning. (a) Masked language modeling (MLM) is the widely adopted training method in BERT [25] and other encoder-based models. (b) Next token prediction is what GPT-series [18], [138], [142], [143] models take and nowadays it is the most popular pre-training task due to the success of GPT [18]. (c) Cross-model contrastive learning (CMLM) and cross-model matching (CMM) are two representation learning methods that specifically defined for cross modeling, which are first introduced in BLIP2 [16]. The difference between the two training is on the self-attention mechanism with different attentive ways, which are shown in the right part on (c). Specifically, the biomolecule tokens (B) and text tokens (T) are attended to each other in CMM, but in CMCL B and T only attend to its own tokens. (d) Self contrastive learning (SCL) is a special one that only works on single modality, usually the biomolecule, to learn the unique representation for each biomolecule.

which aims at learning universal representations, CMM is essentially a binary classification task where the model predicts whether a given biomolecule-text pair is matched or not. The CMM objective function is:

$$\mathcal{L}_{\text{CMM}} = -\mathbb{E}_{(B,W) \in \mathcal{D}} [y \log p + (1 - y) \log(1 - p)], \quad (4)$$

where $y \in \{0, 1\}$ indicates if B and W are matched, and p is their alignment probability.

For example, Text2Mol [91] firstly propose the molecule-text retrieval task, and employs CMCL between them to enhance the model’s capacity for accurately associating textual descriptions with their corresponding molecular structure. MoleculeSTM [73] extends this approach by conducting molecule-text pre-training via CMCL for zero-shot molecule-text retrieval, text-based molecule editing, and molecule property prediction tasks. MolCA [75] utilizes both CMCL

and CMM to enable cross-modal projector (*i.e.*, Q-Former) to extract text-related molecule features from the molecular encoder, and show superior performance in molecule-text retrieval, molecule captioning, and IUPAC name prediction.

5.1.4 Self Contrastive Learning (SCL).

SCL differs from CMCL as it focuses on contrastive learning within a single modality, especially for molecules. The rationale behind SCL’s focus on molecules stems from the inherent multiplicity of representations a single molecule can possess, including various 2D graph and 3D structural forms. These representations can be derived through a range of augmentation strategies, such as node dropping and subgraph sampling, which introduce variability while maintaining the molecular identity. SCL aims to enhance the representational power of the molecule encoder by minimizing the distances

between different augmentations of the same molecule while simultaneously maximizing the distances between distinct molecules. This dual focus facilitates a more nuanced and accurate molecular representation, enhancing the model’s ability to recognize and differentiate molecular structures effectively. For example, MoMu [83] capitalizes on SCL to refine the augmentation and representation of 2D molecular graphs. By employing SCL, MoMu significantly enhances the model’s proficiency in capturing the nuanced features and complexities of molecular graphs, thereby improving its overall capability to accurately represent molecules and performance on molecule-related downstream tasks. Similarly, MolLM [85] extends the boundaries of SCL by introducing novel augmentation methods tailored to 2D graphs and then computing 3D structures. This extension not only broadens the applicability of SCL but also enriches the model’s understanding of molecular geometries, providing a more comprehensive representation that encapsulates the full spectrum of molecular diversity. The SCL objective is mathematically formulated as:

$$\mathcal{L}_{\text{SCL}} = -\mathbb{E}_{B \in \mathcal{D}} \left[\log \frac{s(\mathbf{h}_B, \mathbf{h}_{\bar{B}})}{\sum_i s(\mathbf{h}_B, \mathbf{h}_{B'_i})} \right], \quad (5)$$

where \mathbf{h}_B is the representation of molecule, and $\mathbf{h}_{B'_i}$ is the representations of negative (*i.e.*, different) molecules to B .

5.2 Strategies

Besides the training tasks, how to train (the strategies) is also a crucial aspect that needs attention. In this subsection, we introduce the different training strategies that adopted in existing research works. An overview of these strategies is shown in Figure 8.

5.2.1 Multi-stage Training.

Despite few works opt to train models from scratch [91], most works adhere to the traditional two-stage paradigm of pre-training followed by fine-tuning. Self-supervised pre-training is often conducted on large-scale datasets, which is then succeeded by supervised fine-tuning on downstream tasks. For instance, BioBERT [26] and BioGPT [36] are pre-trained on biomedical texts using MLM and NTP, respectively, and then fine-tuned for biomedical downstream tasks. MolT5 [21] undergoes MLM pre-training on both the C4 [140] corpus and molecule SMILES from PubChem [13]. Moreover, some studies adopt multi-stage pre-training, with each stage targeting distinct objectives. One such example is MolCA [75], which follows a methodology similar to BLIP-2 [16]. In the first stage of pre-training, the molecule graph encoder and Q-Former are trained, enabling the Q-Former to extract representations from the molecule graph relevant to the textual descriptions. In the second stage of pre-training, the molecule graph encoder and Q-Former are coupled with a frozen LLM, employing the NTP task to align the output space of the Q-Former with the text space of the LLM. These two stages of pre-training endow the model with the capability for cross-modal alignment. Additionally, some researches [38], [39] employ multi-stage training to transfer general-domain LLMs into domain-specific LLMs.

This process typically starts with injecting fundamental domain knowledge through continued pre-training of general-domain LLMs on a domain-specific corpus. Following this, domain-specific instruction tuning is applied to enrich the capabilities of LLMs across various task types. The final stage often involves task-specific fine-tuning to further tailor the model to specific tasks. This multi-stage training effectively bridges the gap between general linguistic capabilities and specialized domain proficiency, enabling the LLMs to achieve superior performance on biomedical domain-specific tasks.

5.2.2 Multi-task Learning.

Multi-task learning is a pivotal strategy that significantly augments the generalization capabilities of models while concurrently optimizing deployment costs by concurrently training a singular model across multiple tasks. Distinct studies have harnessed multi-task learning at various stages of model development to leverage its benefits effectively. For instance, BioT5 [22] and ChatMol [66] conduct multi-task learning during the pre-training phase, applying MLM and translation tasks to data from diverse domains and modalities. This early integration of multi-task learning enables the models to develop a versatile foundation, preparing them for various downstream applications. On the other hand, Text+ChemT5 [64] is a cross-domain, multi-task fine-tuned T5 [140] model, which can solve several chemical and NLP tasks without the need of multiple task-specific models. In addition, with the emergence of LLMs, some works [38], [102] have shifted towards fine-tuning LLMs using multi-task instruction datasets. Through instruction tuning, models are equipped with improved abilities in understanding natural instructions and generalizing to new tasks, exhibiting proficiency in both zero-shot and few-shot testing scenarios.

5.2.3 LLM Augmented Training.

LLMs [18], [145], due to their extensive and diverse training corpus, have shown remarkable capabilities in various domains, including the understanding of molecule SMILES. When provided with molecule SMILES as input, LLMs possess the remarkable ability to generate textual narratives that are often more detailed and comprehensive than SMILES itself, like the molecular weight, function groups, chemical characteristics, and so on. In light of this, some studies [52], [53] leverage these textual descriptions as augmentations for SMILES, which helps models gain a deeper and more nuanced understanding of molecular structures, thus showing enhanced performance in related tasks (see Figure 8c as an example). For instance, CaR [52] demonstrates that ChatGPT [18] is able to generate insightful interpretations of molecule SMILES, and further combining SMILES with its interpretations is beneficial to downstream tasks like molecule property prediction.

5.2.4 Parameter Efficient Fine-Tuning (PEFT).

Before the emergence of LLMs, most works adopted full-parameter fine-tuning, wherein all parameters are learnable. However, with the advent of LLMs, many studies have started leveraging pre-trained LLMs for cross-modal tasks, especially biomolecule-to-text tasks with LLMs functioning

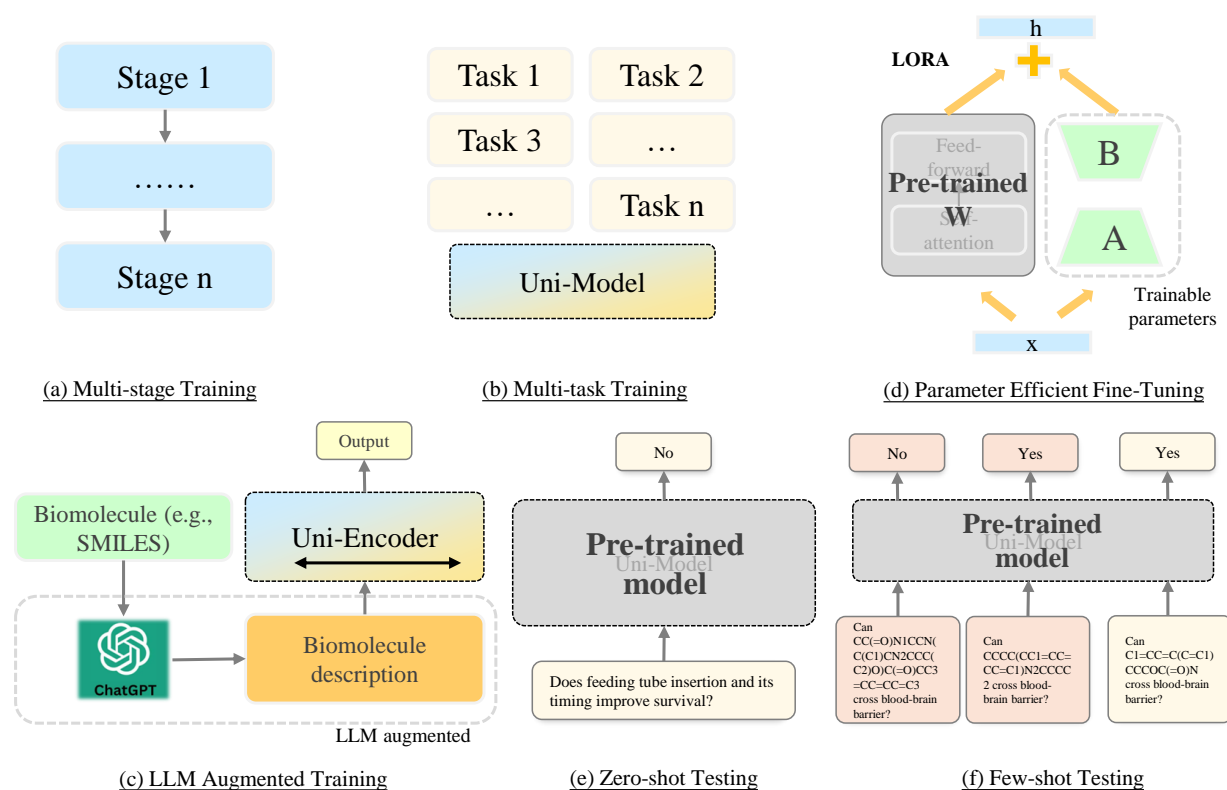


Fig. 8: The different training strategies in representation learning. (a) Multi-stage training usually takes more than two stage training with each stage on one specific domain data. For example, 3D-MoLM [76] conducts three stage training: 3D molecule-text pre-training, 3D molecule-text alignment, and 3D molecule-centric instruction tuning. (b) Multi-task training is a common method that tries to leverage different tasks in training so that the model can benefit from these tasks to gain various abilities. (c) LLM Augmented training is a special one that takes the power of LLM (e.g., ChatGPT) to augmented the description of biomolecules so to enhance the biomolecule representation from these rich contextual text descriptions. (d) Parameter efficient fine-tuning (PEFT) methods are important for large models to save computational cost. Here we take LORA [144] as an example, which is also the most widely used technology among PEFT methods. (e) and (f) are zero-shot testing and few-shot testing. These are based on a well pre-trained representation model (the model parameters are fixed without any further tuning) that has strong generalization ability, usually upon a well instruction-tuned model.

as the language decoder. Due to the extensive number of parameters in these LLMs, there has been a shift towards more parameter-efficient tuning methods to avoid catastrophic forgetting and save computational costs. As a result, several studies [75], [76] have chosen to freeze the parameters of the LLMs and only fine-tune specific components like the biomolecule encoder and cross-modal projector. Other popular PEFT methods, like LoRA [144] (visualized shown in Figure 8d) and Prompt Tuning [146], add minimal learnable parameters while keeping the LLM backbone frozen. These PEFT approaches not only ensure computational efficiency but also preserve the inherent knowledge in the LLMs.

5.2.5 Zero/Few-shot Testing

Despite the above training strategies, some works also directly query the LLMs to finish specific tasks. These works/models are usually based on instruction following since the direct inference requires strong generalization ability. For example, [61] evaluates the capabilities of LLMs in various biological and chemical tasks under zero-shot (shown in Figure 8e) and few-shot (shown in Figure 8f) in-context

learning settings. Additionally, techniques such as Chain-of-Thought (CoT) [147] prompting have been employed to enhance performance by guiding LLMs through intermediate steps towards the solution, mimicking a problem-solving process that leverages biological reasoning. Utilizing biologically similar few-shot examples, rather than random ones, for in-context learning further enhances the performance. Moreover, applying multiple tests and employing ensemble or voting methods on the outcomes can significantly improve the reliability and robustness of the results in complex biological and chemical task scenarios [148].

6 APPLICATIONS

In this section, we highlight several representative practical applications and important tasks of these BL models in biomolecule and text domains.

6.1 Biomolecule Property Prediction

Property prediction for biomolecules, typically a classification or regression task, is important for pharmaceutical development, focusing on evaluating key characteristics such as

Instruction Example

System Instruction:
Molecule property prediction task (a binary classification task) for the BBBP dataset. The blood-brain barrier penetration (BBBP) dataset is designed for the modeling and prediction of barrier permeability. If the given molecule can cross blood-brain barrier, indicate via "Yes". Otherwise, response via "No".

Prompt:
Example 1:
Can CC(=O)N1CCN(C(C1)CN2CCC(C2)O)C(=O)CC3=CC=CC=C3 cross blood-brain barrier?
No.

Example 2:
Can CCCC(CC1=CC=CC=C1)N2CCCC2 cross blood-brain barrier?
Yes.

... (More examples)

Can C1=CC=C(C=C1)CCOC(=O)N cross blood-brain barrier?

Output:
Yes.

Fig. 9: Few-shot instruction example from BBBP [136] dataset for molecule property prediction task, including system instruction (task definition) and prompt. The prompt consists of some example input and output, with a new input for model to generate prediction.

solubility, toxicity, and biological activity. These attributes are fundamental in understanding biological mechanisms and advancing drug discovery efforts. However, the acquisition of detailed biomolecular property data is often hindered by the reliance on expensive and labor-intensive experimental procedures in wet laboratories, which significantly limits the availability of comprehensive datasets.

Conversely, natural language frequently encompasses detailed descriptions of biomolecule properties, offering an alternative and rich source of information. In this context, cross-modal pre-training that leverages both language and biomolecular data emerges as a potent strategy for enhancing the initial stages of property prediction tasks. Such an approach, as demonstrated in studies like [24] and [86], lays a robust foundation for downstream applications by integrating the descriptive power of natural language with the structural and functional nuances of biomolecules. This methodology not only circumvents the challenges associated with direct data collection from wet lab experiments but also harnesses the vast and diverse information embedded in textual descriptions, facilitating a more efficient and effective pathway for biomolecular property prediction in pharmaceutical research.

6.2 Biomolecule Interaction Prediction

Forecasting interactions among biomolecules is a crucial component of drug discovery, extending beyond the mere prediction of biomolecular properties to encompass the interaction types (classification) of affinity scores (regression) of drug-drug interactions (DDI) [149], protein-protein interactions (PPI) [150], and drug-target interactions (DTI) [151]. A comprehensive understanding of these interactions is

essential for identifying potential drug interactions, and therapeutic targets, and understanding the complex dynamics within biological systems. The integration of natural language descriptions and knowledge graph information along with biomolecules during training [22], [23] enables the model to effectively capture the complex relationships between biomolecules. Such advancements underscore the potential of combining diverse data modalities to deepen our understanding of biomolecular interactions, thereby accelerating the pace of innovation in drug discovery.

6.3 Chemical Reaction-oriented Prediction

The significance of chemical reactions lies at the heart of chemistry and molecular science, serving as the foundational process through which reactants interact in the presence of certain reagents to form new products. This interaction underscores the fundamental nature of chemical transformations, enabling the synthesis of novel compounds, the decomposition of complex substances, and the facilitation of various biochemical processes. Derived from the general principles of chemical reactions, 4 distinct generation tasks have emerged, each addressing a different aspect of chemical transformations: (1) Forward Reaction Prediction: This task involves predicting the products of a chemical reaction given the reactants and reagents. Its importance stems from the ability to forecast the outcome of chemical interactions, facilitating the design of new chemical processes and the optimization of existing ones. (2) Retrosynthesis: Retrosynthesis is the process of deconstructing a target molecule into simpler precursor molecules or reactants. This task is crucial for drug discovery and the synthesis of complex organic molecules, offering a roadmap for synthesizing a desired

compound from simpler starting molecules. (3) Reagent Prediction: This task focuses on identifying the reagents required to facilitate a chemical reaction between given reactants to produce the desired products. It is essential for optimizing reaction conditions and developing efficient synthetic pathways, thereby reducing costs and improving yield in chemical manufacturing. (4) Yield Prediction: This task aims to predict whether the chemical reaction is high-yield or not, which is crucial for determining the efficiency and practical viability of a chemical process

In the pursuit of advancing these tasks, models such as InstructMol [87] and BioT5+ [107] are instruction tuned on these tasks from Mol-Instructions [102], demonstrating superior performance. By specializing in forward reaction prediction, retrosynthesis, and reagent prediction, these models contribute significantly to the efficiency and innovation in chemical synthesis, drug development, and a broader understanding of chemical processes.

6.4 Text Biomolecule Retrieval

Text biomolecule retrieval focuses on two primary objectives: identifying the biomolecule from a set of candidates that most closely matches a given textual description, and conversely, locating the textual description that best corresponds to a specific biomolecule. This approach is pivotal in streamlining the identification of biomolecules that best align with specific textual descriptors, which is crucial for accelerating research in areas such as drug discovery, molecular biology, and bioinformatics. Dual-stream model, as described in Section 4.2, is commonly used in this retrieval task, where one stream is dedicated to processing the textual descriptions, and the other stream focuses on the biomolecular data. This architecture facilitates a synergistic interaction between the two streams, enabling more accurate and efficient matching between textual descriptions and biomolecules.

A notable advancement in this field is Text2Mol [91], which pioneers the cross-modal text-molecule retrieval task. This method involves the direct retrieval of the most pertinent molecule based on natural language queries, thereby facilitating a more intuitive and efficient search process for chemical researchers. Following this, MoleculeSTM [73] expands the scope of the task by incorporating bi-directional retrieval capabilities, even in zero-shot scenarios where no prior examples from the same domain are provided. Additionally, ProtST [97] represents a significant contribution to the text-based biomolecule retrieval domain by initially training a dual-stream model that integrates a pre-trained protein LM and a biomedical LM. This innovative approach aims to explore the text-to-protein retrieval task for identifying proteins based on textual descriptions.

6.5 Text Biomolecule Generation

Text biomolecule bi-directional generation is a novel task including two distinct subtasks: generating precise text descriptions from given biomolecular inputs and, conversely, synthesizing biomolecules that accurately align with provided text descriptions. This dual-focused approach necessitates a profound comprehension of the complex dynamics between biomolecules and textual descriptions.

MolT5 [21] stands at the forefront of this endeavor, pioneering the molecule-text bi-directional translation tasks. MolT5 is initially pre-trained on a vast corpus encompassing both molecule SMILES and descriptive texts, setting a robust foundation for its bi-directional translational abilities. Then after fine-tuning, MolT5 exhibits remarkable capabilities in bridging the gap between molecular SMILES and natural language descriptions. ProteinDT [93] further expands the horizon by introducing a multi-modal framework designed to utilize text descriptions for the purposeful design of proteins. This framework leverages the inherent multi-modal of textual and protein data to facilitate the creation of novel proteins, guided by specific textual inputs. Prot2Text [94] delves into the domain of protein function generation, uniquely considering both the amino acid sequences and the 3D structures of proteins. This approach is instrumental in generating detailed textual descriptions that capture the multifaceted functions of proteins, thereby enhancing the understanding and discovery of protein functionalities. Collectively, these advancements signify a substantial leap forward in bioinformatics and make it easy for chemists and biologists to understand and design biomolecules.

6.6 Text-based Biomolecule Optimization/Editing

Unlike the straightforward generation of biomolecules from textual descriptions, text-based biomolecule optimization/editing typically requires an initial biomolecule, denoted as B , and a text-based editing directive, such as enhancing water solubility. The objective is for the model to modify B into a new variant, B' , in alignment with the textual instructions. Crucially, B' must not only fulfill the criteria outlined in the text prompt, such as improved solubility and Quantitative Estimate of Drug-likeness (QED), but also maintain a certain level of similarity to B . Moreover, additional constraints may be imposed, such as thresholds and range requirements for specific property or the simultaneous optimization of multiple properties.

For instance, ChatDrug [101] introduces a novel framework that integrates ChatGPT with a prompt module, retrieval and domain feedback module, and a conversation module to support this task. This framework is specifically designed to facilitate the iterative refinement of biomolecules through an interactive process, leveraging natural language inputs to direct the optimization. Similarly, DrugAssist [59] proposes MolOpt-Instructions datasets for fine-tuning LLMs on molecule optimization tasks. DrugAssist enhances the capability to optimize molecules via a human-machine dialogue, demonstrating the potential of conversational interfaces in guiding the molecular design process with high precision. These approaches represent significant advancements in the field, offering more nuanced and interactive methods for biomolecule editing based on textual descriptions, thereby broadening the scope of possibilities for biomolecular engineering and drug development.

6.7 Molecule Representation Transformation

As discussed in Section 2, molecules can be represented in various forms, like molecular formulas, SMILES, SELFIES, IUPAC names, etc. The task of transforming between these

different representations demands a profound understanding of molecular structures by the models involved.

ChemLLMBench [58] encompasses 4 dual translation tasks aimed at evaluating the capability of models to perform these complex transformations: SMILES to IUPAC name translation (S2I), IUPAC name to SMILES translation (I2S), SMILES to Molecular Formula translation (S2MF), and IUPAC name to Molecular Formula translation (I2MF). Expanding beyond this, [130] introduces additional tasks involving a wider range of molecule representations. This extension includes transformations among molecular images, IUPAC names, captions, InChI, SMILES, SELFIES, and molecular graphs. The importance of these transformation tasks lies in their ability to facilitate a seamless interchange of molecular information across different scientific domains and computational platforms.

6.8 Biomedical NLP

Biomedical NLP has emerged as a critical area of interest within biomedical research, addressing a wide range of tasks pivotal for understanding complex biomedical information. These tasks prominently include Named Entity Recognition (NER), Relation Extraction (RE), and Question Answering (QA), all tailored to the nuanced context of biomedical data. Fundamental to the success of models in these tasks is the initial phase of pre-training on expansive corpora of biomedical texts, which equips them with an in-depth understanding of biomedical concepts and terminologies. This foundational knowledge serves as a springboard for subsequent fine-tuning processes, where models are tailored to excel in specific biomedical NLP tasks, leveraging their extensive pre-existing knowledge base to tackle unique challenges presented within the domain.

A notable advancement in this field is the introduction of PubMedBERT [31], which pioneers domain-specific pre-training for BERT-based models utilizing a vocabulary centered around the medical domain. PubMedBERT further contributes to the field by establishing the Biomedical Language Understanding & Reasoning Benchmark (BLURB). BLURB stands as a comprehensive benchmark, incorporating a diverse array of biomedical NLP tasks and thereby setting a novel standard for the assessment and progression of models in this rapidly advancing area. Conversely, BioGPT [36] showcases the adaptability and effectiveness of GPT-based models in biomedical contexts, achieving superior performance across various biomedical tasks.

7 RESOURCES

To facilitate research in this area, we summarize the representative datasets, models, and performance in Table 1, Table 2, and Table 3, respectively.

7.1 Datasets/Benchmarks

Datasets are super important to train and evaluate the models. Generally speaking, datasets can be categorized into 3 primary types based on their utility: pre-training, fine-tuning, and instructions for instruction tuning or zero-shot testing, as shown in Table 1.

Pre-training datasets are typically large-scale, unsupervised sequences that serve as the foundation for developing models with generalizable capabilities across different modalities. Examples of such datasets include biotext from PubMed [12] or bioRxiv [152], molecule SMILES from PubChem, and protein sequences in FASTA format from UniProt [14]. The primary goal of pre-training on these datasets is to imbue models with a broad understanding of biological concepts and relationships.

Fine-tuning datasets, distinct from those used for instruction-based tasks, are tailored to adapt pre-trained models to specific downstream tasks. For instance, the Biomedical Language Understanding & Reasoning Benchmark (BLURB) [31] encompasses a variety of biomedical NLP tasks derived from diverse datasets. These tasks include biomedical named entity recognition (NER), relation extraction (RE), and question answering (QA), among others. Additionally, benchmarks such as MoleculeNet [136] and Therapeutics Data Commons (TDC) [160] are frequently utilized for molecule property prediction, while the PEER [5] benchmark is dedicated to protein sequence understanding tasks, such as protein function prediction, localization prediction, and protein-protein interaction prediction.

Furthermore, a significant number of datasets are formatted for instruction tuning or zero-shot and few-shot testing. A notable example is Mol-Instructions [102], which amalgamates various biotext, molecule, and protein-oriented tasks in an instruction format [20]. This approach is designed to evaluate and enhance the performance of LLMs on biological tasks, facilitating a direct assessment of their ability to understand and execute task-specific instructions.

7.2 Models

For models, we categorize them based on the type of input modalities they accommodate. These categories include biotext, text+molecule, text+protein, and more modalities.

Biotext models are characterized by their exclusive reliance on textual data inputs. These models are typically pre-trained on large corpora of biological literature, such as PubMed [12], to grasp the nuances of biological context. Subsequently, they are evaluated or fine-tuned on downstream biomedical NLP tasks.

Models that integrate molecules with text, referred to as text+molecule models, are designed to jointly model molecules and textual data. This integration enables the models to gain comprehensive insights from unstructured text about various molecular aspects, including their functions, properties, and applications. Such models bridge the gap between molecules and their unstructured textual information. Similarly, text+protein models follow the same integrative approach, combining proteins with textual information to extract relevant insights.

Beyond these categories, there are models that incorporate even broader modalities². Galactica [104] is a notable example that simultaneously models text, molecules, proteins, DNA, and more. This multi-modal approach enables it to process diverse data types, making it a versatile tool in biomedical research.

2. This category also lies in the cross modeling of BL but this survey mainly focus on the molecule and protein domains.

TABLE 1: A summary of commonly-used datasets in pre-training, fine-tuning, and instruction tuning/testing.

Dataset	Usage	Modality	Link
PubMed [12]	Pre-training	Text	https://pubmed.ncbi.nlm.nih.gov/download
bioRxiv [152]	Pre-training	Text	https://huggingface.co/datasets/mteb/raw_biorxiv
S2ORC [153]	Pre-training	Text	https://github.com/allenai/s2orc
MIMIC [154]	Pre-training	Text	https://physionet.org/content/mimiciii/1.4
UF Health	Pre-training	Text	https://idr.ufhealth.org
GAP-Replay [41]	Pre-training	Text	-
ZINC [155]	Pre-training	Molecule	https://zinc15.docking.org , https://zinc20.docking.org
UniProt [14]	Pre-training	Protein	https://www.uniprot.org
ChEMBL [81]	Pre-training	Molecule, Bioassay	https://www.ebi.ac.uk/chembl
PubChem [13]	Pre-training	Text, Molecule, IUPAC, etc	https://ftp.ncbi.nlm.nih.gov/pubchem
STRING [156]	Pre-training	Text, Protein, etc	https://string-db.org
BLURB [31]	Fine-tuning	Text	https://microsoft.github.io/BLURB
PubMedQA [157]	Fine-tuning	Text	https://github.com/pubmedqa/pubmedqa
SciQ [158]	Fine-tuning	Text	https://huggingface.co/datasets/sciq
BioASQ [159]	Fine-tuning	Text	http://participants-area.bioasq.org/datasets
MoleculeNet [136]	Fine-tuning	Molecule	https://moleculenet.org/datasets-1
TDC [160]	Fine-tuning	Molecule	https://tdcommons.ai/
USPTO [161]	Fine-tuning	Molecule	https://yzhang.hpc.nyu.edu/T5Chem
Graph2graph [162]	Fine-tuning	Molecule	https://github.com/wengong-jin/iclr19-graph2graph/tree/master/data
PEER [5]	Fine-tuning	Protein	https://github.com/DeepGraphLearning/PEER_Benchmark
FLIP [163]	Fine-tuning	Protein	https://benchmark.protein.properties
TAPE [164]	Fine-tuning	Protein	https://github.com/songlab-cal/tape
PubChemSTM [73]	Fine-tuning	Text, Molecule	https://huggingface.co/datasets/chao1224/MoleculeSTM/tree/main
PseudoMD-1M [65]	Fine-tuning	Text, Molecule	https://huggingface.co/datasets/SCIR-HI/PseudoMD-1M
ChEBI-20 [21]	Fine-tuning	Text, Molecule	https://github.com/blender-nlp/MolT5
ChEBI-20-MM [130]	Fine-tuning	Text, Molecule	https://github.com/AI-HPC-Research-Team/SLM4Mol
ChEBI-dia [66]	Fine-tuning	Text, Molecule	https://github.com/Ellenzzn/ChatMol/tree/main/data/ChEBI-dia
L+M-24 [165]	Fine-tuning	Text, Molecule	https://github.com/language-plus-molecules/LPM-24-Dataset
PCdes [24]	Fine-tuning	Text, Molecule	https://github.com/thunlp/KV-PLM
MoMu [83]	Fine-tuning	Text, Molecule	https://github.com/yangzhao1230/GraphTextRetrieval
PubChemQA [39]	Fine-tuning	Text, Molecule	https://github.com/PharMolix/OpenBioMed
3D-MolT [76]	Fine-tuning	Text, Molecule	https://github.com/lsh0520/3D-MolLM
DrugBank [166]	Fine-tuning	Text, Molecule, etc	https://github.com/SCIR-HI/ArtificiallyR2R
SwissProt [97]	Fine-tuning	Text, Protein	https://www.expasy.org/resources/uniprotkb-swiss-prot
UniProtQA [39]	Fine-tuning	Text, Protein	https://github.com/PharMolix/OpenBioMed
SciEval [167]	Instruction	Text	https://github.com/OpenDFM/SciEval
BioInfo-Bench	Instruction	Text	https://github.com/cinnna/bioinfo-bench
MedC-I [38]	Instruction	Text	https://huggingface.co/datasets/axiong/pmc_llama_instructions
BioMedEval [168]	Instruction	Text	https://github.com/tahmedge/llm-eval-biomed
MolOpt-Instructions [59]	Instruction	Text, Molecule	https://github.com/blazerye/DrugAssist
SMolInstruct [60]	Instruction	Text, Molecule	https://github.com/OSU-NLP-Group/LLM4Chem
ChemLLMBench [61]	Instruction	Text, Molecule	https://github.com/ChemFoundationModels/ChemLLMBench
AI4Chem [169]	Instruction	Text, Molecule	https://github.com/andresilvapimentel/AI4Chem
GPTChem [170]	Instruction	Text, Molecule	https://github.com/kjappelbaum/gptchem
DARWIN	Instruction	Text, Molecule, etc	https://github.com/MasterAI-EAM/Darwin/tree/main/dataset
StructChem [171]	Instruction	Text, Molecule, etc	https://github.com/ozyysr/StructChem
InstructProtein [92]	Instruction	Text, Protein	-
Open Protein Instructions [172]	Instruction	Text, Protein	https://github.com/baihealth/opi
Mol-Instructions [102]	Instruction	Text, Molecule, Protein	https://huggingface.co/datasets/zjunlp/Mol-Instructions
CheF [173]	-	Text, Molecule	https://github.com/kosonocky/CheF
ChemNLP [174]	-	Text, Molecule, etc	https://github.com/OpenBioML/chemnlp
ChemFont [175]	-	Text, Molecule, Protein, etc	https://www.chemfont.ca

7.3 Representative Results

For a more straight understanding of the ability/power of existing BL models, we report representative results on some well-known benchmarks to facilitate a clear comparison. Specifically, we focus on two commonly-used benchmarks in the BL domain: MoleculeNet [136] for classification tasks and ChEBI-20 [91] for generation tasks. The performance of different BL models is summarized in Table 3, highlighting the distinctions between single-task specialist models and LLM-based generalist models. Single-task specialist models, which are fine-tuned on the specific dataset, tend to exhibit superior performance compared to LLM-based models. This advantage can largely be attributed to the focused nature of their training. Besides, due to the potential negative interference arising from the multi-task setting, simulta-

neously training on diverse tasks can lead to conflicting optimization objectives, thereby diluting the ability of LLM-based generalist models to excel in any single task.

However, it is worth noting that LLM-based generalist models, despite their relatively lower performance on specific tasks, align with the overarching trend towards a “one model fits all” approach. Their architecture and training paradigms are designed to embody a more universal capability, making them well-suited for generalization across a broader spectrum of tasks. This generalist approach holds promise for the application of these models to unknown tasks, where they can be deployed in zero-shot or few-shot settings to evaluate their generalization ability. The potential for these models to adapt and perform reasonably well in unseen tasks underscores their significance and the growing interest in their development within the AI4Science community.

TABLE 2: A collection of papers, open-sourced codes, and model links about cross modeling methods on BL.

Model	Track	Code Link	Model Link
Biotext			
BioBERT [26]	Bioinformatics 19	https://github.com/dmis-lab/biobert	https://huggingface.co/dmis-lab
SciBERT [27]	EMNLP-IJCNLP 19	https://github.com/allenai/scibert	https://github.com/allenai/scibert
BlueBERT [29]	BioNLP@ACL 19	https://github.com/ncbi-nlp/bluebert	https://huggingface.co/bionlp
BioMegatron [32]	EMNLP 20	https://github.com/NVIDIA/NeMo	-
ClinicalBERT [28]	CHIL 20	https://github.com/kexinhuang12345/clinicalBERT	https://github.com/lindvallab/clinicalXLNet
BioM-BERT [30]	BioNLP@ACL 21	https://github.com/salrowili/BioM-Transformers	https://huggingface.co/sultan
PubMedBERT [31]	HEALTH 21	-	https://shorturl.at/knELR
Scifive [50]	Arxiv 21	https://github.com/justinphan3110/SciFive	https://huggingface.co/razent
DRAGON [51]	NeurIPS 22	https://github.com/michiyasunaga/dragon	https://github.com/michiyasunaga/dragon
BioLinkBERT [34]	ACL 22	https://github.com/michiyasunaga/LinkBERT	https://huggingface.co/michiyasunaga
BioBART [49]	BioNLP@ACL 22	https://github.com/GanjinZero/BioBART	https://huggingface.co/GanjinZero
BioGPT [36]	Bioinformatics 22	https://github.com/microsoft/BioGPT	https://huggingface.co/microsoft/biogpt
Gatortron [35]	Arxiv 22	https://github.com/NVIDIA/Megatron-LM	-
Med-PaLM [43], [44]	Nature 23	-	-
ScholarBERT [33]	ACL 23	-	https://huggingface.co/globuslabs/ScholarBERT
PMC-LLaMA [38]	Arxiv 23	https://github.com/chaoyi-wu/PMC-LLaMA	https://github.com/chaoyi-wu/PMC-LLaMA
BioMedGPT-LM [39]	Arxiv 23	https://github.com/PharMolix/OpenBioMed	https://huggingface.co/PharMolix/BioMedGPT-LM-7b
GatorIronGPT [40]	Arxiv 23	https://github.com/NVIDIA/Megatron-LM	-
Clinical Camel [46]	Arxiv 23	https://github.com/bowang-lab/clinical-camel	https://huggingface.co/wanglab/ClinicalCamel-70B
MEDITRON [41]	Arxiv 23	https://github.com/epfLLM/meditron	https://huggingface.co/epf-llm/meditron-70b
BioinspiredLLM [42]	Arxiv 23	-	https://huggingface.co/lamm-mit/BioinspiredLLM
ClinicalGPT [48]	Arxiv 23	-	https://huggingface.co/medalcai/ClinicalGPT-base-zh
MedAlpaca [47]	Arxiv 23	https://github.com/kbresse/medAlpaca	https://huggingface.co/medalpaca
SciGLM [45]	Arxiv 24	https://github.com/THUDM/SciGLM	https://huggingface.co/zd21/SciGLM-6B
BioMedLM [37]	Report	https://github.com/stanford-crfm/BioMedLM	https://huggingface.co/stanford-crfm/BioMedLM
Text + Molecule			
Text2Mol [91]	EMNLP 21	https://github.com/cnedwards/text2mol	-
MolT5 [21]	EMNLP 22	https://github.com/blender-nlp/MolT5	https://huggingface.co/laituan245
KV-PLM [24]	NC 22	https://github.com/thunlp/KV-PLM	https://shorturl.at/lzW46
MoMu [83]	Arxiv 22	https://github.com/BingSu12/MoMu	https://github.com/BingSu12/MoMu
Text+ChemT5 [64]	ICML 23	https://github.com/GT4SD/multitask_text_and_chemistry_t5	https://huggingface.co/GT4SD
CLAMP [74]	ICML 23	https://github.com/ml-jku/clamp	https://github.com/ml-jku/clamp
GIMLET [81]	NeurIPS 23	https://github.com/zhao-ht/GIMLET	https://huggingface.co/haitengzhao/gimlet
HI-Mol [69]	AI4D3@NeurIPS 23	-	-
ChemLLMBench [61]	NeurIPS 23	https://github.com/ChemFoundationModels/ChemLLMBench	-
MolXPT [54]	ACL 23	-	-
TextReact [70]	EMNLP 23	https://github.com/thomas0809/textreact	-
MolCA [75]	EMNLP 23	https://github.com/eltocier/MolCA	https://ufile.io/6vffm5bg
ReLM [57]	EMNLP 23	https://github.com/syr-cn/ReLM	-
MoleculeSTM [73]	NMI 23	https://github.com/chao1224/MoleculeSTM	https://huggingface.co/chao1224/MoleculeSTM
AMAN [82]	IEEE TAI 23	https://github.com/NicoleBonnie/AMAN	-
MolLM [85]	bioRxiv 23	https://github.com/gersteinlab/MolLM	https://shorturl.at/gKW12
MolReGPT [55]	Arxiv 23	https://github.com/phenixace/MolReGPT	-
CaR [52]	Arxiv 23	https://github.com/ChnQ/LLM4Mol	-
MolFM [86]	Arxiv 23	https://github.com/PharMolix/OpenBioMed	https://shorturl.at/pvF12
ChatMol [66]	Arxiv 23	https://github.com/Ellenzzn/ChatMol	https://shorturl.at/jfJK0
InstructMol [87]	Arxiv 23	https://github.com/IDEA-XL/InstructMol	-
ChemCrow [56]	Arxiv 23	https://github.com/ur-whitelab/chemcrow-public	-
GPT-MolBERTa [53]	Arxiv 23	https://github.com/Suryanarayanan-Balaji/GPT-MolBERTa	-
nach0 [67]	Arxiv 23	-	-
DrugChat [79]	Arxiv 23	https://github.com/UCSD-AI4H/drugchat	https://github.com/UCSD-AI4H/drugchat/tree/main/ckpt
3D-MoLM [76]	ICLR 24	https://github.com/lsh0520/3D-MoLM	-
Ada/Aug-T5 [65]	AAAI 24	https://github.com/SCIR-HI/ArtificiallyR2R	https://huggingface.co/SCIR-HI
MolTailor [72]	AAAI 24	https://github.com/SCIR-HI/MolTailor	-
TGM-DLM [89]	AAAI 24	https://github.com/Deno-V/tgm-dlm	-
GIT-Mol [77]	Comput. Biol. Med. 24	https://github.com/ai-hpc-research-team/git-mol	-
PolyNC [68]	Chemical Science 24	https://github.com/HKQiu/Unified_ML4Polymers	https://huggingface.co/hkqiu/PolyNC
MolTC [78]	Arxiv 24	https://github.com/MangoKiller/MolTC	-
T-Rex [80]	Arxiv 24	https://github.com/lauyikifung/T-Rex	-
LlaSMol [60]	Arxiv 24	https://github.com/OSU-NLP-Group/LLM4Chem	https://huggingface.co/osunlp/LLM4Chem
Drug-to-indication [71]	Arxiv 24	https://github.com/PittNAIL/drug-to-indication	-
ChemDFM [58]	Arxiv 24	-	-
ChemReasoner [90]	Arxiv 24	-	-
DrugAssist [59]	Arxiv 24	https://github.com/blazerye/DrugAssist	-
ChemLLM [62]	Arxiv 24	-	https://huggingface.co/AI4Chem/ChemLLM-7B-Chat
TEDMol [88]	OpenReview	-	https://anonymous.4open.science/r/TEDMol-11E9/
Text + Protein			
OntoProtein [95]	ICLR 22	https://github.com/zjunlp/OntoProtein	https://huggingface.co/zjunlp/OntoProtein
ProTranslator [96]	RECOMB 22	https://github.com/HanwenXuTHU/ProTranslator	-
ProtST [97]	ICML 23	https://github.com/DeepGraphLearning/ProtST	https://github.com/DeepGraphLearning/ProtST
InstructProtein [92]	Arxiv 23	-	-
ProteinDT [93]	Arxiv 23	-	-
ProteinChat [100]	TechRxiv 23	https://github.com/UCSD-AI4H/proteinchat	-
Prot2Text [94]	AAAI 24	https://github.com/hadi-abdine/Prot2Text	https://github.com/hadi-abdine/Prot2Text
ProtChatGPT [98]	Arxiv 24	-	-
ProtAgents [99]	Arxiv 24	https://github.com/lamm-mit/ProtAgents	-
ProLLaMA [176]	Arxiv 24	https://github.com/Lyu6PosHao/ProLLaMA	https://huggingface.co/GreatCaptainNemo/ProLLaMA
More Modalities			
Galactica [104]	Arxiv 22	https://github.com/paperswithcode/galai	https://huggingface.co/models?other=galactica
BioT5 [22]	EMNLP 23	https://github.com/QizhiPei/BioT5	https://huggingface.co/QizhiPei/biot5-base
DARWIN [106]	Arxiv 23	https://github.com/MasterAI-EAM/Darwin	https://github.com/MasterAI-EAM/Darwin
BioMedGPT [39]	Arxiv 23	https://github.com/PharMolix/OpenBioMed	https://shorturl.at/pvF12
StructChem [171]	Arxiv 23	https://github.com/zyyysr/StructChem	-
BioTranslator [105]	NC 23	https://github.com/HanwenXuTHU/BioTranslatorProject	https://tinyurl.com/5df8t97k
Mol-Instructions [102]	ICLR 24	https://github.com/zjunlp/Mol-Instructions	https://huggingface.co/zjunlp
ChatDrug [101]	ICLR 24	https://github.com/chao1224/ChatDrug	-
BioBridge [103]	ICLR 24	https://github.com/RyanWangZf/BioBridge	https://github.com/RyanWangZf/BioBridge
KEDD [23]	AAAI 24	-	-
ChatCell [108]	Arxiv 24	https://github.com/zjunlp/ChatCell	https://huggingface.co/zjunlp
BioT5+ [107]	Arxiv 24	https://github.com/QizhiPei/BioT5	https://github.com/QizhiPei/BioT5

TABLE 3: Performance comparison on molecule property prediction tasks (classification) on MoleculeNet [136] benchmark (**Best**, **Second Best**). Results on general molecule-related tasks for different methods, including molecule property prediction on MoleculeNet [136] benchmark, molecule description tasks generation (mol2text) and description guided molecule design (text2mol) on ChEBI-20 [91] dataset. The evaluation metrics for molecule property prediction, mol2text, and text2mol tasks are AUROC, METEOR [177], and RDKit fingerprint similarity [112], [128], respectively. The suffix “-S” refers to the molecule SMILES or SELFIES, and “-G” refers to the molecule 2D graph. **Orange** indicates the best performance, and **light orange** indicates the second and third best ones. The ChemLLMBench [61] includes only 100 random samples of the original dataset, with results derived from ChemDFM [58]. The results of KV-PLM are sourced from [74]. The results on MoleculeNet of MolT5 are sourced from [74]. Three results of MoMu are sourced from [86]. [130] also explores the effects of different molecule representation and models on the MoleculeNet [136] benchmark.

Method	MoleculeNet							ChEBI-20	
	BACE	BBBP	HIV	Clintox	Tox21	Sider	ToxCast	mol2text	text2mol
<i>Single-task Specialist Models</i>									
KV-PLM [24]	78.5 \pm 2.7	70.5 \pm 0.5	65.4 \pm 1.7	89.2 \pm 2.7	72.1 \pm 1.0	59.8 \pm 0.6	66.3\pm8.1	-	-
MolT5-Large [21]	63.5 \pm 4.6	65.1 \pm 3.9	72.8 \pm 2.7	73.8 \pm 8.6	63.6 \pm 4.4	53.2 \pm 7.4	63.0 \pm 8.5	61.4	74.6
Text+Chem T5 [64]	-	-	-	-	-	-	-	64.8	81.6
MoleculeSTM-S [73]	82.0 \pm 0.4	70.8 \pm 1.9	77.0 \pm 0.4	86.6 \pm 2.3	75.7 \pm 0.9	63.7 \pm 0.8	65.2 \pm 0.4	-	-
MoleculeSTM-G [73]	80.8 \pm 1.3	70.0 \pm 0.5	76.9 \pm 1.8	92.5\pm1.0	76.9 \pm 0.5	61.0 \pm 1.0	65.1 \pm 0.4	-	-
MoMu [83]	76.7 \pm 2.1	70.5 \pm 2.0	75.9 \pm 0.8	79.9 \pm 4.1	75.6 \pm 0.3	60.5 \pm 0.9	63.4 \pm 0.5	57.6	73.7
MolFM [86]	83.9 \pm 1.1	72.9 \pm 0.1	78.8\pm1.1	79.7 \pm 1.6	77.2 \pm 0.7	64.2 \pm 0.9	64.4 \pm 0.2	60.7	75.8
MolXPT [54]	88.4\pm1.0	80.0\pm0.5	78.1\pm0.4	95.3\pm0.2	77.1 \pm 0.2	71.7\pm0.2	-	62.6	75.7
BioT5 [22]	89.4\pm0.3	77.7\pm0.6	81.0\pm0.1	95.4\pm0.5	77.9 \pm 0.2	73.2\pm0.2	-	65.6	80.1
KEDD [23]	-	73.6 \pm 1.1	-	88.4 \pm 0.7	76.8 \pm 0.4	66.0 \pm 1.4	-	-	-
GIT-Mol [77]	81.1 \pm 1.5	73.9 \pm 0.6	-	88.3 \pm 1.2	75.9 \pm 0.5	63.4 \pm 0.8	66.8 \pm 0.5	53.3	58.2
CLAMP [74]	84.3 \pm 3.4	68.2 \pm 3.8	76.3 \pm 2.4	75.3 \pm 7.8	78.2\pm4.2	65.2 \pm 7.5	74.0\pm7.7	-	-
MolCA-S [75]	79.3 \pm 0.8	70.8 \pm 0.6	-	89.0 \pm 1.7	76.0 \pm 0.5	61.1 \pm 1.2	56.2 \pm 0.7	59.7	-
MolCA-GS [75]	79.8 \pm 0.5	70.0 \pm 0.5	-	89.5 \pm 0.7	77.2 \pm 0.5	63.0 \pm 1.7	64.5 \pm 0.8	63.6	-
MolLM [85]	84.1 \pm 0.9	75.7 \pm 1.7	80.2\pm0.7	91.1 \pm 1.0	80.0\pm1.7	71.0\pm0.8	68.2\pm0.4	58.0	-
CaR [52]	80.7 \pm 1.4	82.0\pm4.2	-	84.2 \pm 17.6	-	58.1 \pm 1.8	-	-	-
GPT-MolBERTa [53]	73.4 \pm 0.5	74.1 \pm 0.2	75.5 \pm 1.3	49.7 \pm 0.1	65.9 \pm 0.1	58.5 \pm 0.4	-	-	-
<i>LLM-based Generalist Models</i>									
GIMLET (zero-shot) [81]	69.6	59.4	66.2	-	61.2	-	59.0	-	-
Galactica-6.7B [104]	58.4	53.5	72.2	78.4	63.9	55.9	-	-	-
Galactica-30B [104]	72.7	59.6	75.9	82.2	68.5	61.3	-	-	-
Galactica-120B [104]	61.7	66.1	74.5	82.6	68.9	63.2	-	-	-
GPT-3.5-turbo (zero-shot) [55]	-	-	-	-	-	-	-	16.1	46.2
GPT-3.5-turbo (few-shot) [55]	-	-	-	-	-	-	-	58.5	70.8
InstructMol-G [87]	85.9	64.0	74.0	-	-	-	-	49.1	-
InstructMol-GS [87]	82.3	70.0	68.9	-	-	-	-	50.9	-
BioT5+ [107]	86.2	76.5	76.3	92.3	-	-	-	68.1	83.5
<i>LLM-based Generalist Models on ChemLLMBench</i>									
ChemDFM [58]	78.4	66.7	73.6	89.9	79.8	-	-	40.2	87.1
GPT-4 (zero-shot) [18]	62.5	61.5	65.9	51.6	55.2	-	-	20.9	51.4
GPT-4 (few-shot) [18]	45.9	61.8	50.8	59.3	60.6	-	-	51.9	73.8
LLaMa-2-13B-chat (zero-shot) [178]	26.0	60.3	29.0	45.7	51.7	-	-	-	-
LLaMa-2-13B-chat (few-shot) [178]	72.9	52.3	70.8	42.1	45.9	-	-	37.2	56.8

8 CHALLENGES AND OPPORTUNITIES

Though BL modeling attracts popular attention and is becoming more and more important, there are still many challenges we need to solve. In this section, we discuss about the existing challenges and the future opportunities.

8.1 Specialized Tokenization.

In NLP, tokenization is the process of dividing text into smaller units called tokens, which can be words, characters, or subwords. Tokenization is a fundamental step as it directly affects the ability of models to understand and process the input, thus playing a crucial role in its performance. Similarly, for biomolecular sequences, tokenization also holds significant importance for sequence representation. Inappropriate tokenization disrupts the chemical integrity of atoms or amino acids in biomolecular sequences, posing challenges for the model in understanding the input correctly. Recent works [22], [54], [104] have applied specialized tokenization

and dictionaries tailored for biomolecular sequences, empirically demonstrating the effectiveness of such approaches. Nonetheless, many studies still apply dictionaries derived from natural language directly to biomolecular sequences, which is suboptimal. This underlines the need for more research into developing appropriate tokenization methods for biomolecular sequences.

8.2 Data Scarcity

A major hurdle is the limited availability of large, high-quality datasets linking biological entities and natural language. Developing annotated resources typically requires domain expertise and extensive expert labeling, which renders dataset construction laborious and costly. The small scales of publicly available biomolecule corpora severely restrict the training of complex neural models. While molecules number in the billions, most datasets pair only thousands with descriptive texts. Similarly, biological literature remains

under-annotated for relationship extraction tasks. For example, the most extensive text-biomolecule paired dataset [14], [165] encompasses fewer than 100,000 samples, highlighting the acute shortage of comprehensive data resources in this domain. Rare modalities like protein sequences or 3D structures have even fewer paired examples for multi-modal learning. This scarcity is exacerbated by data sensitivity issues, as commercial organizations hold much proprietary biomolecular data. Due to these constraints, current methods struggle to reach the massive scales of general domain pre-training. They are less capable of capturing the intricacies of biology's data. Data augmentation becomes crucial but is limited by the need for expert feedback to ensure relevance and reliability. Consequently, addressing the challenge of data scarcity is imperative for advancing the capabilities and applications of biomolecular modeling, necessitating concerted efforts to augment data availability and quality.

8.3 Biological Tasks Generalization.

Instruction tuning has emerged as a pivotal strategy for achieving zero-shot task generalization within the domain of (NLP) [133], [135]. It leverages natural instructions to stimulate the understanding capabilities of pre-trained LLMs, thereby enabling them to generalize to new tasks that can be described in natural languages. Such a methodology has shown considerable promise in bridging the gap between pre-existing model knowledge and novel task requirements without the need for task-specific training data. In biomolecular modeling, the application of zero-shot methods predominantly focuses on data generalization, *i.e.*, extending models' applicability to unseen data within known task frameworks, rather than on the broader concept of task generalization. The leap from data generalization to task generalization presents significant challenges, particularly within the biological tasks. There are three primary obstacles underscore the complexity of this transition:

- **Diversity of Biological Tasks:** Unlike the broad spectrum of tasks encountered in general NLP, as highlighted by [132], biological tasks exhibit less variability. This reduced diversity seriously constrains the range of instruction-based adaptability that can be explored through instruction tuning.
- **Variability in Task Definitions:** The biological domain is characterized by tasks with highly variable definitions, reflecting the nuanced and often intricate nature of biological research objectives. This variability complicates the development of a unified instruction tuning approach that can effectively cater to the distinct requirements of each task.
- **Heterogeneity of Data Sources:** Data pertinent to different biological tasks are frequently derived from wet laboratory experiments conducted under a wide variety of conditions. This heterogeneity introduces additional layers of complexity in modeling and understanding the underlying biological processes, further challenging the generalization capabilities of instruction-tuned models.

Given these considerations, the exploration of effective strategies for task generalization in biology through instruction tuning represents a fertile avenue for future research.

8.4 Better Adaption of LLMs.

The adaptation of LLMs to BL domains represents a significant frontier in computational biology. LLMs, trained on extensive textual corpora, have demonstrated exceptional capabilities in understanding and reasoning across various contexts. Strategies such as Retrieval Augmented Generation (RAG) [179], Incontext Learning (ICL) [180], Chain-of-thought (CoT) reasoning [147], and tool learning [181] have substantially advanced the performance and versatility of LLMs. RAG combines the retrieval of relevant information with generative modeling to enhance the model's knowledge base dynamically. ICL leverages examples within the prompt to guide the model's responses, enabling more accurate and contextually relevant outputs. CoT reasoning unfolds complex problems into simpler, sequential steps, facilitating deeper understanding, problem-solving, and interpretability. Tool learning incorporates external computational tools as part of the problem-solving process, extending the model's capabilities beyond its internal knowledge.

Despite these advancements, the application of LLMs in biological tasks has been met with moderate success [55], [61]. The complex and often esoteric nature of biological data poses unique challenges, including the need for highly specialized knowledge and the ability to navigate vast, heterogeneous datasets. Furthermore, the "black-box" nature of LLMs complicates their interpretability, a critical factor in scientific domains where understanding the rationale behind predictions is paramount. Addressing these challenges necessitates a focused effort to tailor LLM strategies for biological applications more effectively. This involves not only integrating advanced LLM methodologies but also enhancing the models' ability to interpret and interact with biological data meaningfully. Such efforts promise to unlock new potentials in biomolecular research, offering more nuanced insights and accelerating discoveries.

8.5 Ethics Problem

The integration of LLMs into BL modeling and biological research introduces complex ethical considerations. These ethical concerns primarily revolve around data privacy, the potential for misuse of biotechnological findings, and the transparency and accountability of AI-driven research methodologies. Moreover, the capability of LLMs to generate or manipulate biomolecular data raises questions about the ethical implications of artificial life forms creation, gene editing, and other advanced biotechnologies. Additionally, the "black-box" nature of many AI models, including LLMs, complicates efforts to ensure transparency and accountability in research findings, further emphasizing the need for ethical guidelines and oversight in the application of AI in biology. Addressing ethical challenges is crucial for responsible AI development in biomolecular modeling, highlighting the need for interdisciplinary collaboration among ethicists, scientists, and policymakers.

9 CONCLUSION

We present a thorough review of the emerging field of the integration of biomolecules and natural language. We start by detailing various biomolecule representations, such

as graphs and sequences, highlighting their significance in biological research. Then we discuss the intuition and objectives behind the integration, highlighting the benefits of combining biomolecular data with natural language for enhanced understanding and novel insights. Then we explore different learning frameworks like GPT-based training and multi-stream modeling, and delve into the complexities of representation learning, covering aspects like training tasks and strategies. We also showcase various applications where this integrated approach has proven beneficial. Furthermore, we compile resources about datasets/benchmarks, models, and representative benchmark summarization to facilitate research and development in this domain. Despite the significant progress, the field still faces several challenges, calling for further efforts in the future.

REFERENCES

- [1] D. Weininger, "Smiles, a chemical language and information system. 1. introduction to methodology and encoding rules," *Journal of chemical information and computer sciences*, vol. 28, no. 1, pp. 31–36, 1988.
- [2] D. Weininger, A. Weininger, and J. L. Weininger, "Smiles. 2. algorithm for generation of unique smiles notation," *Journal of chemical information and computer sciences*, vol. 29, no. 2, pp. 97–101, 1989.
- [3] W. R. Pearson, "Using the fasta program to search protein and dna sequence databases," *Computer Analysis of Sequence Data: Part I*, pp. 307–331, 1994.
- [4] S. Chithrananda, G. Grand, and B. Ramsundar, "Chemberta: large-scale self-supervised pretraining for molecular property prediction," *arXiv preprint arXiv:2010.09885*, 2020.
- [5] M. Xu, Z. Zhang, J. Lu, Z. Zhu, Y. Zhang, C. Ma, R. Liu, and J. Tang, "PEER: A comprehensive and multi-task benchmark for protein sequence understanding," in *NeurIPS*, 2022.
- [6] A. Rives, J. Meier, T. Sercu, S. Goyal, Z. Lin, J. Liu, D. Guo, M. Ott, C. L. Zitnick, J. Ma *et al.*, "Biological structure and function emerge from scaling unsupervised learning to 250 million protein sequences," *Proceedings of the National Academy of Sciences*, vol. 118, no. 15, p. e2016239118, 2021.
- [7] Y. Wang, J. Wang, Z. Cao, and A. B. Farimani, "Molecular contrastive learning of representations via graph neural networks," *Nat. Mach. Intell.*, vol. 4, no. 3, pp. 279–287, 2022.
- [8] C. Ying, T. Cai, S. Luo, S. Zheng, G. Ke, D. He, Y. Shen, and T. Liu, "Do transformers really perform badly for graph representation?" in *NeurIPS*, 2021, pp. 28877–28888.
- [9] J. Jumper, R. Evans, A. Pritzel, T. Green, M. Figurnov, O. Ronneberger, K. Tunyasuvunakool, R. Bates, A. Židek, A. Potapenko *et al.*, "Highly accurate protein structure prediction with alphafold," *Nature*, vol. 596, no. 7873, pp. 583–589, 2021.
- [10] J. Dauparas, I. Anishchenko, N. Bennett, H. Bai, R. J. Ragotte, L. F. Milles, B. I. Wicky, A. Courbet, R. J. de Haas, N. Bethel *et al.*, "Robust deep learning-based protein sequence design using proteinmpnn," *Science*, vol. 378, no. 6615, pp. 49–56, 2022.
- [11] G. Zhou, Z. Gao, Q. Ding, H. Zheng, H. Xu, Z. Wei, L. Zhang, and G. Ke, "Uni-mol: A universal 3d molecular representation learning framework," in *ICLR*. OpenReview.net, 2023.
- [12] K. Canese and S. Weis, "Pubmed: the bibliographic database," *The NCBI handbook*, vol. 2, no. 1, 2013.
- [13] S. Kim, J. Chen, T. Cheng, A. Gindulyte, J. He, S. He, Q. Li, B. A. Shoemaker, P. A. Thiessen, B. Yu *et al.*, "Pubchem 2023 update," *Nucleic acids research*, vol. 51, no. D1, pp. D1373–D1380, 2023.
- [14] E. Boutet, D. Lieberherr, M. Tognolli, M. Schneider, and A. Bairoch, "Uniprotkb/swiss-prot: the manually annotated section of the uniprot knowledgebase," *Plant bioinformatics: methods and protocols*, 2007.
- [15] D. Driess, F. Xia, M. S. M. Sajjadi, C. Lynch, A. Chowdhery, B. Ichter, A. Wahid, J. Tompson, Q. Vuong, T. Yu, W. Huang, Y. Chebotar, P. Sermanet, D. Duckworth, S. Levine, V. Vanhoucke, K. Hausman, M. Toussaint, K. Greff, A. Zeng, I. Mordatch, and P. Florence, "Palm-e: An embodied multimodal language model," in *ICML*, ser. Proceedings of Machine Learning Research, vol. 202. PMLR, 2023, pp. 8469–8488.
- [16] J. Li, D. Li, S. Savarese, and S. Hoi, "Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models," *arXiv preprint arXiv:2301.12597*, 2023.
- [17] H. Liu, C. Li, Q. Wu, and Y. J. Lee, "Visual instruction tuning," *Advances in neural information processing systems*, vol. 36, 2024.
- [18] J. Achiam, S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altenschmidt, S. Altman, S. Anadkat *et al.*, "Gpt-4 technical report," *arXiv preprint arXiv:2303.08774*, 2023.
- [19] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar *et al.*, "Llama: Open and efficient foundation language models," *arXiv preprint arXiv:2302.13971*, 2023.
- [20] R. Taori, I. Gulrajani, T. Zhang, Y. Dubois, X. Li, C. Guestrin, P. Liang, and T. B. Hashimoto, "Stanford alpaca: An instruction-following llama model," https://github.com/tatsu-lab/stanford_alpaca, 2023.
- [21] C. Edwards, T. M. Lai, K. Ros, G. Honke, K. Cho, and H. Ji, "Translation between molecules and natural language," in *EMNLP*. Association for Computational Linguistics, 2022, pp. 375–413.
- [22] Q. Pei, W. Zhang, J. Zhu, K. Wu, K. Gao, L. Wu, Y. Xia, and R. Yan, "Biot5: Enriching cross-modal integration in biology with chemical knowledge and natural language associations," in *EMNLP*. Association for Computational Linguistics, 2023, pp. 1102–1123.
- [23] Y. Luo, X. Y. Liu, K. Yang, K. Huang, M. Hong, J. Zhang, Y. Wu, and Z. Nie, "Towards unified ai drug discovery with multiple knowledge modalities," *arXiv preprint arXiv:2305.01523*, 2023.
- [24] Z. Zeng, Y. Yao, Z. Liu, and M. Sun, "A deep-learning system bridging molecule structure and biomedical text with comprehension comparable to human professionals," *Nature communications*, vol. 13, no. 1, p. 862, 2022.
- [25] J. Devlin, M. Chang, K. Lee, and K. Toutanova, "BERT: pre-training of deep bidirectional transformers for language understanding," in *NAACL-HLT (1)*. Association for Computational Linguistics, 2019, pp. 4171–4186.
- [26] J. Lee, W. Yoon, S. Kim, D. Kim, S. Kim, C. H. So, and J. Kang, "Biobert: a pre-trained biomedical language representation model for biomedical text mining," *Bioinform.*, vol. 36, no. 4, pp. 1234–1240, 2020.
- [27] I. Beltagy, K. Lo, and A. Cohan, "Scibert: A pretrained language model for scientific text," in *EMNLP/IJCNLP (1)*. Association for Computational Linguistics, 2019, pp. 3613–3618.
- [28] E. Alsentzer, J. Murphy, W. Boag, W.-H. Weng, D. Jindi, T. Naumann, and M. McDermott, "Publicly available clinical bert embeddings," in *Proceedings of the 2nd Clinical Natural Language Processing Workshop*, 2019, pp. 72–78.
- [29] Y. Peng, S. Yan, and Z. Lu, "Transfer learning in biomedical natural language processing: An evaluation of BERT and elmo on ten benchmarking datasets," in *BioNLP@ACL*. Association for Computational Linguistics, 2019, pp. 58–65.
- [30] S. Alrowili and V. Shanker, "Biom-transformers: Building large biomedical language models with bert, ALBERT and ELECTRA," in *BioNLP@NAACL-HLT*. Association for Computational Linguistics, 2021, pp. 221–227.
- [31] Y. Gu, R. Tinn, H. Cheng, M. Lucas, N. Usuyama, X. Liu, T. Naumann, J. Gao, and H. Poon, "Domain-specific language model pretraining for biomedical natural language processing," *ACM Trans. Comput. Heal.*, vol. 3, no. 1, pp. 2:1–2:23, 2022.
- [32] H. Shin, Y. Zhang, E. Bakhturina, R. Puri, M. Patwary, M. Shoeybi, and R. Mani, "Biomegatron: Larger biomedical domain language model," in *EMNLP (1)*. Association for Computational Linguistics, 2020, pp. 4700–4706.
- [33] Z. Hong, A. Ajith, J. G. Pauloski, E. Duede, K. Chard, and I. T. Foster, "The diminishing returns of masked language models to science," in *ACL (Findings)*. Association for Computational Linguistics, 2023, pp. 1270–1283.
- [34] M. Yasunaga, J. Leskovec, and P. Liang, "Linkbert: Pretraining language models with document links," in *ACL (1)*. Association for Computational Linguistics, 2022, pp. 8003–8016.
- [35] X. Yang, A. Chen, N. PourNejatian, H. C. Shin, K. E. Smith, C. Parisien, C. Compas, C. Martin, M. G. Flores, Y. Zhang *et al.*, "Gatortron: A large clinical language model to unlock patient information from unstructured electronic health records," *arXiv preprint arXiv:2203.03540*, 2022.
- [36] R. Luo, L. Sun, Y. Xia, T. Qin, S. Zhang, H. Poon, and T. Liu, "Biogpt: generative pre-trained transformer for biomedical text generation and mining," *Briefings Bioinform.*, vol. 23, no. 6, 2022.

- [37] E. Bolton, D. Hall, M. Yasunaga, T. Lee, C. Manning, and P. Liang, "Biomedlm," 2022. [Online]. Available: <https://crfm.stanford.edu/2022/12/15/biomedlm.html>
- [38] C. Wu, X. Zhang, Y. Zhang, Y. Wang, and W. Xie, "Pmc-llama: Further finetuning llama on medical papers," *arXiv preprint arXiv:2304.14454*, 2023.
- [39] Y. Luo, J. Zhang, S. Fan, K. Yang, Y. Wu, M. Qiao, and Z. Nie, "Biomedgpt: Open multimodal generative pre-trained transformer for biomedicine," *arXiv preprint arXiv:2308.09442*, 2023.
- [40] C. Peng, X. Yang, A. Chen, K. E. Smith, N. PourNejatian, A. B. Costa, C. Martin, M. G. Flores, Y. Zhang, T. Magoc *et al.*, "A study of generative large language model for medical research and healthcare," *arXiv preprint arXiv:2305.13523*, 2023.
- [41] Z. Chen, A. H. Cano, A. Romanou, A. Bonnet, K. Matoba, F. Salvi, M. Pagliardini, S. Fan, A. Köpf, A. Mohtashami *et al.*, "Meditron-70b: Scaling medical pretraining for large language models," *arXiv preprint arXiv:2311.16079*, 2023.
- [42] R. K. Luu and M. J. Buehler, "Bioinspiredllm: Conversational large language model for the mechanics of biological and bio-inspired materials," *Advanced Science*, p. 2306724, 2023.
- [43] K. Singhal, S. Azizi, T. Tu, S. S. Mahdavi, J. Wei, H. W. Chung, N. Scales, A. Tanwani, H. Cole-Lewis, S. Pfohl *et al.*, "Large language models encode clinical knowledge," *Nature*, vol. 620, no. 7972, pp. 172–180, 2023.
- [44] K. Singhal, T. Tu, J. Gottweis, R. Sayres, E. Wulczyn, L. Hou, K. Clark, S. Pfohl, H. Cole-Lewis, D. Neal *et al.*, "Towards expert-level medical question answering with large language models," *arXiv preprint arXiv:2305.09617*, 2023.
- [45] D. Zhang, Z. Hu, S. Zhoubian, Z. Du, K. Yang, Z. Wang, Y. Yue, Y. Dong, and J. Tang, "Sciglm: Training scientific language models with self-reflective instruction annotation and tuning," *arXiv preprint arXiv:2401.07950*, 2024.
- [46] A. Toma, P. R. Lawler, J. Ba, R. G. Krishnan, B. B. Rubin, and B. Wang, "Clinical camel: An open-source expert-level medical language model with dialogue-based knowledge encoding," *arXiv preprint arXiv:2305.12031*, 2023.
- [47] T. Han, L. C. Adams, J.-M. Papaioannou, P. Grundmann, T. Oberhauser, A. Löser, D. Truhn, and K. K. Bressen, "Medalpaca—an open-source collection of medical conversational ai models and training data," *arXiv preprint arXiv:2304.08247*, 2023.
- [48] G. Wang, G. Yang, Z. Du, L. Fan, and X. Li, "Clinicalgpt: Large language models finetuned with diverse medical data and comprehensive evaluation," *arXiv preprint arXiv:2306.09968*, 2023.
- [49] H. Yuan, Z. Yuan, R. Gan, J. Zhang, Y. Xie, and S. Yu, "Biobart: Pretraining and evaluation of a biomedical generative language model," *arXiv preprint arXiv:2204.03905*, 2022.
- [50] L. N. Phan, J. T. Anibal, H. Tran, S. Chanana, E. Bahadroglu, A. Peltekian, and G. Altan-Bonnet, "Scifive: a text-to-text transformer model for biomedical literature," *arXiv preprint arXiv:2106.03598*, 2021.
- [51] M. Yasunaga, A. Bosselut, H. Ren, X. Zhang, C. D. Manning, P. Liang, and J. Leskovec, "Deep bidirectional language-knowledge graph pretraining," in *NeurIPS*, 2022.
- [52] C. Qian, H. Tang, Z. Yang, H. Liang, and Y. Liu, "Can large language models empower molecular property prediction?" *arXiv preprint arXiv:2307.07443*, 2023.
- [53] S. Balaji, R. Magar, Y. Jadhav *et al.*, "Gpt-molberta: Gpt molecular features language model for molecular property prediction," *arXiv preprint arXiv:2310.03030*, 2023.
- [54] Z. Liu, W. Zhang, Y. Xia, L. Wu, S. Xie, T. Qin, M. Zhang, and T. Liu, "Molxpt: Wrapping molecules with text for generative pre-training," in *ACL (2)*. Association for Computational Linguistics, 2023, pp. 1606–1616.
- [55] J. Li, Y. Liu, W. Fan, X.-Y. Wei, H. Liu, J. Tang, and Q. Li, "Empowering molecular discovery for molecule-caption translation with large language models: A chatgpt perspective," *arXiv preprint arXiv:2306.06615*, 2023.
- [56] A. M. Bran, S. Cox, O. Schilter, C. Baldassari, A. White, and P. Schwaller, "Augmenting large language models with chemistry tools," in *NeurIPS 2023 AI for Science Workshop*, 2023.
- [57] Y. Shi, A. Zhang, E. Zhang, Z. Liu, and X. Wang, "Relm: Leveraging language models for enhanced chemical reaction prediction," in *EMNLP (Findings)*. Association for Computational Linguistics, 2023, pp. 5506–5520.
- [58] Z. Zhao, D. Ma, L. Chen, L. Sun, Z. Li, H. Xu, Z. Zhu, S. Zhu, S. Fan, G. Shen *et al.*, "Chemdfm: Dialogue foundation model for chemistry," *arXiv preprint arXiv:2401.14818*, 2024.
- [59] G. Ye, X. Cai, H. Lai, X. Wang, J. Huang, L. Wang, W. Liu, and X. Zeng, "Drugassist: A large language model for molecule optimization," *arXiv preprint arXiv:2401.10334*, 2023.
- [60] B. Yu, F. N. Baker, Z. Chen, X. Ning, and H. Sun, "Llasmol: Advancing large language models for chemistry with a large-scale, comprehensive, high-quality instruction tuning dataset," *arXiv preprint arXiv:2402.09391*, 2024.
- [61] T. Guo, B. Nan, Z. Liang, Z. Guo, N. Chawla, O. Wiest, X. Zhang *et al.*, "What can large language models do in chemistry? a comprehensive benchmark on eight tasks," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [62] D. Zhang, W. Liu, Q. Tan, J. Chen, H. Yan, Y. Yan, J. Li, W. Huang, X. Yue, D. Zhou *et al.*, "Chemllm: A chemical large language model," *arXiv preprint arXiv:2402.06852*, 2024.
- [63] L. Zhao, C. Edwards, and H. Ji, "What a scientific language model knows and doesn't know about chemistry," in *NeurIPS 2023 AI for Science Workshop*, 2023.
- [64] D. Christofidellis, G. Giannone, J. Born, O. Winther, T. Laino, and M. Manica, "Unifying molecular and textual representations via multi-task language modelling," in *ICML*, ser. Proceedings of Machine Learning Research, vol. 202. PMLR, 2023, pp. 6140–6157.
- [65] Y. Chen, N. Xi, Y. Du, H. Wang, C. Jianyu, S. Zhao, and B. Qin, "From artificially real to real: Leveraging pseudo data from large language models for low-resource molecule discovery," *arXiv preprint arXiv:2309.05203*, 2023.
- [66] Z. Zeng, B. Yin, S. Wang, J. Liu, C. Yang, H. Yao, X. Sun, M. Sun, G. Xie, and Z. Liu, "Interactive molecular discovery with natural language," *arXiv preprint arXiv:2306.11976*, 2023.
- [67] M. Livne, Z. Miftahutdinov, E. Tutubalina, M. Kuznetsov, D. Polykovskiy, A. Brundyn, A. Jhunjhunwala, A. Costa, A. Aliper, and A. Zhavoronkov, "nach0: Multimodal natural and chemical languages foundation model," *arXiv preprint arXiv:2311.12410*, 2023.
- [68] H. Qiu, L. Liu, X. Qiu, X. Dai, X. Ji, and Z.-Y. Sun, "Polync: a natural and chemical language model for the prediction of unified polymer properties," *Chemical Science*, vol. 15, no. 2, pp. 534–544, 2024.
- [69] S. Kim, J. Nam, S. Yu, Y. Shin, and J. Shin, "Data-efficient molecular generation with hierarchical textual inversion," 2024. [Online]. Available: <https://openreview.net/forum?id=wwotGBxtC3>
- [70] Y. Qian, Z. Li, Z. Tu, C. W. Coley, and R. Barzilay, "Predictive chemistry augmented with text retrieval," in *EMNLP*. Association for Computational Linguistics, 2023, pp. 12731–12745.
- [71] D. Oniani, J. Hilsman, C. Zang, J. Wang, L. Cai, J. Zawala, and Y. Wang, "Emerging opportunities of using large language models for translation between drug molecules and indications," *arXiv preprint arXiv:2402.09588*, 2024.
- [72] H. Guo, S. Zhao, H. Wang, Y. Du, and B. Qin, "Moltailor: Tailoring chemical molecular representation to specific tasks via text prompts," *arXiv preprint arXiv:2401.11403*, 2024.
- [73] S. Liu, W. Nie, C. Wang, J. Lu, Z. Qiao, L. Liu, J. Tang, C. Xiao, and A. Anandkumar, "Multi-modal molecule structure-text model for text-based retrieval and editing," *Nature Machine Intelligence*, vol. 5, no. 12, pp. 1447–1457, 2023.
- [74] P. Seidl, A. Vall, S. Hochreiter, and G. Klambauer, "Enhancing activity prediction models in drug discovery with the ability to understand human language," in *ICML*, ser. Proceedings of Machine Learning Research, vol. 202. PMLR, 2023, pp. 30458–30490.
- [75] Z. Liu, S. Li, Y. Luo, H. Fei, Y. Cao, K. Kawaguchi, X. Wang, and T. Chua, "Molca: Molecular graph-language modeling with cross-modal projector and uni-modal adapter," in *EMNLP*. Association for Computational Linguistics, 2023, pp. 15623–15638.
- [76] S. Li, Z. Liu, Y. Luo, X. Wang, X. He, K. Kawaguchi, T.-S. Chua, and Q. Tian, "Towards 3d molecule-text interpretation in language models," in *ICLR*. Openreview.net, 2024.
- [77] P. Liu, Y. Ren, J. Tao, and Z. Ren, "Git-mol: A multi-modal large language model for molecular science with graph, image, and text," *Computers in Biology and Medicine*, p. 108073, 2024.
- [78] J. Fang, S. Zhang, C. Wu, Z. Liu, S. Li, K. Wang, W. Du, X. Wang, and X. He, "Molc: Towards molecular relational modeling in language models," *arXiv preprint arXiv:2402.03781*, 2024.
- [79] Y. Liang, R. Zhang, L. Zhang, and P. Xie, "Drugchat: towards enabling chatgpt-like capabilities on drug molecule graphs," *arXiv preprint arXiv:2309.03907*, 2023.

- [80] Y. Liu, H. Xu, T. Fang, H. Xi, Z. Liu, S. Zhang, H. Poon, and S. Wang, "T-rax: Text-assisted retrosynthesis prediction," *arXiv preprint arXiv:2401.14637*, 2024.
- [81] H. Zhao, S. Liu, C. Ma, H. Xu, J. Fu, Z.-H. Deng, L. Kong, and Q. Liu, "GIMLET: A unified graph-text model for instruction-based molecule zero-shot learning," in *NeurIPS*, 2023.
- [82] W. Zhao, D. Zhou, B. Cao, K. Zhang, and J. Chen, "Adversarial modality alignment network for cross-modal molecule retrieval," *IEEE Transactions on Artificial Intelligence*, 2023.
- [83] B. Su, D. Du, Z. Yang, Y. Zhou, J. Li, A. Rao, H. Sun, Z. Lu, and J.-R. Wen, "A molecular multimodal foundation model associating molecule graphs with natural language," *arXiv preprint arXiv:2209.05481*, 2022.
- [84] R. Lacombe, A. Gaut, J. He, D. Lüdeke, and K. Pistunova, "Extracting molecular properties from natural language with multimodal contrastive learning," *arXiv preprint arXiv:2307.12996*, 2023.
- [85] X. Tang, A. Tran, J. Tan, and M. B. Gerstein, "Mollm: A unified language model to integrate biomedical text with 2d and 3d molecular representations," *bioRxiv*, pp. 2023–11, 2023.
- [86] Y. Luo, K. Yang, M. Hong, X. Liu, and Z. Nie, "Molfm: A multimodal molecular foundation model," *arXiv preprint arXiv:2307.09484*, 2023.
- [87] H. Cao, Z. Liu, X. Lu, Y. Yao, and Y. Li, "Instructmol: Multi-modal integration for building a versatile and reliable molecular assistant in drug discovery," *arXiv preprint arXiv:2311.16208*, 2023.
- [88] Y. Luo, S. Li, Z. Liu, J. Wu, Z. Yang, X. He, X. Wang, and Q. Tian, "Text-guided diffusion model for 3d molecule generation," 2024. [Online]. Available: <https://openreview.net/forum?id=FdUloEgBSE>
- [89] H. Gong, Q. Liu, S. Wu, and L. Wang, "Text-guided molecule generation with diffusion language model," *arXiv preprint arXiv:2402.13040*, 2024.
- [90] H. W. Sprueill, C. Edwards, K. Agarwal, M. V. Olarte, U. Sanyal, C. Johnston, H. Liu, H. Ji, and S. Choudhury, "Chemreasoner: Heuristic search over a large language model's knowledge space using quantum-chemical feedback," *arXiv preprint arXiv:2402.10980*, 2024.
- [91] C. Edwards, C. Zhai, and H. Ji, "Text2mol: Cross-modal molecule retrieval with natural language queries," in *EMNLP (1)*. Association for Computational Linguistics, 2021, pp. 595–607.
- [92] Z. Wang, Q. Zhang, K. Ding, M. Qin, X. Zhuang, X. Li, and H. Chen, "Instructprotein: Aligning human and protein language via knowledge instruction," *arXiv preprint arXiv:2310.03269*, 2023.
- [93] S. Liu, Y. Zhu, J. Lu, Z. Xu, W. Nie, A. Gitter, C. Xiao, J. Tang, H. Guo, and A. Anandkumar, "A text-guided protein design framework," *arXiv preprint arXiv:2302.04611*, 2023.
- [94] H. Abdine, M. Chatzianastasis, C. Bouyioukos, and M. Vazirgianis, "Prot2text: Multimodal protein's function generation with gtns and transformers," in *NeurIPS 2023 AI for Science Workshop*, 2023.
- [95] N. Zhang, Z. Bi, X. Liang, S. Cheng, H. Hong, S. Deng, Q. Zhang, J. Lian, and H. Chen, "Ontoprotein: Protein pretraining with gene ontology embedding," in *ICLR*. OpenReview.net, 2022.
- [96] H. Xu and S. Wang, "Protranslator: zero-shot protein function prediction using textual description," in *International Conference on Research in Computational Molecular Biology*. Springer, 2022, pp. 279–294.
- [97] M. Xu, X. Yuan, S. Miret, and J. Tang, "Protst: Multi-modality learning of protein sequences and biomedical texts," in *ICML*, ser. Proceedings of Machine Learning Research, vol. 202. PMLR, 2023, pp. 38749–38767.
- [98] C. Wang, H. Fan, R. Quan, and Y. Yang, "Protchatgpt: Towards understanding proteins with large language models," 2024.
- [99] A. Ghafarollahi and M. J. Buehler, "Protagents: Protein discovery via large language model multi-agent collaborations combining physics and machine learning," *arXiv preprint arXiv:2402.04268*, 2024.
- [100] H. Guo, M. Huo, R. Zhang, and P. Xie, "Proteinchat: Towards achieving chatgpt-like functionalities on protein 3d structures," 2023.
- [101] S. Liu, J. Wang, Y. Yang, C. Wang, L. Liu, H. Guo, and C. Xiao, "Conversational drug editing using retrieval and domain feedback," in *ICLR*. Openreview.net, 2024.
- [102] Y. Fang, X. Liang, N. Zhang, K. Liu, R. Huang, Z. Chen, X. Fan, and H. Chen, "Mol-instructions - a large-scale biomolecular instruction dataset for large language models," in *ICLR*. Openreview.net, 2024.
- [103] Z. Wang, Z. Wang, B. Srinivasan, V. N. Ioannidis, H. Rangwala, and R. ANUBHAI, "Biobridge: Bridging biomedical foundation models via knowledge graph," in *ICLR*. Openreview.net, 2024.
- [104] R. Taylor, M. Kardas, G. Cucurull, T. Scialom, A. Hartshorn, E. Saravia, A. Poulton, V. Kerkez, and R. Stojnic, "Galactica: A large language model for science," *arXiv preprint arXiv:2211.09085*, 2022.
- [105] H. Xu, A. Woicik, H. Poon, R. B. Altman, and S. Wang, "Multilingual translation for zero-shot biomedical classification using biotranslator," *Nature Communications*, vol. 14, no. 1, p. 738, 2023.
- [106] T. Xie, Y. Wan, W. Huang, Z. Yin, Y. Liu, S. Wang, Q. Linghu, C. Kit, C. Grazian, W. Zhang *et al.*, "Darwin series: Domain specific large language models for natural science," *arXiv preprint arXiv:2308.13565*, 2023.
- [107] Q. Pei, L. Wu, K. Gao, X. Liang, Y. Fang, J. Zhu, S. Xie, T. Qin, and R. Yan, "Biot5+: Towards generalized biological understanding with iupac integration and multi-task tuning," *arXiv preprint arXiv:2402.17810*, 2024.
- [108] Y. Fang, K. Liu, N. Zhang, X. Deng, P. Yang, Z. Chen, X. Tang, M. Gerstein, X. Fan, and H. Chen, "Chatcell: Facilitating single-cell analysis with natural language," *arXiv preprint arXiv:2402.08303*, 2024.
- [109] N. O'Boyle and A. Dalke, "Deepsmiles: an adaptation of smiles for use in machine-learning of chemical structures," *ChemRxiv*, 2018.
- [110] M. Krenn, F. Häse, A. Nigam, P. Friederich, and A. Aspuru-Guzik, "Self-referencing embedded strings (selfies): A 100% robust molecular string representation," *Machine Learning: Science and Technology*, vol. 1, no. 4, p. 045024, 2020.
- [111] S. Heller, A. McNaught, S. Stein, D. Tchekhovskoi, and I. Pletnev, "Inchi-the worldwide chemical structure identifier standard," *Journal of cheminformatics*, vol. 5, no. 1, pp. 1–9, 2013.
- [112] G. Landrum *et al.*, "Rdkit: A software suite for cheminformatics, computational chemistry, and predictive modeling," *Greg Landrum*, vol. 8, p. 31, 2013.
- [113] S. Hochreiter and J. Schmidhuber, "Long short-term memory," *Neural computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [114] K. Cho, B. Van Merriënboer, C. Gulcehre, D. Bahdanau, F. Bougares, H. Schwenk, and Y. Bengio, "Learning phrase representations using rnn encoder-decoder for statistical machine translation," *arXiv preprint arXiv:1406.1078*, 2014.
- [115] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, "Attention is all you need," in *NIPS*, 2017, pp. 5998–6008.
- [116] Z. Lin, M. Feng, C. N. dos Santos, M. Yu, B. Xiang, B. Zhou, and Y. Bengio, "A structured self-attentive sentence embedding," in *International Conference on Learning Representations*, 2016.
- [117] P. D. Sun, C. E. Foster, and J. C. Boyington, "Overview of protein structural and functional folds," *Current protocols in protein science*, vol. 35, no. 1, pp. 17–1, 2004.
- [118] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and S. Y. Philip, "A comprehensive survey on graph neural networks," *IEEE transactions on neural networks and learning systems*, vol. 32, no. 1, pp. 4–24, 2020.
- [119] J. Zhou, G. Cui, S. Hu, Z. Zhang, C. Yang, Z. Liu, L. Wang, C. Li, and M. Sun, "Graph neural networks: A review of methods and applications," *AI open*, vol. 1, pp. 57–81, 2020.
- [120] Z. Guo, K. Guo, B. Nan, Y. Tian, R. G. Iyer, Y. Ma, O. Wiest, X. Zhang, W. Wang, C. Zhang, and N. V. Chawla, "Graph-based molecular representation learning," in *IJCAI*. ijcai.org, 2023, pp. 6638–6646.
- [121] M. Jiang, S. Wang, S. Zhang, W. Zhou, Y. Zhang, and Z. Li, "Sequence-based drug-target affinity prediction using weighted graph neural networks," *BMC genomics*, vol. 23, no. 1, pp. 1–17, 2022.
- [122] K. Jha, S. Saha, and H. Singh, "Prediction of protein-protein interaction using graph neural networks," *Scientific Reports*, vol. 12, no. 1, p. 8360, 2022.
- [123] J. Zhu, K. Wu, B. Wang, Y. Xia, S. Xie, Q. Meng, L. Wu, T. Qin, W. Zhou, H. Li, and T. Liu, "O-gnn: incorporating ring priors into molecular modeling," in *ICLR*. OpenReview.net, 2023.
- [124] C. Bodnar, F. Frasca, N. Otter, Y. Wang, P. Lio, G. F. Montufar, and M. Bronstein, "Weisfeiler and leman go cellular: Cw networks," *Advances in Neural Information Processing Systems*, vol. 34, pp. 2625–2640, 2021.

- [125] B. Jing, S. Eismann, P. Suriana, R. J. L. Townshend, and R. O. Dror, "Learning from protein structure with geometric vector perceptrons," in *ICLR*. OpenReview.net, 2021.
- [126] S. Luo, T. Chen, Y. Xu, S. Zheng, T. Liu, L. Wang, and D. He, "One transformer can understand both 2d & 3d molecular data," in *ICLR*. OpenReview.net, 2023.
- [127] W. Jin, R. Barzilay, and T. S. Jaakkola, "Antibody-antigen docking and design via hierarchical structure refinement," in *ICML*, ser. Proceedings of Machine Learning Research, vol. 162. PMLR, 2022, pp. 10 217–10 227.
- [128] D. Rogers and M. Hahn, "Extended-connectivity fingerprints," *Journal of chemical information and modeling*, vol. 50, no. 5, pp. 742–754, 2010.
- [129] S. Jaeger, S. Fulle, and S. Turk, "Mol2vec: unsupervised machine learning approach with chemical intuition," *Journal of chemical information and modeling*, vol. 58, no. 1, pp. 27–35, 2018.
- [130] P. Liu, J. Tao, and Z. Ren, "Scientific language modeling: A quantitative review of large language models in molecular science," *arXiv preprint arXiv:2402.04119*, 2024.
- [131] G. O. Consortium, "The gene ontology (go) database and informatics resource," *Nucleic acids research*, vol. 32, no. suppl_1, pp. D258–D261, 2004.
- [132] Y. Wang, S. Mishra, P. Alipoormolabashi, Y. Kordi, A. Mirzaei, A. Naik, A. Ashok, A. S. Dhanasekaran, A. Arunkumar, D. Stap, E. Pathak, G. Karamanolakis, H. G. Lai, I. Purohit, I. Mondal, J. Anderson, K. Kuznia, K. Doshi, K. K. Pal, M. Patel, M. Moradshahi, M. Parmar, M. Purohit, N. Varshney, P. R. Kaza, P. Verma, R. S. Puri, R. Karia, S. Doshi, S. K. Sampat, S. Mishra, S. R. A. S. Patro, T. Dixit, and X. Shen, "Super-naturalinstructions: Generalization via declarative instructions on 1600+ NLP tasks," in *EMNLP*. Association for Computational Linguistics, 2022, pp. 5085–5109.
- [133] L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. L. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray, J. Schulman, J. Hilton, F. Kelton, L. Miller, M. Simens, A. Askell, P. Welinder, P. F. Christiano, J. Leike, and R. Lowe, "Training language models to follow instructions with human feedback," in *NeurIPS*, 2022.
- [134] S. Zhang, L. Dong, X. Li, S. Zhang, X. Sun, S. Wang, J. Li, R. Hu, T. Zhang, F. Wu *et al.*, "Instruction tuning for large language models: A survey," *arXiv preprint arXiv:2308.10792*, 2023.
- [135] J. Wei, M. Bosma, V. Y. Zhao, K. Guu, A. W. Yu, B. Lester, N. Du, A. M. Dai, and Q. V. Le, "Finetuned language models are zero-shot learners," in *ICLR*. OpenReview.net, 2022.
- [136] Z. Wu, B. Ramsundar, E. N. Feinberg, J. Gomes, C. Geniesse, A. S. Pappu, K. Leswing, and V. Pande, "Moleculenet: a benchmark for molecular machine learning," *Chemical science*, vol. 9, no. 2, pp. 513–530, 2018.
- [137] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu, "Exploring the limits of transfer learning with a unified text-to-text transformer," *The Journal of Machine Learning Research*, vol. 21, no. 1, pp. 5485–5551, 2020.
- [138] T. B. Brown, B. Mann, N. Ryder, M. Subbiah, J. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, S. Agarwal, A. Herbert-Voss, G. Krueger, T. Henighan, R. Child, A. Ramesh, D. M. Ziegler, J. Wu, C. Winter, C. Hesse, M. Chen, E. Sigler, M. Litwin, S. Gray, B. Chess, J. Clark, C. Berner, S. McCandlish, A. Radford, I. Sutskever, and D. Amodei, "Language models are few-shot learners," in *NeurIPS*, 2020.
- [139] M. Lewis, Y. Liu, N. Goyal, M. Ghazvininejad, A. Mohamed, O. Levy, V. Stoyanov, and L. Zettlemoyer, "BART: denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension," in *ACL*. Association for Computational Linguistics, 2020, pp. 7871–7880.
- [140] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu, "Exploring the limits of transfer learning with a unified text-to-text transformer," *J. Mach. Learn. Res.*, vol. 21, pp. 140:1–140:67, 2020.
- [141] J. Zhu, Y. Xia, L. Wu, S. Xie, W. Zhou, T. Qin, H. Li, and T.-Y. Liu, "Dual-view molecular pre-training," in *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, 2023, pp. 3615–3627.
- [142] A. Radford, K. Narasimhan, T. Salimans, I. Sutskever *et al.*, "Improving language understanding by generative pre-training," 2018.
- [143] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, I. Sutskever *et al.*, "Language models are unsupervised multitask learners," *OpenAI blog*, vol. 1, no. 8, p. 9, 2019.
- [144] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "Lora: Low-rank adaptation of large language models," in *ICLR*. OpenReview.net, 2022.
- [145] M. R. Al4Science and M. A. Quantum, "The impact of large language models on scientific discovery: a preliminary study using gpt-4," *arXiv preprint arXiv:2311.07361*, 2023.
- [146] B. Lester, R. Al-Rfou, and N. Constant, "The power of scale for parameter-efficient prompt tuning," in *EMNLP (1)*. Association for Computational Linguistics, 2021, pp. 3045–3059.
- [147] J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. H. Chi, Q. V. Le, and D. Zhou, "Chain-of-thought prompting elicits reasoning in large language models," in *NeurIPS*, 2022.
- [148] H. Nori, Y. T. Lee, S. Zhang, D. Carignan, R. Edgar, N. Fusi, N. King, J. Larson, Y. Li, W. Liu *et al.*, "Can generalist foundation models outcompete special-purpose tuning? case study in medicine," *arXiv preprint arXiv:2311.16452*, 2023.
- [149] Y. Qiu, Y. Zhang, Y. Deng, S. Liu, and W. Zhang, "A comprehensive review of computational methods for drug-drug interaction detection," *IEEE/ACM transactions on computational biology and bioinformatics*, vol. 19, no. 4, pp. 1968–1985, 2021.
- [150] L. Hu, X. Wang, Y.-A. Huang, P. Hu, and Z.-H. You, "A survey on computational models for predicting protein-protein interactions," *Briefings in bioinformatics*, vol. 22, no. 5, p. bbab036, 2021.
- [151] M. Bagherian, E. Sabeti, K. Wang, M. A. Sartor, Z. Nikolovska-Coleska, and K. Najarian, "Machine learning approaches and databases for prediction of drug-target interaction: a survey paper," *Briefings in bioinformatics*, vol. 22, no. 1, pp. 247–269, 2021.
- [152] R. Sever, T. Roeder, S. Hindle, L. Sussman, K.-J. Black, J. Argentine, W. Manos, and J. R. Inglis, "biorxiv: the preprint server for biology," *BioRxiv*, p. 833400, 2019.
- [153] K. Lo, L. L. Wang, M. Neumann, R. Kinney, and D. S. Weld, "S2ORC: the semantic scholar open research corpus," in *ACL*. Association for Computational Linguistics, 2020, pp. 4969–4983.
- [154] A. E. Johnson, T. J. Pollard, L. Shen, L.-w. H. Lehman, M. Feng, M. Ghassemi, B. Moody, P. Szolovits, L. Anthony Celi, and R. G. Mark, "Mimic-iii, a freely accessible critical care database," *Scientific data*, vol. 3, no. 1, pp. 1–9, 2016.
- [155] J. J. Irwin, T. Sterling, M. M. Mysinger, E. S. Bolstad, and R. G. Coleman, "Zinc: a free tool to discover chemistry for biology," *Journal of chemical information and modeling*, vol. 52, no. 7, pp. 1757–1768, 2012.
- [156] C. v. Mering, M. Huynen, D. Jaeggi, S. Schmidt, P. Bork, and B. Snel, "String: a database of predicted functional associations between proteins," *Nucleic acids research*, vol. 31, no. 1, pp. 258–261, 2003.
- [157] Q. Jin, B. Dhingra, Z. Liu, W. W. Cohen, and X. Lu, "Pubmedqa: A dataset for biomedical research question answering," in *EMNLP/IJCNLP (1)*. Association for Computational Linguistics, 2019, pp. 2567–2577.
- [158] B. Aydin, Y. S. Y. Y. S. Yilmaz, Y. Li, Q. Li, J. Gao, and M. Demirbas, "Crowdsourcing for multiple-choice question answering," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 28, no. 2, 2014, pp. 2946–2953.
- [159] A. Nentidis, K. Bougiatiotis, A. Krithara, and G. Paliouras, "Results of the seventh edition of the bioasq challenge," in *Machine Learning and Knowledge Discovery in Databases: International Workshops of ECML PKDD 2019, Würzburg, Germany, September 16–20, 2019, Proceedings, Part II*. Springer, 2020, pp. 553–568.
- [160] K. Huang, T. Fu, W. Gao, Y. Zhao, Y. Roohani, J. Leskovec, C. W. Coley, C. Xiao, J. Sun, and M. Zitnik, "Therapeutics data commons: Machine learning datasets and tasks for drug discovery and development," in *NeurIPS Datasets and Benchmarks*, 2021.
- [161] J. Lu and Y. Zhang, "Unified deep learning model for multitask reaction predictions with explanation," *Journal of Chemical Information and Modeling*, vol. 62, no. 6, pp. 1376–1387, 2022.
- [162] W. Jin, K. Yang, R. Barzilay, and T. Jaakkola, "Learning multimodal graph-to-graph translation for molecular optimization," *arXiv preprint arXiv:1812.01070*, 2018.
- [163] C. Dallago, J. Mou, K. E. Johnston, B. J. Wittmann, N. Bhattacharya, S. Goldman, A. Madani, and K. K. Yang, "FLIP: benchmark tasks in fitness landscape inference for proteins," in *NeurIPS Datasets and Benchmarks*, 2021.
- [164] R. Rao, N. Bhattacharya, N. Thomas, Y. Duan, X. Chen, J. F. Canny, P. Abbeel, and Y. S. Song, "Evaluating protein transfer learning with TAPE," in *NeurIPS*, 2019, pp. 9686–9698.
- [165] C. Edwards, Q. Wang, L. Zhao, and H. Ji, "L+ m-24: Building a dataset for language+ molecules@ acl 2024."

- [166] D. S. Wishart, C. Knox, A. C. Guo, S. Shrivastava, M. Hassanali, P. Stothard, Z. Chang, and J. Woolsey, "Drugbank: a comprehensive resource for in silico drug discovery and exploration," *Nucleic acids research*, vol. 34, no. suppl_1, pp. D668–D672, 2006.
- [167] L. Sun, Y. Han, Z. Zhao, D. Ma, Z. Shen, B. Chen, L. Chen, and K. Yu, "Scieval: A multi-level large language model evaluation benchmark for scientific research," *arXiv preprint arXiv:2308.13149*, 2023.
- [168] I. Jahan, M. T. R. Laskar, C. Peng, and J. X. Huang, "A comprehensive evaluation of large language models on benchmark biomedical text processing tasks," *Computers in Biology and Medicine*, p. 108189, 2024.
- [169] C. M. Castro Nascimento and A. S. Pimentel, "Do large language models understand chemistry? a conversation with chatgpt," *Journal of Chemical Information and Modeling*, vol. 63, no. 6, pp. 1649–1655, 2023.
- [170] K. M. Jablonka, P. Schwaller, A. Ortega-Guerrero, and B. Smit, "Leveraging large language models for predictive chemistry," *Nature Machine Intelligence*, pp. 1–9, 2024.
- [171] S. Ouyang, Z. Zhang, B. Yan, X. Liu, J. Han, and L. Qin, "Structured chemistry reasoning with large language models," *arXiv preprint arXiv:2311.09656*, 2023.
- [172] W. Lin, H. Wang, H. Xiao, and Q. Ye, "OPI: Exploring and Benchmarking Large Language Models for Protein Modeling," 2023. [Online]. Available: <https://github.com/baihealth/opi>
- [173] C. W. Kosonocky, C. O. Wilke, E. M. Marcotte, and A. D. Ellington, "Mining patents with large language models elucidates the chemical function landscape," *ArXiv*, 2023.
- [174] K. M. Jablonka, Q. Ai, A. Al-Feghali, S. Badhwar, J. D. Bocarsly, A. M. Bran, S. Bringuier, L. C. Brinson, K. Choudhary, D. Circi *et al.*, "14 examples of how llms can transform materials science and chemistry: a reflection on a large language model hackathon," *Digital Discovery*, vol. 2, no. 5, pp. 1233–1250, 2023.
- [175] D. S. Wishart, S. Girod, H. Peters, E. Oler, J. Jovel, Z. Budinski, R. Milford, V. W. Lui, Z. Sayeeda, R. Mah *et al.*, "Chemfont: the chemical functional ontology resource," *Nucleic Acids Research*, vol. 51, no. D1, pp. D1220–D1229, 2023.
- [176] L. Lv, Z. Lin, H. Li, Y. Liu, J. Cui, C. Y.-C. Chen, L. Yuan, and Y. Tian, "Prollama: A protein large language model for multi-task protein language processing," *arXiv preprint arXiv:2402.16445*, 2024.
- [177] S. Banerjee and A. Lavie, "Meteor: An automatic metric for mt evaluation with improved correlation with human judgments," in *Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*, 2005, pp. 65–72.
- [178] H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale *et al.*, "Llama 2: Open foundation and fine-tuned chat models," *arXiv preprint arXiv:2307.09288*, 2023.
- [179] P. S. H. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W. Yih, T. Rocktäschel, S. Riedel, and D. Kiela, "Retrieval-augmented generation for knowledge-intensive NLP tasks," in *NeurIPS*, 2020.
- [180] Q. Dong, L. Li, D. Dai, C. Zheng, Z. Wu, B. Chang, X. Sun, J. Xu, and Z. Sui, "A survey for in-context learning," *arXiv preprint arXiv:2301.00234*, 2022.
- [181] Y. Qin, S. Hu, Y. Lin, W. Chen, N. Ding, G. Cui, Z. Zeng, Y. Huang, C. Xiao, C. Han *et al.*, "Tool learning with foundation models," *arXiv preprint arXiv:2304.08354*, 2023.