

## Gamified AI Approach for Early Detection of Dementia

<sup>1</sup>Paramita Kundu Maji\*, <sup>2</sup>Soubhik Acharya, <sup>3</sup>Priti Paul, <sup>4</sup>Sanjay Chakraborty\*,  
<sup>5</sup>Saikat Basu

<sup>1234</sup>Department of Computer Science and Engineering, Techno International  
New Town, Kolkata, India

<sup>4</sup>Department of Computer and Information Science, Linkoping University,  
Sweden

<sup>5</sup>Department of Computer Science and Engineering, Maulana Abul Kalam Azad  
University, Kolkata, India

Email: paramita.kundu.maji@tint.edu.in\*, schakraborty770@gmail.com\*

**Abstract:** *This paper aims to develop a new deep learning-inspired gaming approach for early detection of dementia. This research integrates a robust convolutional neural network (CNN)-based model for early dementia detection using health metrics data as well as facial image data through a cognitive assessment-based gaming application. We have collected 1000 data samples of health metrics dataset from Apollo diagnostic center Kolkata that is labeled as either “demented” or “non-demented” for the training of MOD-1D-CNN for the game level 1 and another dataset of facial images containing 1800 facial data that are labeled as either “demented” or “non-demented” is collected by our research team for the training of MOD-2D-CNN model in-game level 2. In our work, the loss for the proposed MOD-1D-CNN model is 0.2692 and the highest accuracy is 70.50% for identifying the dementia traits using real-life health metrics data. Similarly, the proposed MOD-2D-CNN model loss is 0.1755 and the highest accuracy is obtained here 95.72% for recognizing the dementia status using real-life face-based image data. Therefore, a rule-based weightage method is applied to combine both the proposed methods to achieve the final decision. The MOD-1D-CNN and MOD-2D-CNN models are more lightweight and computationally efficient alternatives because they have a significantly lower number of parameters when compared to the other state-of-the-art models. We have compared their accuracies and parameters with the other state-of-the-art deep learning models.*

**Keywords:** *Cognitive assessment, Dementia detection, Deep learning, Convolutional neural networks, Game playing.*

### 1. INTRODUCTION

A major threat to public health in a period of global population aging is the development of dementia. Effective intervention and treatment require early diagnosis of cognitive impairment. Accessibility and involvement are typically lacking in traditional diagnostic techniques [1-3]. This work presents a novel method for identifying early dementia that draws inspiration from gamified cognitive evaluation and deep learning concepts [4-6]. Through the use of a two-tiered memory card matching game, users—demented or not—participate in a dynamic evaluation. If users complete the first level within the allotted

click threshold and time frame, they can go to the second level; if not, they are prompted to provide pertinent health parameters and facial image data. Once the first level has been completed successfully, users are successfully redirected to the second level. If both levels are completed successfully, a message congratulating them on moving through the cognitive assessment levels appears. If users cannot complete the first level of prediction within the designated click threshold and time limit, they are prompted to provide vital health indicators, including age, weight, heart rate, blood oxygen levels, body temperature, weight, and diabetes status, to aid with the first level of prediction. After providing these details, gamers are granted an additional opportunity to go to the second level. Users who do not meet the click threshold on the second level are prompted to capture an image of their face during gameplay. A deep-learning model then examines this image to look for signs of dementia. The user is presented with definitive results at the end of this interactive process, which has reshaped the field of early dementia diagnosis by combining artificial intelligence, health parameter input, and game-based involvement.

By developing a gamified cognitive evaluation tool based on deep learning principles, this research aims to tackle the urgent problem of early dementia identification. The main issue is the low interest and accessibility of conventional diagnostic techniques, which calls for a new strategy that seamlessly combines health parameter input, face picture analysis, and a two-tiered memory card matching game. The main research question that motivates this investigation is whether this novel approach—which combines artificial intelligence and game-based interaction—can offer a practical and efficient way to detect cognitive decline in its early stages, thereby enhancing intervention tactics and the care given to those who are at risk of dementia. This work aims to determine the effectiveness of a gamified cognitive assessment system in the early detection of dementia by using a two-tiered memory card-matching game. Additionally, the accuracy and reliability of the deep learning model in predicting dementia based on user-provided health parameters and facial images will be assessed. The work’s central premise is that combining a dynamic gaming framework with deep learning-based facial image analysis and health parameter input would result in a reliable and approachable way to spot cognitive impairment early on. By achieving these goals, this research hopes to provide insightful information on how cutting-edge technology might transform current approaches to early dementia detection.

There is some interesting literature available in this domain. The literature on dementia detection highlights the critical need for early identification, given the limitations of traditional diagnostic approaches regarding accessibility and engagement. Notable studies explore various innovative methodologies, such as Kherchouche et al. [7] Deep Learning framework for early Alzheimer’s disease detection using Proton Magnetic Resonance Spectroscopy (1H-MRS) data, emphasizing concerns about data limitations and interpretability. Alex et al. [8] propose a cost-effective and non-invasive approach for early AD detection using speech data, acknowledging challenges in dataset diversity and model

interpretability. Qayyum et al. [9] employ EEG data analysis to discern resting and cognitive states, achieving notable achievements but recognizing limitations in sample size and model interpretability. Gamification emerges as a promising avenue, with Paliokas et al. [10] introducing a gamified social platform for dementia care, acknowledging challenges in accessibility and generalizability. Zhang and Chignell [11] explore cognitive assessment games for people with dementia, addressing concerns about generalizability and ethical considerations. Chi et al. [12] introduce the “Smart Thinker” game suite, showing cognitive improvement but recognizing limitations in study duration and sample size. Mora et al. [13] The PNH tool targets cognitive training, addressing challenges in generalizability and ethical user privacy practices. Technological interventions include Paletta et al. [14] PLAYTIME app, combining eye movement analysis and cognitive exercises, with concerns about varying efficacy and the need for clinical validation. Aram et al. [15] introduce a 2-layer model for early detection of dementia problems, emphasizing the need for ethical considerations and diverse dataset validation. Shankle et al. [16] differentiate between normal aging and early dementia using machine learning, highlighting the importance of addressing dataset specificity. Bidani et al. [17] present a Deep Learning approach for dementia detection using MRI scans, facing challenges in dataset homogeneity and model interpretability. Murugan et al. [18] DEMNET framework achieves remarkable accuracy but lacks extensive discussion on interpretability and broader dataset validation. Table 1 presents concise and intriguing research gaps drawn from existing literature that have served as inspiration for our current work.

**Table 1:** Research gaps in some key literature works

<b>Key Literature Works</b>	<b>Research Gaps</b>
[7]	The major research need is for more potent early detection techniques for Alzheimer’s disease (AD) that use data from proton magnetic resonance spectroscopy (1H-MRS) to identify biological alterations in the brain before the onset of structural atrophy.
[8]	The research gap is the need for more investigation and development of robust and explainable multimodal fusion approaches for speech-based automated detection of Alzheimer’s disease (AD), taking into account issues with reliability, data size, and model explainability.
[9]	The area of unmet research need is the investigation of deep learning methods, specifically 1D convolutional neural networks (CNNs), for precise classification and evaluation of cognitive load from EEG data. Specifically, the study should concentrate on the consistent pattern of alpha brain waves in differentiating between resting and cognitive states.

<b>Key Literature Works</b>	<b>Research Gaps</b>
[10]	The area of unmet research need is the need for more investigation and the creation of gamification systems specifically designed for dementia patients and their carers in social networking settings.
[11]	The area of unmet research need is the creation of a thorough framework for the efficient use of cognitive assessment games made especially for dementia patients.
[12]	The research gap lies in the area of computerized serious games, such as “Smart Thinker”, that target memory and attention abilities in older persons to improve cognitive functioning. This is especially important when it comes to managing and preventing dementia.
[13]	The research gap concerns the need for novel and compelling techniques to improve long-term adherence and the efficacy of personalized cognitive impairment prevention treatments in older persons. Examples of such initiatives include gamified crowdsourcing-inspired programs like Preventive Neuro Health (PNH).
[14]	The research gap is the lack of longitudinal data on changing mental processes in dementia, which makes it difficult to provide personalized therapy and prolonged freedom at home.
[15]	The research gap relates to the requirement for machine learning-based early diagnosis models for dementia that are both effective and efficient. These models can alleviate the load on patients and healthcare systems by streamlining diagnostic procedures.
[16]	The research gap relates to the need for machine learning techniques that can use extensive datasets to discern between early symptoms of dementia and normal brain aging, perhaps offering more accessible and accurate diagnostic tools than previous methods.
[17]	The research gap is to meet the demand for better diagnostic instruments in the evaluation of neurodegenerative diseases, a novel method utilizing Deep Convolutional Neural Network (DCNN) and Transfer Learning models has been developed to reliably identify and categorize dementia using MRI brain images.

<b>Key Literature Works</b>	<b>Research Gaps</b>
[18]	The research gap is the need for better Convolutional Neural Network (CNN) models-based diagnostic processes for Alzheimer’s Disease (AD), which address class imbalance and increase sensitivity and precision in MRI image recognition.

This work adds substantially to the corpus of information by addressing the urgent need for novel and approachable techniques in the early identification of dementia. To create a practical and efficient method for detecting cognitive decline early on, we consider implementing a gamified cognitive evaluation system. This system can help assess cognitive function and identify potential signs of decline. By gamifying the evaluation process, we can engage users and make the assessment more enjoyable, increasing their willingness to participate. The scope comprises developing a two-level memory game that combines gaming, deep learning models, face image analysis, and health parameter input for an all-encompassing cognitive evaluation. The work does, however, have many drawbacks, such as a limited sample size, potential biases related to user participation in gamified environments, and the requirement for additional validation in a variety of demographics. Individual variances in user behavior can impact the results and might not fully represent the range of characteristics associated with dementia. The methodology includes developing and implementing a gamified cognitive evaluation system, using deep learning algorithms to detect dementia, and using a quantitative approach to examine user performance data. Important elements of the procedure include data validation, model accuracy evaluation, and analysis of user input to improve the system’s dependability and user-friendliness. In the end, our research aims to transform methods for detecting dementia, encouraging early intervention, and enhancing patient outcomes in the context of proactive dementia care.

The rest of this paper is organized as follows. Section 2 gives a detailed description of the proposed methodology. In section 2, the different levels of the proposed game, MOD-1D-CNN and MOD-2D-CNN algorithms & their architectures are explained. An experimental setup, feature extraction, and mapping strategies are provided in section 3. The result analysis and discussion along with a brief comparison is given in Section 4. Section 5 discusses the conclusions of the work.

## **2. PROPOSED METHODOLOGY**

### **2.1 Levels of Proposed Game**

Cognitive talents comprise a wide range of human abilities, including psychomotor, olfactory, tactile, visual processing, reasoning, reading, writing, and others [19]. Executive Functions (EFs) are cognitive processes that exert influence over other abilities and regulate their functioning [20]. Disruptions in cognitive

processes can result in the development of social and mental health issues [21]. Cognitive assessment is a valuable tool for evaluating cognitive impairment, which refers to a lack of knowledge, cognitive functioning, or sound judgment. To perform cognitive assessments, a variety of popular techniques are used. Each assessment is meticulously designed to assess specific neuropsychological domains, including memory, language, executive function, abstract reasoning, attention, and visuospatial skills [22]. This innovative cognitive assessment game measures critical cognitive abilities such as memory, decision-making, and flexibility, which are essential for the early identification of dementia. It has two levels to evaluate various cognitive abilities and is created with a hypertext markup language (HTML), cascading style sheets (CSS), and JavaScript. The game provides a sophisticated diagnostic experience, ranging from the “Basic Match” level, which evaluates memory retention, to the “Ultimate Test,” which evaluates adaptability and strategic thinking [23-24]. This ground-breaking tool goes beyond traditional gaming by providing a sophisticated diagnostic method and possibly identifying early cognitive deviations through technology-driven assessments. In line with the overall goals of the research, the proposed Level 1 of the “Basic Match” game is intended to serve as a fundamental cognitive evaluation instrument. This grid-layout game with face-down cards that hold concealed images is created with hypertext markup language (HTML), Cascading Style Sheets (CSS), and JavaScript. JavaScript logic is in charge of controlling key operations like card flipping, pair matching detection, and game progression. Using fundamental JavaScript methods for element selection, sound setup, card order randomization, and memory retention countdown, the Level 1 structure follows card-matching guidelines. Card faces are momentarily revealed and hidden as users begin the game by using the ‘clicking()’ method. Select cards can be flipped concurrently by users using the ‘enableClick()’ method, and a pair detection algorithm is used by the ‘match()’ function. Potential user challenges are addressed with an inventive feature. The game will automatically forward players to the next page for cognitive prediction or assessment if their clicks have crossed the limits of the number of click counts, which is the click threshold. Using `window.location.href`, a JavaScript listener initiates a redirection function and keeps track of the number of clicks. An on-screen notification informing that you have beyond the click threshold ends the game along with the redirection. Before the user reaches the prediction page, a confirmation popup makes sure they have acknowledged it. The prediction page functions as a thorough platform, gathering essential input data for 1D Convolution Neural Network (CNN)-based dementia prediction. Users provide details about their body temperature, heart rate, weight, age, diabetes, and blood oxygen level. Using the algorithms of 1D Convolution Neural Network (CNN) to produce predicted insights about cognitive health and possible early indicators of dementia, this data powers an assessment methodology. After the inputs are validated by the model they are again redirected to play the next level of the game which is the Ultimate test for the cognitive assessment. In Level 1, the click threshold is set at 36, the countdown timer is 2 minutes, and the show timer for remembering card positions is 5 seconds. The forecasts are in line with fundamental ideas that highlight memory, judgment, and flexibility as

critical components of early dementia identification. The suggested cognitive evaluation approach is made more useful overall by this smooth transition from gameplay to cognitive assessment in the Level 1 setting. The proposed game level 1 is shown in Fig. 1.



**Fig. 1** Basic Match Level 1 of the Proposed Gaming Web Application

The cognitive evaluation game’s Level 2 of the “Ultimate Test” is designed to provide players with a more challenging experience, introducing a variety of cognitive activities, including grid control, rotations, swaps, and bomb interactions [23-24]. The HTML structure maintains familiarity while enhancing user engagement through the addition of interactive buttons and a header area. JavaScript scripts ensure dynamic shuffling of the grid at the beginning of each game, creating a randomized card layout. To add a layer of complexity, a countdown timer is implemented, offering a brief memorization period for players. Clicking on dynamically rotating grid pieces allows players to match pairs of cards, with the requirement to complete all matches within a specified click count for a predetermined score. Players who complete the level within the given click threshold and countdown timer receive acknowledgment through a message, indicating that they have successfully passed the cognitive assessment and show no signs of dementia. However, for those unable to finish within the allotted click count, the game seamlessly transitions to a facial image capture prompt. Players are instructed to take a picture of their faces, initiating a 2D convolutional neural network (CNN) analysis. The click threshold counter and countdown timer emphasize precision and time sensitivity, ensuring a challenging cognitive experience. The facial image analysis aims to predict whether the player exhibits dementia-like symptoms, providing valuable insights into cognitive health based on facial traits. This comprehensive approach combines gameplay elements, data input, and facial image analysis to offer users a thorough cognitive assessment system. The proposed game level 2 is shown in Fig. 2.



Fig. 2 Ultimate Test Level 2 of the Proposed Gaming Web Application

## 2.2 Proposed Gaming Strategy

The procedural overview of the memory game with an integrated dementia predictor is shown below, which incorporates interactive features, predictive modeling, and facial image analysis to create a comprehensive cognitive evaluation system. The proposed algorithm for the level 1 game is shown below:

---

### ALGORITHM-1: LEVEL – 1: BASIC MATCH GAME

---

**Input:** Game Level

**Output:** -User interactions with face-down cards.

- Completion of the game.

-User input for cognitive prediction (body temperature, heart rate, weight, age, diabetes, blood oxygen level).

-Prediction result using Mod 1D CNN.

-Validation feedback for user inputs.

**Procedure:**

**Begin:**

**Initialize game components:** *setUpGame()*

**Start game:** *startGame()*

**Set level-specific parameters:**

*clickThreshold = 36*

*timerDuration = 2 minutes*

*showTimerDuration = 5 seconds*

**Show timer for memorization:**

*showTimer(showTimerDuration)*

**while(gameInProgress() and withinTimeLimit(timerDuration)) do**

*// User interaction loop with timer*

**Allow user to flip cards:** *handleCardFlipping()*

**if foundMatch() then** *// Check for completed matches*



---

**ALGORITHM-1: LEVEL – 1: BASIC MATCH GAME**

---

```
        handleMatchedPair()
    end if
    if exceedClickThreshold(clickThreshold) then //
    Check for click threshold
        initiateCognitivePrediction()
        displayConfirmationPopup()
        exitGameLoop()
    end if
end while
Collect user input for prediction: collectUserInput()
Use Mod 1D CNN for cognitive prediction:
use1DCNNForCognitivePrediction()
if inputsValidated() then // Validate prediction inputs
    redirectToLevel2()
else
    displayFeedback()
end if
end
```

---

The proposed algorithm for the level 2 game is shown below:

---

**ALGORITHM-2: LEVEL – 2: ULTIMATE TEST GAME**

---

**Input:** Game Level

**Output:** - User interactions with a dynamically shuffled grid.

- Completion of the Ultimate Test.
- Facial image capture prompt.
- Facial image for analysis using Mod 2D CNN.
- Result feedback based on Mod 2D CNN analysis.

**Procedure:**

**Begin:**

**Enhance game elements:** enhanceGame()

**Dynamically shuffle grid:** shuffleGrid()

**Start the Ultimate Test:** startUltimateTest()

**Set level-specific parameters:**

clickThreshold = 70

timerDuration = 5 minutes

showTimerDuration = 10 seconds

**Show timer for memorization:**

showTimer(showTimerDuration)

**while countdownInProgress(timerDuration) do //**

Countdown timer loop

---

**ALGORITHM-2: LEVEL – 2: ULTIMATE TEST GAME**

---

```
Allow user to interact with the grid:
handleGridInteraction()
if allMatchesCompleted() then // Check for
completed matches
    displayAcknowledgment()
    exitCountdownLoop()
end if
if exceedClickThreshold(clickThreshold) then //
Check for click threshold
    initiateFacialImageCapture()
    captureFacialImage()
    analyzeFacialImageWith2DCNN() // Analyze
facial image using Mod-2D-CNN
    displayResultFeedback() // Display result feedback
based on Mod-2D-CNN analysis
    exitCountdownLoop()
end if
end while
end
```

---

## 2.3 Proposed Model

### 2.3.1 Convolutional Neural Network (CNN)

Convolutional Neural Networks (CNNs) are a crucial subset of deep learning, enhancing the analysis of images and videos. They excel at recognizing spatial patterns within visual data and performing hierarchical feature extraction, from basic edge detection to complex textures and object components [25-26]. CNNs use convolutional layers with filters and kernels to scan through input images or feature maps, identifying spatial patterns [27]. The multi-layered architecture of CNNs enables a hierarchical learning process, progressively building upon previously extracted features and improving accuracy in tasks like classification and object detection [28]. In this work, we have proposed a modified CNN (MOD-CNN) algorithm for dementia prediction tasks. This MOD-CNN is divided into two phases.

1. MOD-1D-CNN is working on the first phase of the game.
2. MOD-2D-CNN is working on the second phase of the game.

### 2.3.2 MOD-1D-CNN in Game level-1 for Health Dataset

The one-dimensional Convolutional Neural Network, or MOD-1D-CNN, is a customized model made for processing input sequentially. It is handy for applications like one-dimensional feature representations and time-series analysis [29-30]. Convolutional layers operating across the temporal axis are incorporated

into the design, which enables the model to recognize patterns and relationships in sequential data. MOD-1D-CNN uses convolutional processes to automatically learn hierarchical features, which allows it to recognize pertinent patterns in sequential input [31]. This type of CNN is typically used in cases where the data shows sequential linkages. This technique works especially well in applications where data is naturally sequential, such as signal processing and natural language analysis [32-34]. The proposed MOD-1D-CNN model that is used to predict the status of dementia from the health metrics data is a painstakingly constructed system that uses complex layers to extract extensive features and recognize patterns. Using Conv1D layers with a kernel size 2x2, accompanied by ReLU activation function. These first layers serve as feature extractors, identifying complex patterns from the health metrics data in sequence. After the Conv1D layers, Dropout layers are placed strategically to help keep the network from overfitting by randomly deactivating neurons during training, preventing the network from depending too much on any one attribute. The next layer is MaxPooling1D, which efficiently decreases the spatial dimensions while maintaining important characteristics, improving computing efficiency without sacrificing essential information. After that, a flattened layer is placed so that the model reconfigures the data, preparing it for fully connected layers. By following that, dense layers are positioned for ReLU activation. This layer’s depth facilitates intricate transformations within the data, enhancing the network’s ability to discern complex patterns. The final layer, which is also a dense layer, is situated with the sigmoid activation function, facilitating the critical binary classification between demented and non-demented individuals. By employing the binary cross-entropy loss function and Adam optimization with a learning rate of 0.001, this MOD-1D-CNN model is rigorously compiled for robust training, ensuring accurate and precise prediction of dementia status from health metrics data. Table 2 shows the detailed network architecture of the MOD-1D-CNN model.


**Table 2:** Network Architecture with Number of Parameters of MOD-1D-CNN Model

Layer Type	Kernel Size	Activation	Output Shape	Number of Parameters
Conv1D	2x2	ReLU	(None, 5, 64)	192
Conv1D	2x2	ReLU	(None, 4, 64)	8256
Dropout	-	-	(None, 4, 64)	0
MaxPooling1D	-	-	(None, 2, 64)	0
Flatten	-	-	(None, 128)	0
Dense	-	ReLU	(None, 100)	12900
Dense	-	Sigmoid	(None, 2)	200

In summary, the MOD-1D-CNN model architecture effectively leverages Conv1D layers with ReLU activation,

and MaxPooling1D to extract essential features from the input data efficiently.

The model's ability to learn and generalize from the data is enhanced by Dropout layers, preventing overfitting issues generated due to the dataset at a defined rate for effective handling. These architectural choices collectively contribute to a powerful binary classification model that can accurately distinguish between demented and non-demented cases as per the input features of health metrics data (blood pressure, body temperature, etc.). The training flowchart for the MOD-1D-CNN model is shown in Fig. 3.

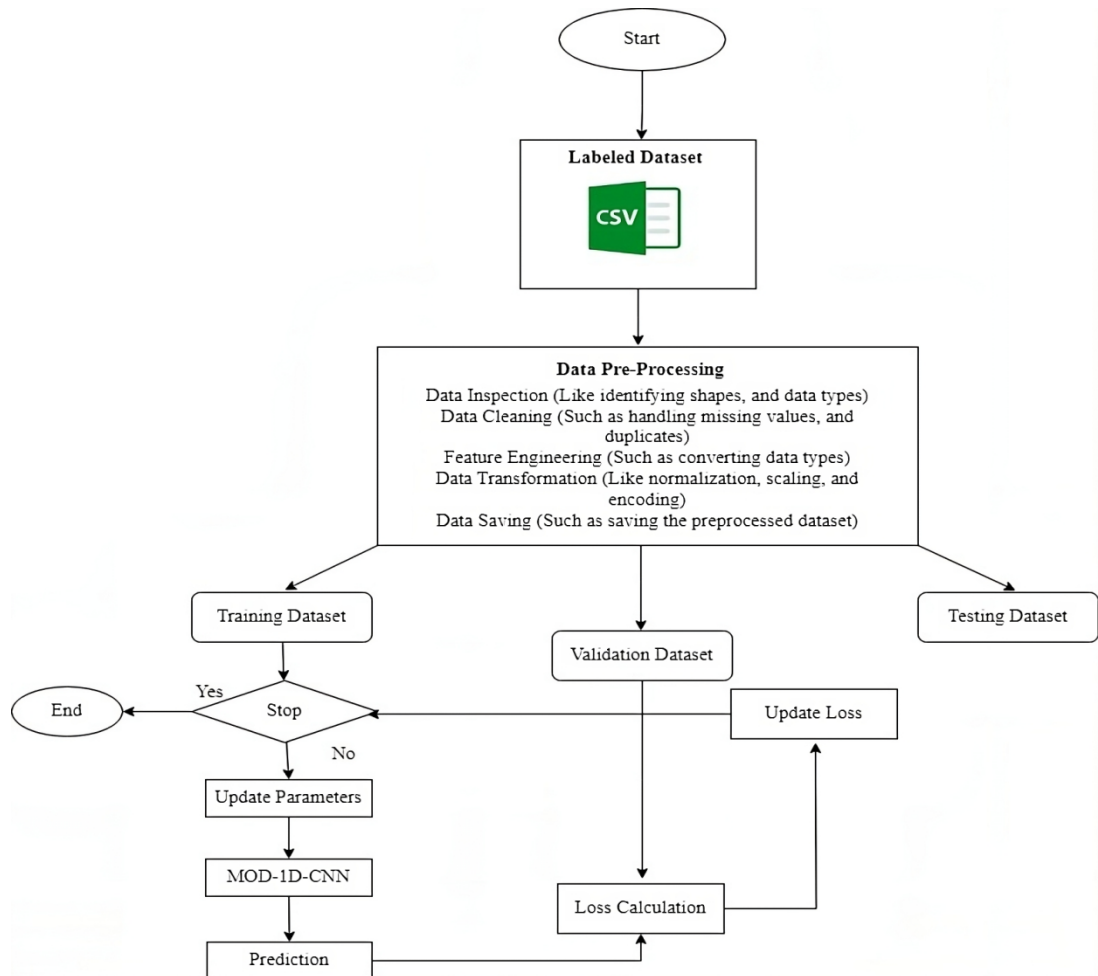

**Fig. 3** Training Flowchart of the Proposed MOD-1D-CNN Model

### 2.3.2.1 MOD-1D-CNN Algorithm

The proposed algorithm for the MOD-1D-CNN model for the classification of demented and non-demented individuals is shown below:

---

**ALGORITHM-3: HEALTH PARAMETERS-BASED DEMENTIA PREDICTION USING MOD-1D-CNN**

---

**Input:** - Diabetic status (0 for absence or 1 for presence)  
- Blood oxygen level (1(<95%) or 2(95%-100%) or 3(>100%))  
- Body temperature: 1(<36.5°C) or 2(36.5°C – 37.5°C) or 3(>37.5°C)  
- Heart rate: 1(<60bpm) or 2(60bpm – 100bpm) or 3(>100bpm)  
- Weight: 1(<50kg) or 2(50kg – 70kg) or 3(>70kg)  
- Age: 1(40-64) or 2(65-70) or 3(75-90)

**Output:** Prediction result indicating whether the individual is demented or non-demented.

**Procedure:**

**Begin**

**Initialization:**

**Import necessary libraries:** *numpy, keras.*

**Load the pre-trained MOD-1D-CNN model:**

*load\_1d\_cnn\_model('mod\_1d\_cnn\_model.h5').*

**Input Acquisition:**

**takeInput(): Diabetic:** 0 or 1

**takeInput(): Blood Oxygen Level:** 1 or 2 or 3

**takeInput(): Body Temperature:** 1 or 2 or 3

**takeInput(): Heart Rate:** 1 or 2 or 3

**takeInput(): Weight:** 1 or 2 or 3

**takeInput(): Age:** 1 or 2 or 3

**Data Preparation:**

**constructAnArray():**

*prepare\_health\_params\_data(diabetic, blood\_oxygen, body\_temp, heart\_rate, weight, age).*

**normalizeData():**

*normalize\_health\_params\_data(health\_params\_data).*

**Making Predictions:**

**Call a function for making predictions using the loaded model:**

*predict\_dementia\_probability(loaded\_model, normalized\_health\_params\_data).*

**Result:**

**if prediction\_score > 0.5:**

**Output:** *display\_result("Prediction: Demented").*

**else:**

**Output:** *display\_result("Prediction: Non-Demented").*

---

**ALGORITHM-3: HEALTH PARAMETERS-BASED DEMENTIA PREDICTION USING MOD-1D-CNN**

---

*Termination:*  
*end*  
*end*

---

### 2.3.2.2 Working in Game Level 1

In the first phase (Game Level 1), the typical health data (age, blood pressure, etc.) from the user are collected and fed into our pre-trained MOD-1D-CNN algorithm. In this stage, essential health data from the user, encompass parameters such as age, blood pressure, and other relevant metrics. It is our initial stage of assessing dementia status of the prediction assessment. This crucial information serves as the input for our pre-trained MOD-1D-CNN algorithm, designed specifically for the analysis of one-dimensional health data. Users in Game Level 1 provide age, blood pressure, and other health metrics, which are integrated into the MOD-1D-CNN algorithm to extract patterns and correlations from a one-dimensional health dataset. The MOD-1D-CNN algorithm, using deep convolutional neural network architecture, efficiently processes health data to identify subtle relationships indicating potential health conditions, facilitating comprehensive health assessments and hence results for the prediction of dementia status whether the individual is demented or non-demented. Streamlit is chosen for Game Level 1 hosting to improve user experience. Its intuitive interface allows easy input of health data and application stages. Combining MOD-1D-CNN's power with Streamlit's accessibility aims for a robust, user-centric experience, enhancing informed health assessment. The working in-game level 1 for the MOD-1D-CNN model is shown in Fig. 4.



## Dementia Classifier using MOD-1D-CNN

Enter the health metrics features and predict whether demented or non-demented.

Health Metrics Input Format:

- Diabetic status (0 for absence or 1 for presence)
- Age: 1(40-64) or 2(65-70) or 3(75-90)
- Heart rate: 1(<60bpm) or 2(60bpm - 100bpm) or 3(>100bpm)
- Blood oxygen level (1(<95%) or 2(95%-100%) or 3(>100%))
- Body temperature: 1(<36.5oC) or 2(36.5oC - 37.5oC) or 3(>37.5oC)
- Weight: 1(<50kg) or 2(50kg - 70kg) or 3(>70kg)

Diabetic  
 0  
 1

Age\_Class  
 1  
 2  
 3

HeartRate\_Class  
 1  
 2  
 3

BloodOxygenLevel\_Class  
 1  
 2  
 3

BodyTemperature\_Class  
 1  
 2  
 3

Weight\_Class  
 1  
 2  
 3

Taking User Input



## Dementia Classifier using MOD-1D-CNN

Enter the health metrics features and predict whether demented or non-demented.

Health Metrics Input Format:

- Diabetic status (0 for absence or 1 for presence)
- Age: 1(40-64) or 2(65-70) or 3(75-90)
- Heart rate: 1(<60bpm) or 2(60bpm - 100bpm) or 3(>100bpm)
- Blood oxygen level (1(<95%) or 2(95%-100%) or 3(>100%))
- Body temperature: 1(<36.5oC) or 2(36.5oC - 37.5oC) or 3(>37.5oC)
- Weight: 1(<50kg) or 2(50kg - 70kg) or 3(>70kg)

Diabetic  
 0  
 1

Age\_Class  
 1  
 2  
 3

HeartRate\_Class  
 1  
 2  
 3

BloodOxygenLevel\_Class  
 1  
 2  
 3

BodyTemperature\_Class  
 1  
 2  
 3

Weight\_Class  
 1  
 2  
 3

Predicted Label: Non-Demented

Activate W  
Go to Settings

Prediction Result



**Fig. 4** Taking Health Metrics Input from User for Predicting Dementia Status  
**2.3.3 MOD-2D-CNN in Game level-2 for Image Dataset**

A more sophisticated version of the conventional 2D Convolutional Neural Network designed for enhanced image recognition and feature extraction is called the Mod-2D-CNN [35]. Key characteristics include residual connections for smoother information flow in deeper architectures, dilated convolutions to improve the receptive field, and multi-scale convolutional layers enabling simultaneous collection of fine- and coarse-grained data [36-38]. Spatial information is maintained by adaptive pooling layers, and feature attention algorithms dynamically modify feature significance. Batch normalization quickens training convergence while dropout regularization guards against overfitting [39]. With its capacity to adapt to different sizes and complex characteristics for strong visual identification, this model performs exceptionally well in a wide range of computer vision applications. Furthermore, the Mod-2D-CNN effectively recognizes global patterns by utilizing the capability of dilated convolutions to capture long-range relationships [40].

Deeper networks may be trained using residual connections without running the danger of gradients disappearing or blowing up. Interpretability is improved by feature attention techniques, which dynamically shift the emphasis to pertinent areas of the image [41-42].

In the proposed MOD-2D-CNN model, the architecture is designed to efficiently process and extract the facial features from the input facial images for binary classification. The model contains a series of Conv2D layers with a kernel size of 3x3, followed by ReLU activation functions. These layers are crucial for understanding the fundamental patterns and characteristics present in the images. After every Conv2D layer, a MaxPooling 2D operation is applied, which reduces the spatial dimensions of the feature maps and helps to capture important information while reducing the computational complexity. By strengthening the translation invariance of the model and preserving pertinent information, this pooling procedure helps the model be more resilient to changes in object location and size. In addition to this, the flattened layer is also added to convert the 3D output into a 1D feature vector, facilitating the transition to the fully connected layers. Furthermore, Dropout layers and Dense layers are also employed in the MOD-2D-CNN architecture. Dropout layers are used after Dense layers to prevent overfitting. During training, Dropout introduces a sort of regularization by randomly deactivating a portion of the neurons, hence decreasing reliance between them. Better generalization results from this, strengthening the model’s accuracy and resilience to new data. Finally, the output layer consists of a single neuron with a sigmoidal activation function, which is used for binary classification, providing the probability of each input belonging to either class (demented or non-demented). The model is trained with the binary cross-entropy loss function, which works well for problems with either 0 or 1 outcomes. It is then optimized using the Adam optimizer, which has a learning rate of 0.0001. Table 3 shows the detailed network architecture of the MOD-2D-CNN model.


**Table 3:** Network Architecture with Number of Parameters of MOD-2D-CNN Model

Layer Type	Kernel Size	Activation	Output Shape	Number of Parameters
Cov2D	3x3	ReLU	(None, 222, 222, 32)	896
MaxPooling2D	-	-	(None, 111, 111, 32)	0
Cov2D_1	3x3	ReLU	(None, 109, 109, 64)	14,496
MaxPooling2D_1	-	-	(None, 54, 54, 64)	0
Cov2D_2	3x3	ReLU	(None, 52, 52, 128)	73,856



Layer Type	Kernel Size	Activation	Output Shape	Number of Parameters
MaxPooling2D_2		-	(None, 26, 26, 128)	0
Cov2D_3	3x3	ReLU	(None, 24, 24, 256)	2,95, 168
MaxPooling2D_3		-	(None, 12, 12, 256)	0
Flatten	-	-	(None, 36,864)	0
Dense	-	ReLU	(None, 512)	18,874,880
Dropout	-	-	(None, 512)	0
Dense_1	-	ReLU	(None, 256)	1,131,328
Dropout_1	-	-	(None, 256)	0
Dense_2	-	Sigmoid	(None, 1)	257

In summary, the MOD-2D-CNN model architecture successfully extracts critical features from the input images by utilizing Conv2D, and MaxPooling layers with ReLU activation. Dropout layers improve the model’s capacity to learn and generalize from the data, avoiding overfitting. Together, these architectural decisions provide a potent binary classification model that effectively discriminates between non-demented facial images and demented facial images. The training flowchart depicted in Fig. 5 outlines the sequential steps involved in training the MOD-2D-CNN model. The representation encapsulates the entire training process, illustrating key stages such as data preprocessing, data splitting, model initialization, updation of parameters, and loss calculation at the time of the training process.

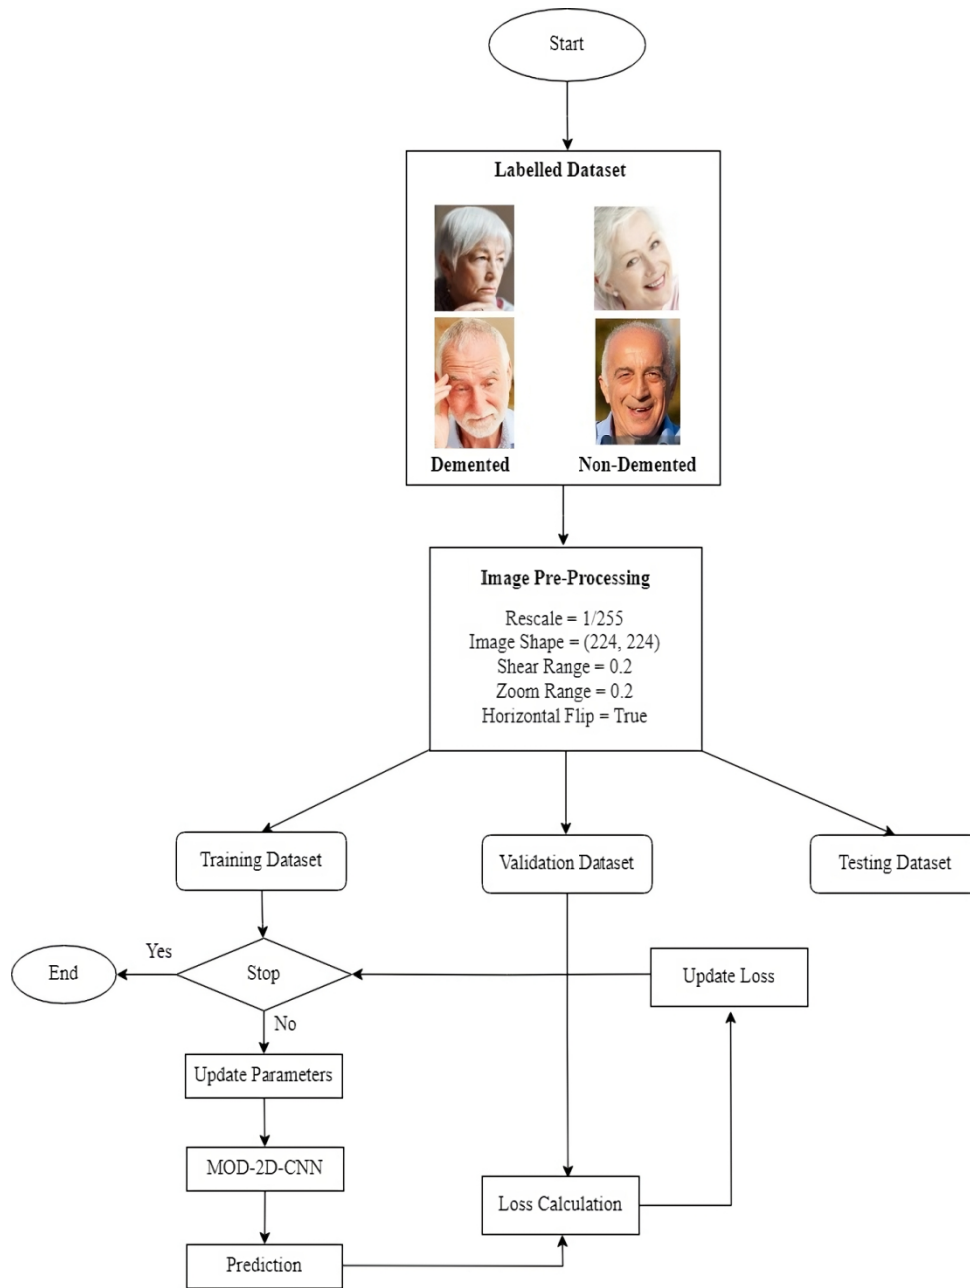

**Fig. 5** Training Flowchart of the Proposed MOD-2D-CNN Model

### 2.3.3.1 MOD-2D-CNN Algorithm

The proposed algorithm for the MOD-2D-CNN model for the classification of demented and non-demented individuals is shown below,

---

**ALGORITHM-4: FACIAL CLASSIFICATION FOR DEMENTIA  
DETECTION USING MOD-2D-CNN MODEL**

---


**Input:** Facial image (live capture or pre-loaded)  
**Output:** Prediction result indicating whether the individual is demented or non-demented using facial analysis.  
**Procedure:**  
*begin*  
    **Initialization:**  
        **Import necessary libraries:** *os, cv2, numpy, keras.*  
        **Load the pre-trained model:**  
            *keras.models.load\_model('mod\_2d\_cnn\_model.h5')*  
    **Preprocessing Steps:**  
        **if inputimage is liveCapture:**  
            **use a camera to capture a live facial image:**  
                *capturedImageFromCamera()*  
        **else:**  
            **load the image from the specified file path:**  
                *loadImageFromFile(inputImage)*  
        **end if**  
        **convert image to array:**  
            *convertImageToArray(capturedImage)*  
        **expand dimensions to match the expected input shape:** *expandDimensions(imageArray)*  
        **normalize the pixel values:**  
            *normalizePixels(expandedImageArray)*  
    **Making Predictions:**  
        **making predictions using the loaded model:**  
            *loadedModel.predict(preprocessedImage)*  
            **function input:** *Preprocessed image.*  
            **function output:** *Prediction score (probability of being demented).*  
    **Result:**  
        **if prediction score > 0.5:**  
            **output:** *“Prediction: Demented.”*  
        **else:**  
            **output:** *“Prediction: Non-Demented.”*  
        **end if**  
    **Termination:**  
        *end*  
*end*

---


### 2.3.3.2 Working in Game Level 2

In the second phase (Game Level 2), we collect the facial image (live or pre-loaded) from the user and feed it into our pre-trained MOD-2D-CNN algorithm.

During this stage, users are prompted to provide either a live or pre-loaded facial image. It's our second level of examination for the user to predict the dementia status. This image is then seamlessly integrated into our advanced MOD-2D-CNN (Modified 2D Convolutional Neural Network) algorithm, which has been pre-trained to discern crucial patterns and features indicative of dementia. Our cutting-edge MOD-2D-CNN algorithm serves as the backbone for predicting dementia status, categorizing users into either the demented or non-demented group based on the intricate analysis of facial characteristics. Streamlit is chosen for its user-friendly interface, enhancing user interaction and accessibility in our dementia prediction tool. It simplifies the process of submitting facial images and providing prompt results on dementia status. The working in-game level 2 for the MOD-2D-CNN model is shown in Fig. 6 and Fig. 7 for both live capture and pre-loaded.

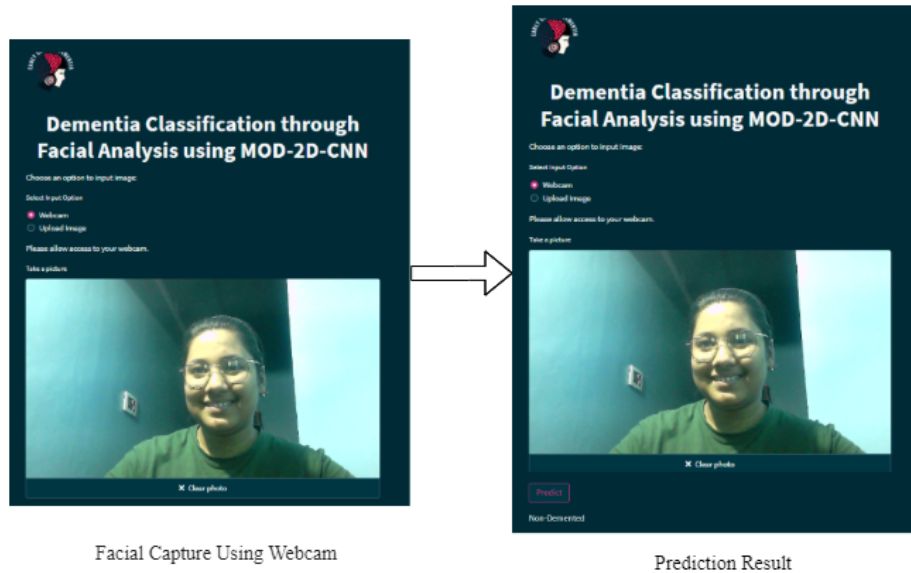

**Fig. 6** Facial Image Capture from User Using Live Camera

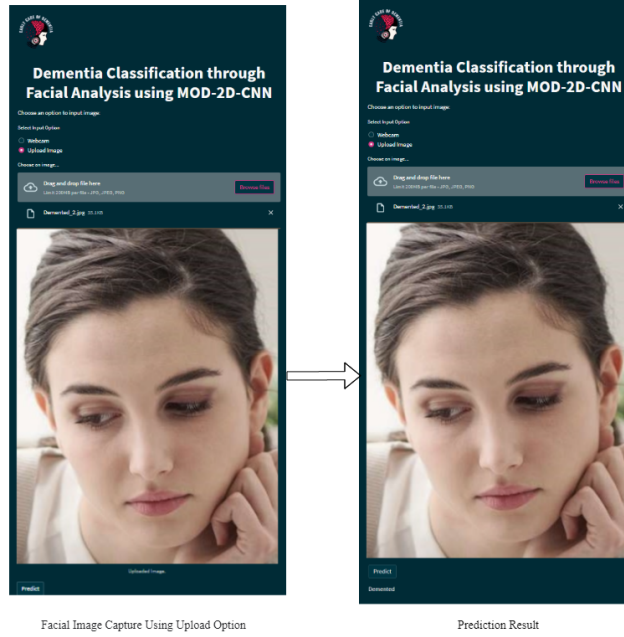

**Fig. 7** Facial Image Capture from User using Upload Option (Pre-loaded)

### 2.3.4 Rule-based Weightage Method for Decision-Making

Table 4, comprises two columns detailing the weights assigned to two distinct convolutional neural network models for dementia prediction. MOD-1D-CNN is allocated a weightage of 30%, while MOD-2D-CNN takes precedence with a more substantial weightage of 70%. The subsequent rows delineate various scenarios denoted by the decision outcomes, showcasing the model’s predictions and the final decisions based on their weighted contributions.

**Table 4:** Decision-making using rule-based weightage method

MOD-1D-CNN (30% weightage)	MOD-2D- CNN (70% weightage)	Decision
1	1	Demented
0	1	Demented with a high probability
1	0	Non-Demented with a high probability
0	0	Non-Demented

## 3. EXPERIMENTAL SETUP

### 3.1 Dataset Description for MOD-1D-CNN

The dataset utilized for training and evaluating the MOD-1D-CNN for cognitive health assessment comprises 1000 data instances sourced from the Apollo diagnostic center Kolkata, India. The central target variable, labeled “Dementia,” assumes binary values (0 or 1), representing the absence (0) or presence (1) of dementia. Additionally, a binary variable labeled “Diabetic” is incorporated, indicating the absence (0) or presence (1) of diabetes. Alongside these categorical attributes, the dataset includes five quantitative features, namely “Age,” “Blood Oxygen Level,” “Heart Rate,” “Body Temperature,” and “Weight,” providing crucial health metrics for the assessment. The dataset undergoes a standard split into training (80%) and testing (20%) sets to facilitate model training and evaluation. Within the training set, a further subdivision designates 20% of the data (160 instances) as a validation subset, utilized during the training process to enhance model performance and prevent overfitting. Important Variables and Measures Included in the dataset are represented in Table 5 below.

**Table 5:** Dataset Description for MOD-1D-CNN

<b>Measures</b>	<b>Description</b>
<b>Dementia</b>	Binary variable indicating the presence (1) or absence (0) of dementia.
<b>Diabetic</b>	Binary variable denoting the presence (1) or absence (0) of diabetes.
<b>Age</b>	Quantitative features representing the age of individuals in the dataset.
<b>Blood Oxygen Level</b>	A quantitative measure indicating the blood oxygen level in the subjects.
<b>Heart Rate</b>	Quantitative measure representing the heart rate of individuals.
<b>Body Temperature</b>	A quantitative measure indicating the body temperature of the subjects.
<b>Weight</b>	Quantitative features representing the weight of individuals.

### 3.2 Dataset Description for MOD-2D-CNN

The facial image dataset employed for 2D Convolutional Neural Network (CNN) analysis in this research is meticulously crafted to facilitate the accurate prediction of dementia based on facial traits. Unlike publicly available datasets, this proprietary collection is purposefully designed with precision and care, ensuring its alignment with the specific requirements of cognitive health assessment. The dataset is categorized into two distinct classes: demented and non-demented, reflecting the binary nature of the prediction task. The demented class comprises 900 facial images, each capturing distinct facial expressions and features indicative of dementia, while the non-demented class equally contributes 900 images for a comprehensive evaluation. The training set consists of 1260 images

to get an in-depth understanding of facial features. The 630 images that each class—demented and non-demented—represents offer extensive information for training the 2D CNN model. The testing set, which consists of 360 images (180 from each class), is essential for evaluating the generalization capabilities of the model. This portion of the dataset is left unaltered during the model-training procedure, providing an objective assessment of the model’s prediction capabilities on data that hasn’t been seen before. A validation set of 180 images (90 from each class) is used in the model training phase to adjust the model parameters and avoid overfitting. This iterative approach guarantees the trained model’s resilience and dependability. Table 6 describes the detailed dataset split ratio for the demented as well as non-demented class of facial images.

**Table 6:** Dataset Split for Dementia Classification using Facial Images

<b>Dataset Split</b>	<b>Demented Class</b>	<b>Non-Demented Class</b>	<b>Total Images</b>	<b>Reference</b>
<b>Training Set</b>	630	630	1260	
<b>Testing Set</b>	180	180	360	[72-75]
<b>Validation Set</b>	90	90	180	
			<b>Total =</b> 1800	

It is crucial to emphasize that this facial image dataset is not sourced from public repositories but is instead a purpose-built collection created by the research team. This deliberate approach guarantees the dataset’s tailored relevance to the research objectives, providing a solid foundation for accurate and insightful dementia prediction through facial image analysis.

### 3.3 Execution Platform

The implementation is carried over the Jupyter Notebook Environment using Python Programming Language for the preparation of models. All the results are analyzed and conducted on the underlying system configuration.

- Intel core i5 10<sup>th</sup> generation processor.
- 12 GB of RAM.
- 256 GB SSD.

### 3.4 Extraction of Features and Dataset Preprocessing of MOD-1D-CNN

In the pursuit of developing a robust cognitive health assessment MOD-1D-CNN model, the initial phase involves meticulous preprocessing of the dataset

obtained from a diagnostic center. This dataset, rich in diverse health metrics, is meticulously divided into distinct classes, such as heart rate, age, body temperature, blood oxygen level, weight, diabetes, and dementia which is our target variable. These classes serve as crucial indicators in the evaluation of dementia. In the case of MOD-1D-CNN, the following preprocessing procedures are applied,

- a. *Numerical Features Categorization*: The categorization involves defining explicit classes for key health metrics, ensuring a comprehensive representation of cognitive health. For heart rate, three classes are delineated: Class I signifies a heart rate below 60 bpm, Class II spans heart rates between 60 and 100 bpm, and Class III designates heart rates exceeding 100 bpm. Age categories encompass Class I (40-64 years), Class II (65-74 years), and Class III (75-90 years). Body temperature is stratified into Class I (<36.5°C), Class II (36.5°C-37.5°C), and Class III (>37.5°C). Similarly, blood oxygen levels are categorized as Class I (<95%), Class II (95%-100%), and Class III (>100%). Weight classes are defined as Class I (<50 kg), Class II (50-70 kg), and Class III (>70 kg).
- b. *Data Preprocessing*: Features and target variables are separated in this step, where X represents features, and Y represents the target variable “Dementia”.
- c. *Oversampling using Synthetic Minority Over-sampling Technique (SMOTE)*: SMOTE (Synthetic Minority Over-sampling Technique) is applied to oversample the minority in the training dataset.
- d. *Normalization/Scaling*: Standard scaling is performed on the features to normalize the data using ‘StandardScaler’ to ensure uniformity.
- e. *Batch Processing*: For the MOD-1D-CNN model in our case the dataset is divided into 32 batches in size to accelerate the process of training so that multiple samples of data inputs can be processed at the same time.

### 3.5 Feature Mapping of MOD-1D-CNN

Feature mapping is a key part of aligning different health parameters with the architecture of the neural network. This makes it easier to find patterns and correlations in the input data [43-44]. In the context of our research, feature mapping involves the systematic arrangement and representation of health-related features such as Diabetic status, Age classification, Heart Rate classification, Blood Oxygen Level classification, Body Temperature classification, and Weight classification. These features serve as the input variables for the subsequent MOD-1D Convolutional Neural Network (CNN) model, which aims to predict dementia based on the provided health metrics.

### 3.6 Extraction of Features and Dataset Preprocessing of MOD-2D-CNN

Feature extraction and dataset preprocessing are important steps in the MOD-



2D-CNN model for getting the facial images of people with and without dementia ready for binary classification. Feature extraction entails converting unstructured data—in this case, facial images of people with and without dementia—into a format that the model can use [45-46]. In the case of MOD-2D-CNN, the following preprocessing techniques are applied:


- a. *Rescaling*: The pixel values of the images are rescaled by dividing them by 255. This step ensures that the pixel values are within the range of 0 to 1.
- b. *Data Augmentation*: Various augmentation techniques are employed to increase the variability and diversity of the training dataset. These techniques include rotation, height, and width shifting, shearing, zooming, and horizontal flipping. Data augmentation helps in mitigating overfitting issues and generalizes the model’s ability to handle unseen data.
- c. *Target Size*: The images are resized to a target size of 224x224 pixels. Resizing the images to a fixed size allows for consistent input dimensions across the dataset and facilitates an efficient way of processing with the neural network architecture.
- d. *Color Mode*: The color mode of the images is set to RGB, representing red, green, and blue color channels. RGB color images are well suited for the task of computer vision and provide richer information for the model to learn patterns from them.
- e. *Batch Processing*: The dataset is divided into batches of size 32 in our case. Batch processing enables parallel computation and accelerates the process of training, as multiple images can be processed simultaneously.
- f. *Class Mode*: The class mode is set to “binary” to reflect the fact that this is a binary classification task using the labels “DEMENTED” and “NON-DEMENTED”.

These preprocessing techniques, such as rescaling, data augmentation, resizing, color mode selection, and batch processing, collectively enhance the model’s ability to learn patterns from the pixel values associated with the input images and make accurate predictions based on those learned features.


### 3.7 Feature Mapping of MOD-2D-CNN

Feature mapping is mainly used to visualize the activation patterns across different convolutional hidden layers. This process allows us to understand and interpret the representation of the learned features by the model [47]. Feature mapping incorporates processes like extracting and visualizing the intermediate feature maps produced by each convolutional layer [48]. These feature maps identify particular structures, patterns, or textures in the input images. We can find more insights about how the model is learning and which features are being prioritized by viewing these feature maps at every convolutional layer. An example image is taken from the dataset and passed through the MOD-2D-CNN model to obtain the layer activations. As shown in Fig. 8, the activations


are then processed and displayed to provide a grid of images, each of which represents the activation of a particular filter inside a certain convolutional layer.

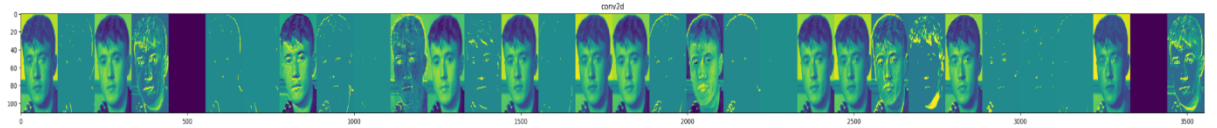


a. First Conv2D layer with 32 filters



b. Second Conv2D layer with 64 filters



c. Third Conv2D layer with 128 filters



d. Fourth Conv2D layer with 256 filters

**Fig. 8** Feature Mapping of the Convolutional Layers

By visualizing the visual interpretations of the feature maps of the conv2D layers, we can observe that the activations of individual filters and their spatial relationships are represented. This visualization explains how the model identifies many traits and patterns that the model recognizes as the input propagates through the neural network. Furthermore, it provides insights into the learned representation's hierarchical structure, in which more abstract and complex features are captured by higher layers.

## 4. RESULT ANALYSIS

### 4.1 Evaluation Metrics

Accuracy, precision, recall, F1-score, and the confusion matrix are some of the evaluation metrics that are frequently used to find the effectiveness of the MOD-1D-CNN and MOD-2D-CNN models. These metrics offer a thorough grasp of the model's classification abilities and its capability to distinguish between non-demented and demented patients effectively. In this subsection, we define each metric, present their mathematical formulae, and discuss their specific uses in evaluating the performance of the demented detection system. Let  $TP$  be the truly predicted demented cases,  $TN$  be the truly predicted non-demented cases,

$FP$  be the falsely predicted demented cases and  $FN$  be the falsely predicted non-demented cases.

**A. Accuracy:**

Accuracy is a pivotal metric that gauges the precision of a classification model’s forecasts, indicating the extent of accurately classified occasions within the dataset [49]. A high accuracy score shows the model’s adequacy in foreseeing correct classes [50]. In any case, more is needed in imbalanced datasets, because it may distort the model’s execution.

$$Accuracy = \frac{TP + TN}{TP + TN + FP + FN} \dots\dots\dots (1)$$

Accuracy is commonly used to evaluate the overall performance of the MOD-1D-CNN and MOD-2D-CNN models and provide a single metric for classifying the classes in the dataset.

**B. Precision:**

Precision expresses the ratio of true positives to total positive instances, which indicates how accurate a model is in making positive predictions [51]. It measures the model’s accuracy in designating positive examples, guaranteeing their applicability. When false positives are expensive or unwanted, high accuracy is essential [52].

$$Precision = \frac{TP}{TP + FP} \dots\dots\dots(2)$$

When it comes to avoiding false positive mistakes, precision is very critical. It assists in assessing how well the system detects cases of dementia.

**C. Recall (Sensitivity):**

The recall measures a model’s ability to accurately distinguish all positive instances in a dataset, indicating its ability to recognize and capture the most positive instances without missing many, particularly in situations where false negatives are costly or destructive [53].

$$Recall = \frac{TP}{TP + FN} \dots\dots\dots(3)$$

To minimize false negatives and identify as many dementia patients as feasible, recall is crucial [54]. It aids in evaluating the sensitivity of the MOD-1D-CNN and MOD-2D-CNN models in precisely identifying instances of dementia.

**D. F1-Score:**

The F1-score is a metric that evaluates a classification model’s performance by combining precision and recall. It’s useful in uneven class distributions or when false positives and false negatives have varying importance [55]. A higher F1-score indicates a better balance between these metrics, showcasing an optimal trade-off.

$$F1 - score = 2 \times \frac{Precision \times Recall}{Precision + Recall} \dots\dots\dots(4)$$

A thorough assessment of the system’s performance that strikes a balance between precision and recall is provided by the F1-score [56]. When minimizing false positive and false negative mistakes is necessary, it is frequently utilized.

#### **E. ROC - AUC Score:**

The Receiver Operating Characteristic (ROC) curve and ROC-AUC score are used to evaluate a classification model’s performance. The ROC curve represents the trade-off between the genuine positive rate (sensitivity) and the false positive rate (specificity) at different thresholds [57-58]. The area under the ROC curve (AUC) measures the MOD-1D-CNN and MOD-2D-CNN model’s ability to differentiate between classes.

#### **F. Confusion Matrix:**

The confusion matrix is a tabular representation of the MOD-1D-CNN and MOD-2D-CNN model’s predicted classifications against the actual ground truth, presenting the counts of true Demented cases, true Non-Demented cases, falsely predicted Demented cases, and falsely predicted Non-Demented cases, and serves as the basis for calculating accuracy, precision, recall, and F1-score. The confusion matrix helps analyze the MOD-1D-CNN and MOD-2D-CNN model’s errors, identify areas for improvement, and optimize its performance. It provides a comprehensive understanding of the model’s classification capabilities, enabling further enhancements and optimizations [59-62]. This enhances the accuracy and reliability of the model, benefiting patients and healthcare providers.


### **4.2 Result Analysis of MOD-1D-CNN**

The Mod 1D CNN model’s classification report shows that it has a remarkable capacity to distinguish between the Demented and Non-Demented classes. The performance of the MOD-1D Convolutional Neural Network (CNN) model is evaluated across different epochs to understand its learning trajectory. After training for 100 epochs, the model achieved an accuracy of 0.62, precision of 0.59, recall of 0.61, and an F1-score of 0.61. As training progressed to 150 epochs, there was a noticeable improvement in accuracy (0.64), precision (0.62), recall (0.61), and F1-score (0.62). Finally, after 200 epochs, the model demonstrated further enhancement, achieving an accuracy of 0.70, precision of 0.68, recall of 0.69, and an F1-score of 0.68. The accuracy, which represents the overall correctness of the model’s predictions, exhibited a consistent upward trend, reaching its highest value at 200 epochs. Precision, indicating the model’s ability to avoid false positives, increased steadily. Recall, highlighting the model’s capacity to capture true positive instances, also showed improvement over the epochs. The F1-score, a harmonic mean of precision and recall, reached 0.68, emphasizing the balanced performance of the model in identifying instances of dementia. A thorough analysis of the model’s performance across different epochs can be found in the classification report in Table 7.

**Table 7:** Performance metrics evolution of Mod 1D CNN Model


Epoch	Accuracy	Precision	Recall	F1-Score
100	0.62	0.59	0.61	0.61
150	0.64	0.62	0.61	0.62
200	0.70	0.68	0.69	0.68

Fig. 9, shows how training accuracy and validation accuracy changed against epochs for the MOD-1D-CNN model.

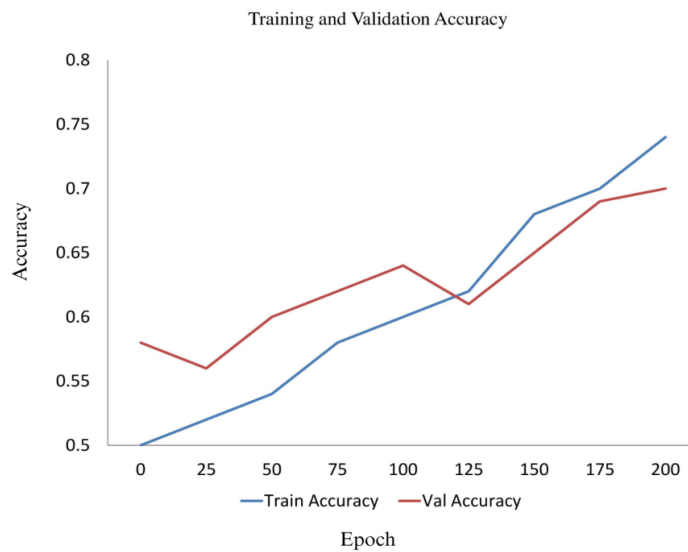

**Fig. 9** Accuracy vs Epoch

Likewise, Fig. 10 shows how loss and validation loss changed against epochs for the MOD-1D-CNN model.

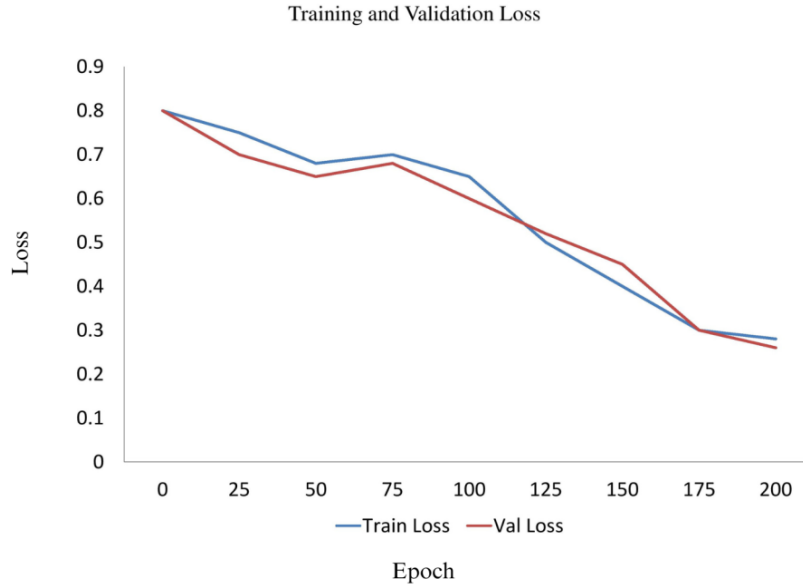

**Fig. 10** Loss vs Epoch

### 4.3 Result Analysis of MOD-2D-CNN


In Table 7, we present the comprehensive results of the MOD-2D-CNN model for facial image analysis, specifically focused on distinguishing between demented and non-demented classes. The model’s performance metrics are evaluated across different training epochs to understand its evolving effectiveness. In the first trial at epoch 30, the MOD-2D-CNN model demonstrated a commendable performance with an accuracy of 86%. Precision, a metric emphasizing the model’s capability to minimize false positives, is observed at 86%, indicating accurate positive predictions. The recall, representing the model’s effectiveness in identifying all relevant instances of a class, is also at 86%, ensuring comprehensive coverage of both demented and non-demented instances. The F1-score, a harmonic mean of precision and recall, stood at 86%. In the second trial at epoch 40, the model continued to show improvement. The accuracy experienced a slight increase to 87%, reinforcing the model’s capacity for precise classification. Precision remained high at 86%, underscoring the model’s consistency in making accurate positive predictions. However, there is a modest reduction in recall to 84%. The F1-score at this epoch is 84%. A detailed analysis of the classification report across different epochs is shown in Table 8.

**Table 8:** Performance metrics of MOD-2D-CNN

Epoch	Accuracy	Precision	Recall	F1-Score
30	0.86	0.86	0.86	0.86


Epoch	Accuracy	Precision	Recall	F1-Score
40	0.87	0.86	0.84	0.84
50	0.95	0.94	0.93	0.93

In the final trial at epoch 50, the model reached its peak performance, demonstrating an impressive accuracy of 95%. This substantial improvement underscored the model's advanced ability to correctly categorize instances. Precision maintained a high level of 94%, indicating the model's continued accuracy in positive predictions. Notably, recall experienced a substantial improvement to 93%, signifying the model's heightened capability to identify instances across both classes. The F1-score at this epoch reached 93%. Looking at the confusion matrix in Fig. 11, we can see that there are 164 truly predicted demented cases (TP), where the model correctly classified demented cases. There are 171 truly predicted non-demented cases (TN), where the model correctly classified non-demented cases. The model has 9 falsely predicted demented cases (FP), incorrectly classifying non-demented cases as demented. Additionally, there are 16 falsely predicted non-demented cases (FN), where the model incorrectly classified demented cases as non-demented.

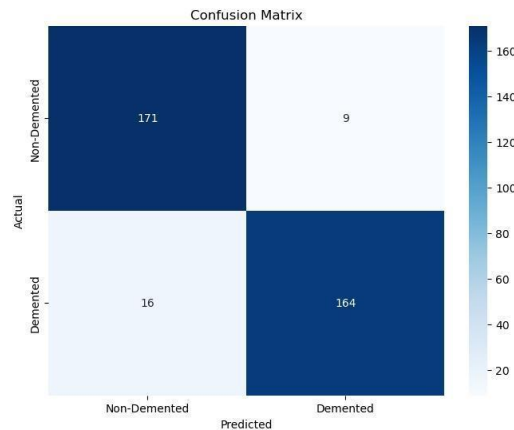

**Fig. 11** Confusion Matrix of the MOD-2D-CNN Model

The accuracy versus epoch plot, presented below in Fig. 12, provides a dynamic visual representation of the MOD-2D-CNN model's performance throughout 50 epochs during the training process.

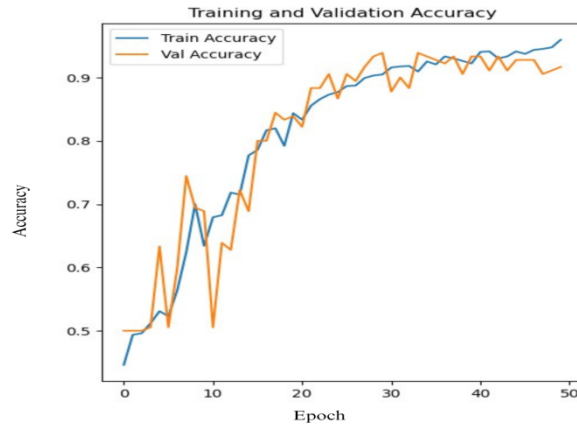

**Fig. 12** Accuracy vs Epochs


Similarly, Fig. 13 shows training loss and validation loss of the MOD-2D-CNN models across 50 epochs.



**Fig. 13** Loss vs Epochs


An Area under the ROC Curve (AUC) of 0.97 in Fig. 14 shown below provides a visual representation of the MOD-2D-CNN model's performance which indicates that the Receiver Operating Characteristic (ROC) curve performs well in distinguishing between demented and non-demented individuals based on facial images. This represents that the model is quite accurate in differentiating between those who have dementia and those who do not.



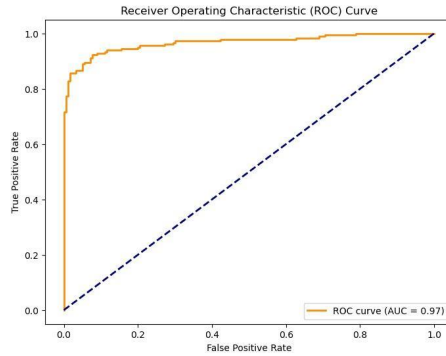

**Fig. 14** Receiver Operating Characteristic (ROC) Curve for MOD-2D-CNN Model

To guarantee the predictive capacity for the face analysis of demented and non-demented individuals, a thorough assessment of the MOD-2D-CNN model’s predictive performance is carried out utilizing a collection of test photos. The MOD-2D-CNN model demonstrated its proficiency in analyzing facial features to make predictions about cognitive health. The resulting predictions of the test images are shown in Fig. 15. This analysis shows the model’s effectiveness in discerning subtle patterns within facial imagery, underlining its potential as a valuable tool for early diagnosis and risk assessment in the context of dementia. The results presented herein exemplify a dual-model strategy for dementia prediction, with MOD-1D-CNN holding a 30% weightage and MOD-2D-CNN taking precedence with a substantial 70% weightage.

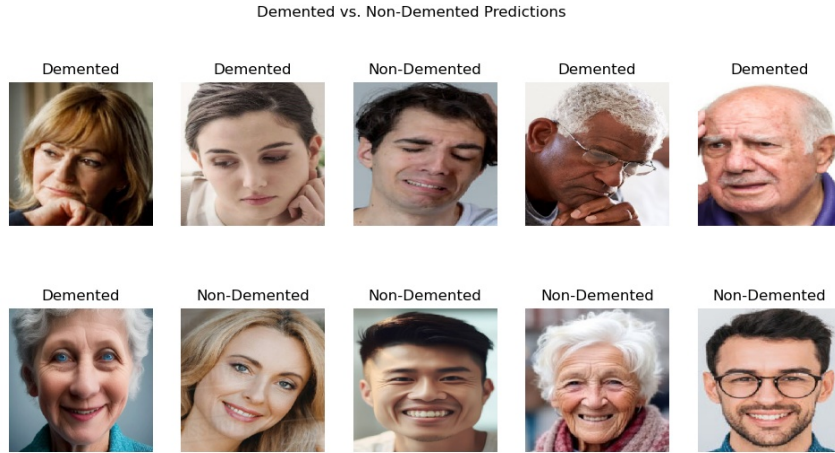

**Fig. 15** Predictive Analysis of Dementia Using Facial Images


In Fig. 16, MOD-1D-CNN predicts a case as Demented using typical test health metrics data, and MOD-2D-CNN aligns with this prediction using a facial image, resulting in an overall decision of Demented. In Fig. 17, although MOD-1D-CNN

predicts Non-Demented, the ultimate decision is in favor of demented due to the higher confidence level provided by MOD-2D-CNN.

#### 4.4 Discussion and Comparison

##### 4.3.1 MOD-1D-CNN

In the comparison analysis of MOD-1D-CNN, various optimizers, namely Adam, Adadelta, Adamax, Adagrad, SGD, RMSprop, and AdamW, are employed to evaluate the model's performance in terms of accuracy, precision, recall, and F1-score, as demonstrated in Table 9. The findings reveal that the Adam optimizer achieved the highest accuracy of 0.70, surpassing other optimizers. In terms of precision, Adam also outperformed other optimizers with a precision score of 0.68, while other optimizers exhibited the lowest precision.

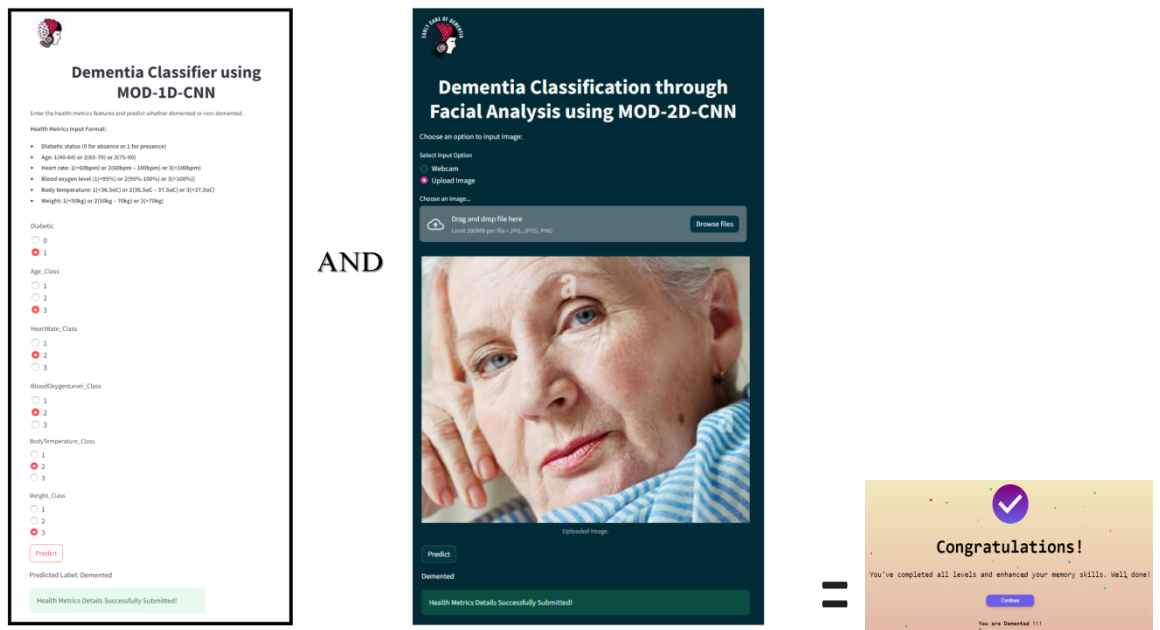


**Fig. 16** Decision Outcome - Demented with Congratulations Page

A similar trend is observed in the recall, where Adam demonstrated the highest score of 0.69, while all others are at the lowest. F1-score, reflecting the balance between precision and recall, mirrored the overall trends, with Adam leading with 0.68. This suggests that Adam's optimization is better for understanding the patterns in the dataset for the accurate prediction of the class labels demented or non-demented.

**Table 9:** Comparison of Training MOD-1D-CNN using Different Optimizers

	Optimizers						
	Adam	Adadelta	Adamax	Adagrad	SGD	RMSprop	AdamW
<b>Accuracy</b>	0.70	0.50	0.62	0.49	0.55	0.62	0.55
<b>Precision</b>	0.68	0.48	0.58	0.47	0.53	0.59	0.52
<b>Recall</b>	0.69	0.49	0.60	0.47	0.52	0.60	0.54
<b>F1-Score</b>	0.68	0.47	0.59	0.47	0.52	0.60	0.54

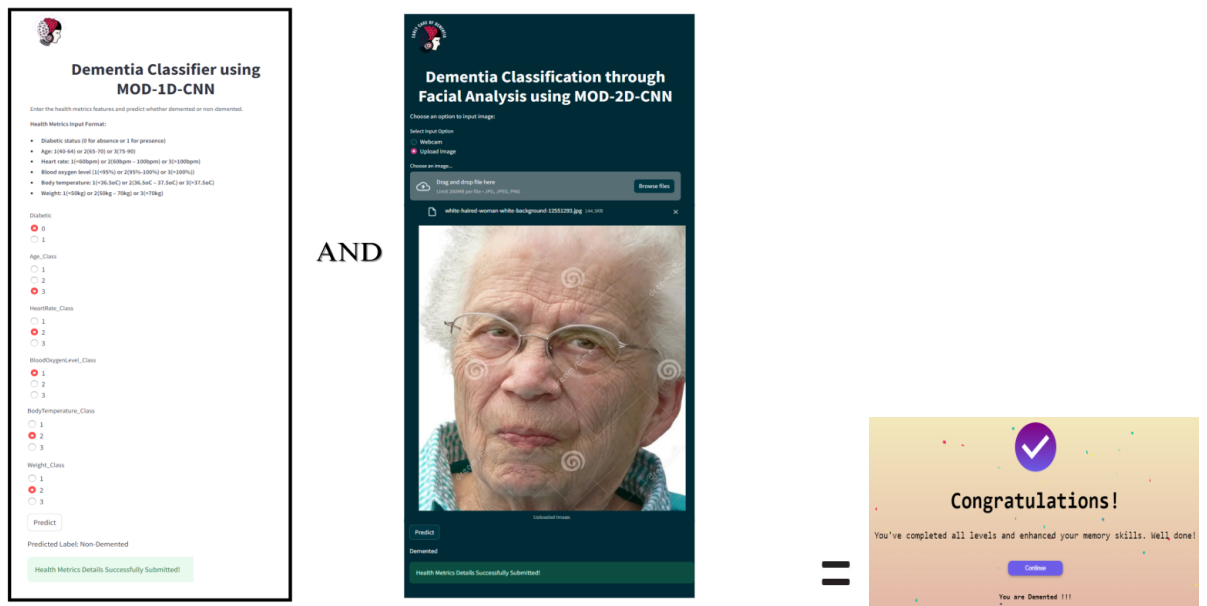

**Fig. 17** Decision Outcome - Demented with high probability

In Fig. 18, although MOD-1D-CNN predicts Demented, the ultimate decision is in favor of Non-Demented due to the higher confidence level provided by MOD-2D-CNN.

### Dementia Classifier using MOD-1D-CNN

Enter the health metrics features and predict whether demented or non-demented.

Health Metrics Input Format:

- Diabetic status (0 for absence or 1 for presence)
- Age: 140-64) or 200-70) or 375-90)
- Heart rate: 140bpm) or 200bpm - 300bpm) or 31-100bpm)
- Blood oxygen level: 140%) or 200% - 300%) or 31-100%)
- Body temperature: 140.5aC) or 200.5aC - 31.5aC) or 31.5aC)
- Weight: 140kg) or 200kg - 310kg) or 310kg)

Diabetic

0

1

Age\_Class

1

2

3

HeartRate\_Class

1

2

3

BloodOxygenLevel\_Class

1

2

3

BodyTemperature\_Class

1

2

3

Weight\_Class

1

2

3

Predicted Label: Demented

Health Metrics Details Successfully Submitted!

AND

### Dementia Classification through Facial Analysis using MOD-2D-CNN

Choose an option to input image:


Select Input Option

Webcam

Upload Image

Choose an image:

Drag and drop file here



Uploaded Image

Non-Demented

Health Metrics Details Successfully Submitted!




Fig. 18 Decision Outcome - Non-Demented with high probability

Conversely, Fig. 19 showcases agreement between both models in predicting Non-Demented, resulting in a conclusive decision of Non-Demented.

### Dementia Classifier using MOD-1D-CNN

Enter the health metrics features and predict whether demented or non-demented.

Health Metrics Input Format:

- Diabetic status (0 for absence or 1 for presence)
- Age: 140-64) or 200-70) or 375-90)
- Heart rate: 140bpm) or 200bpm - 300bpm) or 31-100bpm)
- Blood oxygen level: 140%) or 200% - 300%) or 31-100%)
- Body temperature: 140.5aC) or 200.5aC - 31.5aC) or 31.5aC)
- Weight: 140kg) or 200kg - 310kg) or 310kg)

Diabetic

0

1

Age\_Class

1

2

3

HeartRate\_Class

1

2

3

BloodOxygenLevel\_Class

1

2

3

BodyTemperature\_Class

1

2

3

Weight\_Class

1

2

3

Predicted Label: Non-Demented

Health Metrics Details Successfully Submitted!

AND

### Dementia Classification through Facial Analysis using MOD-2D-CNN

Choose an option to input image:


Select Input Option

Webcam

Upload Image

Choose an image:


Drag and drop file here



Uploaded Image

Non-Demented

Health Metrics Details Successfully Submitted!



**Fig. 19** Decision Outcome - Non-Demented

The findings indicate that the MOD-1D-CNN’s performance is greatly impacted by the optimizer selected, with Adam showing to be the most efficient in terms of all evaluation metrics. This investigation sheds light on the specifics of optimizer influence on model performance and emphasizes how crucial it is to use the right optimizer for 1D convolutional neural networks to get optimal results. In the comparative analysis of model parameters for MOD-1D-CNN, artificial neural network (ANN), and long short-term memory (LSTM), the focus lies on trainable and non-trainable parameters, as well as the overall total parameters. A comparison of parameters to those of other various models is shown in Table 10. MOD-1D-CNN exhibits a total of 21,550 parameters, with all being trainable, signifying the model’s capability to learn from the training data. In contrast, the artificial neural network (ANN) demonstrates a significantly lower parameter count, with a total of 163 trainable parameters. In this case, there are no non-trainable parameters, emphasizing the simplicity of the model. Long short-term memory (LSTM), on the other hand, presents a larger parameter count, with 120,641 trainable parameters and no non-trainable parameters.

**Table 10:** Comparison of the Number of Parameters of the MOD-1D-CNN model with other models

<b>Models</b>	<b>Trainable Parameters</b>	<b>Non-Trainable Parameters</b>	<b>Total Parameters</b>
MOD-1D-CNN	21550	0	21,550
ANN	163	0	163
LSTM	120641	0	1,20,641

This analysis underscores the diversity in parameter complexity across the models. MOD-1D-CNN’s intermediate parameter count suggests a balance between model complexity and simplicity. The effectiveness of the MOD-1D-CNN model is compared with the other cutting-edge deep learning models that are shown in Table 11. The training, validation, and test accuracies are assessed at 100, 150, and 200 epochs in the thorough comparison analysis across various training epochs for MOD-1D-CNN, artificial neural network (ANN), and long short-term memory (LSTM) to determine the model’s learning capacities over time. At 100 epochs, MOD-1D-CNN exhibits a training accuracy of 63.1%, a validation accuracy of 61.0%, and a test accuracy of 58.9%. In comparison, ANN achieves slightly lower accuracies with 60.8%, 58.5%, and 59.2% for training, validation, and test sets, respectively. Long short-term memory (LSTM), on the other hand, records accuracies of 59.8%, 56.8%, and 59.8%. As the training progresses to 150 epochs, MOD-1D-CNN sees improvements, achieving training, validation, and test accuracies of 64.6%, 62.6%, and 62.3%, respectively. ANN also demonstrates incremental improvements with accuracies of 61.7%, 59.8%, and 60.1%, while LSTM maintains relatively stable performance with 60.7%, 58.9%, and 60.0% for

the three sets. Upon reaching 200 epochs, MOD-1D-CNN continues to exhibit substantial enhancements, achieving training, validation, and test accuracies of 73.2%, 71.8%, and 70.5%. ANN displays a modest increase with accuracies of 62.6%, 64.5%, and 61.2%, while LSTM shows marginal improvements, recording accuracies of 61.6%, 61.3%, and 60.5%.

**Table 11:** Comparison of Accuracy of MOD-1D-CNN with other models for different epochs

	100 Epochs			150 Epochs			200 Epochs		
Models	Train	Val	Test	Train	Val	Test	Train	Val	Test
	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-
	cu-	cu-	cu-	cu-	cu-	cu-	cu-	cu-	cu-
	racy	racy	racy	racy	racy	racy	racy	racy	racy
MOD-1D-CNN	0.631	0.610	0.589	0.646	0.626	0.623	0.732	0.718	0.705
ANN	0.608	0.585	0.592	0.617	0.598	0.601	0.626	0.645	0.612
LSTM	0.598	0.568	0.598	0.607	0.589	0.600	0.616	0.613	0.605

This analysis provides insights into the model’s learning trajectories over different epochs, demonstrating MOD-1D-CNN’s capacity for continued improvement and outperforming both ANN and LSTM across various training durations.

#### 4.3.2 MOD-2D-CNN

The MOD-2D-CNN model is compiled using seven different optimizers for comparison analysis across diverse optimizers to test on the image set, and their performance is evaluated on a test set of 360 images.

**Table 12:** Comparison of Training MOD-2D-CNN using Different Optimizers

	Optimizers						
	Adam	Adadelta	Adamax	Adagrad	SGD	RMSprop	AdamW
<b>Accuracy</b>	0.95	0.55	0.83	0.51	0.50	0.92	0.88
<b>Precision</b>	0.93	0.54	0.83	0.50	0.49	0.92	0.89
<b>Recall</b>	0.93	0.50	0.83	0.50	0.48	0.92	0.88
<b>F1-Score</b>	0.93	0.50	0.83	0.50	0.48	0.92	0.87

The optimizer selection has a considerable impact on the MOD-2D-CNN model’s performance, as demonstrated in Table 12. Among the optimizers tested during 50 epochs of iteration, Adam emerged as the most effective, achieving the highest accuracy of 0.95 and demonstrating strong precision, recall, and f1-score

all hovering around values of 0.93 at 50 epochs. This suggests that Adam’s optimization is well-suited for enhancing the model’s ability to correctly classify both positive and negative instances, as well as minimizing false positives and false negatives. Adam’s adaptability makes it an effective choice for deep learning tasks such as image classification since it allows it to converge rapidly and efficiently over complicated loss landscapes. Table 13 compares the MOD-2D-CNN model’s total number of parameters to those of various well-known pre-trained models, including VGG-16, ResNet-50, and MobileNet. The MOD-2D-CNN model demonstrates an impressive parameter efficiency with a total of 19,394,881 parameters consisting entirely of trainable parameters, indicating that its architecture does not incorporate non-trainable parameters and the value for non-trainable parameters is 0. In contrast, VGG16, a well-known architecture, has 21,137,729 total parameters which is little much more than the MOD-2D-CNN model, with 6,423,041 being trainable and 14,714,688 non-trainable. ResNet50 surpasses the others in terms of the sheer number of parameters, with 49,278,337 in total, comprising 25,690,625 trainable parameters and 23,587,712 non-trainable parameters which is two and a half times more than the MOD-2D-CNN model. MobileNet, on the other hand, has a total of 16,074,433 parameters in total, which is somehow less than the MOD-2D-CNN model’s total parameters because of its lightweight architecture which is reflected in its lower parameter count making it suitable for resource-constrained architecture, with 12,845,569 being trainable and 3,228,864 non-trainable.

**Table 13:** Comparison of the Number of Parameters of the MOD-2D-CNN model with other models

<b>Models</b>	<b>Trainable Parameters</b>	<b>Non-Trainable Parameters</b>	<b>Total Parameters</b>
MOD-2D-CNN	19,394,881	0	19,394,881
VGG16	6,423,041	14,714,688	21,137,729
RestNet50	25,690,625	23,587,712	49,278,337
MobileNet	12,845,569	3,228,864	16,074,433

In contrast, the MOD-2D-CNN model’s design strikes a balance between model complexity and parameter efficiency, showcasing that high accuracy and performance can be achieved without excessive parameter usage. MOD-2D-CNN parameter efficiency also extends its attention to the non-trainable parameters because its value is 0 which says that architecture does not exhibit any non-trainable parameters. In contrast, other pre-trained models like ResNet50 have a staggering 23 million non-trainable parameters, which can lead to increased memory usage and longer initialization times. This simplicity makes MOD-2D-CNN a more practical choice for resource-constrained environments, such as edge devices or low-power hardware. Moreover, a model with fewer parameters tends to generalize better and is less prone to overfitting. MOD-2D-CNN relatively smaller parameter count allows it to generalize well even with limited training

data, making it a robust and reliable solution for dementia classification. While some of the larger pre-trained models like VGG16, ResNet50, and MobileNet might achieve slightly higher accuracy on certain datasets, they come at the cost of increased computational requirements and memory consumption. The parameter efficiency of MOD-2D-CNN, combined with its competitive accuracy and performance, positions it as a more noble and practical choice for real-world applications. The effectiveness of the MOD-2D-CNN model is also contrasted with that of other cutting-edge deep learning models, such as the ones in Table 14 (VGG-16, ResNet50, and MobileNet). All the models are trained on the same facial image dataset, allowing for a fair and meaningful comparison across different epoch trials (30, 40, and 50).

**Table 14:** Comparison of Accuracy of MOD-1D-CNN with other pre-trained models with different epochs

	30 Epochs			40 Epochs			50 Epochs		
Models	Train	Val	Test	Train	Val	Test	Train	Val	Test
	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-	Ac-
	cu-	cu-	cu-	cu-	cu-	cu-	cu-	cu-	cu-
	racy	racy	racy	racy	racy	racy	racy	racy	racy
MOD-2D-CNN	0.837	0.821	0.858	0.862	0.855	0.850	0.959	0.933	0.957
VGG16	0.851	0.916	0.927	0.856	0.922	0.930	0.944	0.938	0.913
ResNet50	0.50	0.50	0.50	0.51	0.52	0.50	0.50	0.50	0.50
MobileNet	0.967	0.950	0.933	0.850	0.933	0.933	0.50	0.51	0.50

In the case of MOD-2D-CNN, it demonstrated consistent improvement in both training and validation accuracy as the number of epochs increased. At 30 epochs, MOD-2D-CNN achieved a training accuracy of 83.7%, a validation accuracy of 82.1%, and a test accuracy of 85.8%. The model continued to exhibit enhanced performance at 40 epochs, with training accuracy reaching 86.2%, validation accuracy at 85.5%, and a test accuracy of 85.0%. Surprisingly, at 50 epochs, MOD-2D-CNN demonstrated remarkable improvement, reaching a training accuracy of 95.9%, validation accuracy of 93.3%, and test accuracy of 95.7%. This notable performance may indicate that the model benefits from increased training epochs. Comparatively, VGG16 exhibited commendable performance across different training epochs. At 30 epochs, the model achieved a training accuracy of 85.1%, a validation accuracy of 91.6%, and a test accuracy of 92.7%. The accuracy levels continued to be consistent at 40 epochs, with training accuracy reaching 85.6%, validation accuracy at 92.2%, and test accuracy at 93.0%. While there is a slight dip in test accuracy at 50 epochs at 91.3%, VGG16



maintained high training accuracy at 94.4% and validation accuracy at 93.8%. This consistent performance suggests that VGG16 is a robust model for image classification tasks. However, MOD-2D-CNN demonstrated slightly superior accuracy at the same epoch, suggesting its potential as a robust model for image classification tasks. On the other hand, ResNet50 faced challenges in achieving meaningful accuracy, struggling to surpass 50% throughout all epochs. At 30, 40, and 50 epochs, the model consistently reported a training, validation, and test accuracy of 50.0%, indicating potential issues in convergence or model suitability for the dataset. This shows that MOD-2D-CNN is more robust than ResNet50 in learning the patterns of images for the accurate classification of demented people as well as non-demented ones. Whereas MobileNet, while initially displaying impressive performance at 30 epochs with a training accuracy of 96.7% and validation accuracy of 95.0%, struggled to maintain accuracy in subsequent epochs. At 40 epochs, the model's training accuracy dropped to 85.0%, and the validation accuracy decreased to 93.3%, with the test accuracy falling to 50.0%. This trend continued at 50 epochs, with training accuracy at 50.0%, validation accuracy at 51.0%, and test accuracy at 50.0%. In contrast, MOD-2D-CNN consistently outperformed MobileNet across all epochs, highlighting its robustness in comparison. In summary, MOD-2D-CNN demonstrated competitive accuracy levels and exhibited excellent generalization, parameter efficiency, and robustness in classifying demented as well as non-demented individuals through facial analysis, especially at 50 epochs, making it a promising candidate for image classification tasks when compared to the competitive models like VGG16, ResNet50, and MobileNet. MOD-2D-CNN consistently outperforms them on the test set which makes it a noble choice and a leading solution for the classification of dementia through facial image, highlighting its practicality and effectiveness in real-world scenarios.

**Table 15:** Comparison of the proposed methodology with some popular gaming applications for healthcare

Literature Works	Used Technology	Applications	Pros	Cons
[63], [64], [65]	Virtual reality, memory server, basic processor.	<ul style="list-style-type: none"> <li>• Patient care</li> <li>• Entertainment</li> <li>• Surgeon and nurse training</li> <li>• dental implant training</li> <li>• Nurse transition</li> </ul>	Suitable for medical training and patient entertainment, smart virtual reality	Not useful for disease detection, skilled persons are required to handle

<b>Literature Works</b>	<b>Used Technology</b>	<b>Applications</b>	<b>Pros</b>	<b>Cons</b>
[71], [67]	Microsoft Kinect, and other bio-signal capture devices, Virtual reality, high-end processors, and memory servers.	<ul style="list-style-type: none"> <li>• Neuro-psychological rehabilitation</li> <li>• upper limb rehabilitation</li> <li>• chronic pain rehabilitation diagnosis</li> <li>• management of Parkinson's</li> </ul>	3D versions are available	Not user-friendly, EEG signal analysis complexity, Expensive, Expert/skilled person required
[68], [70]	Virtual reality, NLP algorithms, IoT, Hypertext Application Language, MySQL, taxonomy, ML APIs.	<ul style="list-style-type: none"> <li>• Fat and carbohydrate Oxidation</li> <li>• heart rate improvement</li> <li>• energy expenditure</li> </ul>	Smart GUI, scalability, auto adaptability, virtualization	the use of Node-RED and other third-party APIs, Expensive, Expert/skilled person required
[69]	Blending reality and AR/VR, NVIDIA DLSS algorithm, Mobile devices	<ul style="list-style-type: none"> <li>• Health monitoring</li> <li>• clinical detection, treatment, rehabilitation</li> <li>• recovery tracking, professional</li> </ul>	Intelligent graphics design, 3D application	Expensive, needs skilled users to handle
[66]	Bayesian game-theoretic model, Multi-objective Evolutionary Algorithm using Fuzzy Genetics	<ul style="list-style-type: none"> <li>• Clinical Decision Support System</li> </ul>	Efficient resource utilization, and computationally cost-effective solution	Low Accuracy

Literature Works	Used Technology	Applications	Pros	Cons
<b>Proposed MOD-CNN</b>	1D and 2D CNN deep learning architectures for two layers of training & testing, Javascript, HTML & CSS, memory server, OS, basic hardware, Mobile devices (flexible)	<ul style="list-style-type: none"> <li>Dementia detection of gaming application users</li> </ul>	First-of-its-kind, easy-to-install, dementia detection testing accuracy is high, portable, reliable, secure, quickly responsive, user-friendly, age-independent, and cost-effective	2D Gaming application needs to improve the layout

Table 15 provides a comparison of our proposed AI-based gaming application with some existing state-of-the-art healthcare gaming application works concerning used technology, application areas, advantages, and disadvantages.

## 5. CONCLUSIONS

In this work, we have introduced an innovative cognitive assessment game that seamlessly integrates gameplay elements with a sophisticated early diagnosis methodology. The game comprises two levels - “Basic Match” and “Ultimate Test” and evaluates critical cognitive abilities that are essential for early dementia identification. The transition from gameplay to cognitive assessment is smooth, enhancing the overall utility of the proposed approach. The research incorporates two models tailored for the binary classification of dementia status using a health metrics dataset as well as a facial image dataset. The introduced Modified 1D Convolutional Neural Network (MOD-1D-CNN) is used to analyze a dataset comprising health metrics for accurately identifying dementia traits and the other model i.e. Modified 2D Convolutional Neural Network (MOD-2D-CNN) introduces a facial-based image classification for the demented as well non-demented individual. Through rigorous evaluation and comparison-based analysis with the other state-of-the-art models, the MOD-1D-CNN and MOD-2D-CNN models show their superiority in accuracy, efficiency, and generalization capabilities, solidifying their position as noble and valuable contributions to the

field of dementia detection. Both the models with the efficient parameter design ensure practicality and feasibility in resource-constrained settings, including regions with limited computational resources. Moreover, the MOD-1D-CNN and MOD-2D-CNN model's interpretability fosters transparency and enhances trust enabling them to make more informed decisions based on model predictions. The work contributes to bridging the research gap in early dementia detection by presenting a holistic cognitive assessment system that amalgamates gaming, data-driven analytics, and advanced deep learning techniques. The findings underscore the potential of this approach for early identification of cognitive deviations, thereby advancing the field of dementia research and cognitive health assessment.

### **ACKNOWLEDGEMENT**

We have obtained the health parameter datasets from Apollo Clinic, Kolkata. We appreciate Mr. Souvik Das, Floor Manager, Apollo Clinic, Kolkata, for dedicating his time, effort, and continuous assistance in gathering the dataset.

### **Ethical Approval**

Not Applicable.

### **Competing Interest**

The authors declare no conflict of interest.

### **Consent to Participate**

All the authors have equally participated in this work.

### **Funding**

There is no funding involved for this work.

### **Data Availability Statement**

Data are available upon reasonable request to the corresponding authors.

### **REFERENCES**

- [1] Valcour, V. G., Masaki, K. H., Curb, J. D., & Blanchette, P. L. (2000). The detection of dementia in the primary care setting. *Archives of internal medicine*, 160(19), 2964-2968.
- [2] Giaquinto, S., & Parnetti, L. (2006). Early detection of dementia in clinical practice. *Mechanisms of ageing and development*, 127(2), 123-128.
- [3] Palmer, K., Bäckman, L., Winblad, B., & Fratiglioni, L. (2003). Detection of Alzheimer's disease and dementia in the preclinical phase: population based cohort study. *Bmj*, 326(7383), 245.
- [4] Graafland, M., & Schijven, M. (2018). How serious games will improve healthcare. *Digital health: scaling healthcare to the world*, 139-157.

- [5] Raja, B. S., & Asghar, S. (2020). Disease classification in health care systems with game theory approach. *IEEE Access*, 8, 83298-83311.
- [6] Abd-Alrazaq, A., Abuelezz, I., Hassan, A., AlSammarraie, A., Alhuwail, D., Irshaidat, S., ... & Househ, M. (2022). Artificial Intelligence–Driven Serious Games in Health Care: Scoping Review. *JMIR serious games*, 10(4), e39840.
- [7] Kherchouche, A., Ben-Ahmed, O., Guillevin, C., Tremblais, B., Julian, A., Fernandez-Maloigne, C., & Guillevin, R. (2022). Attention-guided neural network for early dementia detection using MRS data. *Computerized Medical Imaging and Graphics*, 99, 102074.
- [8] Alex, J. S. R., Bhyri, R., Usha, G. P., & Arvind, S. V. (2023). Noninvasive Detection of Alzheimer’s Disease from Conversational Speech Using 1D-CNN. In *Futuristic Communication and Network Technologies: Select Proceedings of VICFCNT 2021, Volume 1* (pp. 583-592). Singapore: Springer Nature Singapore.
- [9] Qayyum, A., Khan, M. A., Mazher, M., & Suresh, M. (2018, November). Classification of eeg learning and resting states using 1d-convolutional neural network for cognitive load assesment. In *2018 IEEE Student Conference on Research and Development (SCOREd)* (pp. 1-5). IEEE.
- [10] Paliokas, I., Tzallas, A., Katertsidis, N., Votis, K., & Tzovaras, D. (2017, October). Gamification in social networking: a platform for people living with dementia and their caregivers. In *2017 IEEE 17th International Conference on Bioinformatics and Bioengineering (BIBE)* (pp. 574-579). IEEE.
- [11] Zhang, B., & Chignell, M. (2020, August). A framework for using cognitive assessment games for people living with dementia. In *2020 IEEE 8th International Conference on Serious Games and Applications for Health (SeGAH)* (pp. 1-8). IEEE.
- [12] Chi, H., Agama, E., & Prodanoff, Z. G. (2017, April). Developing serious games to promote cognitive abilities for the elderly. In *2017 IEEE 5th International Conference on Serious Games and Applications for Health (SeGAH)* (pp. 1-8). IEEE.
- [13] Mora, A., González, C., Arnedo-Moreno, J., & Álvarez, A. (2016, September). Gamification of cognitive training: a crowdsourcing-inspired approach for older adults. In *Proceedings of the XVII international conference on human computer interaction* (pp. 1-8).
- [14] Paletta, L., Pszeida, M., Fellner, M., Russegger, S., Dini, A., Draxler, S., ... & Steiner, J. (2021). Towards Decision Support with Assessment of Neuropsychological Profiles in Alzheimer’s Dementia Using Playful Tablet-Based Multimodal Activation. In *Advances in Neuroergonomics and Cognitive Engineering: Proceedings of the AHFE 2021 Virtual Conferences on Neuroergonomics and Cognitive Engineering, Industrial Cognitive Ergonomics and Engineering Psychology, and Cognitive Computing and Internet of Things, July 25-29, 2021, USA* (pp. 469-477). Springer International Publishing.

- [15] So, A., Hooshyar, D., Park, K. W., & Lim, H. S. (2017). Early diagnosis of dementia from clinical data by machine learning techniques. *Applied Sciences*, 7(7), 651.
- [16] Shankle, W. R., Mani, S., Pazzani, M. J., & Smyth, P. (1997). Detecting very early stages of dementia from normal aging with machine learning methods. In *Artificial Intelligence in Medicine: 6th Conference on Artificial Intelligence in Medicine Europe, AIME'97 Grenoble, France, March 23–26, 1997 Proceedings 6* (pp. 71-85). Springer Berlin Heidelberg.
- [17] Bidani, A., Gouider, M. S., & Travieso-González, C. M. (2019). Dementia detection and classification from MRI images using deep neural networks and transfer learning. In *Advances in Computational Intelligence: 15th International Work-Conference on Artificial Neural Networks, IWANN 2019, Gran Canaria, Spain, June 12-14, 2019, Proceedings, Part I 15* (pp. 925-933). Springer International Publishing.
- [18] Murugan, S., Venkatesan, C., Sumithra, M. G., Gao, X. Z., Elakkiya, B., Akila, M., & Manoharan, S. (2021). DEMNET: a deep learning model for early diagnosis of Alzheimer diseases and dementia from MR images. *Ieee Access*, 9, 90319-90329.
- [19] Kevin S. McGrew, CHC theory and the human cognitive abilities project: Standing on the shoulders of the giants of psychometric intelligence research, *Intelligence*, Volume 37, Issue 1, 2009, Pages 1-10, ISSN 0160-2896.
- [20] Funahashi S, Andreau JM. Prefrontal cortex and neural mechanisms of executive function. *J Physiol Paris*. 2013 Dec;107(6):471-82. doi: 10.1016/j.jphysparis.2013.05.001. Epub 2013 May 15. PMID: 23684970.
- [21] Heatherton TF, Wagner DD. Cognitive neuroscience of self-regulation failure. *Trends Cogn Sci*. 2011 Mar;15(3):132-9. doi: 10.1016/j.tics.2010.12.005. Epub 2011 Jan 26. PMID: 21273114; PMCID: PMC3062191.
- [22] Gonzalez Kelso I, Tadi P. Cognitive Assessment. 2022 Nov 7. In: StatPearls [Internet]. Treasure Island (FL): StatPearls Publishing; 2024 Jan-. PMID: 32310509.
- [23] Basu, Saikat & Saha, Sudipta & Das, Sourav & Guha, Rajlaksmi & Mukherjee, Jayanta & Mahadevappa, Manjunatha. (2022). "Montaj": A Gaming System for Assessing Cognitive Skills in a Mobile Computing Platform. 10.1007/978-981-19-1408-9\_12.
- [24] Basu, Saikat & Saha, Sudipta & Das, Sourav & Guha, Rajlaksmi & Mukherjee, Jayanta & Mahadevappa, Manjunatha. (2022). Assessment of attention and working memory among young adults using computer games. *Journal of Ambient Intelligence and Humanized Computing*. 14. 10.1007/s12652-022-04494-5.
- [25] O'Shea, K., & Nash, R. (2015). An introduction to convolutional neural networks. *arXiv preprint arXiv:1511.08458*.

- [26] Aghdam, H. H., & Heravi, E. J. (2017). Guide to convolutional neural networks. *New York, NY: Springer, 10(978-973)*, 51.
- [27] Dakdareh, S. G., & Abbasian, K. (2024). Diagnosis of Alzheimer's Disease and Mild Cognitive Impairment Using Convolutional Neural Networks. *Journal of Alzheimer's Disease Reports, 8(1)*, 317.
- [28] Kiranyaz, S., Ince, T., Abdeljaber, O., Avci, O., & Gabbouj, M. (2019, May). 1-D convolutional neural networks for signal processing applications. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)* (pp. 8360-8364). IEEE.
- [29] Kiranyaz, S., Avci, O., Abdeljaber, O., Ince, T., Gabbouj, M., & Inman, D. J. (2021). 1D convolutional neural networks and applications: A survey. *Mechanical systems and signal processing, 151*, 107398.
- [30] Li, D., Zhang, J., Zhang, Q., & Wei, X. (2017, October). Classification of ECG signals based on 1D convolution neural network. In *2017 IEEE 19th International Conference on e-Health Networking, Applications and Services (Healthcom)* (pp. 1-6). IEEE.
- [31] Mattioli, F., Porcaro, C., & Baldassarre, G. (2022). A 1D CNN for high accuracy classification and transfer learning in motor imagery EEG-based brain-computer interface. *Journal of Neural Engineering, 18(6)*, 066053.
- [32] Li, F., Liu, M., Zhao, Y., Kong, L., Dong, L., Liu, X., & Hui, M. (2019). Feature extraction and classification of heart sound using 1D convolutional neural networks. *EURASIP Journal on Advances in Signal Processing, 2019(1)*, 1-11.
- [33] Allamy, S., & Koerich, A. L. (2021, December). 1D CNN architectures for music genre classification. In *2021 IEEE Symposium Series on Computational Intelligence (SSCI)* (pp. 01-07). IEEE.
- [34] Hsieh, C. H., Li, Y. S., Hwang, B. J., & Hsiao, C. H. (2020). Detection of atrial fibrillation using 1D convolutional neural network. *Sensors, 20(7)*, 2136.
- [35] Hu, H., Shah, S. A. A., Bennamoun, M., & Molton, M. (2017, November). 2D and 3D face recognition using convolutional neural network. In *TENCON 2017-2017 IEEE Region 10 Conference* (pp. 133-132). IEEE.
- [36] Taha, B., & Hatzinakos, D. (2019, May). Emotion recognition from 2D facial expressions. In *2019 IEEE Canadian Conference of Electrical and Computer Engineering (CCECE)* (pp. 1-4). IEEE.
- [37] Li, H., Sun, J., Xu, Z., & Chen, L. (2017). Multimodal 2D+ 3D facial expression recognition with deep fusion convolutional neural network. *IEEE Transactions on Multimedia, 19(12)*, 2816-2831.
- [38] TanujaPatgar, T. (2021). Convolution neural network based emotion classification cognitive model for facial expression. *Turkish Journal of Computer and Mathematics Education (TURCOMAT), 12(13)*, 6718-6739.

- [39] Almabdy, S., & Elrefaei, L. (2019). Deep convolutional neural network-based approaches for face recognition. *Applied Sciences*, 9(20), 4397.
- [40] Wu, C., & Guo, F. (2021). TSNN: Three-stream combining 2D and 3D convolutional neural network for micro-expression recognition. *IEEJ Transactions on Electrical and Electronic Engineering*, 16(1), 98-107.
- [41] Cui, J., Zhang, H., Han, H., Shan, S., & Chen, X. (2018, February). Improving 2D face recognition via discriminative face depth estimation. In *2018 International Conference on Biometrics (ICB)* (pp. 140-147). IEEE.
- [42] Li, J., Mi, Y., Li, G., & Ju, Z. (2019). CNN-based facial expression recognition from annotated rgb-d images for human-robot interaction. *International Journal of Humanoid Robotics*, 16(04), 1941002.
- [43] Kim, H., Jung, W. K., Park, Y. C., Lee, J. W., & Ahn, S. H. (2022). Broken stitch detection method for sewing operation using CNN feature map and image-processing techniques. *Expert Systems with Applications*, 188, 116014.
- [44] Menikdiwela, M., Nguyen, C., Li, H., & Shaw, M. (2017, December). CNN-based small object detection and visualization with feature activation mapping. In *2017 international conference on image and vision computing New Zealand (IVCNZ)* (pp. 1-5). IEEE.
- [45] Singh, S., & Anand, R. S. (2019). Multimodal medical image fusion using hybrid layer decomposition with CNN-based feature mapping and structural clustering. *IEEE Transactions on Instrumentation and Measurement*, 69(6), 3855-3865.
- [46] Guyon, I., & Elisseeff, A. (2006). An introduction to feature extraction. In *Feature extraction: foundations and applications* (pp. 1-25). Berlin, Heidelberg: Springer Berlin Heidelberg.
- [47] Wu, B. F., & Lin, C. H. (2018). Adaptive feature mapping for customizing deep learning based facial expression recognition model. *IEEE access*, 6, 12451-12461.
- [48] Ge, Z., Cao, G., Li, X., & Fu, P. (2020). Hyperspectral image classification method based on 2D-3D CNN and multibranch feature fusion. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 13, 5776-5788.
- [49] Steurer, M., Hill, R. J., & Pfeifer, N. (2021). Metrics for evaluating the performance of machine learning based automated valuation models. *Journal of Property Research*, 38(2), 99-129.
- [50] Albawi, S., Mohammed, T. A., & Al-Zawi, S. (2017, August). Understanding of a convolutional neural network. In *2017 international conference on engineering and technology (ICET)* (pp. 1-6). Ieee.
- [51] Zhou, J., Gandomi, A. H., Chen, F., & Holzinger, A. (2021). Evaluating the quality of machine learning explanations: A survey on methods and metrics.



*Electronics*, 10(5), 593.

[52] Cui, Y., Zhou, F., Wang, J., Liu, X., Lin, Y., & Belongie, S. (2017). Kernel pooling for convolutional neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 2921-2930).

[53] Vujović, Ž. (2021). Classification model evaluation metrics. *International Journal of Advanced Computer Science and Applications*, 12(6), 599-606.

[54] Hao, W., Yizhou, W., Yaqin, L., & Zhili, S. (2020, December). The role of activation function in CNN. In *2020 2nd International Conference on Information Technology and Computer Application (ITCA)* (pp. 429-432). IEEE.

[55] Hossin, M., & Sulaiman, M. N. (2015). A review on evaluation metrics for data classification evaluations. *International journal of data mining & knowledge management process*, 5(2), 1.

[56] Park, S., & Kwak, N. (2017). Analysis on the dropout effect in convolutional neural networks. In *Computer Vision-ACCV 2016: 13th Asian Conference on Computer Vision, Taipei, Taiwan, November 20-24, 2016, Revised Selected Papers, Part II 13* (pp. 189-204). Springer International Publishing.

[57] Carvalho, D. V., Pereira, E. M., & Cardoso, J. S. (2019). Machine learning interpretability: A survey on methods and metrics. *Electronics*, 8(8), 832.

[58] Jin, J., Dundar, A., & Culurciello, E. (2014). Flattened convolutional neural networks for feedforward acceleration. *arXiv preprint arXiv:1412.5474*.

[59] Bera, S., & Shrivastava, V. K. (2020). Analysis of various optimizers on deep convolutional neural network model in the application of hyperspectral remote sensing image classification. *International Journal of Remote Sensing*, 41(7), 2664-2683.

[60] Jha, S., Kumar, R., Abdel-Basset, M., Priyadarshini, I., Sharma, R., & Long, H. V. (2019). Deep learning approach for software maintainability metrics prediction. *Ieee Access*, 7, 61840-61855.

[61] Marcus, D. S., Fotenos, A. F., Csernansky, J. G., Morris, J. C., & Buckner, R. L. (2010). Open access series of imaging studies: longitudinal MRI data in nondemented and demented older adults. *Journal of cognitive neuroscience*, 22(12), 2677-2684.

[62] Marom, N. D., Rokach, L., & Shmilovici, A. (2010, November). Using the confusion matrix for improving ensemble classifiers. In *2010 IEEE 26-th Convention of Electrical and Electronics Engineers in Israel* (pp. 000555-000559). IEEE.

[63] Wattanasoontorn, V., Hernández, R. J. G., & Sbert, M. (2014). Serious games for e-health care. *Simulations, Serious Games and Their Applications*, 127-146.

- [64] Kato, P. M. (2010). Video games in health care: Closing the gap. *Review of general psychology*, *14*(2), 113-121.
- [65] Abd-Alrazaq, A., Abuelezz, I., Hassan, A., AlSammarraie, A., Alhuwail, D., Irshaidat, S., ... & Househ, M. (2022). Artificial Intelligence–Driven Serious Games in Health Care: Scoping Review. *JMIR serious games*, *10*(4), e39840.
- [66] Raja, B. S., & Asghar, S. (2020). Disease classification in health care systems with game theory approach. *IEEE Access*, *8*, 83298-83311.
- [67] Graafland, M., & Schijven, M. (2018). How serious games will improve healthcare. *Digital health: scaling healthcare to the world*, 139-157.
- [68] Ahmad, S., Mehmood, F., Khan, F., & Whangbo, T. K. (2022). Architecting intelligent smart serious games for healthcare applications: a technical perspective. *Sensors*, *22*(3), 810.
- [69] Savareh, B. A., & Bashiri, A. (2021). Artificial intelligence and Mobile Gaming. *Journal of Biomedical Physics & Engineering*, *11*.
- [70] Sitterding, M. C., Raab, D. L., Saupe, J. L., & Israel, K. J. (2019). Using artificial intelligence and gaming to improve new nurse transition. *Nurse Leader*, *17*(2), 125-130.
- [71] Damaševičius, R., Maskeliūnas, R., & Blažauskas, T. (2023). Serious games and gamification in healthcare: a meta-review. *Information*, *14*(2), 105.
- [72] <https://www.pexels.com/>, Last Access Date: 15.03.2024.
- [73] <https://create.vista.com/>, Last Access Date: 15.03.2024.
- [74] <https://images.google.com/>, Last Access Date: 15.03.2024.
- [75] <https://www.shutterstock.com/>, Last Access Date: 15.03.2024.