

# Query-Enhanced Adaptive Semantic Path Reasoning for Inductive Knowledge Graph Completion

Kai Sun  
Beijing University of Technology  
Beijing, China  
sunkai@emails.bjut.edu.cn

Jiapu Wang\*  
Beijing University of Technology  
Beijing, China  
jpwang@emails.bjut.edu.cn

Huajie Jiang  
Beijing University of Technology  
Beijing, China  
jianghj@bjut.edu.cn

Yongli Hu  
Beijing University of Technology  
Beijing, China  
huyongli@bjut.edu.cn

Baocai Yin  
Beijing University of Technology  
Beijing, China  
ybc@bjut.edu.cn

## ABSTRACT


Conventional Knowledge graph completion (KGC) methods aim to infer missing information in incomplete Knowledge Graphs (KGs) by leveraging existing information, which struggle to perform effectively in scenarios involving emerging entities. Inductive KGC methods can handle the emerging entities and relations in KGs, offering greater dynamic adaptability. While existing inductive KGC methods have achieved some success, they also face challenges, such as susceptibility to noisy structural information during reasoning and difficulty in capturing long-range dependencies in reasoning paths. To address these challenges, this paper proposes the Query-Enhanced Adaptive Semantic Path Reasoning (QASPR) framework, which simultaneously captures both the structural and semantic information of KGs to enhance the inductive KGC task. Specifically, the proposed QASPR employs a query-dependent masking module to adaptively mask noisy structural information while retaining important information closely related to the targets. Additionally, QASPR introduces a global semantic scoring module that evaluates both the individual contributions and the collective impact of nodes along the reasoning path within KGs. The experimental results demonstrate that QASPR achieves state-of-the-art performance.

## KEYWORDS

Knowledge Graph, Inductive Knowledge Graph Completion, Long-range Semantic Dependencies, Query-dependent Masking

## 1 INTRODUCTION

Knowledge Graphs (KGs) are structured graph networks where entities are represented as nodes and relations as edges. Currently, KGs are widely used in fields such as recommendation systems [1] and natural language processing [2]. However, due to the continuous emergence of new knowledge, the issue of incompleteness in knowledge graphs has garnered increasing attention. To address this, the task of Knowledge Graph Completion (KGC) [3] has emerged, aiming to leverage existing knowledge to infer missing facts and enhance completeness. Although traditional KGC methods [4–6] have made some progress, they only address entities

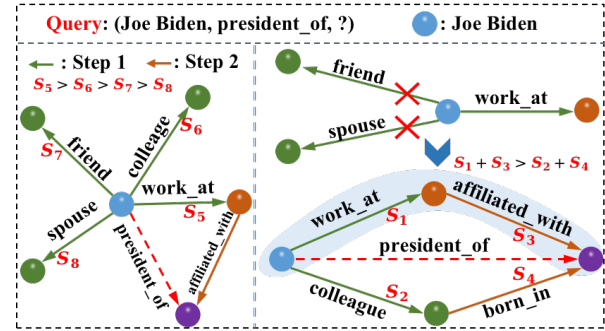


**Figure 1: The motivation of the conventional inductive KGC (left) and the proposed QASPR (right). Conventional inductive KGCs traverse nodes directly over KGs. QASPR sequentially masks the noise structure and captures the long-range semantic dependencies over the whole reasoning path.**

already present in KGs and struggle to perform effectively in scenarios involving emerging entities. To tackle these issues, inductive KGC methods [7–10] have been developed.

Inductive KGC typically relies on techniques such as Graph Neural Networks (GNNs) [11, 12] and self-supervised learning [13] to learn general representations from the graph structure and handle the introduction of new entities. Despite the progress made by current methods, they still face numerous challenges. On the one hand, as shown in Figure 1, previous research has often overlooked the significant challenges posed by the highly complex structures of KGs. The complexity of KGs, with their numerous nodes and edges representing diverse and intricate relation types, can introduce noise during the reasoning process and hinder the effective utilization of structural characteristics [14]. Thus, effectively removing the noise from irrelevant structural information within KGs is crucial.

On the other hand, prior research has typically focused only on the immediately current node in the reasoning path, overlooking the critical long-range semantic dependencies among entities throughout the entire reasoning path. This oversight can lead to an incomplete understanding of the semantic context, thereby reducing the effectiveness of reasoning tasks. Therefore, it is essential to develop a mechanism that captures the full scope of semantic

\*Both authors contributed equally to this research.

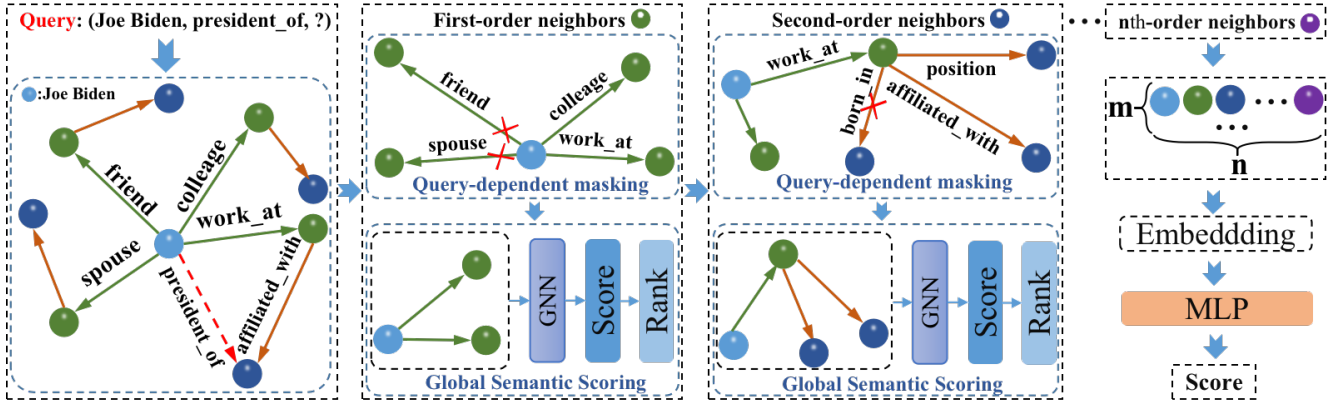

**Figure 2: The whole framework of QASPR. Specifically, Query-dependent masking module adaptively masks the noisy structural information, thereby retaining effective structure; Global semantic scoring module captures the long-range dependencies by evaluating the semantics of the whole reasoning path; MLP is utilized to compute the scores for the candidates.  $m$  indicates the number of reasoning paths and  $n$  denotes number of nodes in every reasoning path.**

dependencies, considering the cumulative influence of all nodes in the reasoning path.

To address these challenges, this paper proposes the Query-Enhanced Adaptive Semantic Path Reasoning (QASPR) framework, which simultaneously captures both structural and semantic information of KGs to enhance the inductive KGC task. Specifically, the proposed QASPR employs a query-dependent masking module to adaptively mask the noisy edges, retaining edges closely related to the targets. Additionally, QASPR introduces a global semantic scoring module that evaluates both the individual contributions and the collective impact of nodes along the reasoning path within KGs. This module can accurately identify critical semantic paths for effective reasoning, capturing long-range semantic dependencies in the reasoning path.

To summarize, the main contributions of this paper are as follows: (1) This paper proposes a novel Query-Enhanced Adaptive Semantic Path Reasoning (QASPR) framework to capture both structural and semantic information of KGs, enhancing the inductive KGC task; (2) This paper designs a query-dependent masking module, which adaptively masks the noisy structures and retains the relevant structures within KGs in a data-driven manner; (3) This paper introduces an innovative path global semantic scoring module to capture the long-range semantic dependencies of the reasoning path within KGs;

## 2 PRELIMINARY

**Inductive Knowledge Graph Completion.** A knowledge graph, denoted as  $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{R})$ , consists of finite sets of facts (edges)  $\mathcal{E}$ , entities (nodes)  $\mathcal{V}$ , and relations  $\mathcal{R}$ . Each fact is represented as a triplet  $(s, r, o) \in \mathcal{V} \times \mathcal{R} \times \mathcal{V}$ , indicating a relation  $r$  from the head entity  $s$  to the tail entity  $o$ . KGC typically predicts the missing information through the known knowledge. Specifically, for a query  $(s, r_q, ?)$ , the goal is to find the set of answers  $\mathcal{V}(s, r_q, ?)$  such that for all  $o \in \mathcal{V}(s, r_q, ?)$ , the triplet  $(s, r_q, o)$  holds true. Based on KGC, inductive KGC is used to predict missing facts for emerging entities that never appear in KGs.

**Logical Rules.** Logical rules  $\rho$  [15, 16] define the relation between two entities  $s$  and  $o$ :

$$\rho : \bigwedge_{i=1}^{l-1} r_i^*(s, o_i) \Rightarrow r_l(s, o), \quad (1)$$

where the right-hand side denotes the rule head with relation  $r$  that can be induced by  $(\Rightarrow)$  the left-hand rule body. The rule body is represented by the conjunction ( $\bigwedge$ ) of a series of body relations  $r_i^* \in \{r_1, \dots, r_{l-1}\}$ . The logical rule is referred to as the single rule when  $r_i^* = r_1$ .

## 3 METHOD

In this section, we introduce the Query-Enhanced Adaptive Semantic Path Reasoning (QASPR) framework for inductive KGC. QASPR mainly comprises two modules, including the query-dependent masking and global semantic scoring modules. Specifically, the query-dependent masking module employs the Bernoulli distribution [17] to mask the noisy structures, thereby obtaining effective structural characteristics. The global semantic scoring module evaluates the semantics of the whole reasoning path to capture long-range semantic dependencies, thereby improving the accuracy of reasoning tasks. The framework is illustrated in Figure 2.

### 3.1 Query-Dependent Masking

The query-dependent masking module utilizes the Bernoulli distribution to adaptively mask the noisy structures irrelevant to the query, thereby retaining critical structural information. Specifically, this module first extracts single rules and calculates their confidence to evaluate the relevance between relations. Subsequently, it applies a normalization strategy to convert this confidence into probability. Finally, the Bernoulli distribution is employed to filter out the irrelevant relations.

Firstly, following logical notations, we denote potential relevance between relation  $r$  and relation  $r_q$  using a single rule  $r \Rightarrow r_q$ . To quantify the degree of such relevance, we define the confidence of a single rule as follows:

$$C(r \Rightarrow r_q) = \frac{\sum_{t \in \mathcal{E}} \mathbb{1}(r \in E_r(t) \wedge r_q \in E_r(t))}{\sum_{t \in \mathcal{E}} \mathbb{1}(r \in E_r(t))},$$

where the function  $\mathbb{1}(x)$  equals 1 when  $x$  is true and 0 otherwise,  $E_r$  denotes the extracted relations from the triplets.  $C(r \Rightarrow r_q)$  quantifies the relevance between  $r$  and  $r_q$ ; a higher value indicates stronger relevance.

Next, we calculate the probability based on their confidence. The probability can be obtained through a normalization step that transforms the confidence into probability:

$$p_{rr_q}^{(l)} = \min\left(\frac{C_{max}^{(l)} - C(r \Rightarrow r_q)}{C_{max}^{(l)} - C_{avg}^{(l)}} \cdot p_e, p_\tau\right),$$

where  $p_{rr_q}^{(l)}$  denotes the relevance between  $r$  and  $r_q$ , which reflects the importance of the relation  $r$ , probability multiplier  $p_e$  [17] is a hyper-parameter controlling the overall probability,  $C_{max}^{(l)}$  and  $C_{avg}^{(l)}$  represent the maximum and average values within the confidence set  $C^{(l)}$ , and  $p_\tau$  is a cut-off probability used to truncate probability value, as extremely low probabilities can lead to the loss of important relations.

Finally, we obtain a modified subset  $\tilde{\mathcal{R}}^{(l)}$  from the candidate relations  $\hat{\mathcal{R}}^{(l)}$  with certain probabilities at the  $l$ -th hop:

$$\tilde{\mathcal{R}}^{(l)} = \{r \mid r \in \hat{\mathcal{R}}^{(l)}, \text{Bern}(p_{rr_q}^{(l)}) = 1\},$$

where  $\hat{\mathcal{R}}^{(l)}$  denotes the set of  $l$ -th order neighboring relations of entity  $s$ ,  $\text{Bern}$  represents a Bernoulli distribution,  $\tilde{\mathcal{R}}^{(l)}$  is then used as the relation set.

After obtaining the subset  $\tilde{\mathcal{R}}^{(l)}$ , we can effectively mask the noisy edges, thereby providing a clean KG for the subsequent reasoning process.

### 3.2 Global Semantic Scoring

Global semantic scoring module aims to capture long-range semantic dependencies by calculating the semantic scores along the whole reasoning path. Specifically, as the reasoning process progresses, the module continuously integrates the ‘current node’ and transitions the previous ‘current node’ into ‘historical node’. This dynamic update mechanism not only ensures the accurate transmission of semantic information during the reasoning process but also enhances the understanding and handling of complex paths.

During the  $L$ -step reasoning process, every step of the reasoning path with length  $l$  ( $0 < l \leq L$ ) treats the node reached at the step as the current node and computes its score:

$$S_{cur}^l = \begin{cases} 0, & l = 0 \\ \mathbf{W}^T \mathbf{Cur}(l), & 1 \leq l \leq L, \end{cases}$$

where  $\mathbf{W}$  indicates the learnable parameter,  $\mathbf{Cur}(l)$  is the embedding of the ‘current node’ with the length  $l$ . Furthermore, the reasoning path with length  $(l-1)$  ( $1 \leq l \leq L$ ) is treated as historical nodes, and the scores can be computed as follows:

$$S(P_{0 \rightarrow (l-1)}) = \begin{cases} 0, & l = 1 \\ \sum_{i \in \{1, l-1\}} S_{cur}^i, & 2 \leq l \leq L, \end{cases}$$

where  $S_{cur}^{l-1}$  represents the score of the historical node with length  $(l-1)$ , and  $S(P_{0 \rightarrow (l-1)})$  denotes the whole score of all historical nodes.

The global semantic scoring module treats all nodes as integral components of the reasoning path. Consequently, the path score is based on the relevance of all nodes along the reasoning path, providing a more thorough assessment compared to methods that focus solely on the current node. The detail is shown as follows:

$$S(P_{0 \rightarrow l}) = S(P_{0 \rightarrow (l-1)}) + S_{cur}^l,$$

where  $S(P_{0 \rightarrow l})$  indicates the score of the whole reasoning path with length  $l$ .

### 3.3 Entity Embedding

Entity embedding module aims to leverage the existing information in KGs to generate embeddings for emerging entities. Specifically, we first employ the global semantic scoring module to obtain the scores of various reasoning paths. Subsequently, we utilize the greedy algorithm to select the *Top-k* paths with the highest scores. Finally, we perform entity embedding for the emerging entities through an iterative learning strategy based on these paths.

Previous research mainly employs path-based approaches [9, 15] to obtain embeddings for emerging entities by analyzing the paths between a pair of entities within a KG [16]. From a representation learning perspective, they aim to learn a representation  $\mathbf{h}_o$  to predict the triplet  $(s, r_q, o)$  based on the set of reasoning paths  $\mathcal{P}$  from entity  $s$  to entity  $o$ :

$$\mathbf{h}_o = \sum_{P \in \mathcal{P}} \sum_{(u,r,v) \in P} \mathbf{h}_{(u,r,v)} = \sum_{P \in \mathcal{P}} \sum_{(u,r,v) \in P} \mathbf{W}_{r_q}^T [\mathbf{h}_{r_q}; \mathbf{h}_r], \quad (2)$$

where  $[\cdot; \cdot]$  is the concatenation operator,  $\mathbf{h}_{(u,r,v)}$  is the representation of triplet  $(u, r, v)$  based on the query relation  $r_q$ ,  $\mathbf{W}_{r_q}$  is a learnable parameter,  $\mathbf{h}_{r_q}$  denotes the representation of the relation  $r_q$ , and  $\mathbf{h}_r$  denotes the representation of the relation  $r$ .

It is worth noting that there are multiple paths to reach the target entity within KGs. Therefore, we employ a greedy algorithm to select the *Top-k* paths with the highest scores:

$$\hat{\mathcal{V}}^{(l-1)} = \text{Top}_k\left(\bigcup_{P \in \mathcal{P}_{0 \rightarrow (l-1)}} S(P_{0 \rightarrow (l-1)})\right),$$

where  $\mathcal{P}_{0 \rightarrow (l-1)}$  denotes all the reasoning paths of the length  $(l-1)$ ,  $\hat{\mathcal{V}}^{(l-1)}$  denotes the set of the end entities inferred from  $\mathcal{P}_{0 \rightarrow (l-1)}$ . Finally, due to the impacts of the *Top\_k* strategy adopted by the greedy algorithm on entity embedding, we further revise Eq (2) as follows:

$$\mathbf{h}_o^{(l)} = \begin{cases} \sum_{(s,r,o) \in \mathcal{E}} \mathbf{W}_{r_q}^T [\mathbf{h}_{r_q}; \mathbf{h}_r], & l = 1 \\ \sum_{x \in \hat{\mathcal{V}}^{(l-1)}} \sum_{(x,r,o) \in \mathcal{E}} \left( \mathbf{h}_x^{(l-1)} + \mathbf{W}_{r_q}^T [\mathbf{h}_{r_q}; \mathbf{h}_r] \right), & 2 \leq l \leq L. \end{cases}$$

After the above operations, we can obtain the final embedding of the predicated entity  $o$ .

### 3.4 Loss function

Following the strategy [18], we train the proposed QASPR through the multi-class log-loss function  $\mathcal{L}$ :

$$\mathcal{L} = \sum_{(s,r_q,o) \in \mathcal{E}_{train}} \left( -\mathbf{W}_s^T \mathbf{h}_o^{(L)} + \log\left( \sum_{\forall x \in \mathcal{V}} \exp(\mathbf{W}_s^T \mathbf{h}_x^{(L)}) \right) \right),$$

where  $\mathbf{W}_s \in \mathbb{R}^d$  is a weight parameter,  $\mathbf{h}_o^{(L)}$  represents the embedding of entity  $o$  at step  $L$ ,  $\mathbf{h}_x^{(L)}$  represents the embedding of entity  $x$  at step  $L$ ,  $\mathcal{E}_{train}$  denotes the set of the positive triplets  $(s, r_q, o)$ .

## 4 EXPERIMENTS

### 4.1 Experiment setup

In this subsection, we will outline the experimental setup for the proposed QASPR framework, detailing the datasets, baselines, and parameter settings.

**Datasets.** Based on the approach in [12], we utilize the same subsets of WN18RR and FB15k237, with each dataset having four different versions, resulting in a total of eight subsets. Each subset includes a different split of the training set and test set. For detailed statistics, please refer to [12].

**Baselines.** The proposed QASPR is compared with several classic inductive KGC methods, including: RuleN [19], NeuralLP [20], DRUM [15], GraIL [7], NBFNet [9], RED-GNN [10], AdaProp [21], A\*Net [12], and MLSAA [22].

**Parameter Setting.** The proposed QASPR chooses *Mean Reciprocal Rank* (MRR) [3] as evaluation metric. Additionally, we adopt Adam[23] as the optimizer. Furthermore, we tune the length of reasoning path  $L$ , the number of selected paths  $K$  in entity embeddings, probability multiplier  $p_e$ , cut-off probability  $p_\tau$  in query-dependent masking module, and list the detailed information of the hyper-parameter in Table 1.

**Table 1: Hyper-parameter configurations of QASPR on both datasets.**

Hyper-parameters	WN18RR				FB15k237			
	V1	V2	V3	V4	V1	V2	V3	V4
$L$	3	3	7	3	7	3	7	5
$K$	150	50	100	300	300	250	300	300
$p_e$	0.5	0.3	0.3	0.6	0.3	0.7	0.3	0.4
$p_\tau$	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
batch size	100	50	100	10	20	10	20	20

### 4.2 Experimental Analysis

As shown in Table 2, the experimental results validate the superiority of the proposed QASPR method compared to the current state-of-the-art baseline methods. Our method significantly improves the performance of MRR on most datasets. This indicates that QASPR can effectively mask the noisy structural information and capture long-range semantic dependencies within KGs through the query-dependent masking and global semantic scoring module, further enhancing inductive reasoning capabilities.

AdaProp[21] and A\*Net[12] are two important baselines, as they both facilitate the reasoning process by capturing the structural information within KGs. However, the proposed QASPR still can obtain the significant improvements on both datasets. This phenomenon demonstrates that the query-dependent masking module can effectively mask the noisy structures, thereby enhancing the inductive KGC tasks.

**Table 2: Performance of inductive KGC on MRR. The best score is in bold, and the second-best score is in underlined.**


Methods	WN18RR				FB15k237			
	v1	v2	v3	v4	v1	v2	v3	v4
RuleN	66.8	64.5	36.8	62.4	36.3	43.3	43.9	42.9
NeuralLP	64.9	63.5	36.1	62.8	32.5	38.9	40.0	39.6
DRUM	66.6	64.6	38.0	62.7	33.3	39.5	40.2	41.0
GraIL	62.7	62.5	32.3	55.3	27.9	27.6	25.1	22.7
NBFNet	68.4	65.2	42.5	60.4	30.7	36.9	33.1	30.5
RED-GNN	70.1	69.0	42.7	65.1	36.9	46.9	44.5	44.2
MLSAA	71.6	70.0	44.8	65.4	36.8	45.7	44.2	43.1
AdaProp	<u>73.3</u>	<u>71.5</u>	<u>47.4</u>	<u>66.2</u>	31.0	47.1	47.1	45.4
A*Net	72.7	70.4	44.1	66.1	45.7	<b>51.0</b>	47.6	<b>46.6</b>
QASPR	<b>79.4</b>	<b>79.8</b>	<b>52.0</b>	<b>76.4</b>	<b>48.8</b>	<u>49.7</u>	<b>48.8</b>	<u>46.3</u>

### 4.3 Ablation Experiments

In order to analyze the impact of each module, we conduct ablation experiments to validate the effectiveness of different modules. The experimental results are shown in Table 3. "QASPR w/o M" means removing the query-dependent masking module, and "QASPR w/o S" means removing the global semantic scoring module. The experimental results show that our proposed QASPR has a significant improvement on both datasets. We conclude that the query-dependent masking module can effectively eliminate the interference of noisy structures, and the global semantic scoring module can fully capture long-range semantic dependencies within the whole reasoning path.

**Table 3: Ablation studies on both datasets. "QASPR w/o M" denotes the model without query-dependent masking module. "QASPR w/o S" denotes the model without the global semantic scoring.**

Methods	WN18RR(V4)			FB15k237(V4)		
	MRR	H@1	H@10	MRR	H@1	H@10
QASPR w/o M	73.3	62.9	94.4	45.2	35.2	63.4
QASPR w/o S	76.2	66.7	95.4	44.6	34.5	61.8
QASPR	<b>76.4</b>	<b>67.2</b>	<b>95.6</b>	<b>46.3</b>	<b>36.1</b>	<b>64.5</b>

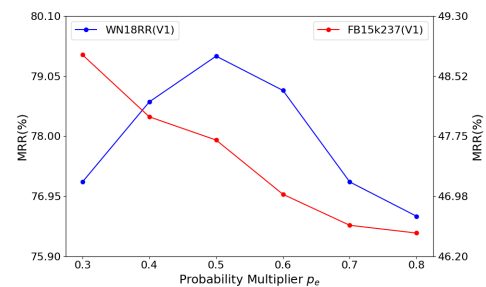

**Figure 3: The performance with different  $p_e$  values on WN18RR(V1) and FB15k237(V1).**

#### 4.4 Probability Multiplier $p_e$

Figure 3 illustrates the trend of MRR performance for two datasets with different probability multiplier  $p_e$ . Overall, the MRR for the WN18RR(V1) dataset first increases and then decreases, showing a clear peak trend. In contrast, the MRR for the FB15k237(V1) dataset exhibits a continuous downward trend, with performance gradually weakening as the probability multiplier increases. This reflects the differences in how different datasets handle noise and related information. The WN18RR(V1) dataset achieves optimal performance within an intermediate range, while the FB15k237(V1) dataset shows a negative correlation with increasing probability multipliers. Therefore, selecting an optimal value of  $p_e$  is crucial for maintaining model performance.

## 5 CONCLUSION

This paper proposes a novel Query-Enhanced Adaptive Semantic Path Reasoning (QASPR) framework for inductive KGC tasks. Specifically, QASPR first designs a query-dependent masking module to adaptively mask the noisy structural information, ensuring the preservation of critical information. Subsequently, QASPR develops a global semantic scoring module to capture long-range semantic dependencies in the reasoning path by evaluating the contributions of the current and historical nodes. Experimental results on two widely used datasets show the superiority of QASPR for inductive KGC tasks.

## REFERENCES

- [1] Wei Wei, Chao Huang, Lianghao Xia, Yong Xu, Jiashu Zhao, and Dawei Yin. Contrastive meta learning with behavior multiplicity for recommendation. In *Proceedings of the fifteenth ACM international conference on web search and data mining*, pages 1120–1128, 2022.
- [2] Jiapu Wang, Boyue Wang, Meikang Qiu, Shirui Pan, Bo Xiong, Heng Liu, Linhao Luo, Tengfei Liu, Yongli Hu, Baocai Yin, et al. A survey on temporal knowledge graph completion: Taxonomy, progress, and prospects. *arXiv preprint arXiv:2308.02457*, 2023.
- [3] Jiapu Wang, Boyue Wang, Junbin Gao, Simin Hu, Yongli Hu, and Baocai Yin. Multi-level interaction based knowledge graph completion. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 32:386–396, 2023.
- [4] Jiapu Wang, Boyue Wang, Junbin Gao, Xiaoyan Li, Yongli Hu, and Baocai Yin. TDN: Triplet distributor network for knowledge graph completion. *IEEE Transactions on Knowledge and Data Engineering*, 35(12):13002–13014, 2023.
- [5] Vinh Thinh Ho, Daria Stepanova, Mohamed H. Gad-Elrab, Evgeny Kharlamov, and Gerhard Weikum. Rule learning from knowledge graphs guided by embedding models. In *The Semantic Web - ISWC 2018 - 17th International Semantic Web Conference*, volume 11136, pages 72–90, 2018.
- [6] Jiapu Wang, Boyue Wang, Junbin Gao, Yongli Hu, and Baocai Yin. Multi-concept representation learning for knowledge graph completion. *ACM Transactions on Knowledge Discovery from Data (TKDD)*, 2022.
- [7] Komal K. Teru, Etienne G. Denis, and William L. Hamilton. Inductive relation prediction by subgraph reasoning. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119, pages 9448–9457, 2020.
- [8] Jiajun Chen, Huarui He, Feng Wu, and Jie Wang. Topology-aware correlations between relations for inductive link prediction in knowledge graphs. In *Thirty-Fifth AAAI Conference on Artificial Intelligence*, volume 35, pages 6271–6278, 2021.
- [9] Zhaocheng Zhu, Zuobai Zhang, Louis-Pascal A. C. Xhonneux, and Jian Tang. Neural bellman-ford networks: A general graph neural network framework for link prediction. In *Advances in Neural Information Processing Systems 34*, pages 29476–29490, 2021.
- [10] Yongqi Zhang and Quanming Yao. Knowledge graph reasoning with relational digraph. In *The ACM Web Conference*, pages 912–924, 2022.
- [11] Changjian Wang, Xiaofei Zhou, Shirui Pan, Linhua Dong, Zeliang Song, and Ying Sha. Exploring relational semantics for inductive knowledge graph completion. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 4184–4192, 2022.
- [12] Zhaocheng Zhu, Xinyu Yuan, Michael Galkin, Louis-Pascal A. C. Xhonneux, Ming Zhang, Maxime Gazeau, and Jian Tang. A\*Net: A scalable path-based reasoning approach for knowledge graphs. In *Advances in Neural Information Processing Systems 36*, 2023.
- [13] Daokun Zhang, Jie Yin, and Philip S. Yu. Link prediction with contextualized self-supervision. *IEEE Transactions on Knowledge and Data Engineering*, 35(7):7138–7151, 2023.
- [14] Jiapu Wang, Boyue Wang, Junbin Gao, Shirui Pan, Tengfei Liu, Baocai Yin, and Wen Gao. MADE: Multicurvature adaptive embedding for temporal knowledge graph completion. *IEEE Transactions on Cybernetics*, 2024.
- [15] Ali Sadeghian, Mohammadreza Armandpour, Patrick Ding, and Daisy Zhe Wang. DRUM: end-to-end differentiable rule mining on knowledge graphs. In *Advances in Neural Information Processing Systems 32*, pages 15321–15331, 2019.
- [16] Jiapu Wang, Kai Sun, Linhao Luo, Wei Wei, Yongli Hu, Alan Wee-Chung Liew, Shirui Pan, and Baocai Yin. Large language models-guided dynamic adaptation for temporal knowledge graph reasoning. *arXiv preprint arXiv:2405.14170*, 2024.
- [17] Yanqiao Zhu, Yichen Xu, Feng Yu, Qiang Liu, Shu Wu, and Liang Wang. Graph contrastive learning with adaptive augmentation. In *WWW '21: The Web Conference 2021*, pages 2069–2080, 2021.
- [18] Timothée Lacroix, Nicolas Usunier, and Guillaume Obozinski. Canonical tensor decomposition for knowledge base completion. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80, pages 2869–2878, 2018.
- [19] Christian Meilicke, Manuel Fink, Yanjie Wang, Daniel Ruffinelli, Rainer Gemulla, and Heiner Stuckenschmidt. Fine-grained evaluation of rule- and embedding-based systems for knowledge graph completion. In *The Semantic Web - 17th International Semantic Web Conference*, volume 11136, pages 3–20, 2018.
- [20] Fan Yang, Zhilin Yang, and William W. Cohen. Differentiable learning of logical rules for knowledge base reasoning. In *Advances in Neural Information Processing Systems 30*, pages 2319–2328, 2017.
- [21] Yongqi Zhang, Zhanke Zhou, Quanming Yao, Xiaowen Chu, and Bo Han. AdaProp: Learning adaptive propagation for graph neural network based knowledge graph reasoning. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 3446–3457, 2023.
- [22] Kai Sun, Huajie Jiang, Yongli Hu, and Baocai Yin. Incorporating multi-level sampling with adaptive aggregation for inductive knowledge graph completion. *ACM Trans. Knowl. Discov. Data*, 18(5), 2024.
- [23] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *3rd International Conference on Learning Representations*, 2015.