
CRAG - Comprehensive RAG Benchmark

Xiao Yang^{*1}, Kai Sun^{*1}, Hao Xin^{*3}, Yushi Sun^{*3}, Nikita Bhalla¹, Xiangsen Chen⁴, Sajal Choudhary¹, Rongze Daniel Gui¹, Ziran Will Jiang¹, Ziyu Jiang⁴, Lingkun Kong¹, Brian Moran¹, Jiaqi Wang¹, Yifan Ethan Xu¹, An Yan¹, Chenyu Yang⁴, Éting Yuan¹, Hanwen Zha¹, Nan Tang⁴, Lei Chen^{3,4}, Nicolas Scheffer¹, Yue Liu¹, Nirav Shah¹, Rakesh Wanga¹, Anuj Kumar¹, Wen-tau Yih², and Xin Luna Dong¹

¹Meta Reality Labs, ²FAIR, Meta, ³HKUST, ⁴HKUST (GZ)

Abstract

Retrieval-Augmented Generation (RAG) has recently emerged as a promising solution to alleviate Large Language Model (LLM)’s deficiency in lack of knowledge. Existing RAG datasets, however, do not adequately represent the diverse and dynamic nature of real-world Question Answering (QA) tasks. To bridge this gap, we introduce the **Comprehensive RAG Benchmark (CRAG)**, a factual question answering benchmark of 4,409 question-answer pairs and mock APIs to simulate web and Knowledge Graph (KG) search. CRAG is designed to encapsulate a diverse array of questions across five domains and eight question categories, reflecting varied entity popularity from popular to long-tail, and temporal dynamisms ranging from years to seconds. Our evaluation on this benchmark highlights the gap to fully trustworthy QA. Whereas most advanced LLMs achieve $\leq 34\%$ accuracy on CRAG, adding RAG in a straightforward manner improves the accuracy only to 44%. State-of-the-art industry RAG solutions only answer 63% questions without any hallucination. CRAG also reveals much lower accuracy in answering questions regarding facts with higher dynamism, lower popularity, or higher complexity, suggesting future research directions. The CRAG benchmark laid the groundwork for a KDD Cup 2024 challenge, attracting thousands of participants and submissions within the first 50 days of the competition. We commit to maintaining CRAG to serve research communities in advancing RAG solutions and general QA solutions.

1 Introduction

Large Language Models (LLMs) have transformed the landscape of Natural Language Processing (NLP) tasks, especially in Question Answering (QA) [14, 15, 27]. Despite the advancements, the issue of hallucination persists as a significant challenge; LLMs may generate answers that lack factual accuracy or grounding [9, 19]. Studies have shown that GPT-4’s accuracy in answering questions referring to slow-changing or fast-changing facts is below 15% [25]; even for stable (never-changing) facts, GPT-4’s accuracy in answering questions referring to torso-to-tail (less popular) entities is below 35% [21]. Overcoming hallucinations thus becomes a priority in building reliable QA systems [8, 9].

Retrieval-Augmented Generation (RAG) [5, 7, 13] has recently emerged as a promising solution to alleviate LLM’s deficiency in lack of knowledge and attracted a lot of attention from both academia research and industry. Given a question, a RAG system searches external sources to retrieve relevant information and then provides grounded answers [6, 7, 13] (see Figure 1 for an illustration). Despite its potential, RAG still faces many challenges, such as selecting the most relevant information, reducing question answering latency, and synthesizing information to answer complex questions.

*Equal contribution, Correspondence to: Xiao Yang (xiaoyangfb@meta.com)

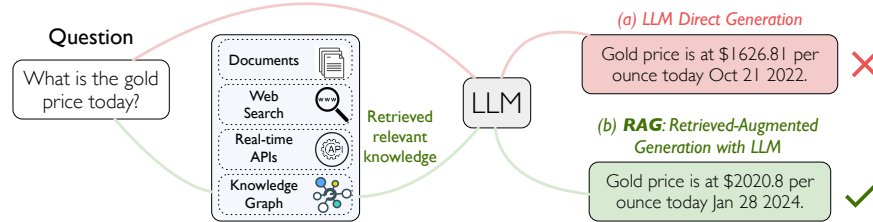


Figure 1: QA using LLMs (a) without RAG vs. (b) with RAG.

A comprehensive benchmark is currently missing to advance continued research efforts in this field. Traditional QA benchmarks such as Natural Questions [12], TriviaQA [10], and MS MARCO [3] have advanced QA in the past decade but do *not* adequately represent the diverse and dynamic challenges RAG is facing. New benchmarks that focus on LLM or RAG, such as FreshQA [25] and RGB [5], usually target certain capabilities of LLMs and contain only a few hundred queries. The goal of our work is to build a comprehensive benchmark to propel the area forward.

What is a good benchmark for QA over LLMs? We consider five critical features.

1. **Realism:** First and foremost, a good benchmark shall best reflect real use cases. In other words, a solution that achieves high metrics in the benchmark shall also perform very well in real scenarios. For example, the questions in a RAG benchmark shall be similar to questions people ask in real-world QA scenarios.
2. **Richness:** The benchmark shall contain a diverse set of instance types, covering both common use cases and some complex and advanced use cases, to represent real-world challenges and reveal possible limitations of existing solutions.
3. **Insightfulness:** The benchmark shall allow for an easy understanding of performance on different slices of the data, reflecting the capability of the solution in addressing different types of challenges.
4. **Reliability:** The benchmark shall allow reliable assessment of metrics: the ground truths shall be accurate; the metrics shall well capture the performance of the model; the evaluation shall be easy and reliable, and the computed metrics shall hold statistical significance.
5. **Longevity:** Finally, to enable research and experimental comparison in a long term, the scenarios and the data in the benchmark shall not quickly expire and ideally shall be refreshed and improved over time.

We strive to create a benchmark that have all of the aforementioned features, and we call it *CRAG – Comprehensive benchmark for RAG*. Our work makes three contributions.

Our first contribution is the dataset itself (Section 3). CRAG contains a *rich* set of 4,409 QA pairs from five domains: *Finance, Sports, Music, Movie, and Open domain*. In addition to simple-fact questions (asking for an attribute of an entity), CRAG contains seven types of complex questions to cover real user queries: questions with *Conditions, Comparison* questions, *Aggregation* questions, *Multi-hop* questions, *Set queries, Post-processing-heavy* questions, and *False-premise* questions. CRAG reflects varied entity popularity from popular to long-tail and temporal spans ranging from seconds to years, allowing easy deep dives for *insights*. As we generated the questions, we referred to smart assistant use cases to make sure the questions are *realistic*, paraphrased the questions to increase the *diversity* of expressions, and manually verified ground truths to ensure *reliability*.

In addition to QA pairs, CRAG provides mock APIs to simulate retrieval from a diverse range of available information. This includes up to 50 full HTML pages for each question returned from a real-world search engine—the Brave Search API [4], and mock KGs with 2.6 million entities. For the mock KGs, we deliberately make sure that the retrieval candidates reflect noises in a *realistic* setting.

Our second contribution is the evaluation mechanism to allow for *reliable* comparisons. We designed 3 tasks to test different components in RAG solutions: web retrieval, structured querying, and summarization (Section 2). Instead of computing the percentage of correctly answered questions, our score system distinguishes hallucinated answers and missing answers, and gives the former a higher

Table 1: Comparing CRAG to existing benchmarks for factual question answering.

Benchmark	Web retrieval	KG search	Mock API	Dynamic question	Torso and tail facts	Beyond Wikipedia
QALD-10 [24]	✗	✓	✗	✗	✗	✗
MS MARCO [3]	✓	✗	✗	not explicitly	not explicitly	✓
Natural Questions [12]	✓	✗	✗	not explicitly	not explicitly	✗
RGB [5]	✓	✗	✗	✗	✗	✓
FreshLLM [25]	✗	✗	✗	✓	✗	✓
CRAG	✓	✓	✓	✓	✓	✓

penalty as it can be more harmful to ruin user trust. We also design an effective automatic evaluation mechanism to allow for fast evaluations and iterations (Section 4).

Our third contribution is a comprehensive evaluation of straightforward RAG solutions and industry state-of-the-art solutions on RAG (Section 5). Whereas most advanced LLMs achieve $\leq 34\%$ accuracy on CRAG, adding RAG in a straightforward manner improves the accuracy only to 44%. State-of-the-art industry RAG solutions answer only 63% questions without any hallucination, still having much lower accuracy in answering questions regarding facts with higher dynamism, lower popularity, or higher complexity. These evaluations serve two roles: first, they demonstrate that CRAG has appropriate level of difficulty, and allows insights drawn from different dimensions of diversities the benchmark has incorporated; second, they highlight the gaps and research directions to a fully trustworthy QA system.

The CRAG benchmark laid the groundwork for a KDD Cup 2024 challenge², has attracted thousands of participants and submissions within the first 50 days of the competition. We commit to maintaining CRAG to serve research communities in advancing RAG solutions and general QA solutions.

Comparison with existing benchmarks. Table 1 compares CRAG with existing benchmarks for factual question answering, which illustrates several advantages of the CRAG benchmark: comprehensive coverage, realistic testing with mock APIs, dynamic question handling, diverse fact popularity, and extensive beyond Wikipedia.

These features make CRAG a robust and versatile benchmark for testing RAG systems and broadly QA systems, providing a shared testbed in evaluating how these systems handle real-world, dynamic, and diverse information retrieval and synthesis challenges for reliable LLM-based question answering.

2 Problem Description

A RAG QA system takes a question Q as input and outputs an answer A ; the answer is generated by LLMs according to information retrieved from external sources or directly from the knowledge internalized in the model. The answer should provide useful information to answer the question without adding any hallucination.

We designed three tasks. They share the same set of (question, answer) pairs but differ in the external data accessible for retrieval to augment QA. Here, we provide the content that can be leveraged in QA to ensure fair comparisons. We describe how we generated the data in Section 3.

Task 1: Retrieval Summarization. In Task 1, we provide up to five web pages for each question. These web pages are likely, but not guaranteed, to be relevant to the question. This task aims to test the answer generation capability of a RAG system.

Task 2: KG and Web Retrieval Augmentation. In Task 2, we in addition provide *mock APIs* to access information from underlying *mock KGs*. The mock KGs store structured data relevant to the questions; answers to the questions may or may not exist in the mock KGs. The mock APIs take input parameters, oftentimes parsed from the question, and provide structured data from the mocked KGs to support answer generation. This task tests how well a RAG system 1) queries structured data sources and 2) synthesizes information from different sources.

²<https://www.aicrowd.com/challenges/meta-comprehensive-rag-benchmark-kdd-cup-2024>

Table 2: Definition of CRAG question types.

Question type	Definition
Simple	Questions asking for simple facts that are unlikely to change overtime, such as the birth date of a person and the authors of a book.
Simple w. Condition	Questions asking for simple facts with some given conditions, such as stock prices on a certain date and a director’s recent movies in a certain genre.
Set	Questions that expect a set of entities or objects as the answer (e.g., “ <i>what are the continents in the southern hemisphere?</i> ”).
Comparison	Questions that compare two entities (e.g., “ <i>who started performing earlier, Adele or Ed Sheeran?</i> ”).
Aggregation	Questions that require aggregation of retrieval results to answer (e.g., “ <i>how many Oscar awards did Meryl Streep win?</i> ”).
Multi-hop	Questions that require chaining multiple pieces of information to compose the answer (e.g., “ <i>who acted in Ang Lee’s latest movie?</i> ”).
Post-processing heavy	Questions that need reasoning or processing of the retrieved information to obtain the answer (e.g., “ <i>how many days did Thurgood Marshall serve as a Supreme Court justice?</i> ”).
False Premise	Questions that have a false preposition or assumption (e.g., “ <i>What’s the name of Taylor Swift’s rap album before she transitioned to pop?</i> ” (Taylor Swift has not yet released any rap album)).

Task 3: End-to-end RAG. Similar to Task 2, Task 3 also provides both web search results and mock APIs as candidates for retrieval but provides 50 web pages, instead of 5, as candidates. The larger set of web pages are more likely to provide necessary information to answer the question, but meanwhile are more likely to contain noises. As such, Task 3 in addition tests how a RAG system ranks a larger number of retrieval results.

The three tasks, each adding upon the previous one, allow testing different capabilities of the end-to-end RAG systems.

3 Dataset Description

CRAG contains two parts of data: the QA pairs and the contents for retrieval. We now describe each part of the data. Data generation details can be found in Appendix A.1.1-A.1.6.

3.1 Question answering pairs

CRAG covers five domains: Finance, Sports, Music, Movie, and Open domain, and eight types of questions, all in English. The question types are listed in Table 2. We constructed the question-answer pairs both from underlying KGs and web contents.

QA pairs constructed from KGs. We constructed QA pairs from KGs by collecting a set of entities based on publicly available data and then creating 600+ question templates based on selected entity types and relations. Next, we sampled entities with different popularities (head, torso and tail) following [21] from the KGs to fill in the templates and generate the full question and answer.

QA pairs constructed from web contents. We asked annotators to write down possible questions that users may ask (e.g., “*most popular action movies in 2023*”) and created QA pairs from the corresponding web search results.

Using the above methods, we collected 2,425 *Web Questions* and 1,984 *KG Questions*, with 661, 658, and 665 *KG Questions* containing *head*, *torso*, and *tail* entities respectively. Tables 3 and 4 summarize the distribution of the questions across different dimensions. The size of each dimension slice (e.g., fast-changing facts) allows us to get metrics with < 5% margin-of-error (with 95% confidence level) for most of the cases. The dynamism distribution roughly reflects the nature of the domain (e.g., much

Table 3: The numbers and percentages (% , in parenthesis) of questions for each category of dynamism, decided manually. Finance and Sports domain have the most Real-time and Fast-changing questions.

Dynamism	Finance	Sports	Music	Movie	Open	Total
Real-time	434 (42)	0 (0)	2 (0)	0 (0)	1 (0)	437 (10)
Fast-changing	204 (20)	275 (33)	40 (6)	17 (2)	28 (4)	564 (13)
Slow-changing	183 (18)	215 (26)	152 (24)	253 (22)	204 (26)	1,007 (23)
Static	218 (21)	343 (41)	430 (69)	855 (76)	555 (70)	2,401 (54)
All	1,039	833	624	1,125	788	4,409

Table 4: The number and percentages (% , in parenthesis) of questions for each question type, decided manually. Simple and simple with condition questions constitute 43% of all questions.

Question type	Finance	Sports	Music	Movie	Open	Total
Simple	466 (45)	23 (3)	112 (18)	519 (46)	85 (11)	1,205 (27)
Simple w. condition	113 (11)	250 (30)	92 (15)	112 (10)	122 (15)	689 (16)
Set	48 (5)	93 (11)	72 (12)	104 (9)	86 (11)	403 (9)
Comparison	146 (14)	85 (10)	102 (16)	105 (9)	98 (12)	536 (12)
Aggregation	69 (7)	137 (16)	96 (15)	71 (6)	116 (15)	489 (11)
Multi-hop	86 (8)	64 (8)	55 (9)	90 (8)	87 (11)	382 (9)
Post-processing heavy	26 (3)	24 (3)	26 (4)	28 (2)	76 (10)	180 (4)
False Premise	85 (8)	157 (19)	69 (11)	96 (9)	118 (15)	525 (12)
All	1,039	833	624	1,125	788	4,409

more real-time questions for *Finance* than for other domains). See Appendix A.1.2 for definition of the dynamism categories.

3.2 Contents for retrieval

We included two types of contents for retrieval to simulate the practical scenario for RAG: web search and KG search.

Web search results. For each question, we used the question text as the search query and stored up to 50 HTML pages from the Brave search API [4]. See Table 8 in Appendix A.1.4 for an example. We estimated the web search recall (50 web pages) with a heuristic-based method: first check whether the ground truth answer URL was found among the 50 pages; if not, search whether the fact in the ground truths is contained in the page snippet or content. The estimated recall is 84% for *Web Questions* and 63% for *KG Questions* (Table 9 in Appendix A.1.5), consistent with our intuition that torso and tail entities in the KG questions may not be included in the 50 returned pages.

Mock KGs. We created mock KGs that contain publicly available KG data used to generate the questions, randomly selected entities of the same type, and also “hard negative” entities with similar names (e.g., “*phantom*” for “*phantom of the opera*”).

Mock APIs. We created mock APIs with pre-defined parameters to support structured search in the mock KGs. For example, for queries asking for stock prices, an example mock API is in the form of `get_price_history(ticker)`.

In total, the resulting data contains 220K webpages, a KG of 2.6M entities, and 38 Mock APIs.

4 Metrics and Evaluation

In this section, we present the metrics for evaluating the RAG systems and briefly describe the 2024 Meta KDD Cup challenge in Appendix A.2.3.

4.1 Metrics

We use a scoring method to assess the performance of RAG systems. For each question in the evaluation set, we first label the answer with **perfect**, **acceptable**, **missing**, or **incorrect**, according to the following criteria.

Perfect. The response correctly answers the user’s question and contains no hallucinated content.

Acceptable. The response provides a useful answer to the user’s question but may contain minor errors that do not harm the usefulness of the answer.

Missing. The response is “I don’t know”, “I’m sorry I can’t find ...”, a system error such as an empty response, or a request from the system to clarify the original question.

Incorrect. The response provides wrong or irrelevant information to answer the user’s question.

We then use a scoring method Score_h with score 1, 0.5, 0, and -1 for each *perfect*, *acceptable*, *missing*, and *incorrect* answer, respectively, where we penalize hallucinated answers and prefer *missing* answers to *incorrect* ones. For a given RAG system, we compute the average score from all examples in the evaluation set as the final score.

4.2 Evaluation

Similar to previous work [26], we employ both human evaluation (**human-eval**) and model-based automatic evaluation (**auto-eval**). In the former, we use manual grading to judge *perfect*, *acceptable*, *missing*, and *incorrect* for each answer. In the latter, we merge *perfect* and *acceptable*, call it **accurate**, and use a three-way scoring Score_a with 1, -1 , 0 for *accurate*, *incorrect*, and *missing* answers.

We design a two-step method for automatic evaluation: if the answer matches the ground truth exactly, it is considered *accurate*; otherwise, we use LLMs to determine whether the response is *accurate*, *incorrect*, or *missing*. To avoid the *self-preference* problem [18], we use two LLM evaluators: ChatGPT (gpt-3.5-turbo) [17] and Llama 3 (llama-3-70B-instruct) [2] and report the average *accurate*, *hallucination*, *missing* rates, and scores from the two models for each RAG system. Our offline experiment shows that this two-step method yields an average F1 score of 94.7% for ChatGPT and 98.9% for Llama 3 compared to human-eval. See Appendix A.2.2 for more details.

Test data split. We split the data randomly into *validation*, *public test*, and *private test* at 30%, 30%, and 40%, and released the validation and public test sets for the KDD Cup Challenge(Appendix A.2.3).

5 Benchmarking

In this section, we present the performance of LLMs and RAG systems on CRAG, demonstrating that CRAG has a reasonable level of difficulty and can help draw insights and show directions in developing RAG techniques.

5.1 Straightforward RAG solutions

Experiment setup: We started with running LLM-only solutions on the CRAG public test set with 1,335 questions, using simple prompts that encourage brief answers and “*I don’t know*” answers when the confidence is low (Appendix A.3.1). We employed Llama 2 Chat (llama-2-7b-chat and llama-2-70b-chat) [23], Llama 3 Instruct (llama-3-8B-instruct and llama-3-70B-instruct) [2], and GPT-4 Turbo [1]. The web-only RAG solutions we evaluated (Task 1) used a fixed-length web context window (2K tokens for Llama 2 Chat and 4K for Llama 3 Instruct and GPT-4 Turbo); we concatenated webpage snippets using the original order from the data as the reference text, until filling up the window (similar to [11, 16, 25]). Our KG-based solutions (Tasks 2, 3) additionally used a fixed-length KG context window (1K tokens for Llama 2 Chat and 2K for Llama 3 Instruct and GPT-4 Turbo) to include the results from the Mock APIs; we extracted the relevant query entities using llama-3-8B-instruct with in-context learning (similar to [20]) detailed in Appendix A.3.1 and concatenated the results returned from all applicable mock APIs (based on the extracted entities), until filling up the window. We discuss results for Llama 3 70B Instruct and GPT-4 Turbo in this section and give more results for other LLMs in Appendix A.3.2.

Table 5: Performance of straightforward RAG solutions. All numbers are in percentage. LLM-only solutions has up to 34% accuracy and straightforward RAG solutions has up to 44% accuracy.

	Model	Accuracy	Hallucination	Missing	Score _a
LLM only	Llama 3 70B Instruct	32.3	28.9	38.8	3.4
	GPT-4 Turbo	33.5	13.5	53.0	20.0
Task 1	Llama 3 70B Instruct	35.6	31.1	33.3	4.5
	GPT-4 Turbo	35.9	28.2	35.9	7.7
Task 2	Llama 3 70B Instruct	37.5	29.2	33.3	8.3
	GPT-4 Turbo	41.3	25.1	33.6	16.2
Task 3	Llama 3 70B Instruct	40.6	31.6	27.8	9.1
	GPT-4 Turbo	43.6	30.1	26.3	13.4

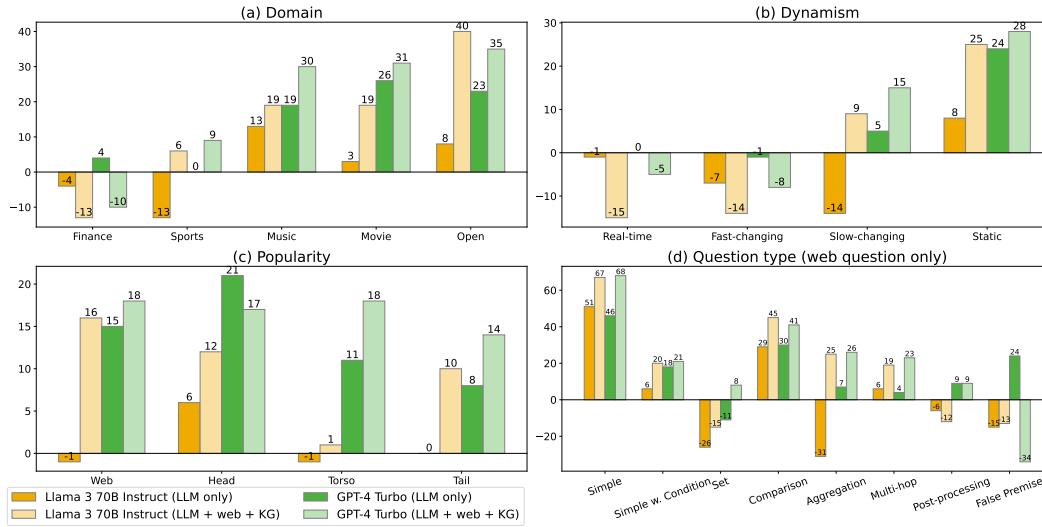


Figure 2: LLM-only and Task 3 solution auto-eval scores (in percentage) across domain, dynamism, popularity, and question type.

Table 5 shows the average evaluation scores from the two auto-evaluators (ChatGPT and Llama 3) and illustrates that the CRAG benchmark is *non-trivial*. First, the best LLM-only solutions (GPT-4 Turbo) obtained an accuracy of only 34%, with a score of 20%, showing a big room for improvement. Second, straightforward RAG solutions obtained up to 44% accuracy, showing that extra information *does* help answer more questions reliably. Interestingly, none of the RAG solutions obtain a score higher than 20%; this is because all RAG solutions introduce more hallucinations generated from irrelevant retrieval results, showing a big challenge in RAG—*How to judiciously use retrieval results without being distracted by retrieval noises?* Third, we found that Task 2 scores are higher than Task 1, showing that the KG knowledge helps improve accuracy, with a similar or even lower hallucination rate, because the KG knowledge is typically brief but precise. Unfortunately, the improvement is mediocre, showing a second challenge in RAG—*How to best leverage the power of KG data?* Finally, the scores for Task 3 are also higher than Task 2, because of better search ranking (recall that Task 1 and 2 provide five pages randomly selected from the top-10 search results) and better search recall. This shows *the importance of search ranking* in RAG.

Figure 2 shows the auto-eval scores across the domain, dynamism, popularity, and question type dimension. The results reveal a lot of interesting observations and show that the CRAG benchmark allows more *insightful* conclusions. First, it shows *which slices of the benchmark are harder*. For example, we found much lower RAG scores on the *Finance* and *Sports* domains, for *real-time* and *fast-changing* facts, for *tail* entities, and for complex questions requiring *set answers*, *post-processing*, and with *false premises*. Second, it shows *where it is harder to leverage retrieval results*. Taking popularity slices as an example, we observed that GPT-4 Turbo’s score dropped from head (21%) to

Table 6: Benchmarking CRAG questions with industry SOTA RAG systems. Perfect, acceptable (Acc.), hallucination (Hall.), missing (Miss.) rates, and score_h are in percentages. The best system achieves a score of 51% and provides perfect answers for up to 63% of questions.

	System	Perfect	Acc.	Hall.	Miss.	Score _h	Latency (ms)
Equal weighted	Copilot Pro	62.6	11.7	17.9	7.8	50.6	11,596
	Gemini Advanced	60.8	10.1	16.6	12.5	49.3	5,246
	ChatGPT Plus	59.8	13.1	25.2	1.9	41.2	6,195
	Perplexity.ai	55.8	8.8	25.3	10.1	34.9	2,455
Traffic weighted	Copilot Pro	60.7	14.2	18.5	6.7	49.3	-
	Gemini Advanced	59.1	10.9	16.6	13.4	48.0	-
	ChatGPT Plus	59.7	13.3	25.1	1.9	41.3	-
	Perplexity.ai	55.8	9.7	25.2	9.3	35.5	-

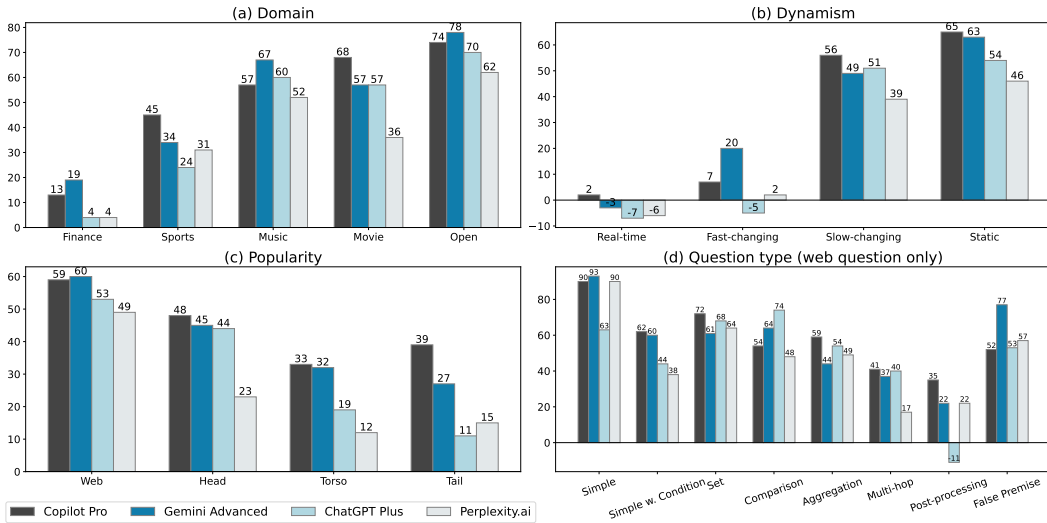


Figure 3: SOTA systems human-eval scores (in percentage) across different dimensions.

torso (11%) to tail (8%), consistent with past observations [21]; however, the straightforward RAG solution based on GPT-4 Turbo improved QA quality regarding torso (+7%) and tail entities (+6%) but lowered the quality regarding head (-4%). Finally, although our goal is *not* to compare different LLMs, the different dimensions allow us to understand the strengths and weaknesses of each method. For example, although the RAG system based on Llama 3 70B Instruct has a lower overall score than the one based on GPT-4 Turbo, it has a similar or slightly higher score in answering *simple* and *comparison* questions, whereas much lower scores in answering *set* and *post-processing* questions, suggesting investigations on the reasoning capabilities.

5.2 State-of-the-art industry solutions

Next, we evaluated industry state-of-the-art (SOTA) RAG solutions on CRAG public test set. We selected four RAG systems built upon SOTA LLMs and search engines, queried them with CRAG questions, collected the responses, and applied manual grading (details in Appendix A.4).

In addition, we applied traffic weights to the questions to understand the solutions in real-world use cases. The traffic weights come from a real QA use case and are generated as follows. Within each domain, we first clustered the questions into sub-domains (e.g., current game points, sports teams), and then derived the sub-domain weights from aggregated data reflective of user interactions. We applied the sub-domain weight to each CRAG question to bridge the result to reflect user experience, and reported the macro average scores across all domains (i.e., giving the same weight to all domains) in Table 6.

Table 6 and Figure 3 show the overall performance of the SOTA systems and their performance across different dimensions. The evaluation results confirm our belief that the CRAG benchmark *reveals interesting insights and shows room for improvement for existing RAG solutions*. First, the scores from SOTA solutions achieve much better scores (highest 51%) compared to the straightforward solutions. However, the weighted hallucination rate ranges from 17% to 25%, so the answers are still *not* trustworthy. Note that the scores between the SOTA solutions and the straightforward solutions are not completely comparable, as they have different accesses to retrieval contents (Appendix A.3 and A.4.1), and the former used auto-eval, while the latter used human-eval; however, the trend is valid. Second, most difficult slices we see in the straightforward solutions remain to be difficult for SOTA solutions: *real-time* and *fast-changing* queries, and questions regarding *torso* and *tail* entities, showing the improvement needed for handling retrieval noises when the system relies on retrieval results to answer the question; as another example, we see lower scores for queries requiring *multi-hop reasoning* or *post-processing*, showing the improvement space for reasoning in question answering. Third, the third SOTA system has slightly higher weighted accuracy (perfect + acceptable) compared to the second system (73% and 70%), but much higher *hallucination* (25.1% and 16.6%), indicating the needs for building RAG systems to wisely answer “I don’t know” when confident answers cannot be found. Last, scores on *set* and *false premise* questions improved significantly in the SOTA solutions compared to the straightforward solutions, showing advancement in RAG systems in providing accurate and complete set answers and detecting *false premises*.

Finally, We observed very different latency, ranging from 2.5s to 11.6s, reflecting the different design options in trading off latency and quality. Note that the latency results come from interacting with the API for Perplexity.ai and the web interfaces for the other systems. See Appendix A.4.2 for additional results and how we measured latency.

6 Conclusion

This paper proposes CRAG, a rich and comprehensive benchmark designed to advance research in retrieval-augmented generation (RAG). With detailed empirical studies, CRAG reviewed gaps in existing RAG solutions and provided valuable insights for future improvement. We plan to continue improving and expanding the benchmark for multi-lingual questions, multi-modal questions, multi-turn conversations, etc., to ensure CRAG stays at the forefront to push RAG research, adapts to emerging challenges, and evolves for new research needs.

References

- [1] J. Achiam, S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altenschmidt, S. Altman, S. Anadkat, et al. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] AI@Meta. Llama 3 model card. 2024.
- [3] P. Bajaj, D. Campos, N. Craswell, L. Deng, J. Gao, X. Liu, R. Majumder, A. McNamara, B. Mitra, T. Nguyen, M. Rosenberg, X. Song, A. Stoica, S. Tiwary, and T. Wang. MS MARCO: A human generated machine reading comprehension dataset, 2018.
- [4] Brave Software. Brave Search API.
- [5] J. Chen, H. Lin, X. Han, and L. Sun. Benchmarking large language models in retrieval-augmented generation. *arXiv preprint arXiv:2309.01431*, 2023.
- [6] W. Chen, H. Hu, X. Chen, P. Verga, and W. Cohen. MuRAG: Multimodal retrieval-augmented generator for open question answering over images and text. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, Dec. 2022.
- [7] Y. Gao, Y. Xiong, X. Gao, K. Jia, J. Pan, Y. Bi, Y. Dai, J. Sun, Q. Guo, M. Wang, and H. Wang. Retrieval-augmented generation for large language models: A survey. 2024.
- [8] L. Huang, W. Yu, W. Ma, W. Zhong, Z. Feng, H. Wang, Q. Chen, W. Peng, X. Feng, B. Qin, et al. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint arXiv:2311.05232*, 2023.
- [9] Z. Ji, N. Lee, R. Frieske, T. Yu, D. Su, Y. Xu, E. Ishii, Y. J. Bang, A. Madotto, and P. Fung. Survey of hallucination in natural language generation. *ACM Comput. Surv.*, 55(12), mar 2023.

- [10] M. Joshi, E. Choi, D. Weld, and L. Zettlemoyer. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. Association for Computational Linguistics, July 2017.
- [11] N. Kandpal, H. Deng, A. Roberts, E. Wallace, and C. Raffel. Large language models struggle to learn long-tail knowledge. In *International Conference on Machine Learning*, pages 15696–15707. PMLR, 2023.
- [12] T. Kwiatkowski, J. Palomaki, O. Redfield, M. Collins, A. Parikh, C. Alberti, D. Epstein, I. Polosukhin, M. Kelcey, J. Devlin, K. Lee, K. N. Toutanova, L. Jones, M.-W. Chang, A. Dai, J. Uszkoreit, Q. Le, and S. Petrov. Natural questions: a benchmark for question answering research. *Transactions of the Association of Computational Linguistics*, 2019.
- [13] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W. tau Yih, T. Rocktäschel, S. Riedel, and D. Kiela. Retrieval-augmented generation for knowledge-intensive nlp tasks, 2021.
- [14] V. Liévin, C. E. Hother, A. G. Motzfeldt, and O. Winther. Can large language models reason about medical questions? *Patterns*, 5(3), 2024.
- [15] P. Liu, W. Yuan, J. Fu, Z. Jiang, H. Hayashi, and G. Neubig. Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9):1–35, 2023.
- [16] A. Mallen, A. Asai, V. Zhong, R. Das, D. Khashabi, and H. Hajishirzi. When not to trust language models: Investigating effectiveness of parametric and non-parametric memories. In *ACL*, 2023.
- [17] OpenAI. ChatGPT. <https://openai.com/index/chatgpt/>, 2023. Accessed: 2024-06-04.
- [18] A. Panickssery, S. R. Bowman, and S. Feng. Llm evaluators recognize and favor their own generations. *arXiv preprint arXiv:2404.13076*, 2024.
- [19] V. Rawte, S. Chakraborty, A. Pathak, A. Sarkar, S. Tonmoy, A. Chadha, A. P. Sheth, and A. Das. The troubling emergence of hallucination in large language models—an extensive definition, quantification, and prescriptive remediations. *arXiv preprint arXiv:2310.04988*, 2023.
- [20] T. Schick, J. Dwivedi-Yu, R. Dessi, R. Raileanu, M. Lomeli, L. Zettlemoyer, N. Cancedda, and T. Scialom. Toolformer: Language models can teach themselves to use tools. *arXiv*, 2023.
- [21] K. Sun, Y. E. Xu, H. Zha, Y. Liu, and X. L. Dong. Head-to-Tail: How knowledgeable are large language models (llms)? a.k.a. will llms replace knowledge graphs? *arXiv preprint arXiv:2308.10168*, 2024.
- [22] A. Talmor and J. Berant. The web as a knowledge-base for answering complex questions, 2018.
- [23] H. Touvron, L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale, D. Bikel, L. Blecher, C. C. Ferrer, M. Chen, G. Cucurull, D. Esiobu, J. Fernandes, J. Fu, W. Fu, B. Fuller, C. Gao, V. Goswami, N. Goyal, A. Hartshorn, S. Hosseini, R. Hou, H. Inan, M. Kardas, V. Kerkez, M. Khabsa, I. Kloumann, A. Korenev, P. S. Koura, M.-A. Lachaux, T. Lavril, J. Lee, D. Liskovich, Y. Lu, Y. Mao, X. Martinet, T. Mihaylov, P. Mishra, I. Molybog, Y. Nie, A. Poulton, J. Reizenstein, R. Rungta, K. Saladi, A. Schelten, R. Silva, E. M. Smith, R. Subramanian, X. E. Tan, B. Tang, R. Taylor, A. Williams, J. X. Kuan, P. Xu, Z. Yan, I. Zarov, Y. Zhang, A. Fan, M. Kambadur, S. Narang, A. Rodriguez, R. Stojnic, S. Edunov, and T. Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- [24] R. Usbeck, X. Yan, A. Perevalov, L. Jiang, J. Schulz, A. Kraft, C. Möller, J. Huang, J. Reineke, A.-C. Ngonga Ngomo, et al. QALD-10—the 10th challenge on question answering over linked data. *Semantic Web*, (Preprint):1–15, 2023.
- [25] T. Vu, M. Iyyer, X. Wang, N. Constant, J. Wei, J. Wei, C. Tar, Y.-H. Sung, D. Zhou, Q. Le, and T. Luong. FreshLLMs: Refreshing large language models with search engine augmentation, 2023.
- [26] F. Xu, Y. Song, M. Iyyer, and E. Choi. A critical evaluation of evaluations for long-form question answering. In *Association of Computational Linguistics*, 2023.
- [27] M. Yasunaga, H. Ren, A. Bosselut, P. Liang, and J. Leskovec. QA-GNN: Reasoning with language models and knowledge graphs for question answering. Association for Computational Linguistics, 2021.

A Appendix

A.1 Dataset

A.1.1 Constructing QA pairs from KGs

We first collected a set of entities based on publicly available data. Then we created question-answer pairs in three steps for *Simple static and dynamic questions*.

Step 1. For each domain, we first selected an entity type and a meaningful relation (e, r) and created a question template. For example, for $(music\ artist, first\ album)$, we create a template “*what is the first album of [music artist]?*”.

Step 2. We then sampled entities from the KGs to fill in the templates and generate the full question. We adopted the method described in [21] and sampled entities of top, middle, and bottom popularity. We defined popularity based on heuristics for each entity type and created an equal number of questions for each bucket.

Step 3. Last, we took the associated attribute values as the answer to the question to create question-answer pairs.

We created the *Comparison, Aggregation, Set, Post-processing, and False-premise questions* in a similar way but 1) made sure the template allows for crisp and deterministic answers and 2) sampled the subject entities that fit the question. We used heuristics to select entity types for these question categories.

Finally, we created multi-hop questions in three steps, similar to those described in [22]. We first sampled an entity e_1 from the KG and selected two relation triplets following a two-hop path: (e_1, r_1, e_2) and (e_1, r_2, e_3) . We then created a question template describing the path. For example, for path $(company_1, is_parent, company_2)$ followed by $(company_1, ceo, person)$, we created the template “*who is the CEO of the parent company of [company₂]*?”. The answer to the new question will be e_3 in the second triplet.

A.1.2 Definition of dynamism categories

Table 7: Definition of dynamism categories.

Dynamism	Definition
Real-time	The answer to the question changes over seconds (e.g., “ <i>What’s Costco’s stock price today?</i> ”).
Fast-changing	The answer to the question changes no more than daily (e.g., “ <i>When is Laker’s game tonight?</i> ”).
Slow-changing	The answer to the question changes no more than yearly (e.g., “ <i>Who won the Grammy award last year?</i> ”).
Static	The answer to the question does not change over time, such as the birth date of a person.

A.1.3 Constructing QA pairs from web contents

Step 1. Ask annotators to write down a list of questions that could possibly be answered by web search based on a general guideline (e.g., “*what is the most popular action movie in 2023?*”).

Step 2. Generate the web search results to answer the question.

Step 3. Finally, annotators reviewed the web search results to determine the ground truth answers to the questions: 1) If the search results successfully provided the necessary information, annotators recorded the ground truth answer text and the URL associated with it based on the retrieved content. Note that the answer is determined by the *query_time* at which the web search happened, especially for the *Fast-changing* and *Real-time* questions. 2) Otherwise, annotators conducted further web searches to document the correct answers.

Besides the QA pairs, the annotators will also provide labels for the domain, dynamism, question types, and an *answer URL* (a URL that contains the answer to the question) for *Web Questions*.

A.1.4 An example of retrieved web search results

Table 8: An example of web search results.

Key	Value
"page name"	"A Short History Of ChatGPT: How We Got To Where We Are Today"
"page url"	"https://www.forbes.com/sites/bernardmarr/2023/05/19/a-short-history-of-chatgpt-how..."
"page snippet"	"OpenAI released an early demo of ChatGPT on November 30, 2022..."
"page last modified"	"2024-1-18 15:32:24"
"html page"	"<!DOCTYPE html><html lang="en"><head><link rel="preload" as="font" href="https..."

A.1.5 Estimated recall for retrieved webpages

Table 9: Estimated recall (in percentage) for *Web* and *KG Questions*.

Question Type	Web Questions		KG Questions	
	Est. Recall	Count	Est. Recall	Count
Simple	94	160	60	1,045
Simple w. Condition	89	420	81	269
Set	87	326	23	186
Comparison	97	350	84	158
Aggregation	95	331	91	149
Multi-hop	91	312	83	77
Post-processing heavy	75	150	90	30
False Premise	49	376	0	70
All	84	2,425	63	1,984

A.1.6 The mock data and mock APIs

CRAG provides mock APIs to simulate retrieval from web, KG, and real-time APIs in the *real* retrieval environment, allowing *accessible* facilitating data and fair comparison.

CRAG provides both structured (through mock KGs) and unstructured (web search results) information to test the effectiveness of RAG systems in leveraging a diverse range of available information. First, for each question in the benchmark, CRAG provides up to 50 web search results from a real-world search engine—the Brave Search API [4]. Different from existing benchmarks that use snippets or selected text chunks [3, 5], CRAG provides full HTML pages, containing more information and potentially more noises as in a realistic setting. Second, CRAG provides mock KG search APIs to test structured search for RAG. The mock KGs, though much smaller in size, contain both information necessary to answer a subset of questions in the benchmark and noises that have similar entity or attribute names, again simulating real settings. Our mock KGs contain about 2.6M entities and have a signal-to-noise ratio of less than 1/30.

A.2 Evaluation

A.2.1 Human evaluation

We run human evaluation to score each answer with respect to the metrics defined in Section 4.1. We score each *perfect*, *acceptable*, *missing*, or *incorrect* answer with a score s_p , s_a , s_m , and s_{in} , respectively and define **Score_{*h*}** as the score of the answer by setting $s_p = 1$, $s_a = 0.5$, $s_m = 0$, and $s_{in} = -1$. We then compute the average score for all examples in the evaluation set as the score for the RAG solution.

Table 10: Accuracy and F1 for the ChatGPT and Llama 3 auto-evaluation models.

	Accuracy		Precision		Recall		F1 score	
	ChatGPT	Llama 3	ChatGPT	Llama 3	ChatGPT	Llama 3	ChatGPT	Llama 3
Accurate	94.1	98.6	98.8	98.5	92.2	99.3	92.0	98.9
Incorrect	94.1	98.6	86.8	98.7	97.8	97.2	92.0	97.9
Missing	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0
Average	96.1	99.1	95.2	99.1	96.7	98.8	94.7	98.9

A.2.2 Automatic evaluation

In auto-eval, we merge *perfect* and *acceptable* as *accurate* and consider only three scores: 1 for *accurate*, 0 for *missing*, and -1 for *incorrect*. The resulting Score_a is calculated by the average score for all the examples in the evaluation set, and is effectively

$$\text{Accuracy} - \text{Hallucination},$$

where **Accuracy**, **Hallucination**, and **Missing** are the percentage of *accurate*, *incorrect*, and *missing* answers in the test set. These score choices penalize *incorrect* answers, while awarding *correct* answers only.

We computed the accuracy and F1 for the two auto-evaluators for the *accurate*, *incorrect*, and *missing* examples in the public test set, respectively. Here, we considered human-eval labels as the ground truth. Table 10 shows both models attain reasonably good accuracy and F1 scores as an evaluator compared to the manual labels.

A.2.3 KDD Cup 2024 Meta CRAG challenge

The KDD Cup 2024 Meta CRAG challenge has two stages. Stage 1 is designed for the participants to develop their RAG solutions by submitting their systems against the leaderboard, whereas Stage 2 determines the final winners. We split our benchmark data into three sets with similar distributions: *validation*, *public test*, and *private test* at 30%, 30%, and 40%, respectively. We shared the validation and public test sets, in total, 2,706 examples in Stage 1, and held out the private test set to select the final winners in Stage 2. We used auto-eval for Stage 1, and selected top teams with auto-eval in Stage 2 to conduct manual evaluation.

A.3 Evaluating straightforward RAG solutions

We send each CRAG question in a prompt shown below. This prompt is designed to include the original *Query Time* for the question and ask the LLM to answer the question **based on the query time and the retrieved result**. Note that the retrieved result was also from the same *query time* and was provided in CRAG. Moreover, this prompt encourages brief answers and “*I don’t know*” answers when confidence is low.

A.3.1 Prompts used in straightforward RAG solutions

Vanilla LLM. PROMPT = "" You are given a Question and the time when it was asked in the Pacific Time Zone (PT), referred to as 'Query Time'. The query time is formatted as "mm/dd/yyyy, hh:mm:ss PT". Your task is to answer the question in as few words as possible.

Please follow these guidelines when formulating your answer:

1. If the question contains a false premise or assumption, answer “invalid question”.
2. If you are uncertain or don’t know the answer, respond with “I don’t know”.

```

### Question
{query}
### Query Time
{query_time}
### Answer
""

```

RAG with web search results (Task 1). PROMPT = "" You are given a Question, References and the time when it was asked in the Pacific Time Zone (PT), referred to as "Query Time". The query

time is formatted as "mm/dd/yyyy, hh:mm:ss PT". The references may or may not help answer the question. Your task is to answer the question in as few words as possible.

Please follow these guidelines when formulating your answer:

1. If the question contains a false premise or assumption, answer "invalid question".
2. If you are uncertain or don't know the answer, respond with "I don't know".

```
### Question
{query}
### Query Time
{query_time}
### References
{references}
### Answer
""
```

RAG with KG and web search results (Tasks 2 and 3). PROMPT = "" You are given a Question, References and the time when it was asked in the Pacific Time Zone (PT), referred to as "Query Time". The query time is formatted as "mm/dd/yyyy, hh:mm:ss PT". The references may or may not help answer the question. Your task is to answer the question in as few words as possible.

Please follow these guidelines when formulating your answer:

1. If the question contains a false premise or assumption, answer "invalid question".
2. If you are uncertain or don't know the answer, respond with "I don't know".

```
### Question
{query}
### Query Time
{query_time}
### References
# web
{web_results}
# knowledge graph
{kg_response}
### Answer
""
```

Query entity extraction. PROMPT = "" You are an agent that only outputs JSON. You are given a Query and Query Time. Do the following:

1) Determine the domain the query is about. The domain should be one of the following: "finance", "sports", "music", "movie", "encyclopedia". If none of the domains apply, use "other". Use "domain" as the key in the result json.

2) Extract structured information from the query. Include different keys into the result json depending on the domains, and put them DIRECTLY in the result json. Here are the rules:

For 'encyclopedia' and 'other' queries, these are possible keys:

- 'main_entity': extract the main entity of the query.

For 'finance' queries, these are possible keys:

- 'market_identifier': stock identifiers including individual company names, stock symbols.
- 'metric': financial metrics that the query is asking about. This must be one of the following: 'price', 'dividend', 'P/E ratio', 'EPS', 'marketCap', and 'other'.
- 'datetime': time frame that the query asks about. When datetime is not explicitly mentioned, use 'Query Time' as default.

For 'movie' queries, these are possible keys:

- 'movie_name': name of the movie
- 'movie_aspect': if the query is about a movie, which movie aspect the query asks. This must be one of the following: 'budget', 'genres', 'original_language', 'original_title', 'release_date', 'revenue', 'title', 'cast', 'crew', 'rating', 'length'.
- 'person': person name related to moves

- ‘person_aspect’: if the query is about a person, which person aspect the query asks. This must be one of the following: ‘acted_movies’, ‘directed_movies’, ‘oscar_awards’, ‘birthday’.
- ‘year’: if the query is about movies released in a specific year, extract the year

For ‘music’ queries, these are possible keys:

- ‘artist_name’: name of the artist
- ‘artist_aspect’: if the query is about an artist, extract the aspect of the artist. This must be one of the following: ‘member’, ‘birth place’, ‘birth date’, ‘lifespan’, ‘artist work’, ‘grammy award count’, ‘grammy award date’.
- ‘song_name’: name of the song
- ‘song_aspect’: if the query is about a song, extract the aspect of the song. This must be one of the following: ‘author’, ‘grammy award count’, ‘release country’, ‘release date’.

For ‘sports’ queries, these are possible keys:

- ‘sport_type’: one of ‘basketball’, ‘soccer’, ‘other’
- ‘tournament’: NBA, World Cup, Olympic.
- ‘team’: teams that users are interested in.
- ‘datetime’: time frame that the user is interested in. When datetime is not explicitly mentioned, use ‘Query Time’ as default.

Return the results in a FLAT json.

NEVER include ANY EXPLANATION or NOTE in the output, ONLY OUTPUT JSON!!!

""""

A.3.2 Performance of straightforward RAG solutions

Table 11 summarizes the results of straightforward RAG solutions. We measured the latency on A100 (80GB) GPUs.

Table 11: Performance of straightforward RAG solutions on CRAG.

	Model	Accuracy (%)	Hallucination (%)	Missing (%)	Score (%)	Latency (ms)
LLM only	Llama 2 7B Chat	14.8	78.4	6.7	-63.6	289
	Llama 2 70B Chat	22.3	28.7	49.0	-6.4	1,392
	Llama 3 8B Instruct	23.7	33.8	42.6	-10.1	823
	Llama 3 70B Instruct	32.3	28.9	38.8	3.4	1,252
	GPT-4 Turbo	33.5	13.5	53.0	20.0	619
Task 1	Llama 2 7B Chat	16.4	83.1	0.5	-66.7	1,545
	Llama 2 70B Chat	29.3	61.0	9.7	-31.7	5,229
	Llama 3 8B Instruct	28.5	45.6	25.9	-17.1	2,152
	Llama 3 70B Instruct	35.6	31.1	33.3	4.5	2,481
	GPT-4 Turbo	35.9	28.2	35.9	7.7	1,270
Task 2	Llama 2 7B Chat	16.4	83.1	0.5	-66.7	1,569
	Llama 2 70B Chat	29.1	61.1	9.7	-32.0	5,251
	Llama 3 8B Instruct	28.6	45.5	25.9	-16.9	1,701
	Llama 3 70B Instruct	37.5	29.2	33.3	8.3	2,175
	GPT-4 Turbo	41.3	25.1	33.6	16.2	1,074
Task 3	Llama 2 7B Chat	16.0	83.6	0.4	-67.6	2,142
	Llama 2 70B Chat	31.9	65.7	2.4	-33.7	6,149
	Llama 3 8B Instruct	32.1	56.3	11.6	-24.1	4,536
	Llama 3 70B Instruct	40.6	31.6	27.8	9.1	5,028
	GPT-4 Turbo	43.6	30.1	26.3	13.4	1,688

A.4 Evaluating state-of-the-art industry solutions

A.4.1 Quality

We send the CRAG public test set question as input to each of the SOTA RAG systems and collect the responses for human grading. Note that the original *Query Time* and the provided retrieval results in CRAG are **not** used in this setting. We simply test the questions and ask human graders to grade the responses based on when the query was made to the SOTA system. We called Copilot Pro, Gemini Advanced, and ChatGPT Plus through their web interfaces and Perplexity.ai through its API. We set

the conversation style to “Precise” when calling Copilot Pro and the temperature to 0 when calling Perplexity.ai. We select GPT-4o and llama-3-sonar-large-32k-online as the base LLM when calling ChatGPT Plus and Perplexity.ai, respectively.

A.4.2 Latency

We quantified the latency by calculating the time difference between the timestamp of the query submission to the system and the timestamp when the complete response was received.

As the latency measured by API call and web interface interactions are not directly comparable, we further called Perplexity.ai through its web interface. The latency under this setting is 4,629ms. However, the latency number measured here may not correspond to the accuracy numbers from the API calls.