T2V-CompBench: A Comprehensive Benchmark for Compositional Text-to-video Generation

Kaiyue Sun¹ Kaiyi Huang¹ Xian Liu² Yue Wu³ Zihan Xu¹ Zhenguo Li³ Xihui Liu¹ ¹The University of Hong Kong ²The Chinese University of Hong Kong ³Huawei Noah's Ark Lab

Project: https://t2v-compbench.github.io/ Code: https://github.com/KaiyueSun98/T2V-CompBench

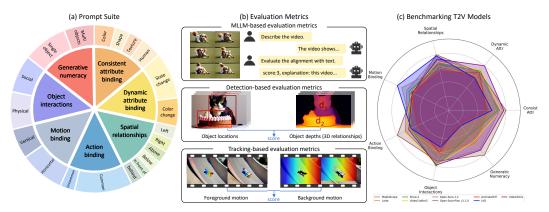


Figure 1: **Overview of T2V-CompBench.** We propose T2V-CompBench, a comprehensive compositional text-to-video generation benchmark that consists of seven categories: **consistent attribute binding, dynamic attribute binding, spatial relationships, action binding, object interactions, and generative numeracy**. We propose three types of evaluation metrics: MLLM-based, detectionbased, and tracking-based metrics. We benchmark various text-to-video generation models.

Abstract

Text-to-video (T2V) generation models have advanced significantly, yet their ability to compose different objects, attributes, actions, and motions into a video remains unexplored. Previous text-to-video benchmarks also neglect this important ability for evaluation. In this work, we conduct the first systematic study on compositional text-to-video generation. We propose T2V-CompBench, the first benchmark tailored for compositional text-to-video generation. T2V-CompBench encompasses diverse aspects of compositionality, including consistent attribute binding, dynamic attribute binding, spatial relationships, motion binding, action binding, object interactions, and generative numeracy. We further carefully design evaluation metrics of MLLM-based metrics, detection-based metrics, and trackingbased metrics, which can better reflect the compositional text-to-video generation quality of seven proposed categories with 700 text prompts. The effectiveness of the proposed metrics is verified by correlation with human evaluations. We also benchmark various text-to-video generative models and conduct in-depth analysis across different models and different compositional categories. We find that compositional text-to-video generation is highly challenging for current models, and we hope that our attempt will shed light on future research in this direction.

1 Introduction

Text-to-video (T2V) generation has made significant progress in recent years [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13]. However, generating videos that accurately depict multiple objects, attributes, and motions in complex and dynamic scenes based on fine-grained text descriptions remains a challenging task. In this work, we aim to conduct a systematic study on compositional text-to-video generation.

Compositional text-to-image (T2I) generation, which aims to compose multiple objects, attributes, and their relationships into complex scenes, has been widely studied in previous methods [14, 15, 16]. Benchmarks for compositional text-to-image generation [17] have been accepted as an important evaluation dimension for text-to-image foundation models [18, 19, 20]. However, most works on text-to-video generation focus on generating videos with simple text prompts, neglecting the significance of compositional text-to-video generation. Moreover, existing video generation benchmarks [21, 22, 23] primarily evaluate video quality, motion quality, and text-video alignment with single-object text prompts, and benchmarks for compositional text-to-video generation have not been systematically and extensively investigated in previous literature.

To this end, we propose T2V-CompBench, a comprehensive benchmark designed for compositional text-to-video generation. This benchmark emphasizes compositionality through multiple objects with attributes, quantities, actions, interactions, and spatial-temporal dynamics. We design a prompt suite composed of 7 categories, where each category consists of 100 text prompts for video generation. When constructing the prompts, we emphasize temporal dynamics and guarantee that each prompt contains at least one action verb. The seven categories are as follows and examples are illustrated in Figure 2: 1) Consistent attribute binding. This category includes prompts featuring at least two dynamic objects, each with a distinct attribute. The attributes associated with each object are consistent throughout the video. 2) Dynamic attribute binding. This category includes prompts featuring attribute binding problems where the attributes change with time. 3) Spatial relationships. In this category, each prompt mentions at least two dynamic objects with specified spatial relationships. 4) Action binding. Prompts in this category contain at least two objects each with a distinct action. 5) Motion binding. The prompts in this category contain objects with specified moving directions. 6) Object interactions. This category tests the models' abilities to understand and generate dynamic interactions, including physical interactions and social interactions. 7) Generative numeracy. The text prompts in this category include at least two objects with quantities ranging from one to eight.

Another challenge lies in the evaluation of compositional text-to-video models. Commonly used metrics, such as Inception Score [24], Fréchet Inception Distance (FID) [25], Fréchet Video Distance (FVD) [26], and CLIPScore [27], cannot fully reflect the compositionality of text-to-video generation models. Evaluating compositionality in text-to-video models requires a fine-grained understanding of not only objects and attributes in each frame but also the dynamics and motions between frames. It is orders of magnitude more complex than evaluating text-to-image models.

To address this challenge, we incorporate temporal dynamics across frames into evaluation and design different metrics to evaluate different categories in the benchmark. Specifically, we design Multimodal Large Language Model (MLLM)-based metrics, including image-LLM and video-LLM, to evaluate dynamic attribute binding, consistent attribute binding, action binding, and object interactions. We devise detection-based metrics to evaluate spatial relationships and generative numeracy. We propose tracking-based metrics to evaluate motion binding. The effectiveness of our proposed metrics is validated by computing the correlation with human evaluations. We evaluate previous text-to-video generation models on T2V-CompBench and conduct systematic studies and analysis of the performance of current models on different compositional categories.

The contributions of our paper are three-fold. 1) To our best knowledge, we are the first to propose a benchmark for compositional text-to-video generation, featuring seven categories with 700 text prompts. 2) We propose comprehensive evaluation metrics for the seven categories and verify their effectiveness through human correlation. 3) We benchmark various open-source T2V models and provide a systematic study with insightful analysis, which will inspire future research in this direction.

2 Related work

Text-to-video generation. Existing text-to-video generation models can be roughly categorized into two types, namely the language model-based [8, 28, 29, 30, 31, 32] and the diffusion-model based [3,

4, 9, 10, 11, 1, 12, 13]. In this paper, we evaluate 20 models, including 13 officially open-sourced models: ModelScope [13], ZeroScope [33], Latte [34], Show-1 [35], VideoCrafter2 [36], Open-Sora 1.1 and 1.2 [37], Open-Sora-Plan v1.0.0 and v1.1.0 [38], AnimateDiff [39], VideoTetris [40], LVD [41], and MagicTime [42], as well as 7 commercial models: Pika [43], Gen-2 [44], Gen-3 [45], Dreamina [46], PixVerse [47], Dream Machine [48] and Kling [49].

Compositional text-to-image generation. Recent studies have delved into compositionality in text-to-image generation [14, 15, 50, 51, 17, 52, 53, 16, 54, 41, 55, 51, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65]. T2I-CompBench [17] proposed the first comprehensive benchmark to evaluate compositionality in text-to-image models, focusing on attributes binding, relationships, and complex compositions. While these evaluations are tailored exclusively to the image domain, video generation requires a deeper consideration of spatio-temporal dynamics. Concurrent work VideoTetris [40] proposes a framework of spatio-temporal compositional diffusion that enables compositional T2V generation. Our work pioneers the development of benchmarking compositional text-to-video generation.

Benchmarks for text-to-video generation. Existing works evaluate the FVD scores of text-to-video models using datasets like UCF-101 [66] and Kinetics-400/600/700 [67, 68, 69], which are limited to specific topics of human action. Recent works design text prompts and evaluation metrics to evaluate the video quality and text-video alignment in open domains. Make-a-Video-Eval [4] contains 300 prompts but only considers spatial appearances. FETV [23] categorizes prompts based on major content, controllable attributes, and prompt complexity. VBench [21] and EvalCrafter [22] propose comprehensive benchmarks to evaluate T2V models from various perspectives, but most prompts focus on single-object rather than composition of multiple objects. Although VBench involves spatial relationships as a subcategory, their prompts, such as "a clock on the left of a vase", do not reflect the dynamics in videos. There is a lack of a comprehensive definition of compositionality in text-to-video generation.

Evaluation metrics for text-to-video generation. Previous methods evaluate video generators from the perspectives of video quality and video-text alignment. For video quality, the commonly used metrics, such as Inception Score (IS) [24] and Fréchet Video Distance (FVD) [26] are adopted to evaluate the diversity and fidelity in video quality. For text-video alignment, CLIPScore [27] is proposed to measure the similarity of the text prompt and the image, using the pre-trained CLIP model [70]. However, these metrics are not suitable for complex prompts in compositionality. We propose evaluation metrics tailored for our benchmark and validate their effectiveness through extensive human correlation studies.

3 Benchmark Construction

3.1 **Prompt Generation**

We define seven prompt categories for compositional text-to-video generation. Each category includes 100 prompts, which are generated by prompting GPT-4 [71] with a list of object classes, prompt structures, and other information for specific prompt categories. Depending on the prompt category, other information provided may include attributes, spatial relationships, motion directions, actions, interactions, and quantities. Although not all prompt categories are designed to evaluate actions and motions, we ensure all prompts in our benchmark contain at least one action verb, to prevent the T2V model from generating static videos. GPT-4 returns both prompts and the parsed meta information of prompts which facilitates evaluation. The prompt templates for generating the text prompts and the meta information are detailed in Appendix A. All generated prompts are verified by humans and improper prompts are filtered out. The whole process is shown in Figure 2.

3.2 Prompt Categories

Consistent attribute binding. Consistent attribute binding such as requires attributes to be consistently associated with corresponding objects throughout the generated video frames. To construct the prompts, we define four attribute types including color, shape, texture, and human attributes. GPT-4 is prompted to generate sentences with at least two objects, two attributes where each attribute associates with an object, and one action verb. About 30% of the prompts contain color attributes, 20% contain shape attributes, 20% contain texture attributes, and 30% contain two different types of

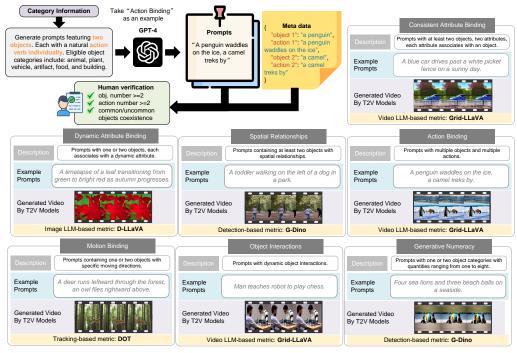


Figure 2: Prompt generation process and illustrations of the seven compositional categories.

attributes to describe the two objects. Among all the prompts, 80% are commonly seen in the real world, while 20% are uncommon ones that require imagination.

Dynamic attribute binding. This category features attribute binding problems where the attributes change over time. For example, "Green avocado darkens to black as the tomato beside it ripens to a deep red".We prompt GPT-4 to generate dynamic attributes such as color transition or state transition for objects. 80% of the prompts describe attribute changes that are commonly seen in the real world, while 20% of the prompts are uncommon and artificial.

Spatial relationships. This category requires the model to generate at least two objects with correct spatial relationships across the dynamic video. We define six types of spatial relationships between two objects in the 3-dimensional space: "on the left of", "on the right of", "above", "below", "in front of", and "behind". Around 35% prompts include left/right, 35% include above/below, and the remaining 30% include in front of/behind. For spatial relationships including left or right, we construct some contrastive prompts by inverting the relationship.

Action binding. This category tests the models' abilities to bind actions to corresponding objects when there are multiple objects and multiple actions described. We prompt GPT-4 to generate text prompts with two objects, each associated with an action verb. This category includes 80% common prompts and 20% uncommon prompts. Uncommon prompts can be further categorized into uncommon coexistence of objects, and uncommon action-object pairs.

Motion binding. The prompts in this category contain one or two objects with specified moving directions, aiming to test the models' abilities to bind specific motion directions with objects. We define four types of moving directions: "leftwards", "rightwards", "upwards" and "downwards". Each object in the prompt moves in one of the directions. 60% of the motion directions included in the prompts are horizontal, and 40% are vertical.

Object interactions. This category tests the models' abilities to understand and generate dynamic interactions, including physical interactions causing motion change or state change and social interactions. Prompts for physical interactions account for 50% prompts, including 30% with state changes and 20% with motion changes. The other 50% are social interactions, with 30% common ones and 20% uncommon ones depicting anthropopathic animals performing social interactions.



Figure 3: **T2V-CompBench statistics**. *Left*: Word cloud of the prompt suite. *Right*: Average occurrences of adverbs, adjectives, verbs, nouns, and prompt length per prompt.

Generative numeracy. The text prompts in this category include one or two object categories with quantities ranging from one to eight. About 60% of the prompts describe single object category, and the other 40% describe two object categories.

3.3 Prompt Suite Statistics

The prompt suite statistics with word cloud visualization and prompt statistics, are depicted in Figure 3. T2V-CompBench stands out for its focus on multiple objects and temporal dynamics: (1) In contrast to previous benchmarks, which predominantly focus on single-object prompts, T2V-CompBench features prompts involving more than two objects (nouns) on average, with each prompt containing approximately 3.2 nouns. (2) T2V-CompBench considers temporal dynamics, with nearly all prompts containing action verbs, averaging at 1.1 per prompt.

4 Evaluation Metrics

We observe that the evaluation metrics for compositional text-to-image generation [17] cannot be directly adopted for evaluating compositional text-to-video generation, due to the large number of frames and complex spatial-temporal dynamics in videos. Most video generation models generate videos within 2-5 seconds. For a fair comparison, we evenly extract 6 frames for MLLM-based evaluation, and 16 frames for detection-based evaluation, and sample the videos to a frame rate of 8 frames per second (FPS) for tracking-based evaluation.

4.1 MLLM-based evaluation metrics

Multimodal Large Language Models (MLLMs) have shown great capabilities in understanding complex contents in images and videos [72, 73, 71, 74]. Inspired by their effectiveness in video understanding, we exploit MLLMs as evaluators for compositional text-to-video generation.

Video LLM-based metrics for consistent attribute binding, action binding, and object interactions. To handle the complex spatial-temporal information in videos, we investigate video LLMs such as Image Grid [75] and PLLaVA [74], which extends LLaVA [73] from single image input to multi-frame input. We empirically find that Image Grid performs better than PLLaVA in our compositional categories. Specifically, Image Grid [75] uniformly samples 6 frames from the video to form an image grid as the input to LLaVA. Additionally, we boost the ability of video LLMs and avoid hallucinations by the chain-of-thought mechanism [76], where we first ask MLLM to describe the video content, and then ask it to score the text-video alignment. (1) To evaluate consistent attribute binding, we use GPT-4 to parse the prompts into different disentangled phrases (e.g., "A blue car drives past a white picket fence on a sunny day" is parsed into "a blue car" and "a white picket fence"), and then ask the video LLM to provide a matching score between the each disentangled prompt and the Image Grid. The scores for each disentangled phrase are averaged to get the final score. (2) For action binding, we use GPT-4 to extract objects and their actions. For example, given the prompt "A dog runs through a field while a cat climbs a tree", we extract the phrases "a dog", "a dog runs through a field", "a cat", and "a cat climbs a tree". We then ask the video LLM to check the alignment between each object-action combination and the video to get the final score (3) For object interactions, we prompt the video LLM to score the video-text alignment.

Image LLM-based metrics for dynamic attribute binding. Evaluating the dynamic attribute binding category such as "Bright green leaf wilts to brown" is challenging as it requires a deep understanding of dynamic changes between frames. We find that current video LLMs achieve unsatisfactory performance in this category, so we design a frame-by-frame evaluation metric based on Image LLM such as LLaVA [73]. We utilize GPT-4 to parse the initial state ("bright green leaf") and final state ("brown leaf"), and prompt LLaVA [73] to score the alignment between each frame and each of the two states. Based on scores between 16 frames and 2 states, we define a scoring function where we encourage the first frame to align with the initial state, the last frame to align with the final state, and the middle frames to be in between. We denote this metric as D-LLaVA.

4.2 Detection-based Evaluation Metrics for Spatial Relationships and Numeracy

Most previous vision-language models face difficulties with spatial relationships and numeracyrelated understandings. So we introduce the object detection model GroundingDINO (G-Dino) [77] to detect objects for each frame, filter out duplicate bounding boxes with high intersection-over-union (IoU), and then define rule-based metrics based on the object detection results.

2D spatial relationships. For 2D spatial relationships including "left", "right", "above", and "below", we define rule-based metrics for each frame similar to T2I-CompBench [17]. Specifically, for each pair of objects, we denote their centers as (x_1, y_1) and (x_2, y_2) , respectively. The first object is on the left of the second object if $x_1 < x_2$, and $|x_1 - x_2| > |y_1 - y_2|$. The rule is similar to other spatial relationships. If there is more than one pair of objects in a frame, we select the most probable one based on their IoU and confidence scores. The per-frame score is (1-IoU) if there is object pair that satisfies the relationship, or 0 if no object pair satisfies the relationship. The video-level score is the average of per-frame scores over all frames.

3D spatial relationships. 3D spatial relationships ("in front of ", "behind") cannot be identified by 2D bounding box locations. With the 2D object bounding boxes detected by Grounding DINO [77], we further leverage the Segment Anything [78] to predict masks of specified objects, and then leverage Depth Anything [79] to predict the depth maps. The depth of an object is defined as the average depth values of the pixels inside the object mask. We define the frame-level scores based on the IoU and relative depth between two objects, and the video-level score is the average of frame-level scores.

Generative numeracy. To evaluate generative numeracy, we count the number of detected objects for each object class. If the detected quantity matches the number in text prompt, we assign a score of 1 for the specified object class. Otherwise, we assign a score of 0. The frame-level score is calculated as the average score of all object classes, and the video-level score is the average of all frames.

4.3 Tracking-based Evaluation Metrics for Motion Binding

The evaluation metric for motion binding should identify the moving direction of objects in the video. In many videos, the object motions are entangled with camera motions, making it challenging to determine the actual motion direction of objects. In videos, the actual moving direction of an object is the relative moving direction between the foreground object and the background. Therefore, we introduce a tracking-based approach to determine the moving direction of background and foreground, respectively. In particular, we use GroundingSAM [80] to derive the foreground object masks and background mask, and adopt DOT [81] to track the foreground object points and background points in the video. We compute the average motion vectors of foreground object points and background motion vector is the actual moving direction of the object. The final score reflects whether the actual moving direction aligns with the motion described in text prompts.

5 Experiments

5.1 Experimental Setup

Evaluated models. We evaluate the performance of 13 open-source text-to-video models and 7 commercial models on T2V-CompBench. Open-source models include ModelScope [13], ZeroScope [33], Latte [34], Show-1 [35], VideoCrafter2 [36], Open-Sora 1.1 and 1.2 [37], Open-Sora-Plan v1.0.0 and v1.1.0 [38], AnimateDiff [39], VideoTetris [40], MagicTime [42] and LVD [41]. Commercial models

Table 1: The correlation between automatic evaluation metrics and human evaluation. O	ur
proposed metrics show enhanced performance in Kendall's τ and Spearman's ρ .	

Metric	Consist-attr		Consist-attr Dynamic-	nic-attr Spatial		Motion		Ac	Action		Interaction		Numeracy	
	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$	$\tau(\uparrow)$	$\rho(\uparrow)$
CLIP	0.3667	0.4859	-0.0096	-0.01401	0.2395	0.3343	0.1381	0.1818	0.2796	0.3799	0.1085	0.1426	0.0560	0.0821
B-CLIP	0.2609	0.3562	0.2100	0.2917	0.1247	0.1647	-0.0582	-0.0889	0.0915	0.1246	0.1220	0.1720	0.0694	0.0829
B-VQA	0.5194	0.6964	_	_	_	_	_	_	_	_	_	_	_	_
LLaVA	0.6626	0.8023	0.0830	0.1110	0.5297	0.6853	0.2535	0.3443	0.4899	0.6451	0.1866	0.2537	0.3212	0.4540
D-LLaVA	_	_	0.3147	0.4106	_	_	_	_	_	_	_	_	_	_
Grid-LLaVA	0.7592	0.8679	0.1435	0.1678	0.4815	0.5763	0.1349	0.1619	0.5469	0.6795	0.3298	0.3962	0.2266	0.2809
PLLaVA	0.2715	0.3105	0.1845	0.2201	-0.1252	-0.1509	0.0401	0.0498	0.4326	0.5066	-0.0713	-0.0835	0.2253	0.3142
G-Dino	_	_	_	_	0.5769	0.7057	_	_	_	_	_	_	0.4063	0.5378
DOT	-	_	-	-	-	-	0.4523	0.5366	-	-	-	-	-	-

are Pika [43], Runway Gen-2 [44], Runway Gen-3 [45], Dreamina [46], PixVerse [47], Luma Dream Machine [48], and Kuaishou Kling [49]. Among those models, LVD [41] is specifically designed to leverage LLM-guided layout planning for videos with multiple objects, and others are text-to-video foundation models. VideoTetris [40] is proposed for compositional multiple objects and dynamic changes in object numbers. Additionally, for dynamic attribute binding, we evaluate MagicTime [42], which is trained from AnimateDiff [39] and designed for metamorphic time-lapse video generation.

Implementation details. We follow the official implementations of the T2V models, please refer to Appendix B for more details.

5.2 Evaluation Metrics

Conventional metrics. We compare our proposed metrics with three metrics widely used in previous studies: 1) *CLIPScore* [27] (denoted as *CLIP*) calculates the cosine similarity between CLIP text and image embeddings. 2) *BLIP-CLIP* [16] (denoted as *B-CLIP*) applies BLIP [82] to generate captions for the generated images, and then calculates the CLIP text-text cosine similarity between two prompts. 3) *BLIP-VQA* [17] (denoted as *B-VQA*) applies BLIP [82] to ask a question to evaluate the text-image alignment. The video-level scores are calculated by averaging across all frames.

Our proposed metrics. As introduced in Sec. 4, the image-LLM-based metric, D-LLaVA, is designed for evaluating dynamic attribute binding, the detection-based metric (G-Dino) is designed for spatial relationships and generative numeracy, and the tracking-based metric (DOT) is designed for motion binding. For more details of our proposed evaluation metrics, please refer to Appendix C. Additionally, we test video-LLM-based metrics (ImageGrid-LLaVA, PLLaVA) and image-LLM-based metrics (LLaVA) for all categories. In the next subsection, we determine the best metric for each category by correlation between metrics and human scores.

5.3 Human Evaluation Correlation Analysis

In this section, we conduct human evaluations and compute the correlation between evaluation metrics and human scores to determine the best metric for each category.

Human evaluation. For the human evaluation of each category, we randomly select 15 prompts out of 100 prompts and use different video generation models to generate a total of 90 videos. Additionally, we include 10 ground truth videos for the dynamic attribute binding category and 16 for the object interactions category. The total number of videos for human evaluation is 656. We employ Amazon Mechanical Turk and ask three annotators to score the text-video alignment score of each video. We average across three scores for each text-video pair and calculate the correlation between human scores and automatic evaluation scores with Kendall's τ and Spearman's ρ . Please refer to Appendix D for more human evaluation details.

Comparisons across evaluation metrics. The human correlation results are illustrated in Table 1. The results validate the effectiveness of our proposed evaluation metrics, highlighted in bold, with ImageGrid-LLaVA for consistent attribute binding, action binding and object interactions, LLaVA for dynamic attribute binding, G-Dino for spatial relationships and generative numeracy, and DOT for motion binding.

CLIP and B-CLIP show relatively low human correlations, indicating they cannot capture the finegrained attributes and dynamics in complex videos and text prompts. LLaVA, ImageGrid-LLaVA,

Table 2: **T2V-CompBench evaluation results with proposed metrics**. A higher score indicates better performance for a category. **Bold** stands for the best score, red indicates the best score across 7 commercial models, yellow indicates the best score across 13 open-sourced models.

Model	Consist-attr	Dynamic-attr	Spatial	Motion	Action	Interaction	Numeracy
Metric	Grid-LLaVA	D-LLaVA	G-Dino	DOT	Grid-LLaVA	Grid-LLaVA	G-Dino
ModelScope [13]	0.5483	0.1654	0.4220	0.2552	0.4880	0.7075	0.2066
ZeroScope [33]	0.4495	0.1086	0.4073	0.2319	0.4620	0.5550	0.2378
Latte [34]	0.5325	0.1598	0.4476	0.2187	0.5200	0.6625	0.2187
Show-1 [35]	0.6388	0.1828	0.4649	0.2316	0.4940	0.7700	0.1644
VideoCrafter2 [36]	0.6750	0.1850	0.4891	0.2233	0.5800	0.7600	0.2041
Open-Sora 1.1 [37]	0.6370	0.1762	0.5671	0.2317	0.5480	0.7625	0.2363
Open-Sora 1.2 [37]	0.6600	0.1714	0.5406	0.2388	0.5717	0.7400	0.2556
Open-Sora-Plan v1.0.0 [38]	0.5088	0.1562	0.4481	0.2147	0.5120	0.6275	0.1650
Open-Sora-Plan v1.1.0 [38]	0.7413	0.1770	0.5587	0.2187	0.6780	0.7275	0.2928
AnimateDiff [39]	0.4883	0.1764	0.3883	0.2236	0.4140	0.6550	0.0884
VideoTetris [40]	0.7125	0.2066	0.5148	0.2204	0.5280	0.7600	0.2609
LVD [41]	0.5595	0.1499	0.5469	0.2699	0.4960	0.6100	0.0991
MagicTime [42]	-	0.1834	-	-	-	-	-
Pika [43]	0.6513	0.1744	0.5043	0.2221	0.5380	0.6625	0.2613
Gen-2 [44]	0.7050	0.2100	0.5250	0.2169	0.5280	0.7300	0.3081
Gen-3 [45]	0.7045	0.2078	0.5533	0.3111	0.6280	0.7900	0.2169
Dreamina [46]	0.8220	0.2114	0.6083	0.2391	0.6660	0.8175	0.4006
PixVerse [47]	0.7370	0.1738	0.5874	0.2178	0.6960	0.8275	0.3281
Dream Machine [48]	0.6900	0.2002	0.5387	0.2713	0.6400	0.7725	0.2109
Kling [49]	0.8045	0.2256	0.6150	0.2448	0.6460	0.8475	0.3044

and PLLaVA perform well in action binding. However, these metrics fall short when it comes to capturing dynamic changes involving attributes or states (as in dynamic attribute binding), as well as in tasks requiring understandings of spatial relationships, motion direction, and numeracy. Instead, our proposed D-LLaVA significantly enhances the ability to capture dynamic attribute changes in videos, resulting in a higher correlation with human evaluations for dynamic attribute binding. Additionally, detection-based and tracking-based metrics show improvements in capturing spatial and counting aspects of compositionality. ImageGrid-LLaVA surpasses LLaVA in terms of consistent attribute binding and object interactions, as it accounts for temporal sequences rather than just a static frame.

5.4 Quantitative Evaluation

The models' performances on T2V-CompBench are shown in Table 2. Comparing against different models, we observe the following: (1) The commercial models outperform the open-source models in seven compositional categories. (2) Show-1 [35], VideoCrafter2 [36], VideoTetris [40], Open-Sora 1.1 and 1.2 [37] and Open-Sora-Plan v1.1.0 [38] exhibit better overall performances. (3) Open-Sora-Plan v1.1.0 shows significant improvement over the previous version, Open-Sora-Plan v1.0.0, in terms of 7 compositional categories, and leads in consistent attribute binding, action binding, and generative numeracy. (4) Show-1 [35] excels in object interactions, while VideoTetris [40] is superior in dynamic attribute binding. (5) LVD [41] performs well in spatial relationships and motion binding due to its design, which leverages LLM-guided layout planning.

5.5 Qualitative Evaluation

The challenging cases for seven compositional categories are illustrated in Fig. 4 and Fig. 5, with the level of challenge decreasing from top to bottom. Fig. 4 shows the performance of open-source models, while Fig. 5 presents that of commercial models.

We observe the following: (1) The most challenging ones are dynamic attribute binding and generative numeracy (rows 1-2 in Fig. 4 and Fig. 5), which require a fine-grained understanding of temporal dynamics or accurate counting. In these categories, models often overlook some parts of prompts. For dynamic attribute binding, the T2V models often focus on keywords in the prompts, neglecting the dynamic changes in attributes or states. They tend to generate consistent results without reflecting the required transitions. For numeracy, the T2V models handle numeracy well when the numbers are smaller than three. However, they struggle when the numbers exceed three.



Figure 4: Qualitative comparisons of seven compositional categories among Show-1 [35], VideoCrafter2 [36], and Open-Sora 1.1 [37].



Figure 5: Qualitative comparisons of seven compositional categories among Gen-3 [45], Dreamina [46], and PixVerse [47].

(2) The second challenging categories include spatial relationships, motion binding, and action binding (rows 3-5 in Fig. 4 and Fig. 5). For spatial relationships, the models often confuse locality

terms such as "left" and "right". The problem worsens with moving directions in motion binding, such as "sail to the left" or "flying right towards". For action binding, the models fail to correctly associate certain actions with objects. For example, given the prompts "A dog runs through a field while a cat climbs a tree", the models tend to generate both animals running instead of performing their respective actions, or they may neglect one object entirely.

(3) The last challenging categories are object interactions and consistent attribute binding (rows 6-7 in Fig. 4 and Fig. 5). In object interactions, the models often produce nearly static videos, neglecting the entire interaction process. For consistent attribute binding, the models sometimes confuse the attributes with specific objects or overlook certain object.

6 Conclusion and Discussions

We conduct the first systematic study on compositionality in text-to-video generation. We propose T2V-CompBench, a comprehensive benchmark for compositional text-to-video generation, with 700 prompts belonging to 7 categories. We further design a suite of evaluation metrics for the 7 categories. Finally, we benchmark 9 text-to-video generation models and provide insightful analysis of the compositionality of current text-to-video models. Compositional text-to-video generation is highly challenging for current models, and we hope our work will inspire future works to improve the compositionality of text-to-video models. A limitation of our work is the lack of a unified evaluation metric for all categories, and we believe that this limitation points out new challenges for multimodal LLMs or video understanding models. The community should be aware of the potential negative social impact of video generation models being used to generate fake videos that mislead people.

References

- [1] Andreas Blattmann et al. "Align your latents: High-resolution video synthesis with latent diffusion models". In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2023, pp. 22563–22575.
- [2] Andreas Blattmann et al. "Stable video diffusion: Scaling latent video diffusion models to large datasets". In: *arXiv preprint arXiv:2311.15127* (2023).
- [3] Jonathan Ho et al. "Imagen video: High definition video generation with diffusion models". In: *arXiv preprint arXiv:2210.02303* (2022).
- [4] Uriel Singer et al. "Make-a-video: Text-to-video generation without text-video data". In: *arXiv* preprint arXiv:2209.14792 (2022).
- [5] Chenfei Wu et al. "Godiva: Generating open-domain videos from natural descriptions". In: *arXiv preprint arXiv:2104.14806* (2021).
- [6] Chenfei Wu et al. "Nüwa: Visual synthesis pre-training for neural visual world creation". In: *European conference on computer vision*. Springer. 2022, pp. 720–736.
- [7] Wenyi Hong et al. "Cogvideo: Large-scale pretraining for text-to-video generation via transformers". In: *arXiv preprint arXiv:2205.15868* (2022).
- [8] Ruben Villegas et al. "Phenaki: Variable length video generation from open domain textual descriptions". In: *International Conference on Learning Representations*. 2022.
- [9] Daquan Zhou et al. "Magicvideo: Efficient video generation with latent diffusion models". In: *arXiv preprint arXiv:2211.11018* (2022).
- [10] Levon Khachatryan et al. "Text2video-zero: Text-to-image diffusion models are zero-shot video generators". In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 2023, pp. 15954–15964.
- [11] Zhengxiong Luo et al. "Videofusion: Decomposed diffusion models for high-quality video generation". In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2023, pp. 10209–10218.
- [12] Yingqing He et al. "Latent video diffusion models for high-fidelity long video generation". In: *arXiv preprint arXiv:2211.13221* (2022).
- [13] Jiuniu Wang et al. "Modelscope text-to-video technical report". In: *arXiv preprint arXiv:2308.06571* (2023).
- [14] Nan Liu et al. "Compositional visual generation with composable diffusion models". In: *ECCV*. 2022.

- [15] Weixi Feng et al. "Training-Free Structured Diffusion Guidance for Compositional Text-to-Image Synthesis". In: *ICLR*. 2023.
- [16] Hila Chefer et al. "Attend-and-excite: Attention-based semantic guidance for text-to-image diffusion models". In: *ACM Trans. Graph.* 2023.
- [17] Kaiyi Huang et al. "T2i-compbench: A comprehensive benchmark for open-world compositional text-to-image generation". In: *NeurIPS* (2024).
- [18] Junsong Chen et al. "PixArt-*alpha*: Fast Training of Diffusion Transformer for Photorealistic Text-to-Image Synthesis". In: *ICLR*. 2024.
- [19] James Betker et al. "Improving image generation with better captions". In: *Computer Science*. *https://cdn. openai. com/papers/dall-e-3. pdf* 2.3 (2023), p. 8.
- [20] Patrick Esser et al. Scaling Rectified Flow Transformers for High-Resolution Image Synthesis. 2024. arXiv: 2403.03206 [cs.CV].
- [21] Ziqi Huang et al. "Vbench: Comprehensive benchmark suite for video generative models". In: *arXiv preprint arXiv:2311.17982* (2023).
- [22] Yaofang Liu et al. "Evalcrafter: Benchmarking and evaluating large video generation models". In: arXiv preprint arXiv:2310.11440 (2023).
- [23] Yuanxin Liu et al. "Fetv: A benchmark for fine-grained evaluation of open-domain text-tovideo generation". In: Advances in Neural Information Processing Systems 36 (2024).
- [24] Tim Salimans et al. "Improved techniques for training gans". In: *NeurIPS*. 2016.
- [25] Martin Heusel et al. "Gans trained by a two time-scale update rule converge to a local nash equilibrium". In: *NeurIPS*. 2017.
- [26] Thomas Unterthiner et al. "FVD: A new metric for video generation". In: (2019).
- [27] Jack Hessel et al. "Clipscore: A reference-free evaluation metric for image captioning". In: *arXiv preprint arXiv:2104.08718* (2021).
- [28] Huiwen Chang et al. "Muse: Text-to-image generation via masked generative transformers". In: arXiv preprint arXiv:2301.00704 (2023).
- [29] Dan Kondratyuk et al. "Videopoet: A large language model for zero-shot video generation". In: *arXiv preprint arXiv:2312.14125* (2023).
- [30] Lijun Yu et al. "Magvit: Masked generative video transformer". In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 2023, pp. 10459–10469.
- [31] Lijun Yu et al. "Language Model Beats Diffusion–Tokenizer is Key to Visual Generation". In: *arXiv preprint arXiv:2310.05737* (2023).
- [32] Huiwen Chang et al. "Maskgit: Masked generative image transformer". In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2022, pp. 11315–11325.
- [33] Zeroscope. 2023. URL: https://huggingface.co/cerspense/zeroscope_%20v2_ 576w.
- [34] Xin Ma et al. "Latte: Latent diffusion transformer for video generation". In: *arXiv preprint arXiv:2401.03048* (2024).
- [35] David Junhao Zhang et al. "Show-1: Marrying pixel and latent diffusion models for text-tovideo generation". In: *arXiv preprint arXiv:2309.15818* (2023).
- [36] Haoxin Chen et al. "Videocrafter2: Overcoming data limitations for high-quality video diffusion models". In: *arXiv preprint arXiv:2401.09047* (2024).
- [37] hpcaitech. Open-sora: Democratizing efficient video production for all. 2024. URL: https://github.com/hpcaitech/Open-Sora.
- [38] PKU-Yuan Lab and Tuzhan AI etc. Open-Sora-Plan. Apr. 2024. DOI: 10.5281/zenodo. 10948109. URL: https://doi.org/10.5281/zenodo.10948109.
- [39] Yuwei Guo et al. "Animatediff: Animate your personalized text-to-image diffusion models without specific tuning". In: *arXiv preprint arXiv:2307.04725* (2023).
- [40] Ye Tian et al. VideoTetris: Towards Compositional Text-to-Video Generation. 2024. arXiv: 2406.04277 [cs.CV]. URL: https://arxiv.org/abs/2406.04277.
- [41] Long Lian et al. "Llm-grounded video diffusion models". In: *arXiv preprint arXiv:2309.17444* (2023).
- [42] Shenghai Yuan et al. "MagicTime: Time-lapse Video Generation Models as Metamorphic Simulators". In: *arXiv preprint arXiv:2404.05014* (2024).

- [43] Pika. 2023. URL: https://www.pika.art/.
- [44] Gen-2. 2024. URL: https://research.runwayml.com/gen2.
- [45] Gen-3. 2024. URL: https://runwayml.com/blog/introducing-gen-3-alpha/.
- [46] Dreamina. 2024. URL: https://dreamina.capcut.com/ai-tool/platform.
- [47] *PixVerse*. 2024. URL: https://app.pixverse.ai.
- [48] Luma AI. 2024. URL: https://lumalabs.ai/dream-machine.
- [49] Kling. 2024. URL: https://kling.kuaishou.com/.
- [50] Zhiheng Li et al. "Stylet2i: Toward compositional and high-fidelity text-to-image synthesis". In: CVPR. 2022.
- [51] Qiucheng Wu et al. "Harnessing the spatial-temporal attention of diffusion models for high-fidelity text-to-image synthesis". In: *ICCV*. 2023.
- [52] Maitreya Patel et al. "Eclipse: A resource-efficient text-to-image prior for image generations". In: *arXiv preprint arXiv:2312.04655* (2023).
- [53] Xuantong Liu et al. "Referee Can Play: An Alternative Approach to Conditional Generation via Model Inversion". In: *arXiv preprint arXiv:2402.16305* (2024).
- [54] Dong Huk Park et al. "Benchmark for compositional text-to-image synthesis". In: *NeurIPS*. 2021.
- [55] Minghao Chen, Iro Laina, and Andrea Vedaldi. "Training-free layout control with crossattention guidance". In: WACV. 2024.
- [56] Ruichen Wang et al. "Compositional text-to-image synthesis with attention map control of diffusion models". In: *arXiv preprint arXiv:2305.13921* (2023).
- [57] Tuna Han Salih Meral et al. "CONFORM: Contrast is All You Need For High-Fidelity Text-to-Image Diffusion Models". In: *arXiv preprint arXiv:2312.06059* (2023).
- [58] Yunji Kim et al. "Dense text-to-image generation with attention modulation". In: 2023.
- [59] Royi Rassin et al. "Linguistic binding in diffusion models: Enhancing attribute correspondence through attention map alignment". In: *NeurIPS* (2024).
- [60] Hanan Gani et al. "Llm blueprint: Enabling text-to-image generation with complex and detailed prompts". In: *arXiv preprint arXiv:2310.10640* (2023).
- [61] Yuheng Li et al. "Gligen: Open-set grounded text-to-image generation". In: ICCV. 2023.
- [62] Ashkan Taghipour et al. "Box It to Bind It: Unified Layout Control and Attribute Binding in T2I Diffusion Models". In: *arXiv preprint arXiv:2402.17910* (2024).
- [63] Zhenyu Wang et al. "Divide and Conquer: Language Models can Plan and Self-Correct for Compositional Text-to-Image Generation". In: *arXiv preprint arXiv:2401.15688* (2024).
- [64] Xiaohui Chen et al. "Reason out your layout: Evoking the layout master from large language models for text-to-image synthesis". In: *arXiv preprint arXiv:2311.17126* (2023).
- [65] Ling Yang et al. "Mastering text-to-image diffusion: Recaptioning, planning, and generating with multimodal llms". In: *arXiv preprint arXiv:2401.11708* (2024).
- [66] Khurram Soomro, Amir Roshan Zamir, and Mubarak Shah. "UCF101: A dataset of 101 human actions classes from videos in the wild". In: *arXiv preprint arXiv:1212.0402* (2012).
- [67] Will Kay et al. "The kinetics human action video dataset". In: *arXiv preprint arXiv:1705.06950* (2017).
- [68] Joao Carreira et al. "A short note about kinetics-600". In: *arXiv preprint arXiv:1808.01340* (2018).
- [69] Lucas Smaira et al. "A short note on the kinetics-700-2020 human action dataset". In: *arXiv* preprint arXiv:2010.10864 (2020).
- [70] Alec Radford et al. "Learning transferable visual models from natural language supervision". In: *ICML*. 2021.
- [71] GPT-4 Technical Report. 2024. arXiv: 2303.08774 [cs.CL].
- [72] Deyao Zhu et al. "Minigpt-4: Enhancing vision-language understanding with advanced large language models". In: *arXiv preprint arXiv:2304.10592* (2023).
- [73] Haotian Liu et al. "Improved baselines with visual instruction tuning". In: *arXiv preprint arXiv:2310.03744* (2023).
- [74] Lin Xu et al. "Pllava: Parameter-free llava extension from images to videos for video dense captioning". In: *arXiv preprint arXiv:2404.16994* (2024).

- [75] Wonkyun Kim et al. "An Image Grid Can Be Worth a Video: Zero-shot Video Question Answering Using a VLM". In: *arXiv preprint arXiv:2403.18406* (2024).
- [76] Jason Wei et al. "Chain-of-thought prompting elicits reasoning in large language models". In: *NeurIPS*. 2022.
- [77] Shilong Liu et al. "Grounding DINO: Marrying DINO with Grounded Pre-Training for Open-Set Object Detection". In: *arXiv preprint arXiv:2303.05499* (2023).
- [78] Alexander Kirillov et al. "Segment Anything". In: arXiv:2304.02643 (2023).
- [79] Lihe Yang et al. "Depth anything: Unleashing the power of large-scale unlabeled data". In: *arXiv preprint arXiv:2401.10891* (2024).
- [80] Tianhe Ren et al. "Grounded sam: Assembling open-world models for diverse visual tasks". In: *arXiv preprint arXiv:2401.14159* (2024).
- [81] Guillaume Le Moing, Jean Ponce, and Cordelia Schmid. "Dense optical tracking: Connecting the dots". In: *arXiv preprint arXiv:2312.00786* (2023).
- [82] Junnan Li et al. "Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation". In: *ICML*. 2022.

Appendix

A T2V-CompBench Dataset Construction

This section provides the instructions used to prompt GPT-4 [71] to generate the text prompts for T2V-CompBench and the corresponding metadata for evaluation. The text prompts in T2V-CompBench, metadata generated for evaluation, and the evaluation code are available at this link.

Consistent attribute binding. Table 3 and Table 4 show the input templates for generating the prompts in the category of consistent attribute binding. Templates in Table 3 are used for generating prompts with color, shape, or texture attributes. Template in Table 4 is used for generating prompts with human attributes. Table 5 is used to generate the metadata for evaluation.

Table 3: Templates for generating common and uncommon **consistent attribute binding** prompts using GPT-4. The attribute type can be color, shape, or texture. Here we take *color* as an example. The input attribute type and examples are marked by cyan. The example output prompts are marked by orange.

Туре	Common	Uncommon
User	Generate 30 prompts featuring two objects with {color} attributes. Ensure these objects are natural to coexist, engaging in separate or shared activities. Objects should be described using vibrant, active verbs, avoiding static actions like 'see', 'rest', or 'park'. Select objects that vary in {color}, speci- fying a unique {color} for each within the prompt to enrich the visual narrative. Eligible object categories include: animal, plant, vehicle, artifact, food, and building. Here are some examples: A blue car drives past a white picket fence on a sunny day, Yellow rubber duck floating next to a blue bath towel.	Generate 10 prompts featuring two objects with {color} attributes. The two objects can be uncommon to co- exist, engaging in separate or shared activ- ities. Objects should be described using vibrant, active verbs, avoiding static actions like 'see', 'rest', or 'park'. The {color} attributes can be uncommon, such as 'Purple banana hanging from a green vine' or 'Blue apple bouncing near a pink tree'. Eligible object categories include: animal, plant, vehicle, artifact, food, and building.
GPT-4	A black dog sits beside a red vase on a table Green parrot perching on a brown chair Green tractor plowing near a white farm- house	Green cat chasing a purple mouse Orange palm tree swaying beside a silver shed Pink giraffe eating from a brown bush

Dynamic attribute binding. Table 6 shows the input template for generating the prompts in the category of dynamic attribute binding. Table 7 is used to generate the metadata for evaluation.

Spatial relationships. Table 8 shows the input template for generating the prompts in the category of spatial relationships. Table 9 is used to generate the metadata for evaluation.

Action binding. Table 10 shows the input templates for generating the prompts in the category of action binding. Table 11 is used to generate the metadata for evaluation.

Motion binding. Table 12 shows the input template for generating the prompts in the category of motion binding. Table 13 is used to generate the metadata for evaluation.

Object interactions. Table 14 shows the input templates for generating the prompts in the category of object interactions.

Generative numeracy. Table 15 shows the input templates for generating the prompts in the category of generative numeracy. Table 16 is used to generate the metadata for evaluation.

Table 4: Template for generating **consistent attribute binding** prompts using GPT-4. The attribute type is human attribute. The example output prompts are marked by orange.

User	 Generate 30 prompts featuring two objects, one of which should be a human. The other object can be a human or fall into the categories of animal, plant, vehicle, artifact, food, or building. Objects should be described using vibrant, active verbs, avoiding static actions like 'see', 'rest', or 'park'. Consider attributes of human appearance such as height, weight, hairstyle, age, facial hair, glasses, or other accessories. For the non-human object, focus on attributes of color, shape, or texture. Choose only one attribute for each object. Use adjectives like tall and short together for comparison. Here are some examples: Boy wearing a blue shirt playing chess with a bearded man, Tall woman discussing plans with a short woman.
GPT-4	Girl with curly hair riding a red bike Woman in red dress painting with a man in a green shirt Boy with a cap playing soccer with a girl wearing a red shirt

Table 5: Template for generating the metadata of consistent attribute binding prompts using GPT-4.

User	I will provide you with several prompts, each on a separate line. Each prompt will describe two objects, each associated with an attribute. For each prompt, you are to create a JSON object. This JSON object should include two keys: "prompt" and "phrases". The "prompt" key should simply replicate the original prompt text. The "phrases" key should contain the two described objects separated by a semicolon. For instance, for the prompt "A blue car drives past a white picket fence on a sunny day", the value under "phrases" should be "a blue car; a white picket fence". Below are the prompts for which you need to generate the JSON objects: A blue car drives past a white picket fence on a sunny day Yellow rubber duck floating next to a blue bath towel Green tractor plowing near a white farmhouse
GPT-4	Here are the JSON representations for the prompts: {"prompt": "A blue car drives past a white picket fence on a sunny day", "phrases": "a blue car; a white picket fence"}, {"prompt": "Yellow rubber duck floating next to a blue bath towel", "phrases": "yellow rubber duck; a blue bath towel"}, {"prompt": "Green tractor plowing near a white farmhouse ", "phrases": "green tractor; a white farmhouse"},

B Implementation Details

ModelScope [13] is a diffusion-based text-to-video generation model that evolves from a textto-image model by incorporating spatio-temporal blocks, ensuring consistent frame generation and smooth movement transitions. ZeroScope [33] is a foundational text-to-video latent diffusion model. Latte [34] is a video generation model that leverages a latent diffusion transformer. Show-1 [35] is a high-quality text-to-video diffusion model that initially employs pixel-based diffusion to create a low-resolution video, followed by a latent-based approach to upsample the video to high resolution. VideoCrafter2 [36] is a video generation model that generates videos with high visual quality and precise text-video alignment without requiring high-quality videos Open-Sora 1.1 and 1.2 [37] and Open-Sora-Plan v1.0.0 and v1.1.0 [38] are open-source projects focused on video generation, aiming at creating a way to reproduce Sora. AnimateDiff [39] provides a framework for animating personalized T2I models with a motion module. LVD [41] is a video diffusion model that Table 6: Template for generating **dynamic attribute binding** prompts using GPT-4. Here we take *state change* as an example. The input example prompts and dynamic change type are marked by cyan. The example output prompts are marked by orange.

-	
User	 Generate 50 prompts featuring two objects, each of them with its own state, think about some cases that the state is changing, from an initial state to a final state. Eligible object categories include: human, animal, plant, vehicle, artifact, food, and building. Here are some examples: A timelapse of an apple decaying over time A pumpkin growing from a small bud into a large fruit
GPT-4	A timelapse of a flower bud blooming into a full flower. A snowman melting under the afternoon sun.

Table 7: Template for generating the metadata of dynamic attribute binding prompts using GPT-4.

User	I will provide you with several prompts, each on a separate line. Each prompt describes a state or color change of one or multiple objects. For each prompt, you are to create a JSON object. This JSON object should include the following keys: "prompt": simply replicate the original prompt text. "state 0": the initial state of the object(s). "state 1": the final state of the object(s). Below are the prompts for which you need to generate the JSON objects: A timelapse of a leaf transitioning from green to bright red as autumn progresses A silver coin tarnishing from shiny to dull
GPT-4	Here are the JSON representations for each prompt: {"prompt": "A timelapse of a leaf transitioning from green to bright red as autumn progresses", "state 0": "A green leaf", "state 1": "A bright red leaf"} {"prompt": "A silver coin tarnishing from shiny to dull", "state 0": "A shiny silver coin", "state 1": "A dull silver coin"}

Table 8: Template for generating **spatial relationships** prompts using GPT-4. The spatial relationship can be left, right, above, below, in front of, and behind. Here we take *left* as an example. The input spatial relationship and example prompts are marked by cyan. The example output prompts are marked by orange.

User	 Generate 30 prompts featuring two objects where one is {on the left of} the other. The prompt must contain movable objects like human or animal, or with dynamic verbs to ensure the scene is dynamic. Eligible object categories include: human, animal, plant, vehicle, artifact, food, and building. Here are some examples: A bird flying on the left side of a hot air balloon A toddler walking on the left of a dog in a park A llama walking on the left side of a motorcycle in a city street
GPT-4	A dog running on the left of a bicycle A penguin standing on the left side of a cactus in a desert A sheep grazing on the left of a surfboard on a sandy beach

incorporates LLM for dynamic scene layouts, and then enhances prompt understanding capabilities such as attributes and motion patterns. VideoTetris [40] is designed for compositional multiple objects and dynamic changes in object numbers. Additionally, for dynamic attribute binding, we

User	I will provide you with several prompts, each on a separate line. For each prompt, you are to create a JSON object.
	This JSON object should include the following keys:
	"prompt": simply replicate the original prompt text.
	"spatial": contain the word from the prompt that represents the spatial relationship.
	Choose one from the following six options: left, right, above, below, in front of, and behind. For example, if the prompt uses the word "under", set the value of "spatial"
	to "below" because these words have the same meaning.
	"object_1" and "object_2": These keys represent the two objects mentioned in the
	prompt. The value of "object_1" should be positioned to the left of, right of, above,
	below, in front of, or behind "object_2" based on the spatial word used in the prompt.
	Here's an example to illustrate the format:
	Prompt: "A toddler walking on the left of a dog in a park"
	JSON object: {"prompt": "A toddler walking on the left of a dog in a park", "spatial": "left", "object_1": "toddler", "object_2": "dog" }
	Below are the prompts for which you need to generate the JSON objects:
	A bird flying on the left side of a hot air balloon
	A toddler walking on the left of a dog in a park
	A llama walking on the left side of a motorcycle in a city street
GPT-4	Here are the JSON objects for each of your prompts, accurately capturing the spatial relationship, object_1, and object_2:
	{"prompt": "A bird flying on the left side of a hot air balloon", "spatial": "left", "object_1": "bird", "object_2": "hot air balloon"},
	{"prompt": "A toddler walking on the left of a dog in a park", "spatial": "left", "object_1": "toddler", "object_2": "dog"},
	{"prompt": "A llama walking on the left side of a motorcycle in a city street", "spatial": "left", "object_1": "llama", "object_2": "motorcycle"},

Table 9: Template for generating the metadata of **spatial relationships** prompts using GPT-4.

evaluate MagicTime [42] that is designed for metamorphic time-lapse video generation. The details of the videos generated by the T2V models, including duration, FPS, and resolution, are presented in Table 17.

C Automatic Evaluation Details

Video LLM-based metrics for consistent attribute binding, action binding, and object interactions. We detail the prompts used for video LLM-based metrics. For each category, we boost the ability of video LLM by the chain-of-thought mechanism [76]. Specifically, Table 18, Table 20, and Table 21 show the prompt template for evaluating consistent attribute binding, action binding, and object interactions, respectively.

Image LLM-based metrics for dynamic attribute binding. For evaluating dynamic attribute binding in a video and to disentangle the complex temporal sequence, we use GPT-4 to extract the initial and final states from a given prompt. For instance, given the prompt "A timelapse of a flower bud blooming into a full flower," GPT-4 identifies the initial state as "A flower bud" and the final state as "A full flower."

The video frames are labeled as (F_0, F_1, \ldots, F_T) . We evaluate the first and last frames $(F_0 \text{ and } F_T)$ in relation to the initial and final states (i.e., the flower bud and the full flower), while ensuring that the intermediate frames $(F_1, F_2, \ldots, F_{T-1})$ represent the transition between these states.

Specifically, we align the initial frame (F_0) with both the initial and final states and do the same for the final frame (F_T) . For the intermediate frames, we ensure they depict the transition from the initial state to the final state. The detailed prompts are represented in Table 19. The overall evaluation score

Туре	Common	Uncommon
User	Generate 80 prompts that describe either an animal or a human engaging in an activ- ity, while another animal or human is also engaged in a separate activity. Use dynamic verbs or actions such as walk, run, fly, swim, or eat. Avoid static actions like think, dream, watch, see, or make a sound. Here are some examples: A dog runs through a field while a cat climbs a tree A panda eats bamboo while a monkey swings from branch to branch A kangaroo bounds across the plain and a cow grazes	Generate 20 prompts that describe either an animal or a human engaging in an activ- ity, while another animal or human is also engaged in a separate activity. You can choose to pair animals with an- thropomorphic activities such as play a gui- tar, taking a selfie, listening to music with headphones, or wearing VR goggles. Alternatively, you can use two objects that are uncommon to coexist, such as 'A pen- guin waddles on the ice, a camel treks by'. Use dynamic verbs or actions such as walk, run, fly, swim, or eat. Avoid static actions like think, dream, watch, see, or make a sound.
GPT-4	An elephant sprays water with its trunk, a lion sitting nearby A deer grazes in the meadow as a rabbit hops by A frog jumps from lily to lily, a swan swims nearby 	A dog plays guitar while a cat takes a selfie A kangaroo boxes in a ring while a sheep jumps rope A fish swims gracefully in a tank as a horse gallops outside

Table 10: Templates for generating common and uncommon **action binding** prompts using GPT-4. The example input prompts are marked by cyan. The example output prompts are marked by orange.

Table 11: Template for	r generating the metadata	of action binding pr	ompts using GPT-4.

Table	Table 11: Template for generating the metadata of action binding prompts using GPT-4.		
User	I will provide you with several prompts, each on a separate line. For each prompt, your task is to extract the prompt into a noun phrase and a noun phrase with an action. For example, given the prompt "A dog runs through a field while a cat climbs a tree", the output should be: { "prompt": "A dog runs through a field while a cat climbs a tree", "phrase_0": ["a dog?", "a dog runs through a field?"], "phrase_1": ["a cat?", "a cat climbs a tree?"] } Below are the prompts for which you need to generate the JSON objects: An elephant sprays water with its trunk, a lion sitting nearby A deer grazes in the meadow as a rabbit hops by A frog jumps from lily to lily, a swan swims nearby		
GPT-4	Here are the extracted phrases for each prompt: {"prompt": "An elephant sprays water with its trunk, a lion sitting nearby", "phrase_0": ["an elephant?", "an elephant sprays water with its trunk?"], "phrase_1": ["a lion?", "a lion sitting nearby?"]}, {"prompt": "A deer grazes in the meadow as a rabbit hops by", "phrase_0": ["a deer?", "a deer grazes in the meadow?"], "phrase_1": ["a rabbit?", "a rabbit hops by?"]}, {"prompt": "A frog jumps from lily to lily, a swan swims nearby", "phrase_0": ["a frog?", "a frog jumps from lily to lily?"], "phrase_1": ["a swan?", "a swan swims nearby?"]}, 		

calculates the scores of the first and last frames, and get the average score while considering the intermediate frames' temporal dynamics.

Table 12: Template for generating **motion binding** prompts using GPT-4. The motion direction can be leftwards, rightwards, upwards, and downwards. Here we take a single object moving leftwards as an example. The input motion direction and example prompts are marked by cyan. The example output prompts are marked by orange.

User	 Generate 30 prompts that describe an animal, human, or movable object moving leftwards. Here are some examples: A cat slinking to the left side of a cozy living room A golden retriever scampering leftwards across a garden A boat sails to the left on the ocean
GPT-4	A golden retriever scampering leftwards across a garden A soccer ball being kicked hard to the left A paper airplane gliding to the left across a classroom

Table 13: Template for generating the metadata of motion binding prompts using GPT-4.

User	I will provide you with several prompts, each on a separate line. Each prompt describes the movement of one or two objects in different directions. For each prompt, you are to create a JSON object. This JSON object should include the following keys: "prompt": simply replicate the original prompt text. "object_1": the first object mentioned in the prompt that moves in a direction. "d_1": motion direction for "object_1" and can only be one of the following: left, right, up, or down. "object_2": If there is a second object mentioned in the prompt that moves in a direction, this key will contain its name. Otherwise, the value will be an empty string. "d_2": If there is "object_2", this key will represent its motion direction. Otherwise, the value will be an empty string. Below are the prompts for which you need to generate the JSON objects: A rabbit hops from left to right in a garden A paper airplane gliding to the left across a classroom A ball rolls left while a puppy dashes right
GPT-4	Here are the JSON representations for each prompt: {"prompt": "A rabbit hops from left to right in a garden", "object_1": "rabbit", d_1": "right", "object_2": "", "d_2": ""} {"prompt": "A paper airplane gliding to the left across a classroom", "object_1": "paper airplane", d_1": "right", "object_2": "", "d_2": ""} {"prompt": "A ball rolls left while a puppy dashes right", "object_1": "ball", d_1": "left", "object_2": "puppy", "d_2": "right"}

D Human Evaluation Details

We follow [17] to conduct human evaluations on Amazon Mechanical Turk (AMT). Specifically, we ask the annotators to rate the alignment score between a generated video and the text prompt used to generate the video, based on the provided examples and rules. Figure 6, 7, 8, 9, 10, 11, 12 show the interfaces for human evaluation over the 7 categories. We randomly sample 15 prompts from each category and use the generated videos from 6 models (ModelScope [13], Latte [34], Show-1 [35], VideoCrafter2 [36], Open-Sora 1.1 [37], Open-Sora-Plan v1.0.0 [38]). In addition, we include 10 ground truth videos for the dynamic attribute binding category and 16 for the object interactions category. In total, we gather 656 video-text pairs for human evaluation experiments. Each video-text pair is rated by 3 human annotators according to the video-text alignment. The estimated hourly wage paid to each participant is 9.6 USD. We spend 195 USD in total on participant compensation.

Table 14: Templates for generating physical and social **object interactions** prompts using GPT-4. The input interaction type and example prompts are marked by cyan. The example output prompts are marked by orange.

Туре	Physical	Social
User	Generate 30 prompts describing physical interaction between two objects that cause motion state change, Eligible object categories include: human, animal, plant, vehicle, artifact, food, and building. Here are some examples: Two cars collide at an intersection Football players bump into each other dur- ing a game	Generate 20 prompts describing social in- teraction between two objects. Eligible object categories include: human, animal, plant, vehicle, artifact, food, and building. Here are some examples: Man teaches robot to play chess Girl reads bedtime story to her stuffed bear
GPT-4	Child kicks a soccer ball Bird lands on a branch causing it to dip 	Child plays with family dog at the beach Fisherman feeds seagulls at the dock

Table 15: Template for generating **generative numeracy** prompts using GPT-4. The example input prompts are marked by cyan. The example output prompts are marked by orange.

User	Generate 40 prompts that describe a specific object class with a quantity ranging from one to eight, along with another object class with a quantity ranging from one to eight, engaging in activities within a scene. The eligible object categories include human, animal, plant, vehicle, artifact, food, and building. Here are some examples: Three dogs play in the snow with a red ball Four children and three dogs having a picnic in a park
GPT-4	Three bees and five butterflies fly around a blooming garden two horses and four cows graze together on a sunny hillside

Table 16: Template for generating the metadata of **generative numeracy** prompts using GPT-4.

User	I will provide you with several prompts, each on a separate line. Each prompt describes a certain number of objects engaging in an activity, where each object is associated with a specific quantity. For example, the prompt may include phrases like "two cats" or "three dogs". For each prompt, you are to create a JSON object. This JSON object should include the following keys: "prompt": simply replicate the original prompt text. "objects": This key will contain the objects mentioned in the prompt. If there are multiple objects, they will be separated by commas. "numbers": This key will represent the corresponding numbers associated with each object. The numbers will be concatenated with commas. When describing the action the objects are performing and the environment, there may be mentions of other objects, articles like "a park" or "the woods" or other unnecessary details. Please ignore these and focus only on extracting the objects and their respective quantities. Below are the prompts for which you need to generate the JSON objects: three bees and five butterflies fly around a blooming garden two horses and four cows graze together on a sunny hillside
GPT-4	Here are the JSON representations for each prompt: {"prompt": "three bees and five butterflies flying around a blooming garden", "objects": "bee,butterfly", "numbers": "3,5"}, {"prompt": "two horses and four cows graze together on a sunny hillside", "objects": "horse,cow", "numbers": "2,4"},

Table 17: Details about evaluation models. The table shows duration, FPS, and resolution for each model.

Model	Duration (s)	FPS	Resolution
ModelScope [13]	2	8	256×256
ZeroScope [33]	3.6	10	576×320
Latte [34]	2	8	512×512
Show-1 [35]	3.625	8	576×320
VideoCrafter2 [36]	2.7	24	512×320
Open-Sora 1.1 [37]	2	8	512×512
Open-Sora 1.2 [37]	2.125	24	640×360
Open-Sora-Plan v1.0.0 [38]	2.7	24	512×512
Open-Sora-Plan v1.1.0 [38]	2.7	24	512×512
AnimateDiff [39]	2	8	384×256
VideoTetris [40]	1.6	10	512×320
LVD [41]	2	8	256×256
MagicTime [42]	2	8	512×512
Pika [43]	3	24	1280×720
Gen-2 [44]	4	24	1408×768
Gen-3 [45]	5.33	24	1280×768
Dreamina [46]	3	8	1280×720
PixVerse [47]	4.06	18	1408×768
Dream Machine [48]	5.25	24	1360×752
Kling [49]	5.1	30	1280×720

Table 18: Prompts details for video LLM-based evaluation metrics on consistent attribute binding.

Describe	The provided image arranges key frames from a video in a grid view. Describe the video within 20 words, carefully examining the characters or objects throughout the frames and their visible attributes.
Predict	According to your previous description, please select one answer from options A1 to D1 for the first multiple-choice question, and select one answer from options A2 to D2 for the second one. Question 1: A1: '{phrase_1}' is clearly portrayed throughout the frames. B1: '{phrase_1}' is present in some frames. C1: '{phrase_1}' is not correctly portrayed. D1: '{phrase_1}' is not present. Question 2: A2: '{phrase_2}' is clearly portrayed throughout the frames. B2: '{phrase_2}' is present in some frames. C2: '{phrase_2}' is not correctly portrayed. D2: '{phrase_2}' is not present. Separate the two options by a comma and put it in JSON format with the following keys: option (e.g., A1, B2), explanation (within 20 words).

Table 19: Prompts details for video LLM-based evaluation metrics on dynamic attribute binding.

Describe	Describe the provided image within 20 words, highlight all the objects' attributes that appear in the image.
First and last frames	According to the image and your previous answer, evaluate if the text {initial state} or {final state} is correctly described in the image. Give a score from 1 to 5, according to the criteria: 5: the image accurately describe the text. 4: the image roughly describe the text, but the attribute is a little different. 3: the image roughly describe the text, but the attribute is totally different. 2: the image do not describe the text. 1: the image did not depict any elements that match the text. Provide your analysis and explanation in JSON format with the following keys: score (e.g., 2), explanation (within 20 words).
Intermediate frames	According to the image, evaluate if the image is aligned with the text {initial state} or {final state}. Give a score from 0 to 2, according to the criteria: 2: the image matches with the text {initial state}. 1: the image matches with the text {final state}. 0: the image is not aligned with the two texts totally. Provide your analysis and explanation in JSON format with the following keys: score (e.g., 1), explanation (within 20 words).

Table 20: Prompts details for video LLM-based evaluation metrics on action binding.		
Describe	The provided image arranges key frames from a video in a grid view. Describe the video within 20 words, highlight all the characters or objects that appear throughout the frames and indicate how they act.	
Predict	 According to the video and your previous answer, evaluate if the text {prompt} is correctly portrayed in the video. Assign a score from 0 to 5 according to the criteria: 5: Both {obj1} and {obj2} are present, and {obj1's action}, {obj2's action}. 4: Both {obj1} and {obj2} are present, but only one of the actions (either {obj1's action} or {obj2's action}) is depicted. 3: Both {obj1} and {obj2} are present, neither of the actions are depicted. 2: Only one of {obj1} or {obj2} is present, and its action matches the text. 1: Only one of {obj1} or {obj2} is present, but its action does not match the text. 0: Neither {obj1} nor {obj2} appears in the video. Provide your analysis and explanation in JSON format with the following keys: score (e.g., 2), explanation (within 20 words). 	

Table 21: Prompts details for video LLM-based evaluation metrics on object interactions.		
Describe	The provided image arranges key frames from a video in a grid view. Describe the video within 20 words, focusing on the interactions between characters or objects visible throughout the frames.	
Predict	 According to the video and your previous answer, evaluate if the text {prompt} is correctly portrayed in the video. Assign a score from 1 to 5 according to the criteria: 5: All the objects involved in the interaction are present, and the interaction is depicted correctly. 4: All the objects involved in the interaction are present, and the interaction is almost correct. 3: All the objects involved in the interaction are present, but the interaction is not correct. 2: Some of the objects involved in the interaction are present. Provide your analysis and explanation in JSON format with the following keys: score (e.g., 2), explanation (within 20 words). 	

Rate how accurately the Video matches the Text Prompt based on the attributes of the objects:

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 1 to 5.
- A text prompt describes some objects and their attributes(e.g. color, shape, texure, other specific features...). Please rate how well the video matches the given text based
 on the attributes of the objects in the video:
- · Below are the rating criteria, along with 5 examples:


Text: A black dog sits beside a red vase on a table Text: A blue car drives past a white picket fence on Text: Green tractor plowing near a white a sunny day farmhouse



5 – Perfect: Both objects (dog, vase) match their attributes (black, red) in the text prompt throughout the frames.



4 – Good: Both objects (car, picket fence) match their attributes (blue, white) in most of the frames.





3 - Not Okay: Only one of the objects (tractor) matches its attributes (green) in most frames, while the other (farmhouse) is not present or has wrong attribute.

Text: Blue apple bouncing near a pink tree



2 – Bad: Objects (apple) are present in some frames, but their attributes are wrong.



 Poor: Neither of the objects matches the attributes throughout the frames.

Please take some time to read the instructions, then check the **Video** and **Text Prompt** carefully! We will check the results and reject tasks from workers, who obviously did not follow the instructions. Thanks for your reading and cooperation!

Text Prompt:A blue car drives past a white picket fence on a sunny day Video:



Rate how accurately the Video matches the Text Prompt based on the attributes of objects:

- O 5 Perfect: both objects match their attributes throughout the frames
- \bigcirc 4 Good: almost aligned with the text in most frames
- \bigcirc 3 Not Okay: merely aligned with the text
- 2 Bad: not aligned with the text
 1 Poor: almost irrelevant to the text
- 1 Pool . almost melevant to the text

Figure 6: AMT Interface for the video-text alignment evaluation on consistent attribute binding.

Rate how accurately the Video matches the Text Prompt based on the attribute change:

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 1 to 3.
- A text prompt describes some objects and their dynamic attributes. Please rate how well the video matches the given text based on the objects and their attribute change in the video:

rusting when exposed to moisture

1 - Poor: The video does not depict any

elements that match the text.

0

0:00 / 0:02

• Below are the rating criteria, along with 3 examples:

Text: The plant is reviving

Text: A timelapse of a leaf transitioning from green Text: A timelapse of a piece of metal gradually to bright red as autumn progresses



3 - Perfect: The video accurately depicts the attribute change described in the text

0:00 / 0:02

2 - Not Okay: The video does not depict the attribute change described in the text, but some relevant elements (leaf) are present.

Please take some time to read the instructions, then check the Video and Text Prompt carefully! We will check the results and reject tasks from workers, who obviously did not follow the instructions. (If the submit button does not work, please refer to this link: https://www.reddit.com/r/mturk/comments/truhty/how_to_still_submit_when_the_button_is_broken/) Thanks for your reading and cooperation!

Text Prompt: A timelapse of a leaf transitioning from green to bright red as autumn progresses. Video:



Figure 7: AMT Interface for the video-text alignment evaluation on dynamic attribute binding.

Instructions

Rate how well the video matches the given text based on spatial layout.

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 1 to 5. • A text prompt describes some objects and spatial relationship between them (left, right, above, below, in front of and behind). Please rate how well the video matches the
- given text based on their spatial relationship in the video:
 When checking 2D spatial relationship is (left, right, above, below), depth of objects should not be considered, spatial relationship is correct as long as there is an object, for example, on the right of another object.
- When checking 3D spatial relationships (in front of, behind), depth of objects should be considered, and objects should be overlapped to have a 3D spatial relationship · Below are the rating criteria, along with 5 examples:

Text: A toddler walking on the left of a dog in a Text: A cat sitting on the right of a fireplace park



5 - Perfect: Both objects (toddler and dog) are present, and their spatial relationship (on the left of) are correct throughout the frames.

Text: A toddler walking on the left of a dog in a park



4 - Good: spatial relationship is correct in most frames, but may not be well maintained in the video (initially on the right then overlap).

Text: A squirrel darting under a car



Text: A basket placed below a table

3 - Not Okay: Both objects (basket and table) are present, but spatial relationship is not correct.





1 - Poor: Neither of the objects (squirrel and car) are correctly generated in the video.

Please take some time to read the instructions, then check the Video and Text Prompt carefully!

We will check the results and reject tasks from workers, who obviously did not follow the instructions.

Thanks for your reading and cooperation!

Text Prompt: A toddler walking on the left of a dog in a park



Rate how accurately the Video matches the Text Prompt based on their spatial relationship:

O 5 - Perfect: accurate alignment

- \bigcirc 4 Good: almost aligned with the text
- O 3 Not Okay: merely aligned with the text
- O 2 Bad: not aligned with the text

 \bigcirc 1 - Poor: almost irrelevant to the text

Figure 8: AMT Interface for the video-text alignment evaluation on spatial relationships.

Rate how accurately the Video matches the Text Prompt based on the objects and actions they take:

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 0 to 5.
- A text prompt describes a number of objects and the actions they take. Please rate how well the video matches the given text based on the objects and actions in the video:
 Below are the rating criteria, along with 6 examples:

Text: A camel walks through the desert, a car drives in the background Text: A dog runs through a field while a cat climbs Text: A woman gardens and a panda munches on a tree bamboo



5 – Perfect: Both objects (camel and car) are present, and both are performing their actions as described in the text.

Text: A child plays toys, a robot walks around



4 – Good: Both objects (dog and cat) are present, but only one of them is performing its action as described (dog runs).

Text: A kangaroo bounds across the plain and a cow grazes



3 – Fair: Both objects (woman and panda) are present, but neither is performing the actions described.

Text: A penguin waddles on the ice, a camel treks by



2 – Not Okay: Only one of the objects (robot) is present, and its action matches the description (robot walks).



1 – Bad: Only one of the objects (cow) is present, but its action does not match the description. ý



0 – Poor: Neither of the objects appears correctly in the video.

Please check the Video and Text Prompt carefully! We anticipate that it takes at the very least about 15 seconds to perform a task (in "easy" cases). If a worker consistently submits answers after only 3-4 seconds or so, we will reject such submissions and consider blocking the worker. We also check the results and reject all tasks from workers, who obviously did not follow the instructions. Thanks for your reading and cooperation!

Text Prompt: A dog runs through a field while a cat climbs a tree



Rate how accurately the Video matches the Text Prompt based on the objects and actions they take:

 \bigcirc 5 - Perfect: all/both objects perform correct actions

O 4 - Good: almost aligned with the text

O 3 - Fair: basic level of alignment

 \bigcirc 2 - Not Okay: merely aligned with the text \bigcirc 1 - Bad: not aligned with the text

0 - Poor: almost irrelevant to the text

Figure 9: AMT Interface for the video-text alignment evaluation on action binding.

across a garden

Rate how well the video matches the given text based on motion directions.

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 1 to 5.
 - A text prompt describes one or multiple objects moving in some directions (leftwards, rightwards, upwards or downwards.). Please rate how well the video matches the given text based on their actual moving directions in the video:
 - Below are the rating criteria, along with 5 examples:

Text: A golden retriever scampering leftwards

Text: A golden retriever scampering leftwards across a gardene



present, and their moving directions are correct throughout the frames.



4 - Good: All the objects mentioned are present their moving directions are correct but the movement is relatively small.

Text: An apple falling downwards from a tree in an Text: A drone ascending towards the clouds orchard



1 - Poor: Objects do not appear at all.





Text: A ball rolls left while a puppy dashes right



3 - Not Okay: Only some of the objects are present and their motion direction is correct; or all of the objects appear but only some are moving correctly.



Text Prompt: A golden retriever scampering leftwards across a garden Video




Rate how accurately the Video matches the Text Prompt based on their spatial relationship:

○ 5 - Perfect: accurate alignment

- O 4 Good: almost aligned with the text
- O 3 Not Okay: merely aligned with the text

 \bigcirc 2 - Bad: not aligned with the text O 1 - Poor: almost irrelevant to the text



Rate how accurately the Video matches the Text Prompt based on the objects and interactions between them:

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 1 to 5.
- A text prompt describes some objects and interactions between them. Please rate how well the video matches the given text based on the objects and their interactions in the video:

Text: Bird lands on a branch causing it to dip


Below are the rating criteria, along with 5 examples:

Text: Paper burns in a fire



5 – Perfect: Both objects involved in the interaction (paper and fire) are present, and the interaction is depicted correctly.

Text: Balloon pops when pricked with a needle



4 – Good: Both objects involved in the interaction (bird and branch) are present, and the interaction is almost correct.

Text: Drum skin vibrates when struck by a drumstick




Text: Knife sharpens pencil

3 - Fair: Both objects involved in the interaction (knife and pencil) are present, but the interaction is not correct.



the interaction are missing (no needle).



 Bad: Neither of the objects involved in the interaction are present.

Please take some time to read the instructions, then check the Video and Text Prompt carefully! We will check the results and reject tasks from workers, who obviously did not follow the instructions. Thanks for your reading and cooperation!

Text Prompt:Two cars collide at an intersection Video:



Rate how accurately the Video matches the Text Prompt based on the objects and interactions they take:

○ 5 - Perfect: all/both objects perform correct interactions
 ○ 4 - Good: almost aligned with the text
 ○ 3 - Fair: basic level of alignment
 ○ 2 - Bad: not aligned with the text

O 1 - Poor: almost irrelevant to the text

Figure 11: AMT Interface for the video-text alignment evaluation on object interactions.

Rate how accurately the video matches the given text in terms of numerical correctness of the objects.

seaside

- Please evaluate the correspondence of the Video to the Text Prompt by rating on a scale of 0 to 5.
- A text prompt describes some objects and their quantities. Please rate how well the video matches the given text based on the objects and their quantities in the video:
 Below are the rating criteria, along with 6 examples:

Text: Three parrots chatter in a tropical rainforest Text: Four birds build a nest together in a large

Text: Four birds build a nest together in a large tree

Text: Three dogs and five chairs in a cozy living room



Instructions

5 – Perfect: All identified objects (parrots) are present, and their quantities (three) are correct throughout the frames.



4 – Good: All identified objects (birds) are present, and their quantities (four) are correct in most frames.

Text: Four sea lions and three beach balls on a



3 - Fair: All of the objects (dogs and chairs) are present, but only some of them (dogs) have correct quantities.

Text: Two wolves and five deers in a tense standoff in the woods



 Bad: All identified objects are present (sea lions and beach balls), but none of them has correct quantity.





2 – Not Okay: Only some of the objects (wolves) is present, and their quantities are correct.

Please take some time to read the instructions, then check the **Video** and **Text Prompt** carefully! We will check the results and reject tasks from workers, who obviously did not follow the instructions Thanks for your reading and cooperation!

Text Prompt: three dogs play in the snow with a red ball



Rate how accurately the Video matches the Text Prompt based on the objects and interactions they take:

 \bigcirc 5 - Perfect: all objects have correct quantities

- O 4 Good: almost aligned with the text
- O 3 Fair: basic level of alignment
- O 2 Not Okay: merely aligned with the text
- O 1 Bad: not aligned with the text
- \bigcirc **0 Poor**: almost irrelevant to the text



0 – Bad: Only some of the objects is present (lanterns), but their quantities are not correct.

Figure 12: AMT Interface for the video-text alignment evaluation on generative numeracy.