TC-RAG: Turing-Complete RAG's Case study on Medical LLM Systems

Xinke Jiang[♠]*, Yue Fang[♠]*, Rihong Qiu[♠]*, Haoyu Zhang[♠], Yongxin Xu[♠], Hao Chen[♡], Wentao Zhang[♡] Ruizhe Zhang[♠], Yuchen Fang[◇], Xu Chu[♠]†, Junfeng Zhao[♠]†‡, Yasha Wang[♠]†

♦ Key Laboratory of High Confidence Software Technologies,

- Ministry of Education; School of Computer Science, Peking University, Beijing, China
- School of Statistics and Mathematics, Zhongnan University of Economics and Law, Wuhan, China University of Chinese Academy of Science, Beijing, China
- School of Computer Science, University of Electronic Science and Technology of China, Chengdu, China

₹ {XinkeJiang, YueFang, RihongQiu}@pku.stu.edu.com

https://https://github.com/Artessay/SAMA.git

Abstract

In the pursuit of enhancing domain-specific Large Language Models (LLMs), Retrieval-Augmented Generation (RAG) emerges as a promising solution to mitigate issues such as hallucinations, outdated knowledge, and limited expertise in highly specialized queries. However, existing approaches to RAG fall short by neglecting system state variables, which are crucial for ensuring adaptive control, retrieval halting, and system convergence. In this paper, we introduce the Turing-Complete-RAG (TC-RAG) through rigorous proof, a novel framework that addresses these challenges by incorporating a Turing Complete System to manage state variables, thereby enabling more efficient and accurate knowledge retrieval. By leveraging a memory stack system with adaptive retrieval, reasoning, and planning capabilities, TC-RAG not only ensures the controlled halting of retrieval processes but also mitigates the accumulation of erroneous knowledge via Push and Pop actions. In the case study of the medical domain, our extensive experiments on real-world healthcare datasets demonstrate the superiority of TC-RAG over existing methods in accuracy by over 7.20%. Our dataset and code have been available at https://https://github.com/Artessay/SAMA. git.

1 Introduction

Large Language Models (LLMs), such as ChatGPT (OpenAI 2022) and GPT-4 (OpenAI 2023), have achieved remarkable strides in pivotal areas, demonstrated exceptional performance across a variety of downstream tasks (Kaplan et al. 2020; Vu et al. 2024). In the medical domain—those medical LLMs (Wang et al. 2023; Zhang et al. 2023; Yang et al. 2023; Pal and Sankarasubbu 2023)—exhibit great promise in the healthcare field, where accountability and trustworthiness are paramount (Ji

et al. 2023a; Song et al. 2024). By incorporating comprehensive medical knowledge through pre-training (Kaplan et al. 2020), they can support physicians in making accurate diagnoses and formulating treatment plans (Jiang et al. 2023a), as well as enhance medical resource allocation (Wang et al.; Xu et al.; Liu et al. 2024). Despite medical LLMs' advancements, significant conundrums still remain, including the difficulty in avoiding factual inaccuracies (i.e., hallucinations) (Ji et al. 2023a; Cao et al. 2020; Ji et al. 2023b; Jiang et al. 2024), outdated knowledge (He, Zhang, and Roth 2022), and a lack of highly specialized expertise (Kandpal et al. 2023). Consequently, Retrieval-Augmented Generation (RAG) (Edge et al. 2024; Asai et al. 2024: Yang et al. 2024b), which uses the external knowledge base to provide medical knowledge as contextual information to enhance content generation, combined with medical-LLMs with their massive parameterized knowledge can be likened to the expertise of doctors, is deemed as a promising and necessary solution to the aforementioned difficulties.

However, while current approaches in enhancing LLMs with external knowledge through RAG show promise (Su et al. 2024; Asai et al. 2024; Jiang et al. 2023c), they have consistently overlooked the introduction of system state variables—an essential component for ensuring adaptive control, retrieval halting, and system convergence. Moreover, these existing RAG methods are not Turing Complete, lacking the ability to dynamically manage and monitor the retrieval process in a way that guarantees convergence to a reliable conclusion. In complex medical scenarios, where decisions often require intricate, multi-step reasoning and adaptive responses (Mustafa, Saad, and Rizkallah 2023), the absence of Turing Completeness (Turing 1936) significantly limits a system's effectiveness and reliability. This gap motivates our approach: to construct a Turing Complete System that effectively manages state variables, using a finite logical framework to enhance the RAG process. However, how to effectively construct a Turing Complete RAG sys-

^{*}These authors contributed equally.

[†]Corresponding authors.

[‡]Junfeng Zhao is also at the Big Data Technology Research Center, Nanhu Laboratory, 314002, Jiaxing.

tem remains unexplored and faces substantial challenges: C1. How to design a Turing Complete RAG System with

the monitored state variable. Designing a Turing Complete RAG system requires the integration of monitored state variables that dynamically track and control the retrieval process—something that existing RAG methods lack. Current approaches (Jeong et al. 2024; Su et al. 2024) do not have an explicit mechanism to assess whether the system has converged to a reliable conclusion, which is a critical gap. A significant challenge lies in leveraging the forward propagation of the large model to accurately compute these state variables in real-time. This involves ensuring that the state variables effectively reflect the system's evolving context, guiding crucial decisions on whether to continue, halt, or refine the retrieval process. Managing these variables within the model's forward pass, while maintaining adaptability to complex and varied medical queries, is essential for achieving both efficiency and accuracy, ensuring that the retrieval process finally reliably converges to an optimal conclusion. C2. Whether to, What to, and How to plan retrieval for efficient and accurate knowledge to maintain optimal state. With the ability to assess the state, how to dynamically manage it to achieve the expected state is significant. In a reallife consultation, doctors will decide whether to perform and what to search based on their state of mastery of this problem (Cox et al. 2021), instead of the regardless search—which can lead to redundant information that the model already possesses, potentially causing confusion or even misleading the LLMs. Moreover, an experienced doctor can systematically analyze and plan further steps with access to a vast medical knowledge base, while a layperson might struggle in a dilemma as to choose where to start or which tools to use (Yao et al. 2022a; Zhu et al. 2024). The medical LLM is analogous to a medical expert (DIS 2023), and the challenge lies in effectively utilizing the LLM's internal parameterized knowledge to retrieve to maintain an optimal state.

C3. How to avoid irrelevant noise affecting system state during RAG. Since the traditional RAG's retrieval process is typically driven by query keywords (Soman et al. 2023b,a; Sen, Mavadia, and Saffari 2023; Kim et al. 2023) rather than the model's specific needs, it may introduce extensive irrelevant and noisy context. And the erroneous knowledge will continue to accumulate with the retrieval and reasoning process (Yao et al. 2022a; Shinn et al. 2024), which can cause to waste token resources (Jiang et al. 2024), accumulate invalid memories, and encounter the "lost in the middle" (Liu et al. 2023) problems. Therefore, how to effectively remove erroneous knowledge is crucial for maintaining system state.

To address these challenges, we propose <u>Turing</u> <u>Complete-RAG</u> (TC-RAG), a Turing Complete System for domain-specific LLMs to provide reliable and trustworthy medical analysis. <u>1</u>) For *CI*, we designed a Turing Complete RAG system with a memory stack that monitors intermediate states, ensuring the retrieval process reliably converges to an optimal conclusion. <u>2</u>) For *C2*, we extensively collected medical data and pre-trained a medical LLM, elevating its understanding from layperson to expert level, thus enhancing its reasoning and planning abilities. The model's reasoning ability is leveraged to decide whether and what

to retrieve adaptively, and its planning capacity guides tool usage and action planning, akin to how medical professionals solve complex problems. 3) For C3, TC-RAG incorporates a memory stack system with backtrack and summary operations to timely remove errors and condense redundant knowledge, mitigating accumulation of erroneous information and noise. In summary, our contributions are as follows:

- To the best of our knowledge, TC-RAG is the first RAG framework to introduce the system state variable and the Turing Completeness mechanism, which could make the retrieval process controllable and halt.
- By introducing the state variable, we theoretically prove the Turing Completeness of our white-box approach.
- TC-RAG establishes a stack memory system, capable of adaptive retrieval, incorporating composed actions to effectively manage memory, particularly in handling harmful or noisy knowledge.
- We have open-sourced a meticulously curated Chinese medical pretraining dataset, along with extensive medical documents and a comprehensive knowledge graph.
- Our thorough experimental evaluation on three real-world Medical Q&A datasets demonstrates the superior performance of TC-RAG over existing baselines, underscoring its accuracy and explainability. Furthermore, TC-RAG has been successfully deployed on an online platform (name omitted for anonymity).

2 Related Work

Retrieval-Augmented Generation (RAG), introduced by (Lewis et al. 2020), enhances LLM performance on knowledge-intensive tasks by integrating relevant information from external knowledge bases through prompt engineering. RAG not only mitigates hallucination issues during LLM inference but also provides up-to-date, task-specific knowledge, significantly boosting both interpretability and performance on downstream tasks (Izacard et al. 2022; Asai et al. 2023b,a). In the biomedical field, RAG has been widely used to improve LLMs' reasoning and analytical capabilities by leveraging external medical knowledge from sources such as medical papers, guidelines, textbooks, Wikipedia (Jin, Leaman, and Lu 2023; Lála et al. 2023; Zakka et al. 2024; Wang, Ma, and Chen 2023; Xiong et al. 2024), and knowledge graphs (Soman et al. 2023b; Matsumoto et al. 2024; Jiang et al. 2024).

Naive & Advanced RAG. Naive RAG typically follows a simple *retrieve-and-read* approach, where relevant information is retrieved based on the initial user query, and the answer is generated using that content (Soman et al. 2023b,a; Sen, Mavadia, and Saffari 2023; Khandelwal et al. 2020; Borgeaud et al. 2022; Ram et al. 2023). Advanced RAG, however, incorporates more sophisticated components such as retrievers (Qu et al. 2021; Ma et al. 2023), rerankers (Cheng et al. 2021; Yu et al. 2022), filters (Jiang et al. 2024), and readers (Yoran et al. 2024; Fang et al. 2024), to improve the quality of both retrieval and generation. However, neither naive nor advanced RAG considers whether the LLM already possesses the necessary knowledge. This often leads to the retrieval of excessive, redundant informa-

tion, which can mislead the model and cause a "lost in the middle" dilemma (Liu et al. 2023). Our method addresses this issue by determining whether to retrieve and what to retrieve based on the model's internal parameterized knowledge, resulting in more efficient and accurate retrieval.

Adaptive RAG. Recent research has focused on developing adaptive RAG strategies, enabling LLMs to determine whether and when to retrieve and to select the most appropriate retrieval tools from huge knowledge base. FLARE (Jiang et al. 2023d) predicts the next sentence and uses the generated low-confidence tokens as query to re-retrieve relevant documents. DRAGIN (Su et al. 2024) leverages the LLM's uncertainty in its generated content to decide when to trigger retrieval based on the internal self-attention weights and corresponding keywords. Adaptive-RAG (Jeong et al. 2024) uses a smaller LLM as a classifier to query complexity and subsequently selects the most appropriate retrieval strategy—ranging from simple to advanced. However, these existing adaptive RAG methods are not Turing Complete, lacking the ability to dynamically manage and monitor the retrieval process in a way that guarantees convergence to a reliable conclusion. Moreover, they have yet to fully harness the step-by-step planning and tool-use abilities of LLMs in conjunction with RAG. Our approach addresses these limitations by integrating a Turing Complete framework that optimizes retrieval through advanced planning and tool-use strategies, ensuring more reliable and accurate outcomes.

2.1 Reasoning and Planning Capabilities

Recent advancements have focused on enhancing the reasoning and planning capabilities of LLMs (Zhu et al. 2024; Yao et al. 2022a; Shinn et al. 2024; Koh et al. 2024). One notable approach is Chain-of-Thought (CoT)(Wei et al. 2022), which demonstrates how LLMs can construct structured "thought processes" to solve complex problems. ReAct(Yao et al. 2022b) integrates reasoning traces with task-specific actions, enabling LLMs to plan, adjust actions, and manage exceptions while gathering information from external sources such as knowledge bases. Reflexion (Shinn et al. 2024) further improves LLMs by using linguistic feedback, allowing them to reflect on and store task feedback, enhancing decision-making in future trials. Despite these advancements, the reasoning and planning processes of LLMs often lead to the accumulation of errors and redundant information. While these methods introduce new decision trials, they frequently fall short in managing previous memory-particularly in removing ineffective decisions or refining historical records. To address these challenges, TC-RAG incorporates a memory stack system with backtrack and summary operations, allowing for timely error correction and condensation of redundant knowledge. This ensures that the model's reasoning process remains efficient and accurate, leading to more reliable outcomes.

3 Prelinmary

Definition 1. (Stack of Memory). In TC-RAG, the Memory of LLMs is conceptualized as a White Box Turing Machine (Turing 1936), with the rigorous theoretical proof in

Appendix 8.1. Let $TC = (S, A, M, \delta, s_0, F, \sigma)$ represent the stack memory of the LLMs, where:

- S denotes the set of possible states the LLMs occupy. Specifically, we use numerical values like perplexity (Jelinek et al. 1977) & uncertainty (Peng et al. 2024) to define system's state.
- A represents the set of actions that the LLMs can perform. Following stack theory, we define the fundamental meta-actions: **push** and **pop**. Additionally, we have composite actions composed of the two meta-actions: "Thought", "Tool_Observation", "Backtrack", "Summary", and "Conclusion".
- \mathcal{M} is the stack memory, which includes the set of actions \mathcal{A} and potentially other symbols may be used in stack operations, such as the initiation state "User_Query". Hence, $\mathcal{A} \subseteq \mathcal{M}$.
- $\delta: \mathcal{S} \times \mathcal{M} \to \mathcal{S} \times \mathcal{A} \times \mathcal{M} \times (0, +\infty)$ is the state transition function. It defines how the LLM transitions to a new state, selects an action, updates the stack memory, and calculates a new system state value based on the current state and stack memory. The transition involves selecting an action $a \in \mathcal{A}$ (which includes push and pop operations), leading to a new stack top and an updated system state value $s \in \mathcal{S}$ within the range $(0, +\infty)$. δ is decided by LLMs and state calculation function.
- s₀ ∈ S is the initial state, with its initial value defined as s₀ = \$Large_Value\$ (where a lower value indicates a more desirable system state).
- $\mathcal{F} \subseteq \mathcal{S}$ is the set of final states. The state $f \in \mathcal{F}$ is deemed final if the current action is "Conclusion" and the current state value f is less than the threshold σ . Otherwise, the system will either reset the state value to the threshold σ or change the action from "Conclusion" to "Thought" for further analysis.
- $\sigma \in (0, +\infty)$ is the hyper-threshold for the final state.

Definition 2. (Meta-Actions). In this part, we define the meta-actions in TC-RAG as follows:

• Push: When the medical-LLM processes new information or obtains tool observations, a new action is determined and pushed onto the stack \mathcal{M} :

$$(s_{t+1}, a_{t+1}) \leftarrow \delta(s_t, \mathcal{M}_t), \mathcal{M}_{t+1} \leftarrow push(\mathcal{M}_t, a_{t+1}).$$
 (1)

where s_{t+1} represents the LLM's next system state value, a_{t+1} is the next action to be pushed onto the stack \mathcal{M} .

• Pop: If an error or inconsistency is detected, the LLM needs to revert to the previous state by popping the top element from the stack:

$$(s_{t+1}, a_{t+1}) \leftarrow \delta(s_t, \mathcal{M}_t), \quad \mathcal{M}_{t+1} \leftarrow pop(\mathcal{M}_t).$$
 (2)

Task Definition. Given the parameterized knowledge Θ embedded within the LLM, and non-parameterized knowledge base $\mathcal D$ which comprises diverse types of knowledge, the objective is to generate a reliable medical analysis Response given the natural language User_Query:

$$Response \leftarrow \Theta(User_Query, \mathcal{D} \mid \mathcal{P}), \qquad (3)$$

where \mathcal{P} is the task-specific prompt, *i.e.* CoT prompt (Wei et al. 2023), ReACT prompt (Yao et al. 2022a), etc.

4 TURING-COMPLETE

We define a stack-based memory system incorporating a system state variable and prove its equivalence to a universal Turing machine T through a series of formal definitions, lemmas, and a main theorem. The detailed proofs are provided in **Appendix 8.1**. We prove this by showing that for any Turing machine T, there exists TC that can simulate T.

Step 1: Construction of the Turing System. Given a Turing machine $T = (\mathcal{S}_T, \mathcal{A}_T, \mathcal{M}_T, \delta_T, st_0, st_{accept}, st_{reject})$, we interpret $TC = (\mathcal{S}, \mathcal{A}, \mathcal{M}, \delta, s_0, \mathcal{F}, \sigma)$ with the following components:

- 1. $S = S_T \cup f$, where $f \notin S_T$ is the end state.
- 2. $\mathcal{A} = \mathcal{A}_T$, $\mathcal{M} = \mathcal{M}_T \cup \mathcal{A}$, $s_0 = st_0$, $\mathcal{F} = \{f\}$, σ is the hyper-threshold to decide accept or reject.
- 3. The transition function δ is defined as:

$$\delta(s,a) = \begin{cases} (s',push,s \geq \sigma) & \text{if } \delta_T(st,a) = (st',a,R) \\ (s',pop,s \geq \sigma) & \text{if } \delta_T(st,a) = (st',a,L) \\ (f,no_op,a,s < \sigma) & \text{if } st \in \{st_{accept},st_{reject}\} \end{cases}$$

where a is the executing action for T or Tc. The operations push and pop are corresponding to the right (R) and left (L) movements in T. Transition function $\delta(\cdot,\cdot)$ is for Tc and $\delta_T(\cdot,\cdot)$ is for T. The operation no_op indicates no operation is performed when the system is halting.

Step 2: Configuration Mapping Next, we define a bijective mapping function h that maps each configuration of T to TC. We now define the configuration c of T as $c = (st, w_1 a w_2), w_1, w_2$ represents the sequence of actions to the left / right of the tape head, where $st \in \mathcal{S}_T$, $a \in \mathcal{A}_T$ is the tape head/action. The configuration of TC c_{TC} is composed of the tuple as (system state, remaining actions, stack memory actions, whether to halt) as:

$$h(st, w_1 a w_2) = (s, w_2, w_1^R a, s \ge \sigma) = c_{\text{TC}}$$

where w_1^R is the reverse of w_1 , which is necessary due to Last-In-First-Out (LIFO) principle of \mathcal{M} .

Step 3: Simulation of Computation Steps We now prove that TC can simulate each step of T as in Lemma 3:

Lemma 1 If $c_1 \vdash_T c_2$ in T, then $h(c_1) \vdash_{\mathsf{TC}}^* h(c_2)$ in TC , where * denotes one or multiple steps of derivation, \vdash is the action shift operator.

Proof 4.1 Let $c_1 = (st_1, w_1a_1w_2)$ and $c_2 = (st_2, w_1'a_2w_2')$ be configurations of T with $a_t = \{L, R\}$. We prove Lemma 3 by considering the two cases push and pop corresponding to the possible directions of tape head movement in T.

• Case 1: If $\delta_T(st_1, a_1) = (st_2, a_2, R)$, then:

$$h(c_1) = (st_1, w_2, w_1^R a_1, st_1 \ge \sigma)$$

$$\vdash_{\mathsf{TC}} (s_2, w_2', w_1^R a_1 a_2, s_2 \ge \sigma) \quad (\textbf{\textit{push}} \ a_2)$$

$$= h(st_2, w_1 a_1 a_2 w_2') = h(st_2, w_1' a_2 w_2') = h(c_2)$$

• Case 2: If $\delta_T(st_1, a_1) = (st_2, a_2, L)$, then:

$$\begin{split} h(c_1) &= (st_1, w_2, w_1^R a_1, st_1 \geq \sigma) \\ &\vdash_{\mathsf{TC}} (s_2, w_2, w_1^R, s_2 \geq \sigma) \quad (\textit{pop } a_1) \\ &\vdash_{\mathsf{TC}} (s_2, w_2', w_1'^R a_2, s_2 \geq \sigma) \quad (\textit{push } a_2, \textit{if } a_2 \neq \textit{null}) \\ &= h(st_2, w_1' a_2 w_2') = h(c_2) \end{split}$$

It is noted that the two cases correspond to the meta operations of push (Case 1) and pop (Case 2) in TC-RAG.

Step 4: Preservation of Acceptance and Rejection

Lemma 2 T accepts (rejects) the whole input w if and only if TC reaches a configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from the initial configuration $(s_0, w, NULL, s_0 \ge \sigma)$.

Proof 4.2 We prove the consistency of reaching the termination state from both $T \to TC$ and $TC \to T$ perspectives.

(Forward \Rightarrow) Assume T accepts (rejects) input w. Then: $\exists t \in \mathbb{N}$ such that after t steps, T enters state st_{accept} (or st_{reject}). Then, Let (st_t, w_t) be the configuration of T at step t, where $st_t \in \{st_{accept}, st_{reject}\}$. By our construction of δ , $\forall a \in \mathcal{A}$, we have:

$$\delta(s, a) = (f, no_op, a, f < \sigma) \quad \forall st \in \{st_{accept}, st_{reject}\}$$

Therefore, if $h(st_t, w_t) = (s_t, w_2, w_1^R a, s_t \ge \sigma)$ is the corresponding configuration in TC, then:

$$(s_t, w_2, w_1^R a, s_t \ge \sigma) \vdash_{\mathsf{TC}}^t (f, NULL, \mathcal{M}, f < \sigma)$$

Thus, TC achieve f with system state value lower than σ . (**Backward** \Leftarrow) Assume TC reaches configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from $(s_0, w, NULL, s_0 \geq \sigma)$. Then: $\exists t \in \mathbb{N}$ such that:

$$(s_0, w, NULL, s_0 \ge \sigma) \vdash_{\mathsf{TC}}^t (f, NULL, \mathcal{M}, f < \sigma).$$

Let $(s_{t-1}, w_2, w_1^R a, s_{t-1} \geq \sigma)$ be the configuration of TC at step t-1. Then, by the construction of δ , the only way to reach f is if $s_{t-1} \in \{st_{accept}, st_{reject}\}$. Therefore, the corresponding configuration of T at step t-1 must be $(st_{t-1}, w_1 a w_2)$, where $st_{t-1} \in \{st_{accept}, st_{reject}\}$. Thus, T must have entered st_{accept} or st_{reject} , implying that T accepts or rejects w.

From both the **Forward** and **Backward** proof, T accepts (rejects) input w if and only if TC reaches a configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from the initial configuration $(s_0, w, NULL, s_0 \ge \sigma)$.

By the above lemmas, we have shown that: (1) TC can simulate every move of T. (2) TC halts if and only if T achieve acceptance or rejection behavior. Thus, TC can simulate any computation of any Turing machine T, which by definition makes TC Turing complete.

5 Memory Stack and State Monitor

In this section, we present our innovative framework, TC-RAG, as illustrated in Figure 1. Traditional methods, such as those based on thought chain (Yu et al. 2023; Li et al. 2023a; Ma et al. 2023; Wei et al. 2023) and reasoning and acting approaches (Yao et al. 2022a; Shinn et al. 2024; Zhu et al. 2024), often suffer from lack of state management, retrieval halting, accumulated erroneous knowledge, token inefficiency, and the issue of being "lost in the middle". To address these challenges, we introduce a stack-based memory system that leverages push and pop actions for efficient memory management for *C1*, *C3*. Additionally, to further improve the LLMs' knowledge comprehension and adaptability, we incorporate an expert knowledge pre-training

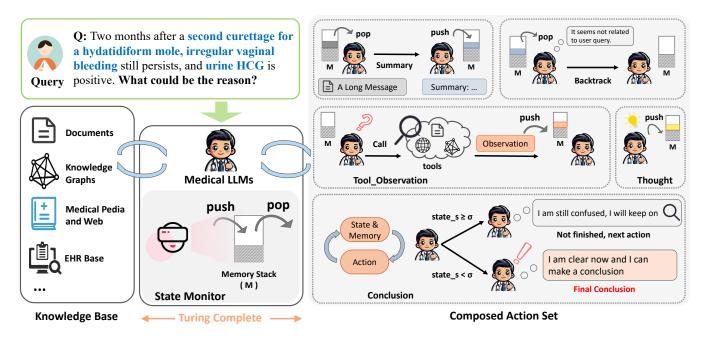


Figure 1: Overall framework of TC-RAG.

module based on the general LLM, which enhances the LLMs' understanding and reasoning capabilities (as detailed in **Appendix 8.3**) for *C2*. Next, in subsection 5.1, we define the stack memory structure and the composite actions such as "Thought", "Tool_Observation", "Backtrack", "Summary", and "Conclusion". We then outline the stack states—initiation, intermediate, and final—and provide specific state calculations in subsection 5.2. In **Appendix 8.4**, we describe the prompting strategy and the full algorithm employed in TC-RAG.

5.1 Stack Memory and Composed Actions

In managing memory for LLMs, memory can be conceptualized as a stack structure adhering to the "last-in, first-out" (LIFO) principle. Unlike Markov processes where future actions depend solely on the current actions, in TC-RAG, each new memory entry builds upon the accumulated memory (Pimentel and Silva 2018; Miller and Chomsky 2003). To maintain the orderliness and consistency of the memory, erroneous entries are ejected sequentially from the top of the stack. This approach prevents "contamination" and confusion that might arise from directly removing intermediate memories, thereby mitigating unreasonable interference during the reasoning process.

As a consequence, as outlined in Definition 1, we leverage the stack \mathcal{M} to simulate the LLM's memory. Based on the meta stack operations of push and pop in Section 4, the following composite actions have been devised to enhance the reasoning and planning capabilities of LLMs:

- Thought: This action represents LLM's analytical process. Once the model has processed information and generated an insight, this analysis is **pushed** onto stack M.
- Tool Observation: When the LLM interacts with ex-

- ternal tools to gather additional data or insights, the result of this interaction is captured as an observation. Both the tool's name and the resulting observation are then pushed onto the stack \mathcal{M} .
- Backtrack: Triggered by the LLM's reflection mechanism, this action occurs when the top of the stack is found to be irrelevant or harmful to the ongoing task. The model pops the top element off the stack M, removing the irrelevant or harmful memory.
- Summary: When the content at the top of the stack M becomes too lengthy or cluttered with irrelevant information, the LLM initiates a summarizing process. The content is first popped off the stack, and then the concise summary is pushed back onto the M, ensuring that the stack remains focused on the most pertinent information.
- Conclusion: This action occurs when the LLM believes it has reached a final conclusion or solution in a black-box manner. However, if the current state does not satisfy the necessary stopping conditions, the Conclusion action is replaced with Thought, allowing the model to continue refining its reasoning.

5.2 Stack Status and Memory Management

Pipline We will systematically describe the changes in the memory stack and system status.

- Stack and State Initialization: Initially, the overall system state value is assigned a large constant as \$Large_Value\$. The memory stack, \mathcal{M} , begins with only the "User_Query" action. This entry is immutable, meaning it cannot be popped and permanently resides at the bottom of the stack.
- State Value Evaluation: During the analytical process, outputs tagged with the actions "Conclusion" and

	LLM Turbo		Qwen-32B				Pretrained Owen-32B					
Method	Туре	Dataset	CMB-Exam	MMCU-Medical		CMB-Clin	1	CMB-Exam	MMCU-Medical		CMB-Clir	1
		Metric	EM	EM	BLEU-1	BLEU-4	ROUGE	EM	EM	BLEU-1	BLEU-4	ROUGE
Danding	Without RAG	Base	67.33	80.92	06.84	10.82	24.10	68.34	80.70	06.93	11.24	23.75
		CoT	70.88	80.53	07.23	11.64	24.30	69.94	80.06	07.37	11.67	23.54
	Naive RAG	SR-RAG	66.73	80.31	09.48	14.18	22.23	68.54	83.15	11.56	16.72	22.38
		FL-RAG	67.94	75.17	10.67	15.32	22.96	69.48	78.61	10.95	16.20	23.13
		FS-RAG	64.65	71.62	05.12	08.63	20.29	67.20	75.20	05.76	09.20	21.34
	Advanced RAG	CoK	76.25	79.04	13.96	25.33	31.49	79.18	81.31	14.92	27.84	46.90
Baselines		SuRe	76.96	83.08	14.88	27.90	31.06	78.55	85.56	15.26	28.01	44.38
		HyKGE	82.17	86.45	19.02	41.84	38.92	84.58	87.09	22.85	43.79	50.23
	Adaptive RAG	ReACT	82.20	87.34	19.15	48.55	41.22	84.08	88.19	22.37	49.96	50.45
		Self-RAG	81.88	85.78	18.23	46.82	44.70	84.32	86.77	20.06	47.12	48.90
		FLARE	82.89	87.26	19.85	49.19	51.15	85.14	87.37	20.91	50.38	52.96
		DRAGIN	82.78	85.28	19.48	44.18	45.23	84.80	85.46	19.56	46.72	47.38
Ours	Adaptive RAG	TC-RAG-cppl	84.90	89.61	20.86	53.04	53.29	87.33	92.80	24.65	56.94	57.46
		TC-RAG-uct	85.63	89.46	21.03	53.24	54.98	87.95	93.15	25.89	57.29	56.59
	*Performance Gain ↑		03.31	02.60	05.94	08.23	07.49	03.30	05.62	13.30	13.72	08.50
Ablations		TC-RAG(w/o Backtrack)	83.44	88.61	20.04	51.38	52.40	86.24	90.67	22.06	52.92	53.88
	Adaptive-RAG	TC-RAG(w/o Summary)	84.82	89.00	20.72	52.11	53.07	84.79	88.47	24.48	54.39	54.72
		TC-RAG(w/o State Monitor)	83.75	88.79	19.82	49.44	51.07	85.27	89.04	21.40	48.42	51.86

Table 1: Performance comparison (%) on CMB-Exam, MMCU-Medical and CMB-Clin datasets.

"Thought" are monitored. For each output, a system state value is computed and carried forward in subsequent iterations. This value can be determined using metrics like conditional perplexity and uncertainty, with lower values indicating higher decision confidence.

- Conclusion Validation: If the LLMs output a Conclusion, the system evaluates whether the associated state value meets predefined stopping conditions. If not, action Conclusion is reclassified as Thought, signaling the need for further analysis.
- State Restoration: If a Thought is popped from the stack (e.g., via Backtrack action), the system restores the system state value to its previous level before the addition of that Thought. This management strategy ensures the system remains dynamic and responsive to memory, allowing for iterative refinement of LLM's outputs. By continuously evaluating and adjusting based on the system state value, the LLMs can effectively navigate toward accurate and reliable conclusions.

System Value Calculation To ensure that the system is progressing toward a reliable conclusion, a system state value is calculated by comparing the content generated by the LLMs at the top of the stack (from either a Thought or Conclusion) with the bottom "User_Query". This comparison, based on metrics such as conditional perplexity and uncertainty, quantifies how closely the system's current reasoning aligns with the original intent of the task:

Conditional Perplexity: Conditional Perplexity is a metric used to evaluate the predictability of a language model given prior context (Jelinek et al. 1977). For the sequence of text M_{top} at the top of the M, and the original query at the bottom (denoted as M_{bottom}), the conditional perplexity cppl is calculated as:

$$cppl(\mathcal{M}_{top} \mid \mathcal{M}_{bottom}) = \exp\left(-\frac{1}{N} \sum_{i=1}^{N} \log P(token_i \mid token_1, \dots, token_{i-1}, \mathcal{M}_{bottom})\right),$$
 (4)

where N is the number of tokens in \mathcal{M}_{top} and $P(token_i \mid$

 $token_1, \ldots, token_{i-1}, \mathcal{M}_{bottom})$ represents the probability of the i-th token in \mathcal{M} top given the preceding tokens and the context \mathcal{M}_{bottom} .

• Uncertainty: uct measures the confidence (Jiang et al. 2023b) in the context \mathcal{M}_{top} and is derived from the entropy of the output probability distribution:

$$uct(\mathcal{M}_{top}) = -\sum_{i=1}^{N} P(token_i \mid token_1, \dots,$$
 (5)

$$token_{i-1})\log P(token_i \mid token_1, \dots, token_{i-1}),$$

where higher entropy indicates greater uncertainty and less reliability.

The system will then select either cppl or uct as the system state value s_t at step t. If $s_t < \sigma$, it suggests that the LLM's output is both predictable and confident, indicating alignment with the original query. Vice versa, a high-value signal that the output may not be reliable or relevant, necessitating further refinement. The system will continuously update s_t during reasoning process, using it to guide decisions on whether to finalize or continue refining the output.

6 Experiments

In this section, we conduct a series of experiments on three medical datasets to answer the following research questions:

- **RQ1** (Section 6.2): Does TC-RAG outperform the SOTA RAG methods using the same database source?
- **RQ2** (Section 6.3): Is the stack framework we designed effective? What impact does each component have on the overall performance?
- RQ3 (Section 6.4, Appendix 8.6): Can TC-RAG really pop up erroneous execution memory and noise injection and achieve memory management?
- **RQ4** (Section 6.5): How sensitive is TC-RAG to hyperparameters σ to different system types cppl and uct?

Noise poisoning attack experiment is in **Appendix 8.6** and we also anonymously rank TC-RAG on the largest Chinese

medical CMB Leaderboard, which includes detailed medical scores for each subcategory (c.f. **Appendix 8.7**)¹.

6.1 Experimental Setup

Datasets. Our experiments are conducted on two multi-task medical datasets MMCU-Medical (Zeng 2023) and CMB-Exam (Wang et al. 2023b), and one open-domain Q&A medical dataset CMB-Clin (Wang et al. 2023b). RAG Tools. We incorporate various RAG tools including knowledge graph search, document search, web and pedia search, and electronic medical record database. LLM Turbo. The generaldomain LLM Qwen-32B (Yang et al. 2024a) was selected as the base model, which we further pre-trained for the medical domain. Baselines. To assess the effectiveness of our approach, we compare TC-RAG with twelve baselines. (1) Without RAG: Base and CoT (Wei et al. 2023). (2) Naive RAG: SR-RAG (Soman et al. 2023b), FL-RAG (Khandelwal et al. 2020) and FS-RAG (Trivedi et al. 2023). (3) Advanced RAG: CoK (Li et al. 2023b), SuRe (Kim et al. 2024), HyKGE (Jiang et al. 2024). (4) Adaptive RAG: ReACT (Yao et al. 2022a), Self-RAG (Asai et al. 2024), FLARE (Jiang et al. 2023c) and DRAGIN (Su et al. 2024). Evaluation Metrics. We use EM (Zhu et al. 2021; Karpukhin et al. 2020) metric for multi-task medical choice questions and ROUGE-R (Xu 2023) and BLEU-1, BLEU-4 (Xu 2023) for open-domain Q&A tasks. Detailed experimental settings are in Appendix 8.5.

6.2 Main Result Analysis (RQ1)

To answer RQ1, we conduct experiments and report results of the accuracy on the MMCU-Medical, CMB-Exam and CMB-Clin datasets with two LLMs in Table1. From the reported accuracy, we can find the following observations:

Comparison of RAG methods and Base LLMs. Given the complexity of patient queries, we observe that the performance of the Naive RAG methods shows little to no improvement compared to the No RAG baselines. In contrast, the effectiveness of Adaptive RAG is significantly higher than that of Advanced RAG and substantially outperforms other approaches. This underscores the necessity of employing more sophisticated submodules for advanced and adaptive retrieval in domain-specific scenarios.

Comparison of TC-RAG and other RAG methods. Our model, TC-RAG, clearly outperforms the baseline models across all datasets, with an average performance gain of all metrics of up to **7.20**%. For instance, the EM and BLEU-4 scores improve by approximately 2.60%-5.62% and 8.23%-13.72%, respectively. These results highlight the effectiveness of our modules in system state & memory management, as well as adaptive retrieval. Additionally, it is worth noting that domain-specific LLMs significantly outperform general LLMs, further demonstrating the importance of pre-training a medical LLM to support TC-RAG, which aligns with *C2*.

6.3 Ablation Study (RQ2)

We perform ablation studies to evaluate the impact of each component within TC-RAG, as detailed in Table 1,

with three variants: (1) TC-RAG without Backtrack action (denoted as w/o Backtrack), (2) TC-RAG without Summary action (denoted as w/o Summary), (3) Tc-RAG without State Monitor, relying solely on the LLM's 'Final Answer' action to determine termination, transforming into a black-box system (denoted as w/o State Monitor). The results reveal that each component contributes positively to the overall performance of TC-RAG. The exclusion of any component leads to a noticeable reduction in effectiveness. Particularly, the absence of the State Monitor results in significant performance degradation, highlighting the critical importance of the system state variable in monitoring the process, in line with C1, which is essential for preventing overconfidence and ensuring appropriate termination, thereby avoiding excessive or inadequate retrieval. Moreover, the removal of the Backtrack and Summary actions underscores the necessity of effective memory management. These actions are crucial for mitigating irrelevant noise and maintaining an optimal system state, aligning with the challenges outlined in C3.

6.4 Case Study (RQ3)

In this case study, we examine the effectiveness of two RAG systems: one without memory and state management–ReACT, and TC-RAG. We evaluate how each system impacts the state management, retrieval, and reasoning process, particularly when dealing with irrelevant or incorrect noise.

The results indicate that the ReACT-based approach struggles with accumulating irrelevant noise, leading to overconfidence and inaccurate conclusions, simply due to the unit conversion in Figure 2. In contrast, TC-RAG effectively manages its memory and utilizes Summary & Backtrack actions to prune incorrect retrievals, resulting in more concise and accurate conclusions, which underscores TC-RAG's superiority in handling complex tasks (for C3). Furthermore, we found that the ReACT-based approach tends to prematurely settle on answers when the system state value is high, due to the lack of state management. On the other hand, TC-RAG dynamically monitors the RAG process, ensuring that the system state value meets the termination condition, which highlights the necessity of constructing a system state, in line with C1.

6.5 Sensitivity Analysis (RQ4)

To demonstrate the effectiveness of the system state variables, we also conducted experiments on TC-RAG via two LLMs on MMCU-Medical and CMB-Exam. As shown in Figure 3, we found that as σ increases, the system state is imposed with small constraints, and the LLM becomes "overconfident", reaching conclusions before fully analyzing and planning the necessary steps. Conversely, when σ decreases, the state variable exerts a stronger influence on the output, making it harder to reach the termination state. Thus, the LLM becomes overly cautious, attempting multiple actions and slightly reducing effectiveness. Overall, we can balance σ to ensure optimal performance and accuracy of TC-RAG, aligning with the challenges outlined in CI.

https://cmedbenchmark.llmzoo.com/static/leaderboard.html

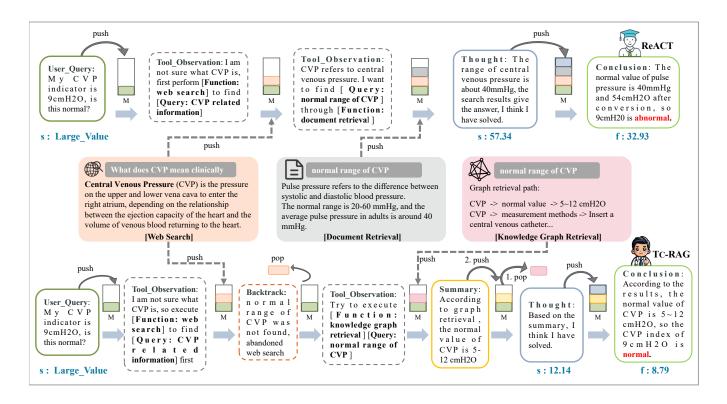


Figure 2: Case Study of ReACT-based and TC-RAG.




Figure 3: Hyper-parameter study with the different threshold σ for cppl (Left) and uct (Right).

7 Conclusions and Future Works

We introduce the first Turing-Complete RAG system for medical LLMs, named TC-RAG. By incorporating a monitored state variable, we have developed a stack memory framework that enables more dynamic and adaptive retrieval processes, effectively addressing the endless and inaccurate retrieval challenges. The TC-RAG framework, with its memory stack system for backtracking and summarizing, effectively reduces the accumulation of erroneous knowledge and irrelevant noise. Our experiments suggest that TC-RAG outperforms existing baselines across multiple real-world medical datasets, showing potential improvements in accuracy and reliability. Furthermore, the successful deployment of TC-RAG on an online platform also highlights its practical value in real-world applications. Future efforts will

focus on incorporating more complex composed actions, enabling multi-LLM interactions, and exploring its application in other specialized domains.

References

2023. Bridging General Large Language Models and Real-World Medical Consultation.

Asai, A.; Min, S.; Zhong, Z.; and Chen, D. 2023a. Retrieval-based language models and applications. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 6: Tutorial Abstracts)*, 41–46.

Asai, A.; Wu, Z.; Wang, Y.; Sil, A.; and Hajishirzi, H. 2023b. Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. *arXiv* preprint arXiv:2310.11511.

Asai, A.; Wu, Z.; Wang, Y.; Sil, A.; and Hajishirzi, H. 2024. Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. In *ICLR*.

Borgeaud, S.; Mensch, A.; Hoffmann, J.; Cai, T.; Rutherford, E.; Millican, K.; van den Driessche, G.; Lespiau, J.-B.; Damoc, B.; Clark, A.; de Las Casas, D.; Guy, A.; Menick, J.; Ring, R.; Hennigan, T.; Huang, S.; Maggiore, L.; Jones, C.; Cassirer, A.; Brock, A.; Paganini, M.; Irving, G.; Vinyals, O.; Osindero, S.; Simonyan, K.; Rae, J. W.; Elsen, E.; and Sifre, L. 2022. Improving language models by retrieving from trillions of tokens. arXiv:2112.04426.

BYAMBASUREN, O.; YANG, Y.; SUI, Z.-f.; DAI, D.; CHANG, B.; LI, S.; and ZAN, H. 2020. Preliminary study

- on the construction of chinese medical knowledge graph. *Journal of Chinese Information Processing*.
- Cao, M.; Dong, Y.; Wu, J.; and Cheung, J. C. K. 2020. Factual Error Correction for Abstractive Summarization Models. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 6251–6258. Online: Association for Computational Linguistics.
- Cheng, H.; Shen, Y.; Liu, X.; He, P.; Chen, W.; and Gao, J. 2021. UnitedQA: A Hybrid Approach for Open Domain Question Answering. arXiv:2101.00178.
- Cox, C. L.; Miller, B. M.; Kuhn, I.; and Fritz, Z. 2021. Diagnostic uncertainty in primary care: what is known about its communication, and what are the associated ethical issues? *Family practice*, 38(5): 654–668.
- Cuconasu, F.; Trappolini, G.; Siciliano, F.; Filice, S.; Campagnano, C.; Maarek, Y.; Tonellotto, N.; and Silvestri, F. 2024. The Power of Noise: Redefining Retrieval for RAG Systems. arXiv:2401.14887.
- Edge, D.; Trinh, H.; Cheng, N.; Bradley, J.; Chao, A.; Mody, A.; Truitt, S.; and Larson, J. 2024. From Local to Global: A Graph RAG Approach to Query-Focused Summarization. arXiv:2404.16130.
- Fang, F.; Bai, Y.; Ni, S.; Yang, M.; Chen, X.; and Xu, R. 2024. Enhancing Noise Robustness of Retrieval-Augmented Language Models with Adaptive Adversarial Training. arXiv:2405.20978.
- Gunasekar, S.; Zhang, Y.; Aneja, J.; Mendes, C. C. T.; Del Giorno, A.; Gopi, S.; Javaheripi, M.; Kauffmann, P.; de Rosa, G.; Saarikivi, O.; et al. 2023. Textbooks Are All You Need. *ArXiv preprint*, abs/2306.11644.
- He, H.; Zhang, H.; and Roth, D. 2022. Rethinking with Retrieval: Faithful Large Language Model Inference. arXiv:2301.00303.
- Hongying, Z.; Wenxin, L.; Kunli, Z.; Yajuan, Y.; Baobao, C.; and Zhifang, S. 2020. Building a Pediatric Medical Corpus: Word Segmentation and Named Entity Annotation. In *Workshop on Chinese Lexical Semantics*, 652–664.
- Izacard, G.; Lewis, P.; Lomeli, M.; Hosseini, L.; Petroni, F.; Schick, T.; Dwivedi-Yu, J.; Joulin, A.; Riedel, S.; and Grave, E. 2022. Atlas: Few-shot Learning with Retrieval Augmented Language Models. arXiv:2208.03299.
- Jelinek, F.; Mercer, R. L.; Bahl, L. R.; and Baker, J. K. 1977. Perplexity—a measure of the difficulty of speech recognition tasks. *J. Acoust.*
- Jeong, S.; Baek, J.; Cho, S.; Hwang, S. J.; and Park, J. C. 2024. Adaptive-rag: Learning to adapt retrieval-augmented large language models through question complexity. *arXiv* preprint arXiv:2403.14403.
- Ji, Z.; Lee, N.; Frieske, R.; Yu, T.; Su, D.; Xu, Y.; Ishii, E.; Bang, Y. J.; Madotto, A.; and Fung, P. 2023a. Survey of hallucination in natural language generation. *ACM Computing Surveys*, 55(12): 1–38.
- Ji, Z.; Lee, N.; Frieske, R.; Yu, T.; Su, D.; Xu, Y.; Ishii, E.; Bang, Y. J.; Madotto, A.; and Fung, P. 2023b. Survey of Hallucination in Natural Language Generation. *ACM Comput. Surv.*, 55(12).

- Jiang, X.; Zhang, R.; Xu, Y.; Qiu, R.; Fang, Y.; Wang, Z.; Tang, J.; Ding, H.; Chu, X.; Zhao, J.; and Wang, Y. 2023a. Think and Retrieval: A Hypothesis Knowledge Graph Enhanced Medical Large Language Models.
- Jiang, X.; Zhang, R.; Xu, Y.; Qiu, R.; Fang, Y.; Wang, Z.; Tang, J.; Ding, H.; Chu, X.; Zhao, J.; and Wang, Y. 2024. HyKGE: A Hypothesis Knowledge Graph Enhanced Framework for Accurate and Reliable Medical LLMs Responses. arXiv:2312.15883.
- Jiang, X.; Zhuang, D.; Zhang, X.; Chen, H.; Luo, J.; and Gao, X. 2023b. Uncertainty Quantification via Spatial-Temporal Tweedie Model for Zero-inflated and Long-tail Travel Demand Prediction. In *Proceedings of the 32nd ACM International Conference on Information and Knowledge Management*, CIKM '23. ACM.
- Jiang, Z.; Xu, F. F.; Gao, L.; Sun, Z.; Liu, Q.; Dwivedi-Yu, J.; Yang, Y.; Callan, J.; and Neubig, G. 2023c. Active Retrieval Augmented Generation. arXiv:2305.06983.
- Jiang, Z.; Xu, F. F.; Gao, L.; Sun, Z.; Liu, Q.; Dwivedi-Yu, J.; Yang, Y.; Callan, J.; and Neubig, G. 2023d. Active retrieval augmented generation. *arXiv* preprint arXiv:2305.06983.
- Jin, Q.; Leaman, R.; and Lu, Z. 2023. Retrieve, summarize, and verify: how will ChatGPT affect information seeking from the medical literature? *Journal of the American Society of Nephrology*, 34(8): 1302–1304.
- Johnson, A. E.; Bulgarelli, L.; Shen, L.; Gayles, A.; Shammout, A.; Horng, S.; Pollard, T. J.; Hao, S.; Moody, B.; Gow, B.; et al. 2023. MIMIC-IV, a freely accessible electronic health record dataset. *Sci. Data*, 10(1): 1.
- Johnson, A. E.; Pollard, T. J.; Shen, L.; Lehman, L.-w. H.; Feng, M.; Ghassemi, M.; Moody, B.; Szolovits, P.; Anthony Celi, L.; and Mark, R. G. 2016. MIMIC-III, a freely accessible critical care database. *Sci. Data*, 3(1): 1–9.
- Kandpal, N.; Deng, H.; Roberts, A.; Wallace, E.; and Raffel, C. 2023. Large language models struggle to learn long-tail knowledge. In *International Conference on Machine Learning*, 15696–15707. PMLR.
- Kaplan, J.; McCandlish, S.; Henighan, T.; Brown, T. B.; Chess, B.; Child, R.; Gray, S.; Radford, A.; Wu, J.; and Amodei, D. 2020. Scaling Laws for Neural Language Models. arXiv:2001.08361.
- Karpukhin, V.; Oğuz, B.; Min, S.; Lewis, P.; Wu, L.; Edunov, S.; Chen, D.; and tau Yih, W. 2020. Dense Passage Retrieval for Open-Domain Question Answering. arXiv:2004.04906.
- Khandelwal, U.; Levy, O.; Jurafsky, D.; Zettlemoyer, L.; and Lewis, M. 2020. Generalization through Memorization: Nearest Neighbor Language Models. arXiv:1911.00172.
- Kim, J.; Jaehyun Nam, S. M.; Park, J.; Lee, S.-W.; Seo, M.; Ha, J.-W.; and Shin, J. 2024. SuRe: Summarizing Retrievals using Answer Candidates for Open-domain QA of LLMs. In *ICLR*.
- Kim, J.; Kwon, Y.; Jo, Y.; and Choi, E. 2023. KG-GPT: A General Framework for Reasoning on Knowledge Graphs Using Large Language Models. In *ACL*.
- Kingma, D. P.; and Ba, J. 2015. Adam: A Method for Stochastic Optimization. In *ICLR*.

- Koh, J. Y.; McAleer, S.; Fried, D.; and Salakhutdinov, R. 2024. Tree Search for Language Model Agents. arXiv:2407.01476.
- Lála, J.; O'Donoghue, O.; Shtedritski, A.; Cox, S.; Rodriques, S. G.; and White, A. D. 2023. Paperqa: Retrieval-augmented generative agent for scientific research. *arXiv* preprint arXiv:2312.07559.
- Lewis, P.; Perez, E.; Piktus, A.; Petroni, F.; Karpukhin, V.; Goyal, N.; Küttler, H.; Lewis, M.; Yih, W.-t.; Rocktäschel, T.; et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33: 9459–9474.
- Li, J.; Fei, H.; Liu, J.; Wu, S.; Zhang, M.; Teng, C.; Ji, D.; and Li, F. 2021. Unified Named Entity Recognition as Word-Word Relation Classification. arXiv:2112.10070.
- Li, X.; Zhao, R.; Chia, Y. K.; Ding, B.; Joty, S.; Poria, S.; and Bing, L. 2023a. Chain-of-Knowledge: Grounding Large Language Models via Dynamic Knowledge Adapting over Heterogeneous Sources. arXiv:2305.13269.
- Li, X.; Zhao, R.; Chia, Y. K.; Ding, B.; Joty, S.; Poria, S.; and Bing, L. 2023b. Chain-of-Knowledge: Grounding Large Language Models via Dynamic Knowledge Adapting over Heterogeneous Sources. arXiv:2305.13269.
- Li, Z.; Zhang, X.; Zhang, Y.; Long, D.; Xie, P.; and Zhang, M. 2023c. Towards General Text Embeddings with Multistage Contrastive Learning. arXiv:2308.03281.
- Liu, N. F.; Lin, K.; Hewitt, J.; Paranjape, A.; Bevilacqua, M.; Petroni, F.; and Liang, P. 2023. Lost in the Middle: How Language Models Use Long Contexts. arXiv:2307.03172.
- Liu, Q.; Wu, X.; Zhao, X.; Zhu, Y.; Zhang, Z.; Tian, F.; and Zheng, Y. 2024. Large Language Model Distilling Medication Recommendation Model. arXiv:2402.02803.
- Luo, J.; Yang, S.; Qiu, X.; Chen, P.; Nai, Y.; Zeng, W.; Zhang, W.; and Jiang, X. 2024. Kuaiji: the First Chinese Accounting Large Language Model. arXiv:2402.13866.
- Ma, K.; Cheng, H.; Zhang, Y.; Liu, X.; Nyberg, E.; and Gao, J. 2023. Chain-of-Skills: A Configurable Model for Opendomain Question Answering. arXiv:2305.03130.
- Matsumoto, N.; Moran, J.; Choi, H.; Hernandez, M. E.; Venkatesan, M.; Wang, P.; and Moore, J. H. 2024. KRA-GEN: a knowledge graph-enhanced RAG framework for biomedical problem solving using large language models. *Bioinformatics*, 40(6).
- Miller, G. A.; and Chomsky, N. 2003. Memory and the Processing of Complex Sentences. *Cognitive Science*, 27(4): 607–646.
- Mustafa, E. M.; Saad, M. M.; and Rizkallah, L. W. 2023. Building an enhanced case-based reasoning and rule-based systems for medical diagnosis. *Journal of Engineering and Applied Science*, 70(1): 139.
- OpenAI. 2022. Introducing ChatGPT. https://openai.com/blog/chatgpt.
- OpenAI. 2023. GPT-4 Technical Report. *ArXiv*, abs/2303.08774.

- Pal, A.; and Sankarasubbu, M. 2023. Gemini Goes to Med School: Exploring the Capabilities of Multimodal Large Language Models on Medical Challenge Problems and Hallucinations.
- Paszke, A.; Gross, S.; Massa, F.; Lerer, A.; Bradbury, J.; Chanan, G.; Killeen, T.; Lin, Z.; Gimelshein, N.; Antiga, L.; et al. 2019. Pytorch: An imperative style, high-performance deep learning library. In *NeurIPS*.
- Peng, K.; Ding, L.; Yuan, Y.; Liu, X.; Zhang, M.; Ouyang, Y.; and Tao, D. 2024. Revisiting Demonstration Selection Strategies in In-Context Learning. arXiv:2401.12087.
- Pimentel, D. S.; and Silva, M. A. 2018. A Review of Memory Management Techniques in Computing Systems. *ACM Computing Surveys (CSUR)*, 51(3): 1–35.
- Pollard, T. J.; Johnson, A. E.; Raffa, J. D.; Celi, L. A.; Mark, R. G.; and Badawi, O. 2018. The eICU Collaborative Research Database, a freely available multi-center database for critical care research. *Sci. Data*, 5(1): 1–13.
- Qu, Y.; Ding, Y.; Liu, J.; Liu, K.; Ren, R.; Zhao, W. X.; Dong, D.; Wu, H.; and Wang, H. 2021. RocketQA: An Optimized Training Approach to Dense Passage Retrieval for Open-Domain Question Answering. arXiv:2010.08191.
- Ram, O.; Levine, Y.; Dalmedigos, I.; Muhlgay, D.; Shashua, A.; Leyton-Brown, K.; and Shoham, Y. 2023. In-Context Retrieval-Augmented Language Models. arXiv:2302.00083.
- Sen, P.; Mavadia, S.; and Saffari, A. 2023. Knowledge Graph-augmented Language Models for Complex Question Answering. *Proceedings of the 1st Workshop on Natural Language Reasoning and Structured Explanations (NLRSE)*.
- Shinn, N.; Cassano, F.; Gopinath, A.; Narasimhan, K.; and Yao, S. 2024. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36.
- Soman, K.; Rose, P. W.; Morris, J. H.; Akbas, R. E.; Smith, B.; Peetoom, B.; Villouta-Reyes, C.; Cerono, G.; Shi, Y.; Rizk-Jackson, A.; Israni, S.; Nelson, C. A.; Huang, S.; and Baranzini, S. E. 2023a. Biomedical knowledge graphenhanced prompt generation for large language models. arXiv:2311.17330.
- Soman, K.; Rose, P. W.; Morris, J. H.; Akbas, R. E.; Smith, B.; Peetoom, B.; Villouta-Reyes, C.; Cerono, G.; Shi, Y.; Rizk-Jackson, A.; et al. 2023b. Biomedical knowledge graph-enhanced prompt generation for large language models. *arXiv preprint arXiv:2311.17330*.
- Song, I.; Pendse, S. R.; Kumar, N.; and Choudhury, M. D. 2024. The Typing Cure: Experiences with Large Language Model Chatbots for Mental Health Support. arXiv:2401.14362.
- Su, W.; Tang, Y.; Ai, Q.; Wu, Z.; and Liu, Y. 2024. Dragin: Dynamic retrieval augmented generation based on the real-time information needs of large language models. *arXiv* preprint arXiv:2403.10081.
- Trivedi, H.; Balasubramanian, N.; Khot, T.; and Sabharwal, A. 2023. Interleaving Retrieval with Chain-of-Thought

- Reasoning for Knowledge-Intensive Multi-Step Questions. arXiv:2212.10509.
- Turing, A. M. 1936. On computable numbers, with an application to the Entscheidungsproblem. *Journal of Mathematics*, 58(345-363): 5.
- Vu, M. D.; Wang, H.; Li, Z.; Chen, J.; Zhao, S.; Xing, Z.; and Chen, C. 2024. GPTVoiceTasker: LLM-Powered Virtual Assistant for Smartphone. arXiv:2401.14268.
- Wang, H.; Liu, C.; Xi, N.; Qiang, Z.; Zhao, S.; Qin, B.; and Liu, T. 2023a. HuaTuo: Tuning LLaMA Model with Chinese Medical Knowledge.
- Wang, S.; Zhao, Z.; Ouyang, X.; Wang, Q.; Shen, D.; and Segmentor, L. ???? ChatCAD: Interactive Computer-Aided Diagnosis on Medical Image using Large Language Models. Wang, X.; Chen, G. H.; Song, D.; Zhang, Z.; Chen, Z.; Xiao, Q.; Jiang, F.; Li, J.; Wan, X.; Wang, B.; and Li, H. 2023b. CMB: A Comprehensive Medical Benchmark in Chinese. arXiv:2308.08833.
- Wang, Y.; Ma, X.; and Chen, W. 2023. Augmenting black-box llms with medical textbooks for clinical question answering. *arXiv* preprint arXiv:2309.02233.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Ichter, B.; Xia, F.; Chi, E.; Le, Q.; and Zhou, D. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv:2201.11903.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Xia, F.; Chi, E.; Le, Q. V.; Zhou, D.; et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35: 24824–24837.
- Xiong, G.; Jin, Q.; Lu, Z.; and Zhang, A. 2024. Benchmarking retrieval-augmented generation for medicine. *arXiv* preprint arXiv:2402.13178.
- Xu, C.; Xu, Y.; Wang, S.; Liu, Y.; Zhu, C.; Mcauley, J.; and Diego, D. ???? Small Models are Valuable Plug-ins for Large Language Models.
- Xu, Z. 2023. Context-aware Decoding Reduces Hallucination in Query-focused Summarization. arXiv:2312.14335.
- Yang, A.; Yang, B.; Hui, B.; Zheng, B.; Yu, B.; Zhou, C.; Li, C.; Li, C.; Liu, D.; Huang, F.; Dong, G.; Wei, H.; Lin, H.; Tang, J.; Wang, J.; Yang, J.; Tu, J.; Zhang, J.; Ma, J.; Yang, J.; Xu, J.; Zhou, J.; Bai, J.; He, J.; Lin, J.; Dang, K.; Lu, K.; Chen, K.; Yang, K.; Li, M.; Xue, M.; Ni, N.; Zhang, P.; Wang, P.; Peng, R.; Men, R.; Gao, R.; Lin, R.; Wang, S.; Bai, S.; Tan, S.; Zhu, T.; Li, T.; Liu, T.; Ge, W.; Deng, X.; Zhou, X.; Ren, X.; Zhang, X.; Wei, X.; Ren, X.; Liu, X.; Fan, Y.; Yao, Y.; Zhang, Y.; Wan, Y.; Chu, Y.; Liu, Y.; Cui, Z.; Zhang, Z.; Guo, Z.; and Fan, Z. 2024a. Qwen2 Technical Report. arXiv:2407.10671.
- Yang, S.; Jiang, X.; Zhao, H.; Zeng, W.; Liu, H.; and Jia, Y. 2024b. FaiMA: Feature-aware In-context Learning for Multi-domain Aspect-based Sentiment Analysis. In *COL-ING*.
- Yang, S.; Zhao, H.; Zhu, S.; Zhou, G.; Xu, H.; Jia, Y.; and Zan, H. 2023. Zhongjing: Enhancing the Chinese Medical Capabilities of Large Language Model through Expert Feedback and Real-world Multi-turn Dialogue.

- Yao, S.; Zhao, J.; Yu, D.; Du, N.; Shafran, I.; Narasimhan, K.; and Cao, Y. 2022a. ReAct: Synergizing Reasoning and Acting in Language Models. *arXiv preprint arXiv:2210.03629*.
- Yao, S.; Zhao, J.; Yu, D.; Du, N.; Shafran, I.; Narasimhan, K.; and Cao, Y. 2022b. React: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*.
- Yoran, O.; Wolfson, T.; Ram, O.; and Berant, J. 2024. Making Retrieval-Augmented Language Models Robust to Irrelevant Context. arXiv:2310.01558.
- Yu, D.; Zhu, C.; Fang, Y.; Yu, W.; Wang, S.; Xu, Y.; Ren, X.; Yang, Y.; and Zeng, M. 2022. KG-FiD: Infusing Knowledge Graph in Fusion-in-Decoder for Open-Domain Question Answering. arXiv:2110.04330.
- Yu, W.; Zhang, H.; Pan, X.; Ma, K.; Wang, H.; and Yu, D. 2023. Chain-of-Note: Enhancing Robustness in Retrieval-Augmented Language Models. arXiv:2311.09210.
- Zakka, C.; Shad, R.; Chaurasia, A.; Dalal, A. R.; Kim, J. L.; Moor, M.; Fong, R.; Phillips, C.; Alexander, K.; Ashley, E.; et al. 2024. Almanac—retrieval-augmented language models for clinical medicine. *NEJM AI*, 1(2): AIoa2300068.
- Zeng, H. 2023. Measuring Massive Multitask Chinese Understanding. arXiv:2304.12986.
- Zhang, H.; Chen, J.; Jiang, F.; Yu, F.; Chen, Z.; Li, J.; Chen, G.; Wu, X.; Zhang, Z.; Xiao, Q.; Wan, X.; and Wang, B. 2023. HuatuoGPT, towards Taming Language Model to Be a Doctor.
- Zhang, N.; Chen, M.; Bi, Z.; Liang, X.; Li, L.; Shang, X.; Yin, K.; Tan, C.; Xu, J.; Huang, F.; Si, L.; Ni, Y.; Xie, G.; Sui, Z.; Chang, B.; Zong, H.; Yuan, Z.; Li, L.; Yan, J.; Zan, H.; Zhang, K.; Tang, B.; and Chen, Q. 2022. CBLUE: A Chinese Biomedical Language Understanding Evaluation Benchmark. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 7888–7915. Dublin, Ireland: Association for Computational Linguistics.
- Zhu, F.; Lei, W.; Wang, C.; Zheng, J.; Poria, S.; and Chua, T.-S. 2021. Retrieving and Reading: A Comprehensive Survey on Open-domain Question Answering. arXiv:2101.00774.
- Zhu, H.; Togo, R.; Ogawa, T.; and Haseyama, M. 2023. A Medical Domain Visual Question Generation Model via Large Language Model.
- Zhu, Y.; Qiao, S.; Ou, Y.; Deng, S.; Zhang, N.; Lyu, S.; Shen, Y.; Liang, L.; Gu, J.; and Chen, H. 2024. KnowAgent: Knowledge-Augmented Planning for LLM-Based Agents. arXiv:2403.03101.

8 Appendix

8.1 Full Proof of Turing-Complete

We prove this by showing that for any Turing machine T, there exists our TC that can simulate T:

Let $\mathbb N$ denote the set of natural numbers, and $\mathbb R$ the set of real numbers. We consider computations over finite alphabets and prove the Turing completeness of our proposed model.

Definition 1. (Standard Turing Machine). A standard Turing Machine is a 7-tuple Turing machine $T = (S_T, A_T, M_T, \delta_T, st_0, st_{accept}, st_{reject})$ where:

- S_T is a finite set of states.
- $A_T \subset M_T$ is the input alphabet.
- \mathcal{M}_T is the tape alphabet, with $\sqcup \in \mathcal{M}_T \backslash \mathcal{A}_T$ as the blank symbol.
- $\delta_T : \mathcal{S}_T \times \mathcal{M}_T \to \mathcal{S}_T \times \mathcal{M}_T \times \{L, R\}$ is the transition function.
- $st_0 \in \mathcal{S}_T$ is the initial state.
- $st_{accept}, st_{reject} \in \mathcal{S}_T$ are the accept and reject states, respectively.

Definition 2. (T Configuration). A configuration of T is a tuple $c_T = (st, w_1 a w)2$), where:

- $st \in \mathcal{S}_T$ is the current system state value,
- w1, w2 represents the sequence of actions $a \in \mathcal{A}_T$ to the left / right of the tape head.

Definition 3. (TC Configuration). A configuration of TC is a tuple $c_{\text{TC}} = (s, w, \mathcal{M}, \{halt \mid | continue\}) \in \mathcal{S} \times \mathcal{A} \times \mathcal{M} \times \{halt, continue\}$, where:

- $s \in \mathcal{S}$ is the current system state value,
- w is the remaining input actions,
- \mathcal{M} is the current stack content,
- {halt || continue} is the conditions that determine whether the system will continue or halt.

Definition 4. (Computation Step). For configurations of TC at step t $c_t = (s_t, w_t, \mathcal{M}_t, s_t \geq \sigma)$ and $c_{t+1} = (s_{t+1}, w_{t+1}, \mathcal{M}_{t+1}, \cdot)$, we say $c_t \vdash_{\mathsf{TC}} c_{t+1}$ if and only if:

- 1. $w_t = aw_{t+1}$ for some $a \in \mathcal{A} \cup \{\varepsilon\}$
- 2. $\delta(s_t, a) = (s_2, op, b)$

3.
$$\mathcal{M}_{t+1} = \begin{cases} push(\mathcal{M}_t, b) & \text{if } op = push\\ pop(\mathcal{M}_t) & \text{if } op = pop \end{cases}$$

4. The computation terminates if $s_{t+1} < \sigma$

where $top(\mathcal{M})$ returns the top element of the stack \mathcal{M} . Next, we will break down this proof process into the following steps:

Step 1: Construction of the Turing System. Given a Turing machine $T = (\mathcal{S}_T, \mathcal{A}_T, \mathcal{M}_T, \delta_T, st_0, st_{accept}, st_{reject})$, we interpret $TC = (\mathcal{S}, \mathcal{A}, \mathcal{M}, \delta, s_0, \mathcal{F}, \sigma)$ with the following components:

- 1. $S = S_T \cup f$, where $f \notin S_T$ is the end state.
- 2. $\mathcal{A} = \mathcal{A}_T$, $\mathcal{M} = \mathcal{M}_T \cup \mathcal{A}$, $s_0 = st_0$, $\mathcal{F} = \{f\}$, σ is the hyper-threshold to decide accept or reject.

3. The transition function δ is defined as:

$$\delta(s,a) = \begin{cases} (s',push,s \geq \sigma) & \text{if } \delta_T(st,a) = (st',a,R) \\ (s',pop,s \geq \sigma) & \text{if } \delta_T(st,a) = (st',a,L) \\ (f,no_op,a,s < \sigma) & \text{if } st \in \{st_{accept},st_{reject}\} \end{cases}$$

where a is the executing action for T or TC. The operations push and pop are corresponding to the right (R) and left (L) movements in T. Transition function $\delta(\cdot,\cdot)$ is for TC and $\delta_T(\cdot,\cdot)$ is for T. The operation no_op indicates no operation is performed when the system is halting.

Step 2: Configuration Mapping Next, we define a bijective mapping function h that maps each configuration of T to TC. We now define the configuration c of T as $c=(st,w_1aw_2),w_1,w_2$ represents the sequence of actions to the left / right of the tape head, where $st \in \mathcal{S}_T, a \in \mathcal{A}_T$ is the tape head/action. The configuration of TC c_{TC} is composed of the tuple as (system state, remaining actions, stack memory actions, whether to halt) as:

$$h(st, w_1 a w_2) = (s, w_2, w_1^R a, s \ge \sigma) = c_{TC}$$

where w_1^R is the reverse of w_1 , which is necessary due to Last-In-First-Out (LIFO) principle of \mathcal{M} .

Step 3: Simulation of Computation Steps We now prove that TC can simulate each step of T as in Lemma 3:

Lemma 3 If $c_1 \vdash_T c_2$ in T, then $h(c_1) \vdash_{T_C}^* h(c_2)$ in T_C , where * denotes one or multiple steps of derivation, \vdash is the action shift operator.

Proof 8.1 Let $c_1 = (st_1, w_1a_1w_2)$ and $c_2 = (st_2, w_1'a_2w_2')$ be configurations of T with $a_t = \{L, R\}$. We prove Lemma 3 by considering the two cases push and pop corresponding to the possible directions of tape head movement in T.

• Case 1: If $\delta_T(st_1, a_1) = (st_2, a_2, R)$, then:

$$h(c_1) = (st_1, w_2, w_1^R a_1, st_1 \ge \sigma)$$

$$\vdash_{\mathsf{TC}} (s_2, w_2', w_1^R a_1 a_2, s_2 \ge \sigma) \quad (\textit{push } a_2)$$

$$= h(st_2, w_1 a_1 a_2 w_2') = h(st_2, w_1' a_2 w_2') = h(c_2)$$

• Case 2: If $\delta_T(st_1, a_1) = (st_2, a_2, L)$, then:

$$\begin{split} h(c_1) &= (st_1, w_2, w_1^R a_1, st_1 \geq \sigma) \\ &\vdash_{\mathsf{TC}} (s_2, w_2, w_1^R, s_2 \geq \sigma) \quad (\textit{pop } a_1) \\ &\vdash_{\mathsf{TC}} (s_2, w_2', w_1'^R a_2, s_2 \geq \sigma) \quad (\textit{push } a_2, \textit{if } a_2 \neq \textit{null}) \\ &= h(st_2, w_1' a_2 w_2') = h(c_2) \end{split}$$

It is noted that the two cases correspond to the meta operations of push (Case 1) and pop (Case 2) in TC-RAG.

Step 4: Preservation of Acceptance and Rejection

Lemma 4 T accepts (rejects) the whole input w if and only if TC reaches a configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from the initial configuration $(s_0, w, NULL, s_0 \ge \sigma)$.

Proof 8.2 We prove the consistency of reaching the termination state from both $T \to TC$ and $TC \to T$ perspectives. (Forward \Rightarrow) Assume T accepts (rejects) input w. Then: $\exists t \in \mathbb{N}$ such that after t steps, T enters state st_{accept} (or

 st_{reject}). Then, Let (st_t, w_t) be the configuration of T at step t, where $st_t \in \{st_{accept}, st_{reject}\}$. By our construction of δ , $\forall a \in \mathcal{A}$, we have:

$$\delta(s, a) = (f, no_op, a, f < \sigma) \quad \forall st \in \{st_{accept}, st_{reject}\}\$$

Therefore, if $h(st_t, w_t) = (s_t, w_2, w_1^R a, s_t \ge \sigma)$ is the corresponding configuration in TC, then:

$$(s_t, w_2, w_1^R a, s_t \ge \sigma) \vdash_{\mathsf{TC}}^t (f, NULL, \mathcal{M}, f < \sigma)$$

Thus, TC achieve f with system state value lower than σ . (**Backward** \Leftarrow) Assume TC reaches configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from $(s_0, w, NULL, s_0 \geq \sigma)$. Then: $\exists t \in \mathbb{N}$ such that:

$$(s_0, w, NULL, s_0 \ge \sigma) \vdash_{\mathsf{TC}}^t (f, NULL, \mathcal{M}, f < \sigma).$$

Let $(s_{t-1}, w_2, w_1^R a, s_{t-1} \geq \sigma)$ be the configuration of TC at step t-1. Then, by the construction of δ , the only way to reach f is if $s_{t-1} \in \{st_{accept}, st_{reject}\}$. Therefore, the corresponding configuration of T at step t-1 must be (st_{t-1}, w_1aw_2) , where $st_{t-1} \in \{st_{accept}, st_{reject}\}$. Thus, T must have entered st_{accept} or st_{reject} , implying that T accepts or rejects w.

From both the **Forward** and **Backward** proof, T accepts (rejects) input w if and only if TC reaches a configuration $(f, NULL, \mathcal{M}, f < \sigma)$ from the initial configuration $(s_0, w, NULL, s_0 \ge \sigma)$.

By the above lemmas, we have shown that: (1) TC can simulate every move of T. (2) TC halts if and only if T achieve acceptance or rejection behavior. Thus, TC can simulate any computation of any Turing machine T, which by definition makes TC Turing complete.

8.2 Review of LLMs

Definition (Large Language Models). Generative LLMs are powerful language models capable of generating coherent and contextually relevant text. Through pretraining on large-scale text corpora and alignment fine-tuning to follow human instructions, they can generate human-like text based on given prompts or inputs. Typically, LLMs Θ model the probability of a sentence (i.e., a sequence of word tokens) $l = (token_1, token_2, \ldots, token_n)$ as $P(s; \Theta) = \prod_i^n P(token_i \mid token_{<i}; \Theta)$, where $token_i$ denotes the i-th token of the sentence l and $token_{<i}$ denotes the partial word token sequence before the i-th step.

8.3 Model Pretrain

Pretrain LLMs The high-quality pre-training corpus can greatly improve the performance of LLM and even break the scaling laws to some extent (Gunasekar et al. 2023). Among them, continuous pre-training is a crucial phase where the language model undergoes extensive training on vast and diverse unlabeled datasets. This process spans multiple iterations, each aimed at refining the model's language understanding capabilities (Luo et al. 2024). Initially, the LLM is initialized with the pre-trained weights of basic LLMs and learns to predict missing words or segments within sentences using self-supervised learning objectives such as

masked language modeling (MLM) and next-sentence prediction (NSP). Through exposure to a wide variety of textual data sources, the model gradually acquires a rich domain understanding of language structure, semantics, and context in the medical domain. Additionally, techniques like attention mechanisms and multi-layer architectures are employed to capture complex linguistic patterns and dependencies.

It should be noted that we did not use supervised finetuning because it would lead to overconfidence in the large model, resulting in the large model often receiving diagnostic results directly without planning and calling professional medical knowledge retrieval tools.

Table 2: Medical pre-train data statistics

Type	Dataset	Size		
Dialogues	RealHospital-QA Web-QA	2318 MB 567 MB		
Knowledge graphs	Medical-KG	379 MB		
Exams	Medical-Exam	443 MB		
Textbooks	Chinese-Textbook English-Textbook	52 MB 212 MB		
Guidelines	Med-Guidelines	878 MB		
Encyclopedia	Med-Encyclopedia	798 MB		
To	5647 MB			

Data Preparement To build a diverse medical corpus, we compiled data from multiple sources, ensuring broad coverage across various medical domains.

- Dialogues: The RealHospital-QA dataset includes realworld clinical conversations, while Web-QA provides Q&A pairs from online health forums, capturing common public inquiries.
- Knowledge Graphs: Medical-KG organizes medical knowledge into entities and relationships, integrating data from clinical guidelines, research papers, and textbooks.
- Exams: The Medical-Exam dataset consists of questions from medical exams, aiding the model in handling complex diagnostic scenarios.
- Textbooks: We included Chinese-Textbook and English-Textbook datasets to provide foundational knowledge in both languages.
- **Guidelines**: **Med-Guidelines** comprises official medical guidelines, essential for evidence-based practice.
- **Encyclopedia**: The **Med-Encyclopedia** offers concise explanations of medical terms and conditions.

These datasets span multiple specialties, giving the model a comprehensive understanding of medical knowledge. The total corpus size is 5647 MB, as shown in Table 2.

Pretrain Loss Function The pertaining loss function is defined as follows:

$$L = \sum_{t \in \text{masked}} \log P(token_t \mid l_{\setminus t}; \Theta), \tag{6}$$

where $l_{\backslash t}$ represents the remaining part of the sequence l after masking the t-th word.

Training Setup We performed the continuous pre-training on Qwen1.5-32B-Chat using the aforementioned medical datasets. The pre-training was conducted on eight H100 GPUs for one epoch with a learning rate of 1e-4, and the entire training process spanned 4 days. This configuration was chosen to balance computational efficiency with the need for thorough learning, allowing the model to effectively internalize the extensive medical knowledge embedded in the training data. Through this process, we aimed to enhance the model's reasoning and planning capabilities, ensuring it can provide accurate and reliable medical analysis in real-world applications.

8.4 Prompt and Algorithm

Prompt Format. In this module, we will provide a detailed introduction to the Prompt used in our entire model in the following Prompt:

TC-RAG Algotithm. Algorithm 1 describes the reasoning loop of TC-RAG for generating a final answer based on user query using a pre-trained Medical LLM. The process begins by initializing the stack memory and the initial state (Lines 1-2). The user query is then pushed into the stack memory (Line 3).

Within the loop, which continues until the action limit is reached or the system state value drops below the threshold σ , the model generates an action based on the current memory stack (Lines 5-6). If the action type is identified as a Conclusion, the system state is recalculated; if it remains within acceptable bounds, the final answer is confirmed and pushed into the stack, terminating the loop (Lines 7-11). Otherwise, the final answer is reclassified as a Thought, and processing continues (Lines 12-14).

If the action type is a Thought, the system state is updated, and the thought result is pushed into the stack (Lines 15-17). For Tool_Use, the model retrieves relevant observations using specified tools or a knowledge base, which are then pushed into the stack (Lines 18-20). When the action type is Backtrack, the top of the stack is popped, and the previous system state is restored (Lines 21-23). If the action is a Summary, the stack is adjusted by popping irrelevant content, summarizing it, and pushing the summary back onto the stack (Lines 24-26).

Finally, after exiting the loop, the top of the stack is returned as the final answer (Lines 27-28).

```
Require: User\_Query, pretrained Medical LLM \Theta,
     knowledge base \mathcal{D}, system value threshold \sigma, Tc-
     RAG Prompt \mathcal{P}
Ensure: Conclusion
 1: Initialize stack memory \mathcal{M}, state s \leftarrow \text{Large\_Value}
 2: Push User\_Query into \mathcal{M}
 3: actions\_taken \leftarrow 0
 4: while actions\_taken < max\_loop and s \ge \sigma do
 5:
         Action \leftarrow \Theta(\mathcal{M} \mid \mathcal{P})
 6:
         if Action is Conclusion then
              f \leftarrow \text{calculate\_state}(User\_Query, Action)
 7:
 8:
             if f < \sigma then
                  Push Action into {\cal M}
 9:
10:
                  Break
11:
             else
12:
                  action\_type \leftarrow Thought, s \leftarrow f
                  Push Action into \mathcal{M}
13:
14:
             end if
15:
         else if Action is Thought then
16:
             s \leftarrow \text{calculate\_state}(User\_Query, Action)
17:
             If s < \sigma Then s \leftarrow \sigma
             Push Action into {\cal M}
18:
         else if Action is Tool_Use then
19:
             observation \leftarrow call(tool\_type) & search D
20:
             Push observation into {\cal M}
21:
         else if Action is Backtrack then
22:
```

Algorithm 1: TC-RAG Inference Algorithm

```
24: If old_action is Thought then reset s to the previous state
25: else if Action is Summary then
26: Pop from M
27: Push Action into M
28: end if
29: actions_taken ← actions_taken + 1
30: end while
31: Return Conclusion ← top(M)
```

 $old_action = Pop from \mathcal{M}$

23:

8.5 Detailed Experimental Setup

Dataset. Our experiments are conducted on two opensource query sets: MMCU-Medical (Zeng 2023) and CMB-Exam (Wang et al. 2023b) datasets, which are designed for multi-task Q&A and encompass single and multiplechoice questions in the medical field, and one open-domain Q&A dataset CMB-Clin (Wang et al. 2023b) which is the inaugural multi-round question-answering dataset based on real, complex medical diagnosis and treatment records. For MMCU-Medical, the questions are from the university medical professional examination, covering the three basic medical sciences, pharmacology, nursing, pathology, clinical medicine, infectious diseases, surgery, anatomy, etc., with a total of 2,819 questions. The CMB-Exam dataset utilizes qualifying exams as a data source in the four clinical medicine specialties of physicians, nurses, medical technicians, and pharmacists, with a total of 269,359 questions. The CMB-Clin dataset contains 74 high-quality, complex, and real patient cases with 208 medical questions.

TC-RAG Prompt

Answer the following questions as best you can. You have access to the following tools:

[Insert tool_descriptions here]

i.e. DOC_RAG: You can obtain medical knowledge from authoritative documents via this tool to help you reply.

Please think strictly according to the provided way of thinking without omission, and use the following format:

[Actions Pipeline Format]

User_Query: User's questions or observed information,

Thought: You should think about what to do, whether to answer questions based on the results of the tool or decide which tool to use.

Tool_Use: The tool to be used must be one of [tool_name], do not add any extra characters or symbols! Only the name of the tool can be output!

Tool_Observation: The answer provided by the tool (not generated by you)

Summary: When the previous action outputs a large amount of vocabulary and you need to summarize it, please output a detailed summary based on your knowledge.

Backtrack: When the result of the previous action is meaningless to your task and you need to reexecute it, apply this.

...(Thought/Tool_Use/Summary/Backtrack here can be repeated zero or more times)

Thought: \tilde{I} now know the final answer. Conclusion: the final answer to the original input question.

[Start Conversation]

Begin!

User_Query:...

RAG Tools. We have involved several types of RAG tools:

(1) Knowledge Graph Search. CMeKG (Clinical Medicine Knowledge Graph)²³ (BYAMBASUREN et al. 2020), CPubMed-KG (Large-scale Chinese Open Medical Knowledge Graph)⁴ and Disease-KG (Chinese disease Knowledge Graph)⁵ are open-source medical KGs, which integrates extensive medical text data, including diseases, medications, symptoms and diagnostic treatment technologies. The fused KG has 1,288,721 entities and 3,569,427 relations. However, due to the lack of medical entity descriptions in its entities, we collect relevant entity knowl-

edge from Wikipedia⁶, Baidu Baike⁷, and Medical Baike⁸, and store them as entity descriptions. As mentioned by HyKGE (Jiang et al. 2024) and GraphRAG (Edge et al. 2024), we choose the reasoning chains and knowledge communities as knowledge carriers.

- (2) Documents Search. We have collected over 2 million medical documents of 3B size from drug instructions, medical textbooks, medical encyclopedias, clinical diagnosis and treatment guidelines, medical papers, and medical electronic medical records. To be specific, we utilize the GTE embedding model (Li et al. 2023c) "gte_sentence-embedding" to obtain the embedding for each document, which is currently the top-performing model for text vector embedding in the retrieval field. We set the document chunk size to 128 with overlap size 50.
- (3) Web and Pedia Search. In order to support the implementation of online retrieval, we also support searching on encyclopedias such as Wikipedia and MedNet (for this purpose, we pre-trained a W2NER model (Li et al. 2021) for medicine to extract medical entities). In addition, we also use search engines such as Bing and Google for web retrieval.
- (4) Electronic Medical Record Database Search. In order to support the retrieval of similar patient information, we also apply mimic-III (Johnson et al. 2016), mimic-IV (Johnson et al. 2023), and eICU (Pollard et al. 2018) datasets, following the code translation "ICD9-CM" principle to support the retrieval of similar patients

LLM Turbo. To fairly verify whether TC-RAG can effectively enhance LLMs, we selected the general-domain large model and the medical-domain large model as the base models and explored the gains brought by TC-RAG: Qwen-1.5-32B-chat.

Compared Methods. In order to explore the advantages of the TC-RAG, we compare the TC-RAG results against twelve other models: (1) Base Model (Base) servers as the model without any external knowledge, used to check the improvement effect of different RAG methods. We use Qwen and pre-trained ones as base models. (2) CHAIN-OF-THOUGHT (CoT) (Wei et al. 2023) generates a series of intermediate reasoning steps to perform complex reasoning. (3) Single Round-RAG (SR-RAG) is selected with the combination of KGRAG (Soman et al. 2023b,a; Sen, Mavadia, and Saffari 2023), embedding-based Document RAG and web search based on the initial question. (4) Fix Length RAG (FL-RAG) (Khandelwal et al. 2020; Borgeaud et al. 2022; Ram et al. 2023) triggers the retrieval module every n tokens and the tokens generated in the previous token window are utilized as the query. (5) Fix Sentence RAG (FS-RAG) (Trivedi et al. 2023): Similar to FL-RAG, we retrieves based on every sentence. (6) CHAIN-OF-NOTE (CoK) (Li et al. 2023b) generates sequential thoughts af-

²https://cmekg.pcl.ac.cn/

³https://github.com/king-yyf/CMeKG_tools

⁴https://cpubmed.openi.org.cn/graph/wiki

⁵https://github.com/nuolade/disease-kb

⁶https://www.wikipedia.org/

https://baike.baidu.com/

⁸https://www.yixue.com/

⁹https://www.modelscope.cn/models/damo/nlp_gte_sentence-embedding

ter retrieved knowledge, enabling a thorough evaluation of their relevance to the given question and integrating these thoughts to formulate the final answer. (7) Summarizing Retrievals (SuRe) (Kim et al. 2024) constructs summaries of the retrieved passages for each of the multiple answer candidates and confirms the most plausible answer from the candidate set by evaluating the validity and ranking of the generated summaries. (8) Hypothesis Knowledge Graph Enhanced Framework (HyKGE) (Jiang et al. 2024) leverages the hypothesis output and knowledge graph to enhance model inference. (9) Reasoning And Acting (ReACT) (Yao et al. 2022a) overcomes issues of hallucination and error propagation prevalent in chain-of-thought reasoning and actions. (10) Self-Reflective RAG (Self-RAG) (Asai et al. 2024) enhances an LM's quality and factuality through API retrieval and self-reflection. (11) Forward-Looking Active RAG (FLARE) (Jiang et al. 2023c) iteratively uses a prediction of the upcoming sentence to anticipate future content and retrieve relevant documents to regenerate the sentence if it contains low-confidence tokens. (12) Dynamic Retrieval **Augmented Generation based on the Information Needs** (DRAGIN) (Su et al. 2024) is designed to make decisions on when and what to retrieve based on real-time information needs. Note that we strictly follow the prompts for the baselines as stated.

Evaluation Metrics. As for the evaluation of multi-task medical choice question performance, we guide LLMs to only answer the correct answer and employ established metric Exact Match (EM) as suggested by prior work (Zhu et al. 2021; Karpukhin et al. 2020). For the EM score, an answer is deemed acceptable if its form corresponds to all correct answers in the provided list. For open-domain medical Q&A tasks, we utilize ROUGE-R (Xu 2023) and Bilingual Evaluation Understudy (BLEU-1 for answer precision, BLEU-4 for answer fluency) (Xu 2023) to gauge the similarity of LLMs responses to the ground-truth doctor analysis. ROUGE-R measures the extent to which the LLMs' responses cover the retrieved knowledge, which is crucial for ensuring comprehensive information coverage.

Experimental Implementation. In TC-RAG, $\sigma=10$ for cppl and 20 for uct. Moreover, for all the baselines and TC-RAG, we set the maximum number of returned tokens for LLMs to 500 and the temperature to 0.6. For a fair comparison, we apply the same W2NER, GTE (Li et al. 2023c) models for all baselines. Moreover, the parameters of W2NER are optimized with Adam optimizer (Kingma and Ba 2015) with L_2 regularization and dropout on high-quality medical dataset (Zhang et al. 2022; Hongying et al. 2020), the learning rate is set to 1e-3, the hidden unit is set to 1024 and weight decay is 1e-4. Implementations are done using the PyTorch 1.9.0 framework (Paszke et al. 2019) in Python 3.9, on an Ubuntu server equipped with 8 A100 GPU and an Intel(R) Xeon(R) CPU.

8.6 Noise Poisoning Attack (RQ3)

To assess the robustness of TC-RAG against noise poisoning attacks, we conducted two distinct types of attacks: Partial Attack and Structural Attack. These attacks simulate

scenarios involving excessive redundant information or situations where retrieval mechanisms fail, leaving no effective information. Additionally, we introduced two categories of noise—Irrelevant Retrieval Noise & Relevant Retrieval Noise (Yoran et al. 2024; Cuconasu et al. 2024; Fang et al. 2024)—to evaluate the effectiveness of the Backtrack and Summary actions.

In terms of implementation, we artificially constructed 100 pieces of noise based on CMB-Exam for each type of noise. It is worth noting that for partial attacks, we directly concatenate the noise knowledge after the retrieved results. For structural attacks, we replace the retrieved knowledge instead. We conduct the poison attack during the first function call:

Table 3: Results for Structural and Partial Attacks

Noise Type	Summary Prob.	Backtrack Prob.	EM	
Structural Attack				
Irrelevant Retrieval Noise	01.00%	94.00%	91.00	
Relevant Retrieval Noise	12.00%	76.00%	84.00	
Mixed Retrieval Noise	04.00%	91.00%	89.00	
Partial Attack				
Irrelevant Retrieval Noise	37.00%	49.00%	85.00	
Relevant Retrieval Noise	52.00%	29.00%	79.00	
Mixed Retrieval Noise	41.00%	47.00%	81.00	

Impact of Structural Attack and Partial Attack In the context of Structural Attack, the influence of Partial Attack is particularly pronounced. Since this type of noise is directly embedded within the sentence, it exerts a greater interference on TC-RAG. The experimental results indicate that under Partial Attack, (1) TC-RAG is more likely to trigger the Summary action, attempting to condense and process the excess information. This suggests that the model tends to utilize summarization as a means to handle noise in such scenarios. (2) Nevertheless, TC-RAG still triggers the Backtrack action in some cases, though with a lower probability compared to Structural Attack. (3) More notably, due to the greater impact of this embedded noise, the model's EM score significantly decreases, indicating that Partial Missing noise has the most substantial impact on TC-RAG during Structural Attack.

Comparison of Noise Types (1) In contrast, the impact of Relevant Noise is even more severe, particularly in the context of Partial Attack. Since Relevant Noise is highly related to the task, TC-RAG struggles to determine whether the noise contains the required answer, leading to a significantly lower EM compared to when dealing with Irrelevant Noise. (2) Relevant Noise is more likely to trigger the Summary action, indicating that when faced with task-related noise, the model may prefer summarizing the information rather than directly identifying and discarding irrelevant content. (3) In contrast, Irrelevant Noise is more easily detected by TC-RAG and effectively removed through the Backtrack action. The model handles it more efficiently, with the Backtrack execution probability reaching as high as 94%. (4) The results for Mixed Noise fall be-

Table 4: Performance of Various Approaches on CMB Leaderboard

Method	Average Score	Medical Qualification	Nursing Exam	Pharmacist Exam	Medical Technician	Professional Knowledge	Medical Postgraduate
TC-RAG	87.95	89.50	92.63	88.00	86.75	83.56	87.25
HuatuoGPTII-34B	76.80	75.65	82.31	76.81	76.17	74.38	75.56
Qwen-72B-Chat	74.38	78.55	83.56	79.78	77.92	68.25	58.19
Yi-34B-Chat	69.17	71.10	77.56	73.16	73.67	66.56	52.94
Yi-6B-Chat	65.87	67.25	76.38	68.50	67.83	61.75	53.50
GPT-4	59.46	59.90	69.31	52.19	61.50	59.69	54.19
Qwen-14B-Chat	57.64	60.40	65.63	60.94	58.83	54.50	45.56
Baichuan2-13B-chat	39.88	40.04	45.65	40.60	39.25	39.25	34.45
ChatGLM2-6B	38.51	40.25	47.56	36.06	36.58	35.56	35.06
Baichuan-13B-chat	38.20	37.70	44.75	41.22	34.67	37.94	32.94
HuatuoGPT	29.49	29.90	34.00	29.06	30.92	27.38	25.69
ChatMed-Consult	20.23	19.40	21.69	20.00	22.83	18.88	18.56

tween the two, but since it contains **Irrelevant Noise**, which is easier for the model to detect, its performance is closer to that of **Irrelevant Noise**.

Overall Robustness under Attack Overall, under the attacks, TC-RAG demonstrates strong robustness, with the execution probabilities of Summary and Backtrack remaining above 81%, and sometimes reaching as high as 95%. This clearly illustrates the effectiveness of TC-RAG in managing the memory stack, effectively preventing the introduction of erroneous knowledge and irrelevant information, thereby maintaining the purity of the memory stack, in line with *C3*.

8.7 CMB Leaderboard

Here, we compared the specific testing results of our model on CMB with the publicly available rankings on CMB Leaderboard with open-source baselines in Table 4.