Re-boosting Self-Collaboration Parallel Prompt GAN for Unsupervised Image Restoration

Xin Lin*, Yuyan Zhou*, Jingtong Yue, Chao Ren⊠, Kelvin C.K. Chan, Lu Qi, Ming-Hsuan Yang

Abstract—Deep learning methods have demonstrated state-of-the-art performance in image restoration, especially when trained on large-scale paired datasets. However, acquiring paired data in real-world scenarios poses a significant challenge. Unsupervised restoration approaches based on generative adversarial networks (GANs) offer a promising solution without requiring paired datasets. Yet, these GAN-based approaches struggle to surpass the performance of conventional unsupervised GAN-based frameworks without significantly modifying model structures or increasing the computational complexity. To address these issues, we propose a selfcollaboration (SC) strategy for existing restoration models. This strategy utilizes information from the previous stage as feedback to guide subsequent stages, achieving significant performance improvement without increasing the framework's inference complexity. The SC strategy comprises a prompt learning (PL) module and a restorer (Res). It iteratively replaces the previous less powerful fixed restorer Res in the PL module with a more powerful Res. The enhanced PL module generates better pseudo-degraded/clean image pairs, leading to a more powerful Res for the next iteration. Our SC can significantly improve the Res's performance by over 1.5 dB without adding extra parameters or computational complexity during inference. Meanwhile, existing self-ensemble (SE) and our SC strategies enhance the performance of pre-trained restorers from different perspectives. As SE increases computational complexity during inference, we propose a re-boosting module to the SC (Reb-SC) to improve the SC strategy further by incorporating SE into SC without increasing inference time. This approach further enhances the restorer's performance by approximately 0.3 dB. Additionally, we present a baseline framework that includes parallel generative adversarial branches with complementary "self-synthesis" and "unpaired-synthesis" constraints, ensuring the effectiveness of the training framework. Extensive experimental results on restoration tasks demonstrate that the proposed model performs favorably against existing state-of-the-art unsupervised restoration methods. Source code and trained models are publicly available at: https://github.com/linxin0/RSCP2GAN.

Index Terms—Image restoration, unsupervised learning, generative adversarial network.

1 Introduction

MAGE restoration aims to recover high-quality, visually pleasing images from degraded observations, which is a classical problem in computer vision. Early methods leverage physical priors to constrain the solution space and recover latent clean images [1], [2], [3], [4]. However, these methods, constrained by empirical statistical priors, often struggle with the complexity and variability of real-world degraded images, leading to unreliable results. With the advances of deep learning, recent learning-based methods achieve state-of-the-art results by training deep neural networks on paired degraded/clean datasets using supervised learning [5], [6], [7], [8], [9], [10], [11], [12], [13], [14], [15]. However, the lack of paired training data is one of the biggest obstacles in these tasks. Creating a large amount of paired training data is time-consuming and labor-intensive.

To address this issue, unsupervised image restoration methods

[16], [17], [18], [19], [20], [21] have emerged, leveraging the generative adversarial network (GAN) framework. These methods aim to generate high-quality pseudo-degraded images to train effective restoration models (restorers). However, the performance of restorers trained with current unsupervised frameworks is limited. As noted in GAN2GAN [22], a primary limitation is the gap between real and pseudo degraded images, and thus a model using multiple generators and discriminators is proposed to generate images to better match the real noise distribution. Furthermore, existing frameworks cannot improve the restoration potential without significantly changing their structure or increasing the inference complexity (e.g., using a certain self-ensemble strategy).

To address the above-mentioned issues, we introduce an innovative unsupervised restoration framework called Re-boosting Self Collaboration Parallel Prompt GAN (RSCP²GAN). The core self-collaboration (SC) strategy provides the framework with an effective self-boosting capability, enabling the restorer obtained from the conventional GAN framework to evolve continuously and significantly. Specifically, it consists of a prompt learning (PL) module and a restorer (Res). The SC strategy operates iteratively by replacing the previous, less powerful fixed restorer Res in the PL module with the current, more capable Res. The updated PL module then generates higher-quality pseudo-degraded images, further enhancing the Res in subsequent iterations. The comparative analysis with the conventional self-ensemble (SE) strategy, shown in Fig. 1, reveals that the SE requires a k-fold testing cost and obtains only marginal improvement. In contrast, our SC can significantly improve the restorer's (Res) performance by over 1.5

This work was supported in part by the National Natural Science Foundation of China under Grant 62171304 and partly by the Natural Science Foundation of Sichuan Province under Grant 2024NSFSC1423, and Cooperation Science and Technology Project of Sichuan University and Dazhou City under Grant 2022CDDZ-09.

Xin Lin, Jingtong Yue, and Chao Ren are with the College of Electronics and Information Engineering, Sichuan University, Chengdu 610065, China. E-mails: linxin020826@gmail.com; yuejingtong@stu.scu.edu.cn; chaoren@scu.edu.cn.

Lu Qi and Ming-Hsuan Yang are with the University of California at Merced, Merced, CA 95343 USA. Emails: {lqi5, mhyang}@ucmerced.edu.

[•] Yuyan Zhou is with Baichuan Inc, China. Email: 0903yyz@gmail.com.

Kelvin C.K. Chan is with Google DeepMind, USA. Email: kelvinckchan@google.com.



Fig. 1: Comparison of the proposed self-collaboration strategy with the conventional self-ensemble strategy in training complexity, testing complexity, and performance improvement, respectively.

dB without incurring extra testing expenses.

Both SE and SC strategies aim to improve Res's performance but from different perspectives: SE focuses on data augmentation during inference, while SC enhances cooperation between the restorer and the generator during training. Building on this, we propose a re-boosting module for SC, termed the Reb-SC strategy, to further enhance the performance of the PL module and Res without increasing model parameters. Extensive experimental results on deraining and denoising tasks confirm the superiority of our method.

The main contributions of this work are:

- We propose a Self-Collaboration (SC) strategy that significantly enhances the performance of GAN-based restoration frameworks without increasing inference computational complexity. This strategy relies on two key components: the prompt learning (PL) module and the restorer (Res). The PL module is the core part of the promptguided degraded image generator capable of synthesizing high-quality degraded images.
- We introduce a parallel prompt GAN framework that incorporates complementary "self-synthesis" and "unpairedsynthesis" constraints, serving as a robust baseline for image restoration.
- We present a re-boosting module to further increase the
 effectiveness of the proposed SC strategy, i.e., Reb-SC.
 Similar to the SC strategy, the inference time also does not
 increase, and the performance of the restorer (Res) can be
 enhanced further.
- We conduct comprehensive experiments on restoration tasks, demonstrating that our RSCP²GAN achieves strong performance across various datasets.

This work significantly extends our prior work [23]. The key advancements in this paper include: 1) Extension to General Restoration Framework: Our early work focuses only on image denoising tasks. This paper extends the previous denoising model and noise extract (NE) module to the restoration framework and degradation prompt learning (PL) module, resulting in the generalized Self-Collaboration Parallel Prompt GAN (SCP²GAN) framework. 2) Introduction of Reb-SC Strategy: We introduce the Reb-SC strategy to further improve the performance of the PL module without additional parameters and further improve the performance of the restorer. The framework in this work is RSCP²GAN. 3) Extended Experiments and Analysis: We perform extensive experiments on multiple datasets, including deraining (Rain100L [24], Rain12 [25], RealRainL [26]) and denoising (SIDD [27], DND [28], PolyU [29]), and compare our method

against state-of-the-art techniques, demonstrating RSCP²GAN's superior performance.

2 RELATED WORK

2.1 Supervised Image Restoration

In recent years, supervised data-driven CNN models have been shown to outperform conventional image restoration methods in various tasks such as image denoising [30], [31], [32], [7], [8], image deraining [33], [34], [12], [35], [36], image dehazing [9], [37], [38], [39], [10], and image declaring [40], [41], [42]. These approaches typically involve designing effective restorers trained using pairs of clean and degraded image datasets captured from real scenes.

Image denoising. The RIDNet method [43] combines synthetic and real images during training to enhance the model generality for denoising. On the other hand, Cheng et al. [44] generate a set of image basis vectors from the noisy input images and reconstruct them from the subspace formed by these basis vectors to obtain image-denoising results. Numerous approaches simultaneously address Gaussian and real-world noise [7], [8]. NAFNet [5] incorporates a series of straightforward but highly effective enhancements, refining the network and fully realizing its performance potential. Recently, a transformer-based framework [6] has been developed, leveraging the advantages of the self-attention strategy while reducing computational complexity.

Image deraining. Li et al. [26] use real-world rainy video clips to establish a high-quality dataset named RealRainL, consisting of 1,120 high-resolution paired clean and rainy images with lowand high-density rain streaks. On the other hand, SGINet [33] uses high-level semantic information to improve rain removal and RadNet [45] simultaneously removes rain streaks and raindrops. Recently, MIRNet [46] presents an effective feature extraction module to facilitate image restoration and enhancement, and RCDNet [12] proposes an unfolding technique, employing multistage training with M-net and B-net to achieve better deraining results. Most recently, NAFNet [5] shows a simple yet effective and efficient approach that achieves state-of-the-art performance for image restoration with using nonlinear activation functions. Restormer [6] utilizes the attention mechanism for deraining and leverages the transformer framework for deraining and optimizing their benefits while reducing computational complexity. A multiexperts-based DRSFormer [35] provides more accurate detail and texture recovery. However, the number of real-world degraded images is limited, and creating large amounts of paired training data is time-consuming and labor-intensive.

2.2 Unsupervised Image Restoration

Numerous restoration methods using a large amount of synthetic data from generative adversarial networks for training have been developed.

Image denoising. GCBD [16] uses a generator capable of producing pseudo-noisy images to train a denoiser, and CycleGAN [47] is introduced for further improvement. Among these methods, GAN2GAN [22] uses a multi-generator / discriminator architecture to enhance the extraction of noisy information and generate synthetic images that closely match the real noise distribution. On the other hand, Hong et al. [17] introduce UIDNet, which utilizes a sharpening processing mechanism to achieve noise separation and improve the training of unpaired denoising models. In SCPGabNet [23], a self-collaboration strategy that iteratively enhances the performance of the denoising network has been proposed, leading to significant improvements over conventional GAN frameworks. Additionally, various methods have emerged for training models exclusively with noisy images, called selfsupervised denoising. CVF-SID [48] integrates cyclic adversarial learning with the self-supervised residual framework. Recently, a self-supervised framework named AP-BSN [49] has been shown to effectively manage real-world signal-dependent noise and adapt well to realistic noise conditions. Most recently, LG-BPN [50] shows masking the central region of a large convolution kernel to reduce the spatial correlation of noise and introduces a dilated Transformer block to capture global information, while others are developed to APBSN using random sampling for augmentation [51].

Image deraining. Numerous unsupervised image restoration methods have been developed [52], [53], [54], [20] based on the CycleGAN model. The DerainCycleGAN [20] extracts the rain streak masks using two constrained cycle-consistency branches by paying attention to both the rainy and rain-free image domains for restoration. Yu et al. [55] consider the prior knowledge of the rain streak and connect the model-driven and data-driven methods via an unsupervised learning framework. DCD-GAN [21] incorporates contrastive learning loss as a constraint during network training, which enhances the model performance. NLCL [56] uses a decomposition-based non-local contrastive learning strategy to compute the self-similarity of the image for restoration.

However, once trained, existing frameworks cannot enhance the restoration capability without substantially altering their architecture or adding to the inference complexity. To address this problem, we propose a self-collaboration unit (SC) strategy that enables the generators and restorers within the framework to achieve significant performance gains without increasing the GAN-based restoration framework's run-time complexity.

3 Proposed Method

In this section, we introduce an unsupervised re-boosting self-collaboration prompt GAN (RSCP²GAN).

3.1 Parallel Prompt GAN for Image Restoration

We propose a parallel prompt GAN (P²GAN) method that ensures the model stability and effectiveness for unsupervised image restoration.




Fig. 2: Architecture of the prompt-guided degraded image generator. It learns the degradation prompt through the degradation prompt learning (PL) module and then projects the degradation prompt and clean image to the generator (G). This module reduces the burden on the G when synthesizing degraded images.

3.1.1 Prompt-Guided Degraded Image Generator

Despite the state-of-the-art performance of supervised image restoration frameworks on numerous benchmark datasets, they require a large amount of paired data, which is challenging to obtain in real-world scenarios. Although several GAN-based unsupervised frameworks can address this limitation, the performance is often inferior to supervised approaches. This performance gap is largely due to the domain gap between synthetic and real-world degraded images [22], [57]. To bridge this gap, the key is to enhance the quality of synthetic images to make them as close as possible to real-world degraded images. If synthetic images can be generated to closely resemble real degraded images, the performance of unsupervised restoration models can approach the effectiveness of their supervised counterparts. Improving the quality of synthetic images is thus critical to boosting the performance of unsupervised restoration frameworks.

The generator accomplishes two tasks while synthesizing lowquality images: (1) learning the content information of real clean images, and (2) learning the degradation characteristics of real degraded images while masking their content information to avoid affecting the generation process. As depicted in Fig. 2, we propose a novel prompt-guided degraded image generator, which better captures degradation information. Since it is challenging to learn degradation information directly, instead of inputting a degraded image and a clean image into the generator [17], we use the prompt learning (PL) module to mask the content information of the degraded images and obtain the degradation prompt. Specifically, a Res restores the degraded content, and the degradation prompt is obtained by subtracting the clean image from the original degraded one. The degradation prompt is then used to guide the generation of the synthetic degraded image with an unpaired clean image. This approach facilitates the generator learning the image content and focusing on degradation information to synthesize degraded images, which are closer to real-world degraded ones, thereby improving the restoration performance.

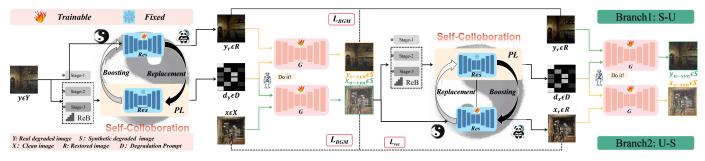


Fig. 3: RSCP²GAN framework consists of two branches: Branch1: "Self-synthesis - Unpaired-synthesis" (Left: obtain Self-synthesis image y_{s-syn} from y_r and d_y ; Right: obtain Unpaired-synthesis image y_{u-syn} from y_r and d_x) and Branch2: "Unpaired-synthesis - Self-synthesis" (Left: obtain Unpaired-synthesis image x_{u-syn} from x and d_y ; Right: obtain Self-synthesis image x_{s-syn} from d_x and x_r). Each branch contains a ReB module and an SC strategy that involves a fixed restorer \overline{Res} in the Prompt Learning (PL) module and a learnable restorer Res. This process is essentially an Replacement-Boosting iteration, where the PL module extracts the degradation prompt from the degraded image, and the Res removes the degradation from the degraded image to output a high-quality image.

3.1.2 Parallel Prompt GAN (P² GAN)

There are two scenarios for generating pseudo-degraded images in P²GAN: (1) when the clean and degraded images are different, and (2) when the clean and degraded images are the same. The first scenario is a common unpaired-synthesis approach used in many unsupervised works [19], [57], [17]. It learns the degradation information from the degraded images and guides the generation of a pseudo-degraded image from another clean image. This method imposes unpaired constraints on the generator, enabling it to capture more prior information and improve the quality of pseudo-degraded images. A robust generator should learn the real degraded properties of different inputs. To balance the degraded content extracted from "same image" and "different images", we propose self-synthesized contents for restoration. These two complementary constraints improve the generator-discriminator's adversarial performance and produce pseudo-degraded images that are more consistent with the real-world degradation distribution.

As shown in Fig. 3, P^2GAN comprises two branches: branch 1 utilizes the "self-synthesis—unpaired synthesis" architecture, and branch 2 employs the "unpaired synthesis—self-synthesis" architecture. Specifically, branch 1 generates the self-synthesized degraded image y_{s-syn} and the unpaired synthesized degraded image y_{u-syn} . On the other hand, branch 2 generates the unpaired synthesized degraded image x_{u-syn} and the self-synthesized degraded image x_{s-syn} . These images are then fed as inputs to the discriminator, along with the real degraded image y. The "self-synthesis" and the "unpaired-synthesis" constraints are strongly complementary within and between each branch of P^2GAN .

3.1.3 GAN-based Degradation Synthesis

As depicted in Fig. 3, x and y represent the clean and degraded images. The generator G aims to perform domain transformation by learning the image distribution in an unsupervised GAN framework. Simultaneously, the discriminator D distinguishes whether a given degraded image is synthesized by our generator G or sampled from a real degraded image dataset. Here, G and D are trained adversarially to accomplish the domain transformation. For the x_{u-syn} generative process in Fig. 3, we extract the degradation prompt d_y from the real degraded image y using the PL module, and input both the degradation prompt and clean image into G to synthesize a synthetic degraded image x_{u-syn} :

$$x_{u-syn} = G(x, PL(y)), \tag{1}$$




Fig. 4: Example of BGM loss. We use different Gaussian-Blur levels to ensure content consistency between clean images and synthetic degraded images.

To prevent model degradation during training and improve the representation capability of the network, we use the adversarial loss for $L_{\rm adv2}$:

$$L_{\text{adv2}} = ||D(y) - \mathbf{1}||_2^2 + ||D(x_{u-syn}) - \mathbf{0}||_2^2,$$
 (2)

which means for the generated image x_{u-syn} , its adversarial loss $L_{\rm adv2}$ is constrained between y and x_{u-syn} . The other three adversarial losses can be constructed similarly by constraining the current generated images and y. The overall loss for the GAN model is:

$$L_{\text{GAN}} = L_{\text{adv1}} + L_{\text{adv2}} + L_{\text{adv3}} + L_{\text{adv4}}.$$
 (3)

Similar to [58], we apply a background guidance module (BGM) to provide additional supervision. The BGM maintains the consistency of the background between the synthetic degraded image and the clean image, constraining their low-frequency contents to be similar. We illustrate this approach using $L_{\rm BGM}$ in branch 2. Low-frequency contents are extracted by using several low-pass filters and constrained to be close to each other through the L1 loss:

$$L_{\text{BGM}} = \sum_{\sigma=3.9.15} \lambda_{\sigma} ||B_{\sigma}(x) - B_{\sigma}(x_{u-syn})||_{1},$$
(4)

where B_{σ} denotes the Gaussian filter operator with blurring kernel size σ , and λ_{σ} denotes the weight for the level σ . An example of the BGM loss is shown in Fig. 4. We set σ -s to 3, 9, and 15, and λ -s to 0.01, 0.1, and 1, respectively.

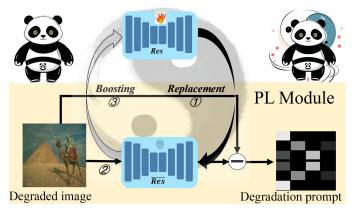


Fig. 5: Illustration of the SC strategy. In the PL module, k denotes the number of iterations. It is a learnable convolutional block when k=0. When k>0, the iterative collaboration of \overline{Res} in the PL module and the restorer Res is conducted. ①: the current restorer Res replaces the previous weaker \overline{Res} , which enhances the performance of the degradation prompt learning (PL) module. ②: the updated PL can generate better clean-degraded image pairs used to train the Res. ③: the Res is trained using the updated clean-degraded image pairs, further boosting its performance.

In the image restoration framework, we utilize pseudo-paired samples denoted by x^i and x^i_{rec} . The restorer is trained by optimizing the following loss functions:

$$L_{\text{Res}} = \frac{1}{2m} \sum_{i=1}^{m} \left[\|x_{rec}^{i} - x^{i}\|_{1} + \lambda_{\text{SSIM}} L_{\text{SSIM}}(\mathbf{x}_{rec}^{i}, x^{i}) \right], \quad (5)$$

where m denotes the total number of the sample pairs, x^i_{rec} is the clean image estimated by the restorer, $L_{\rm SSIM}$ represents the structural information used by SSIM loss to constrain the image, and $\lambda_{\rm SSIM}$ is the weight for $L_{\rm SSIM}$. The total loss function is:

$$L = \min_{G} \max_{D} \left[L_{\text{GAN}} + \lambda_{\text{BGM}} L_{\text{BGM}} + L_{\text{Res}} \right], \tag{6}$$

where λ_{BGM} is the weight of background consistency loss.

3.2 Proposed SC Based P²GAN

As P^2GAN introduced in Section 3.1 is formulated within the conventional GAN-based unsupervised framework, it is challenging to achieve further performance gains without significantly modifying the architecture or increasing inference complexity. To address these issues, we propose the SC-based P^2GAN (SCP 2GAN) model.

3.2.1 Self-Collaboration Strategy

The proposed Self-collaboration (SC) strategy enables a restorer trained in a conventional unsupervised framework to self-correct and improve its performance without requiring modifications to its structure or increased complexity in the inference phase. The SC strategy, illustrated in Fig. 5, comprises a prompt learning (PL) module and a restorer (Res). As described above, the PL module extracts degradation prompts from a real degraded image and guides the generator to produce high-quality pseudo-degraded images. To train the P^2GAN , we initially use a simple and learnable linear convolutional layer as the \overline{Res} in the PL module. Then, the Res is iteratively replaced and boosted. During each iteration, the current more powerful Res replaces the previous




Fig. 6: Illustration of the Reb-SC strategy. The self-ensemble (SE) can improve the model's performance during testing but increases the network's computational complexity. In contrast, our self-collaboration (SC) is used only in the training phase, does not increase inference time, and can significantly enhance the restorer's performance. Based on this, we combine the characteristics of the SE and SC to propose Reb-SC. In Stage 1, we use the original SC; in Stage 2 and Stage 3, we use Reb-SC. We input augmentation of low-quality images into the fixed PL module to enhance the performance of the \overline{Res} in PL, thereby training a better restorer Res. The SE can bring a 0.12 dB improvement to the Res, while our SC can provide a 1.61 dB improvement. However, the Reb-SC combines both characteristics and can achieve a 1.93 dB improvement.

weaker \overline{Res} in the PL module. This leads to a more effective \overline{Res} to extract more accurate degradation prompts. That is, it generates more realistic synthetic degraded/clean image pairs and iteratively improves the performance of the updated Res with higher-quality synthetic samples. We observe a significant improvement in Res's performance using the SC strategy compared to the original one without SC. During the SC stage, we set the


$$R_{fake1} = \overline{Res}(x_{u-syn}), R_{fake2} = \overline{Res}(y),$$
 (7)

and the loss functions of G and D are the same as before. The loss function of Res is defined as:

$$L_{\text{Res-SC}} = L_{\text{Res}} + ||x_r - R_{fake1}||_1 + ||y_r - R_{fake2}||_1 + \lambda_{\text{SSIM}} L_{\text{SSIM}}(x_r, R_{fake1}) + \lambda_{\text{SSIM}} L_{\text{SSIM}}(y_r, R_{fake2}).$$

$$(8)$$

Using feedback from one part of a framework to improve other parts is called positive feedback. It encourages our SC (self-collaboration) strategy of utilizing feedback from one part to guide the improvement of other parts. Subsequently, the improved parts can, in turn, guide the initial parts. This iterative process of positive feedback is referred to as self-collaboration. We show this approach can facilitate numerous low-level vision tasks.

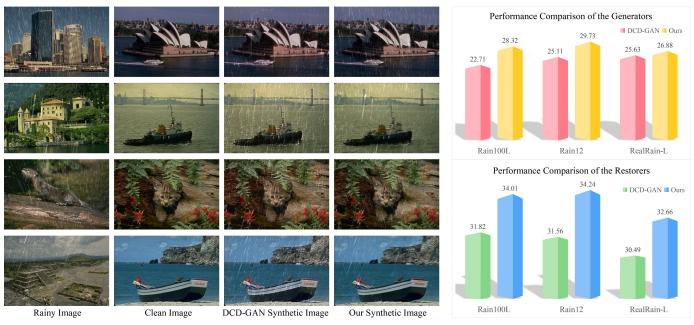

(a) Visualization of the unpaired-synthesis image

(b) Performance of the generators and restorers

Fig. 7: (a) Visualization of the unpaired synthetic degraded image by DCD-GAN [21] and our RSCP²GAN. (b) Quantitative comparison between DCD-GAN and our framework for generator and restorer.

3.2.2 Re-boosting SC Strategy

The typical self-ensemble (SE) strategy applies random flip and rotation to input images and averages the resulting outputs to achieve better performance during testing [7], [59]. However, this approach increases inference times and provides only limited improvements. In contrast, the proposed SC strategy avoids additional test computation while delivering significant improvements with only minor modifications to the training phase. In this work, we propose a Re-boosting SC (Reb-SC) module that combines the SC and SE strategies. Specifically, as shown in Fig. 6, the Reb-SC strategy is applied at the end of the SC process: the original input to a fixed PL undergoes self-ensemble with multiple inputs. The outputs are averaged, leading to improved performance of the PL and further enhancement of the Res. The process is:

$$x_{u-syn-(1,2,\dots,k)} = Aug(x_{u-syn}), \tag{9}$$

$$R_{fake1-(1,2,...,k)} = \overline{Res}(x_{u-syn-(1,2,...,k)}),$$
 (10)

$$y_{1,2,\dots,k} = Aug(y), \tag{11}$$

$$R_{fake2-(1,2,\dots,k)} = \overline{Res}(y_{1,2,\dots,k}), \tag{12}$$

$$R_{fake1} = \frac{1}{k} \sum_{i=1}^{k} (R_{fake1-(1,2,\dots,k)}), \tag{13}$$

$$R_{fake2} = \frac{1}{k} \sum_{i=1}^{k} (R_{fake2-(1,2,\dots,k)}), \tag{14}$$

where the k is the number of augmentation images, the loss function of the Res is the same as the SC strategy before.

3.2.3 Analysis of RSCP2 GAN

We propose RSCP²GAN by integrating the SC and Reb-SC strategies with our P²GAN. The training process of our RSCP²GAN is detailed in Algorithm 1. In this model, Res represents the trainable restorer, \overline{Res} is the fixed restorer within the PL module, and Gau denotes the Gaussian filter. The symbols D, R, $s_{1,2,3}$,

Algorithm 1 The training process of our RSCP²GAN.

Input: Res: the restorer; Gau: the Gaussian filter; Res: the restorer in the PL module; D: degraded images; R: restored images; $s_{1,2,3}$: the last epoch of stage 1,2,3; s: current numbers of epoch

```
> The basic stage without SC.
      if s < s_1 then \overline{Res} = Gau
      for epoch in 0 to s_1 epochs do:
           R \leftarrow Res(D)
           Optimizer(Res, R)
> The SC stage.
      else if s_1 < s < s_2 then \overline{Res} = Res
      for epoch in 0 to s_2 - s_1 epochs do:
           R_{fake} \leftarrow \overline{Res}(D)
           R \leftarrow Res(D)
           Optimizer(Res, R, R_{fake})
> The Reb-SC stage.
      else if s_2 < \overline{s} < s_3 then \overline{Res} = Res
      for epoch in 0 to s_3 - s_2 epochs do:
           for k in 0...max folds do
                D_{1,2,\ldots,k} \leftarrow \operatorname{Aug}(D)
           R_{fake-(1,2,\dots,k)} \leftarrow \overline{Res}(D_{1,2,\dots,k})
R_{fake} \leftarrow R_{fake-(1,2,\dots,k)}
           R \leftarrow Res(D)
           Optimizer(Res, R, R_{fake})
```

and s refer to degraded images, restored images, and the last epochs of stages 1, 2, 3, and the current epoch, respectively. Initially, we train P^2GAN through the first stage until the restorer converges.

In the SC stage, at the beginning of each iteration, the new PL more accurately captures the degradation prompt in the degraded image by replacing \overline{Res} in the PL module with an improved Res. This reduces the influence of image content on the synthetic degraded image generation process. As illustrated

TABLE 1: Denoising results of several competitive methods on SIDD Validation, SIDD Benchmark, and DND Benchmark. The highest PSNR(dB)/SSIM is highlighted in red, while the second is in blue. Additionally, * denotes that the approach is trained on the DND benchmark directly, and the results without * means the methods trained on the SIDD datasets.

		GAN-based	SIDD Validation		SIDD Benchmark		DND Benchmark	
	Methods	/Publication	PSNR↑	SSIM↑	PSNR↑	SSIM↑	PSNR↑	SSIM↑
Non-learning	BM3D [60]	No/TIP 2007	31.75	0.7061	25.65	0.6850	34.51	0.8510
Non-learning	WNNM [61]	No/CVPR 2014	_	_	25.78	0.8090	34.67	0.8650
	TNRD [62]	No/TPAMI 2016	26.99	0.7440	24.73	0.6430	33.65	0.8310
	DnCNN [30]	No/TIP 2017	26.20	0.4414	28.46	0.7840	32.43	0.7900
D 1 '	RIDNet [32]	No/CVPR 2019	38.76	0.9132	37.87	0.9430	39.25	0.9530
Real pairs (Supervised)	AINDNet [8]	No/CVPR 2020	38.96	0.9123	38.84	0.9510	39.34	0.9520
(Superviseu)	DeamNet [7]	No/CVPR 2021	39.40	0.9169	39.35	0.9550	39.63	0.9531
	ScaoedNet [59]	No/NeurIPS 2022	39.52	0.9187	39.48	0.9570	40.17	0.9597
	Restormer [59]	No/CVPR 2022	39.93	0.960	40.02	0.960	40.03	0.956
	DnCNN [30]	No/TIP 2017	_	_	23.66	0.5830	32.43	0.7900
G . 1 . 1 . 1	CBDNet [63]	No/CVPR 2019	30.83	0.7541	33.28	0.8680	38.06	0.9420
Synthetic pairs (Two Stages)	PD+ [64]	No/AAAI 2020	34.03	0.8810	34.00	0.8980	38.40	0.9450
	C2N+DnCNN [57]	Yes/ICCV 2021	_	_	33.76	0.9010	36.08	0.9030
	C2N+DIDN [57]	Yes/ICCV 2021	_	_	35.02	0.9320	36.12	0.8820
	N2V [65]	No/CVPR 2019	29.35	0.6510	27.68	0.6680	_	_
	GCBD [16]	Yes/CVPR 2018	_	_	_	_	35.58	0.9220
	UIDNet [17]	Yes/AAAI 2020	_	_	32.48	0.8970	_	_
	R2R [66]	No/CVPR 2021	35.04	0.8440	34.78	0.8980	36.20	0.9250
	$\text{CVF-SID}(S^2)$ [48]	No/CVPR 2022	_	_	34.71	0.9170	36.50	0.9240
Unsupervised	AP-BSN+ R^3 [49]	No/CVPR 2022	35.76	_	35.97	0.9250	38.09	0.9371
Unsupervised	LG-BPN+ R^3 [50]	No/CVPR 2023	37.31	0.8860	37.28	0.9360	38.02	0.9373
	BNN-LAN [67]	No/CVPR 2023	37.39	0.8830	37.41	0.9340	38.18	0.9386
	SDAP (E) [51]	No/ICCV 2023	37.30	0.8937	37.24	0.9360	37.86	0.9366
	SCPGabNet [23]	Yes/ICCV 2023	36.53	0.8860	36.53	0.9250	38.11	0.9393
	PUCA [68]	No/NeurIPS 2024	37.49	0.8800	37.54	0.9360	38.83*	0.9420*
	Complementary-BSN [69]	No/TCSVT 2024	37.51	0.8850	37.43	0.9360	38.24	0.9400
	RSCP ² GAN (ours)	Yes/-	37.83	0.9070	37.69	0.9450	38.37	0.9421

in Fig. 3, with more precise degradation prompt extraction from the degraded image y, our Res achieves better results in both self-synthesis in branch 1 and unpaired synthesis in branch 2, leading to higher-quality synthetic degraded images. Similarly, a more accurate degradation prompt extracted from the synthetic degraded image x_{u-syn} improves unpaired synthesis in branch 1 and self-synthesis in branch 2, thus enhancing complementary constraints between the two branches and improving the interconnectedness of the network modules. Consequently, our SC strategy establishes a self-boosting framework that enhances Res training and performance. The implementation of the SC strategy involves several steps: After the original P^2GAN framework has converged, replace Res in the PL module with the latest Res and fix its parameters to generate better pseudo-degraded images. Retrain G, D, and Res until convergence is achieved. Repeat this

process until the performance of Res no longer improves. In the Reb-SC stage, we use the Reb-SC strategy to further enhance the performance of the PL module and Res. Specifically, we augment synthesized low-quality images and input them into the fixed \overline{Res} within the PL module to improve its performance, thereby training a better-performing Res.

We validate the effectiveness of the pseudo-degraded images generated by RSCP²GAN. As shown in Fig. 7(a), we compare the real degraded image, the unpaired clean image, degraded images generated by the current state-of-the-art algorithm DCD-GAN [21], and degraded images generated by our method. The rain streaks produced by DCD-GAN [21] are curved and do not align with the real degraded image, which is a core reason for the unsatisfactory performance of the restorer. To quantitatively assess the impact of the generated images, we evaluate cases

Method	CVF-SID [48]	AP-BSN+ R^3 [49]	BNN-LAN [67]	LG-BPN+ R^3 [50]	SCPGabNet [23]	SDAP (E) [51]	RSCP ² GAN (ours)
PSNR/SSIM	33.00/0.9101	36.88/0.9496	37.13/0.9541	36.25/0.9473	37.14/0.9534	37.21/0.9537	37.61/0.9549

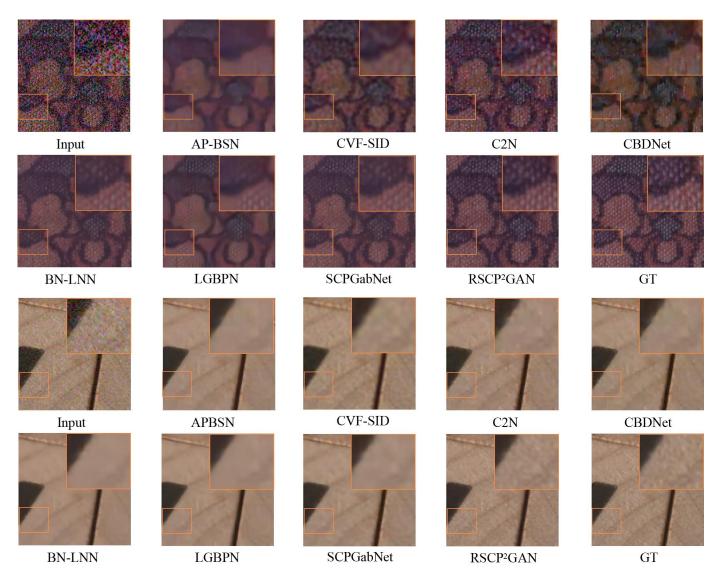


Fig. 8: Visual comparison of our method against other competing methods on the SSID [27] Validation.

where the degraded image and the clean image originate from the same image content. As shown in the upper part of Fig. 7(b), our generator outperforms DCD-GAN across multiple datasets. Additionally, the lower part of Fig. 7(b) demonstrates that our restorer surpasses DCD-GAN, further indicating that improving the generator performance is an effective way to enhance the restorer performance.

4 EXPERIMENTS

We first describe the datasets we utilized and present the implementation details. Next, we provide the image denoising and deraining analysis with the existing state-of-the-art unsupervised approaches qualitatively and quantitatively. We conduct ablation

studies to validate the effectiveness of the proposed methods and modules.

4.1 Datasets

Denoising Task. We conduct experiments on widely used real-world image denoising datasets: SIDD [27], DND [28], and PolyU [29]. The SIDD Medium training set consists of 320 pairs of noisy and corresponding clean images captured by multiple smartphones. The SIDD validation and benchmark sets each contains 1280 color images of size 256×256 . There are 50 high-resolution noisy images and 1000 sub-images of size 512×512 in the DND dataset. The PolyU dataset contains 40 high-resolution noisy-clean image pairs for training and 100 images of size 512×512 for testing. We train our model on the SIDD training set and test it on

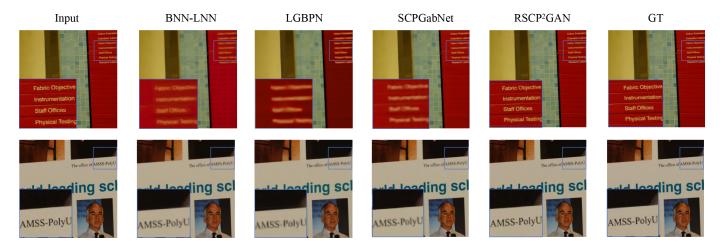


Fig. 9: Visual comparison of our method against other competing methods on the PolyU [29].

the SIDD Validation, SIDD Benchmark, and DND Benchmark. Specifically, we divide the SIDD Medium training set equally into noisy and clean image parts. Then, we use 160 clean images from the first part and 160 noisy images from the second part to construct an unpaired dataset for training. Additionally, we train our approach on the PolyU training dataset and test on its testing set, following a similar processing method as for the SIDD dataset. **Deraining Task.** We train and test our model on commonly used deraining datasets: Rain100L [24], RealRainL [26], and Rain12 [25]. The Rain100L dataset has 200 synthetic image pairs for training and 100 image pairs for testing. The RealRainL set [26] consists of 784 real-world image pairs for training and 224 image pairs for testing. The Rain12 dataset contains 12 pairs of rainy and clean images. Following the recent work [20], we test on the Rain12 dataset [25] using models trained on the images from the Rain100L dataset.

4.2 Implementation Details

To optimize the proposed network, we use the Adam optimizer with $\beta_1{=}0.9,~\beta_2{=}0.999,$ and an initial learning rate of $2\times 10^{-4}.$ The proposed models are implemented using PyTorch and trained on two Nvidia GeForce RTX 3090 GPUs. For the denoising task, the batch size and patch size are set to 6 and 112, respectively. We set λ_{BGM} in Eq. 4 to 6 and λ_{SSIM} in Eq. 5 to 1. We use a ResNet with 6 residual blocks as the generator, a PatchGAN [47] as the discriminator, and a Restormer [6] as the restorer. For the deraining task, following prior work [21], we set the batch size to 1 and the patch size to 256. The NAFNet [5] as our restorer.

4.3 Image Denoising

We evaluate our method on real-world noisy images from the SIDD Validation [27], SIDD Benchmark [27], and DND Benchmark [28]. We compare our approach with existing supervised methods based on paired images and the latest unsupervised methods based on unpaired images quantitatively and qualitatively. **Quantitative Comparison.** We utilize full-reference metrics (PSNR and SSIM) to assess the effectiveness of our method. Table 1 shows that our RSCP²GAN performs favorably against state-of-the-art methods. Compared to single-image self-supervised methods like BNN-LAN [67] and SDAP (E) [51], RSCP²GAN provides a PSNR gain of 0.44 dB and 0.53 dB, and an SSIM

gain of 0.024 and 0.013 on the SIDD Benchmark. Additionally, compared to recent methods like PUCA [68] and Complementary-BSN [69], our model achieves improvements of 0.34 dB/0.32 dB on the SIDD Validation set and 0.15 dB/0.26 dB on the SIDD Benchmark. Note that the results on the DND [28] dataset by PUCA [68] are obtained from training on the DND Benchmark, unlike other methods trained on the SIDD dataset. In terms of twostage GAN-based denoising approaches, RSCP²GAN outperforms synthetic pairs methods with self-ensemble (e.g., C2N+DnCNN, C2N+DIDN) on both SIDD and DND datasets. Although our method's denoising performance is not as good as some of the latest supervised methods [59], [6] using real image pairs, these methods require a large number of paired images. Consequently, they may not be effectively applied to real-world image denoising tasks with insufficient paired images for training. In contrast, RSCP²GAN performs well without paired images, making it suitable for a range of real-world denoising scenarios. Our method also achieves favorable results on the PolyU [29] dataset, as shown in Table 2.

Qualitative Comparison. Fig. 8 shows that RSCP²GAN generates visually pleasing results in terms of detail, color, and naturalness. Existing methods often fail to recover image details, over-smooth the noisy images, or generate results with chromatic aberration. For example, ASPSN [49], CVF-SID [48], and LGBPN [50] over-smooth images and generate results without details. BNN-LAN [67] and C2N [57] may cause image blurring, while CBDNet [63] sometimes results in chromatic aberration. In contrast, RSCP²GAN better removes noise, preserves details, and avoids chromatic aberration. The results on the PolyU dataset, shown in Fig. 9, demonstrate that our method effectively preserves details that other methods may mistakenly remove.

4.4 Image Deraining

We evaluate the proposed method and state-of-the-art approaches on image draining benchmark datasets.

Quantitative Comparison. Quantitative Comparison. We evaluate the deraining performance of our method on the Rain100L [24], RealRainL [26] and Rain12 [25] datasets. We note that there are few unsupervised deraining methods with source codes for performance evaluation. Table 3 shows that RSCP²GAN outperforms all unsupervised approaches. Compared to DerainCycleGAN [20] and DCDGAN [21], our method achieves a PSNR gain of 2.52

TABLE 3: Deraining results of several competitive methods on Rain100L and RealRainL. The highest PSNR(dB)/SSIM is highlighted in red, while the second is in blue.

		GAN-based	Rain100L		RealRainL		Rain12	
	Methods	/Publication	PSNR†	SSIM↑	PSNR↑	SSIM↑	PSNR↑	SSIM1
Model-based methods	DSC [60]	No/TIP 2007	27.34	0.8490	27.76	0.8750	_	_
Woder-based methods	GMM [61]	No/CVPR 2014	29.05	0.8720	28.87	0.9259	_	_
	DDN [70]	No/CVPR 2017	32.38	0.9260	31.18	0.9172	34.04	0.933
	RESCAN [71]	No/ECCV 2018	38.52	0.9810	31.33	0.9261	_	_
Cumamicad	SPA-Net [72]	No/CVPR 2018	31.95	0.9190	30.43	0.9470	_	_
Supervised	MSPFN [73]	No/CVPR 2020	32.40	0.9330	35.51	0.9670	_	_
	NAFNet [5]	No/ECCV 2022	37.00	0.9780	38.80	0.9860	34.81	0.9430
	Restormer [6]	No/CVPR 2022	38.34	0.9830	40.90	0.9850	_	_
	CycleGAN [47]	Yes/ICCV 2017	24.61	0.8340	20.19	0.8198	21.56	0.8450
	NLCL [56]	Yes/CVPR 2022	20.50	0.7190	23.06	0.8320	22.68	0.7350
Unsupervised	DerainCycleGAN [20]	Yes/TIP 2017	31.49	0.9360	28.16	0.9010	33.52	0.9400
	DCDGAN [21]	Yes/CVPR 2022	31.82	0.9410	30.49	0.9390	31.56	0.9240
	RSCP ² GAN (Ours)	Yes/-	34.01	0.9606	32.66	0.9460	34.24	0.946
Input	CycleGAN	DCD-GAN		RSCP ² GAN			GT	



Fig. 10: Restoration results of our model against other competing methods on the Rain100L [24] dataset.

TABLE 4: Ablation studies on the proposed modules. **V1**: (U) Conventional GAN-based unsupervised denoising network only with unpaired synthesis; **V2**: V1 + BGMloss; **V3**: V1 + BGMloss + PL module; **V4**: (S) SGabNet (V1 + BGMloss + PL module + self-synthesis) **V5**: (P) P²GAN (our baseline).

Methods	V1	V2	V3	V4	V5(ours)
U BGMloss PL module S P	✓	√ ✓	√ √	✓ ✓ ✓ ✓	√ √ √
PSNR(dB)	34.52	34.69	34.92	35.37	35.90

dB and 2.19 dB, and an SSIM gain of 0.024 and 0.019 on the Rain100L test set. Our method also performs comparably to some supervised methods like SPA-Net [72] and DDN [70].

Qualitative Comparison. Fig. 11 visually compares deraining

methods on the Rain100L and RealRainL datasets. RSCP²GAN achieves favorable deraining results, effectively removing rain streaks where other methods fail and avoiding chromatic aberration seen with DCD-Net [21]. On the RealRainL dataset, CycleGAN tends to oversharpen image details, and DCD-GAN causes severe blurriness. The second row of images confirms that RSCP²GAN provides the best visual results for image deraining.

4.5 Ablation Study

Effectiveness of the Proposed Framework. We validate the effectiveness of the P^2GAN structure as described in Table 4 for the denoising task. Here, V1 represents a GAN-based unsupervised denoising network with only unpaired synthesis. In addition, V2 extends V1 by adding the BGM loss, while V3 further includes the PL module. V4 introduces the branch U-S, and V5 is our baseline (P^2GAN).

Table 4 shows that adding the BGM loss to the GAN-based unsupervised network (V1 to V2) results in a 0.17 dB PSNR

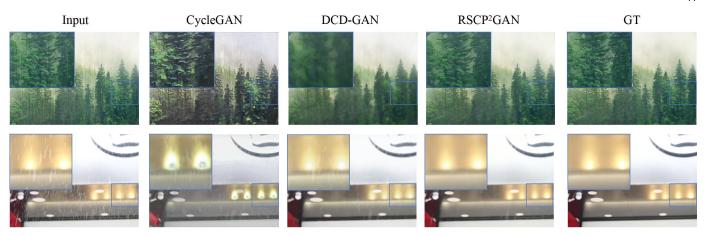


Fig. 11: Restoration results of our method against other competing methods on the RealRainL [26] dataset.

TABLE 5: Ablation studies of Re-boosting module on SC strategy (Reb-SC) on SIDD Validation, SIDD Benchmark, Rain100L, and RealRainL. The N is the number of augmentation images.

	N	SIDD Validation	SIDD Benchmark	Rain100L	RealRainL	Average improve
Baseline	0	37.51	37.43	33.66	32.28	0
	2	37.71	37.60	33.90	32.53	0.22
	4	37.83	37.69	34.01	32.66	0.33
	8	37.78	37.69	33.93	32.67	0.29

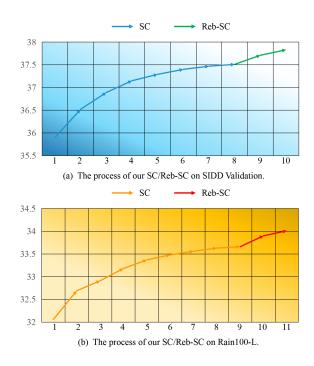


Fig. 12: The process of SC and Reb-SC on SIDD Validation [27] and Rain100L [24]. In the SC stage, they need nearly eight iterations. In Reb-SC stage, two iterations are required: the first with the number of augmented images N=2 and the second with N=4.

improvement. Incorporating the PL module (V2 to V3) yields an additional PSNR increase of approximately 0.23 dB, highlighting the effectiveness of the PL module in enhancing synthetic image

quality. When adding the "self-synthesis" constraint to V3 to obtain V4, there is a notable improvement of 0.45 dB PSNR on the SIDD Benchmark, indicating that combining "self-synthesis" with unpaired synthesis enhances network training and restorer performance. Comparing P²GAN with V4, we observe a substantial performance boost in P²GAN, with PSNR gains of 0.53 dB on the SIDD Validation. This demonstrates that P²GAN produces more realistic synthetic degraded images, improving the restorer's performance.

Effectiveness of the SC and Reb-SC Strategies. We apply the SC and Reb-SC strategies to our baseline method (P²GAN), resulting in SCP²GAN and RSCP²GAN. Fig. 12 shows the performance of the restorer after each iteration on the SIDD Validation and Rain100L datasets. SCP²GAN demonstrates significant improvement in the initial iterations, with gains exceeding 0.5 dB on both datasets in the first iteration. However, the PSNR improvement between subsequent iterations decreases, with the final iteration showing only about a 0.03 dB gain. For RSCP²GAN, after the SC strategy converges, the Reb-SC strategy results in a substantial improvement of approximately 0.3 dB. Compared to P²GAN, RSCP²GAN achieves significant improvements of 1.93 dB on the SIDD Validation and 1.95 dB on Rain100L. This demonstrates that our approach achieves state-of-the-art performance in image denoising and deraining and shows the general applicability of the SC strategy.

Effectiveness of the Number of Augmentation Images (N) in the Re-boosting (ReB) Module. Table 5 shows that Reb-SC improves performance across all datasets. For N=2, the improvement is approximately 0.2 dB; for N=4, it is about 0.3 dB. However, when N=8, the performance improvement is less significant than N=4.




Fig. 13: Effectiveness of SC and Reb-SC strategy on five restorers.

4.6 Analysis on Transferability

To evaluate the transferability of our SC and Reb-SC strategies, we apply them to various classical and modern restorers, including DnCNN [30], UNet [74], DeamNet [7], and DBSNL [18]. The framework still adopts the P²GAN proposed in section 3 with different restorers. Fig. 13 shows that the SC and Reb-SC strategies are effective across these networks. For example, applying SC to DnCNN yields PSNR/SSIM improvements of 0.96 dB/0.0085 on the SIDD Validation dataset. For UNet and DBSNL, the gains are 1.58 dB/0.0373 and 1.52 dB/0.0035, respectively. Reb-SC also shows improvement across multiple restorers, demonstrating its high transferability and potential applicability to other restorers within unsupervised image restoration frameworks.

5 CONCLUSION

In this paper, we first introduce Parallel Prompt GAN (P^2GAN) for unsupervised image restoration as our baseline. Furthermore, we propose an SC strategy to provide the Res and PL modules with a self-boosting capacity and significantly improve restoration performance. To improve the performance of the Res, we apply a Reb-SC strategy, which leads to further enhancement of the Res module using the SC strategy. Extensive experimental results show that the proposed method achieves state-of-the-art performance. In addition, We also demonstrate the transferability of the SC and Reb-SC strategies to various restorers, indicating their broad applicability to low-level computer vision tasks.

Although the SC and Reb-SC strategies proposed in this paper significantly improve denoising and deraining performance within an unsupervised GAN framework, these are aimed at individual restoration tasks. Real-world scenarios often involve mixed degradations, such as low resolution, motion blur, adverse weather conditions, and compression artifacts. Future work will explore these more complex scenarios and evaluate the generalization capabilities of the SC and Reb-SC strategies across diverse restoration challenges.

REFERENCES

- [1] J. Chen, J. Benesty, Y. Huang, and S. Doclo, "New insights into the noise reduction wiener filter," in *Proceedings of IEEE Transactions on Audio, Speech, and Language Processing*, 2006, p. 1218–1234. 1
- [2] A. Buades, B. Coll, and J.-M. Morel, "A non-local algorithm for image denoising," in *Proceedings of IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, 2005, p. 60–65.
- [3] T. Chen, K.-K. Ma, and L.-H. Chen, "Tri-state median filter for image denoising," *IEEE Transactions on Image Processing*, p. 1834–1838, 1999. 1

- [4] K. Dabov, A. Foi, V. Katkovnik, and K. Egiazarian., "Image denoising by sparse 3-d transformdomain collaborative filtering," *IEEE Transactions* on *Image Processing*, p. 2080–2095, 2007. 1
- [5] L. Chen, X. Chu, X. Zhang, and J. Sun, "Simple baselines for image restoration," in *Proceedings of the European Conference on Computer Vision*, 2022, pp. 17–33. 1, 2, 9, 10
- [6] S. W. Zamir, A. Arora, S. Khan, M. Hayat, F. S. Khan, and M.-H. Yang, "Restormer: Efficient transformer for high-resolution image restoration," in *Proceedings of the IEEE International Conference on Computer Vision and Pattern Recognization*, 2022, pp. 5728–5739. 1, 2, 9, 10
- [7] C. Ren, X. He, C. Wang, and Z. Zhao, "Adaptive consistency prior based deep network for image denoising," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2021, pp. 8596–8606. 1, 2, 6, 7, 12
- [8] Y. Kim, J. W. Soh, G. Y. Park, and N. I. Cho, "Transfer learning from synthetic to real-noise denoising with adaptive instance normalization," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2020, pp. 3482–3492. 1, 2, 7
- [9] H. Wu, Y. Qu, S. Lin, J. Zhou, R. Qiao, Z. Zhang, Y. Xie, and L. Ma, "Contrastive learning for compact single image dehazing," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2021, pp. 10551–10560. 1, 2
- [10] Y. Zheng, J. Zhan, S. He, J. Dong, and Y. Du, "Curricular contrastive regularization for physics-aware single image dehazing," in *Proceedings* of the IEEE Conference on Computer Vision and Pattern Recognition, 2023, pp. 5785–5794. 1, 2
- [11] X. Fu, J. Huang, X. Ding, Y. Liao, and J. Paisley, "Clearing the skies: A deep network architecture for single-image rain removal," *IEEE Transactions on Image Processing*, p. 2944–2956, 2017. 1
- [12] H. Wang, Q. Xie, Q. Zhao, Y. Li, Y. Liang, Y. Zheng, and D. Meng, "Rednet: An interpretable rain convolutional dictionary network for single image deraining," *IEEE Transactions on Neural Networks and Learning Systems*, pp. 8668–8682, 2023. 1, 2
- [13] H. Bai and J. Pan, "Self-supervised deep blind video super-resolution," IEEE Transactions on Pattern Analysis and Machine Intelligence, pp. 4641–4653, 2024.
- [14] J. Pan, B. Xu, H. Bai, J. Tang, and M.-H. Yang, "Cascaded deep video deblurring using temporal sharpness prior and non-local spatialtemporal similarity," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 9411–4625, 2024. 1
- [15] J. Dong, J. Pan, J. S. Ren, L. Lin, J. Tang, and M.-H. Yang, "Learning spatially variant linear representation models for joint filtering," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 8355–8370, 2021.
- [16] J. Chen, J. Chen, H. Chao, and M. Yang, "Image blind denoising with generative adversarial network based noise modeling," in *Proceedings of* the IEEE Conference on Computer Vision and Pattern Recognition, 2018, pp. 3155–3164. 1, 3, 7
- [17] Z. Hong, X. Fan, T. Jiang, and J. Feng, "End-to-end unpaired image denoising with conditional adversarial networks," in *Proceedings of the* AAAI Conference on Artificial Intelligence, 2020, pp. 4140–4149. 1, 3, 4 7
- [18] X. Wu, M. Liu, and Y. Cao, "Unpaired learning of deep image denoising," in *Proceedings of the European conference on computer vision*, 2020, pp. 352–368. 1, 12
- [19] W. Du, H. Chen, and H. Yang, "Learning invariant representation for unsupervised image restoration," in *Proceedings of the IEEE Conference* on Computer Vision and Pattern Recognition, 2020, pp. 483–392. 1, 4
- [20] Y. Wei, Z. Zhang, Y. Wang, M. Xu, Y. Yang, S. Yan, and M. Wang, "Deraincyclegan: Rain attentive cyclegan for single image deraining and rainmaking," *IEEE Transactions on Image Processing*, pp. 4788–4801, 2021. 1, 3, 9, 10
- [21] X. Chen, J. Pan, K. Jiang, Y. Li, Y. Huang, C. Kong, L. Dai, and Z. Fan, "Unpaired deep image deraining using dual contrastive learning," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2022, pp. 2017–2026. 1, 3, 6, 7, 9, 10
- [22] S. Cha, T. Park, B. Kim, J. Baek, and T. Moon, "Gan2gan: Generative noise learning for blind denoising with single noisy images," in *Proceedings of International Conference on Learning Representations*, 2019, pp. 1712–1722. 1, 3
- [23] X. Lin, C. Ren, X. Liu, J. Huang, and Y. Lei, "Unsupervised image denoising in real-world scenarios via self- collaboration parallel generative adversarial branches," in *Proceedings of the IEEE International* Conference on Computer Vision, 2023, p. 12642–12652. 2, 3, 7, 8
- [24] W. Yang, R. T. Tan, J. Feng, J. Liu, Z. Guo, and S. Yan, "Deep joint rain detection and removal from a single image," in *Proceedings of the*

- IEEE Conference on Computer Vision and Pattern Recognition, 2017, pp. 1357–1366. 2, 9, 10, 11
- [25] Y. Li, R. T. Tan, X. Guo, and J. L. M. S. Brown, "Rain streak removal using layer priors," in *Proceedings of the IEEE Conference on Computer* Vision and Pattern Recognition, 2016, pp. 2736–2744. 2, 9
- [26] W. Li, Q. Zhang, J. Zhang, Z. Huang, X. Tian, and D. Tao, "Toward real-world single image deraining: A new benchmark and beyond," arXiv preprint arXiv:2206.05514, 2022. 2, 9, 11
- [27] A. Abdelhamed, S. Lin, and M. S. Brown, "A high-quality denoising dataset for smartphone cameras," in *Proceedings of the IEEE Conference* on Computer Vision and Pattern Recognition, 2018, pp. 1692–1700. 2, 8, 9, 11
- [28] TobiasPlotz and StefanRoth, "Benchmarking denoising algorithms with real photographs," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 1586–1595. 2, 8, 9
- [29] J. Xu, H. Li, Z. Liang, D. Zhang, and L. Zhang, "Real-world noisy image denoising: A new benchmark," arXiv:1804.02603, 2018. 2, 8, 9
- [30] K. Zhang, W. Zuo, Y. Chen, D. Meng, and L. Zhang, "Beyond a gaussian denoiser: Residual learning of deep cnn for image denoising," *IEEE Transactions on Image Processing*, pp. 3142–3155, 2017. 2, 7, 12
- [31] K. Zhang, W. Zuo, and L. Zhang, "Ffdnet: Toward a fast and flexible solution for cnn-based image denoising," *IEEE Transactions on Image Processing*, pp. 4608–4622, 2018. 2
- [32] S. Anwar and N. Barnes, "Real image denoising with feature attention," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 3155–3164. 2, 7
- [33] Y. Wei, Z. Zhang, H. Zheng, R. Hong, Y. Yang, and M. Wang, "Sginet: Toward sufficient interaction between single image deraining and semantic segmentation," in *Proceedings of the ACM International Conference* on Multimedia, 2022, p. 6202–6210. 2
- [34] X. Lin, J. Yue, C. Ren, C.-L. Guo, and C. Li, "Unlocking low-light-rainy image restoration by pairwise degradation feature vector guidance," arXiv:2305.03997, 2023. 2
- [35] X. Chen, H. Li, and M. L. J. Pan, "Learning a sparse transformer network for effective image deraining," in *Proceedings of the IEEE International Conference on Computer Vision and Pattern Recognization*, 2023, pp. 5896–5905.
- [36] F. Zhang, S. You, Y. Li, and Y. Fu, "Learning rain location prior for nighttime deraining," in *Proceedings of the IEEE Conference on Computer Vision*, 2023, pp. 13148–13157.
- [37] Y. Shao, L. Li, W. Ren, C. Gao, and N. Sang, "Domain adaptation for image dehazing," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2020, pp. 2808–2817.
- [38] Z. Chen, Y. Wang, Y. Yang, and D. Liu, "Psd: Principled synthetic-toreal dehazing guided by physical priors," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2021, pp. 7180–7189.
- [39] Y. Song, Z. He, H. Qian, and X. Du, "Vision transformers for single image dehazing," *IEEE Transactions on Image Processing*, pp. 1927– 1941, 2023. 2
- [40] Y. Zhou, D. Liang, S. Chen, S.-J. Huang, S. Yang, and C. Li, "Improving lens flare removal with general-purpose pipeline and mulieee transactions on image processingle light sources recovery," in *Proceedings of the IEEE International Conference on Computer Vision*, 2023, pp. 12969– 12979.
- [41] Y. Wu, Q. He, T. Xue, R. Garg, J. Chen, A. Veeraraghavan, and J. T. Barron, "How to train neural networks for flare removal," in *Proceedings of the IEEE International Conference on Computer Vision*, 2021, pp. 2239–2247.
- [42] Y. Dai, C. Li, S. Zhou, R. Feng, and C. C. Loy, "Flare7k: A phenomenological nighttime flare removal dataset," in *Proceedings of Advances in Neural Information Processing Systems*, 2022, pp. 3926–3937.
- [43] S. Anwar and N. Barnes, "Real image denoising with feature attention," in *Proceedings of the IEEE International Conference on Computer Vision*, 2019, pp. 3155–3164.
- [44] S. Cheng, Y. Wang, H. Huang, D. Liu, H. Fan, and S. Liu, "Nbnet: Noise basis learning for image denoising with subspace projection," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2021, pp. 4896–4906. 2
- [45] Y. Wei, Z. Zhang, M. Xu, R. Hong, J. Fan, and S. Yan, "Robust attention deraining network for synchronous rain streaks and raindrops removal," in *Proceedings of the ACM International Conference on Multimedia*, 2022, p. 6464–6472. 2
- [46] S. W. Zamir, A. Arora, S. Khan, M. Hayat, F. S. Khan, M.-H. Yang, and L. Shao, "Learning enriched features for fast image restoration and enhancement," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 1934–1948, 2022. 2

- [47] J. Zhu, T. Park, P. Isola, and A. A. Efros, "Unpaired image-to-image translation using cycle-consistent adversarial networks," in *Proceedings* of the IEEE International Conference on Computer Vision, 2017, pp. 2223–2232. 3, 9, 10
- [48] R. Neshatavar, M. Yavartanoo, S. Son, and K. M. Lee, "Cvf-sid: Cyclic multi-variate function for self-supervised image denoising by disentangling noise from mage," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2022, pp. 17583–17591. 3, 7, 8, 9
- [49] W. Lee, S. Son, and K. M. Lee, "Ap-bsn: Self-supervised denoising for real-world images via asymmetric pd and blind-spot network," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2022, pp. 17725–17734. 3, 7, 8, 9
- [50] Z. Wang, Y. Fu, J. Liu, and Y. Zhang, "Lg-bpn: Local and global blind-patch network for self-supervised real-world denoising," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2023, p. 18156–18165. 3, 7, 8, 9
- [51] Y. Pan, X. Liu, X. Liao, Y. Cao, and C. Ren, "Random sub-samples generation for self-supervised real image denoising," in *Proceedings* of the IEEE International Conference on Computer Vision, 2023, pp. 12150–12159. 3, 7, 8, 9
- [52] K. Han and X. Xiang, "Decomposed cyclegan for single image deraining with unpaired data," in *Proceedings of the IEEE International Conference* on Acoustics, Speech and Signal Processing, 2020, p. 1828–1832. 3
- [53] X. Jin, Z. Chen, J. Lin, Z. Chen, and W. Zhou, "Unsupervised single image deraining with self-supervised constraints," in *Proceedings of the IEEE International Conference on Image Processing*, 2019, p. 2761–2765.
- [54] H. Zhu, X. Peng, J. T. Zhou, S. Yang, V. Chanderasekh, L. Li, and J.-H. Lim., "Singe image rain removal with unpaired information: A differentiable programming perspective," in *Proceedings of the AAAI* Conference on Artificial Intelligence, 2019, p. 9332–9339. 3
- [55] C. Yu, Y. Chang, Y. Li, X. Zhao, and L. Yan, "Unsupervised image deraining: Optimization model driven deep cnn," in *Proceedings of the* ACM International Conference on Multimedia, 2021, pp. 2634–2642.
- [56] Y. Ye, C. Yu, Y. Chang, L. Zhu, X.-L. Z. L. Yan, and Y. Tian, "Unsupervised deraining: Where contrastive learning meets self-similarity," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2022, pp. 5821–5830. 3, 10
- [57] G. Jang, W. Lee, S. Son, and K. Lee, "C2n: Practical generative noise modeling for real-world denoising," in *Proceedings of the IEEE International Conference on Computer Vision*, 2021, pp. 2350–2359. 3, 4,7,9
- [58] X. Jin, Z. Chen, J. Lin, Z. Chen, and W. Zhou, "Unsupervised single image deraining with self-supervised constraints," in *Proceedings of the IEEE International Conference on Image Processing*, 2019, pp. 2761– 2765. 4
- [59] C. Ren, Y. Pan, and J. Huang, "Enhanced latent space blind model for real image denoising via alternative optimization," in *Proceedings of Neural Information Processing Systems*, 2022, pp. 10581–10590. 6, 7, 9
- [60] D. Kostadin, F. Alessandro, K. Vladimir, and E. Karen, "Image denoising by sparse 3-d transform-domain collaborative filtering," *IEEE Transac*tions on Image Processing, pp. 2080–2095, 2007. 7, 10
- [61] S. Gu, L. Zhang, W. Zuo, and X. Feng, "Weighted nuclear norm minimization with application to image denoising," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2014, pp. 2862–2869. 7, 10
- [62] Y. Chen and T. Pock, "Trainable nonlinear reaction diffusion: A flexible framework for fast and effective image restoration," *IEEE Transactions* on Pattern Analysis and Machine Intelligence, pp. 1256–1272, 2016. 7
- [63] S. Guo, Z. Yan, K. Zhang, W. Zuo, and L. Zhang, "Toward convolutional blind denoising of real photographs," in *Proceedings of the IEEE Confer*ence on Computer Vision and Pattern Recognition, 2019, pp. 1712–1722.
- [64] Y. Zhou, J. Jiao, H. Huang, Y. Wang, J. Wang, H. Shi, and T. Huang, "When awgn-based denoiser meets real noises," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2020, pp. 13074–13081.
- [65] A. Krull, T.-O. Buchholz, and F. Jug, "Noise2void-learning denoising from single noisy images," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 2129–2137. 7
- [66] T. Pang, H. Zheng, Y. Quan, and H. Ji, "Recorrupted-to-recorrupted: Unsupervised deep learning for image denoising," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2021, pp. 2043–2052. 7
- [67] J. Li, Z. Zhang, X. Liu, C. Feng, X. Wang, L. Lei, and W. Zuo, "Spatially adaptive self-supervised learning for real-world image denoising," in

- Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2023, p. 9914–9924. 7, 8, 9
- [68] H. Jang, J. Park, D. Jung, J. Lew, H. Bae, and S. Yoon, "Puca: Patch-unshuffle and channel attention for enhanced self-supervised image denoising," in *Proceedings of Advances in Neural Information Processing Systems*, 2024, p. 36. 7, 9
- [69] L. Fan, J. Cui, H. Li, X. Yan, H. Liu, and C. Zhang, "Complementary blind-spot network for self-supervised real image denoising," *IEEE Transactions on Circuits and Systems for Video Technology*, pp. 1–14, 2024. 7, 9
- [70] X. Fu, J. Huang, D. Zeng, Y. Huang, X. Ding, and J. Paisley, "Removing rain from single images via a deep detail network," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 3855–3863. 10
- [71] X. Li, J. Wu, Z. Lin, and H. Liu1, "Recurrent squeeze-and-excitation context aggregation net for single image deraining," in *Proceedings of* the European conference on computer vision, 2018, pp. 254–269. 10
- [72] T. Wang, X. Yang, K. Xu, S. Chen, Q. Zhang, and R. W. Lau, "Spatial attentive single-image deraining with a high quality real rain dataset," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 12 270–12 279. 10
- [73] K. Jiang, Z. Wang, P. Yi, C. Chen, B. Huang, Y. Luo, J. Ma, and J. Jiang, "Multi-scale progressive fusion network for single image deraining," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2020, pp. 8346–8355. 10
- [74] R. O, F. P, and B. T, "U-net: Convolutional networks for biomedical image segmentation," in *Proceedings of the International Conference on Medical Image Computing and Computer-Assisted Intervention*, 2015, pp. 234–241. 12