



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11


Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

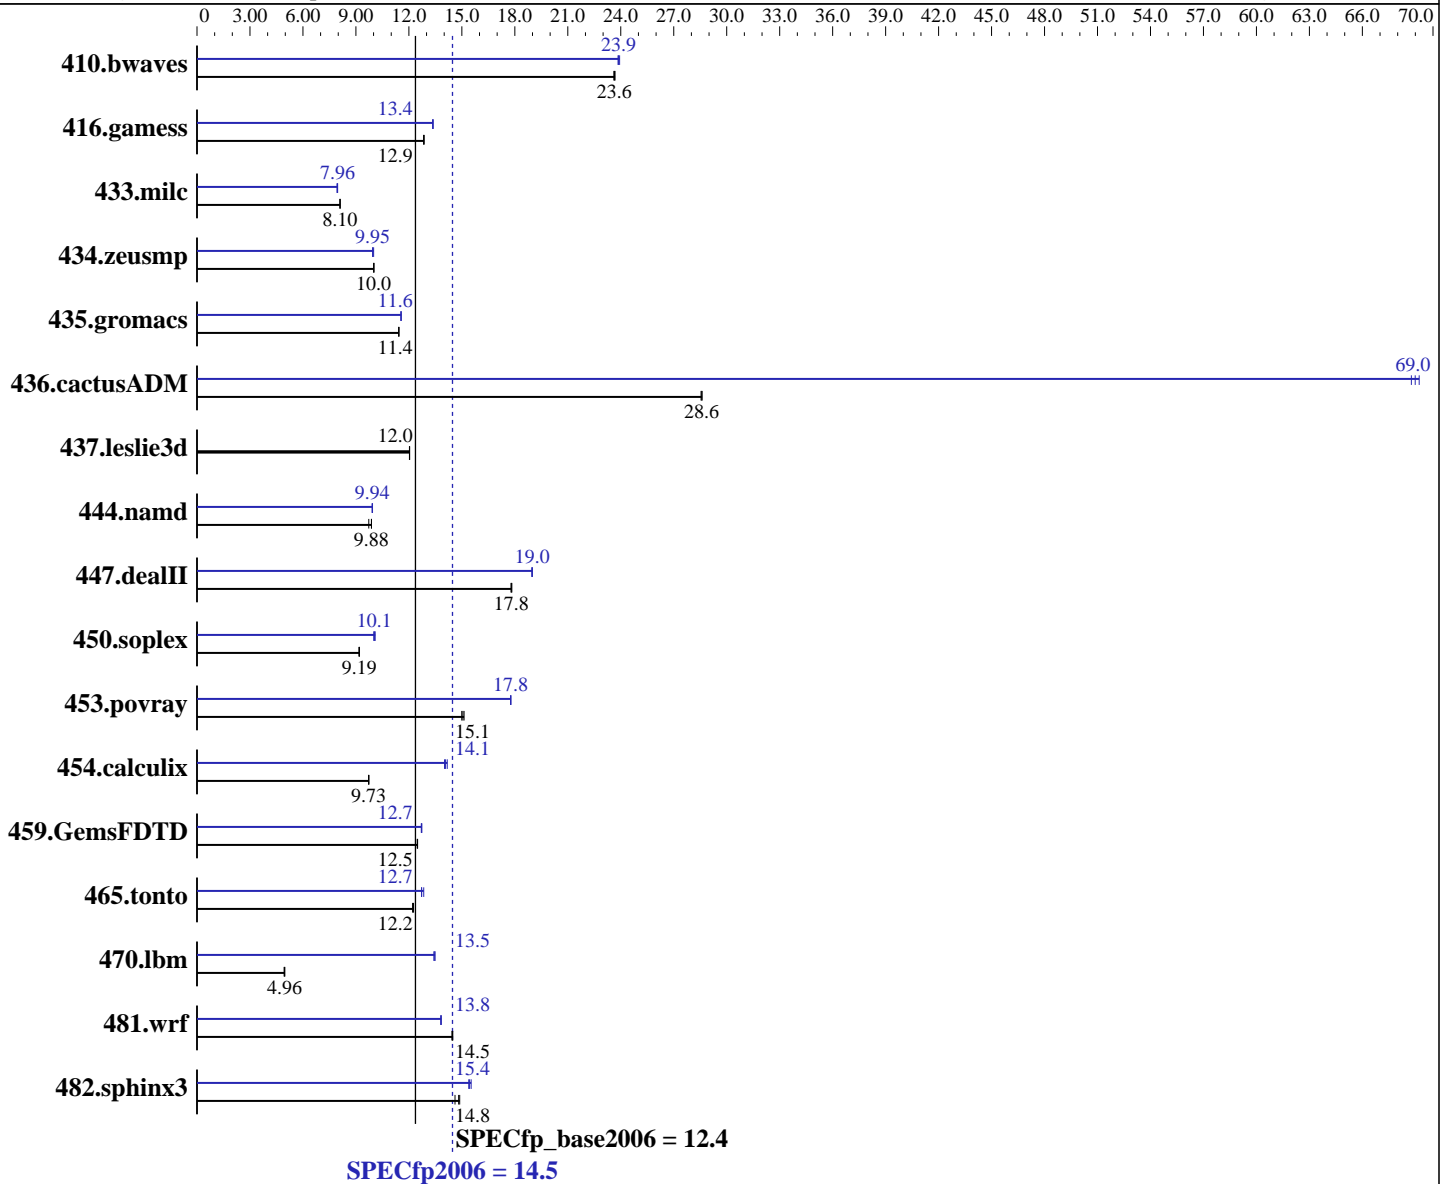

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	576	23.6	575	23.6	574	23.7	570	23.8	569	23.9	568	23.9
416.gamess	1523	12.9	1524	12.9	1526	12.8	1465	13.4	1467	13.3	1465	13.4
433.milc	1133	8.10	1133	8.10	1133	8.10	1158	7.93	1153	7.96	1153	7.96
434.zeusmp	909	10.0	909	10.0	909	10.0	910	10.0	915	9.95	914	9.95
435.gromacs	625	11.4	624	11.4	625	11.4	618	11.6	618	11.6	617	11.6
436.cactusADM	419	28.5	418	28.6	418	28.6	173	69.0	174	68.8	173	69.2
437.leslie3d	781	12.0	781	12.0	781	12.0	781	12.0	781	12.0	781	12.0
444.namd	812	9.88	824	9.73	812	9.88	807	9.94	807	9.94	809	9.92
447.dealII	643	17.8	642	17.8	643	17.8	603	19.0	602	19.0	603	19.0
450.soplex	909	9.17	908	9.19	906	9.20	826	10.1	833	10.0	830	10.1
453.povray	353	15.1	352	15.1	355	15.0	300	17.8	299	17.8	299	17.8
454.calculix	848	9.73	848	9.73	849	9.72	586	14.1	582	14.2	588	14.0
459.GemsFDTD	850	12.5	849	12.5	850	12.5	835	12.7	834	12.7	834	12.7
465.tonto	802	12.3	804	12.2	806	12.2	773	12.7	766	12.8	774	12.7
470.lbm	2764	4.97	2769	4.96	2785	4.93	1024	13.4	1021	13.5	1019	13.5
481.wrf	771	14.5	774	14.4	772	14.5	808	13.8	808	13.8	809	13.8
482.sphinx3	1334	14.6	1315	14.8	1310	14.9	1255	15.5	1262	15.4	1266	15.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
Powersaved dameon was disabled in OS

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

```
433.milc: icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.15.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.15.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 14.5

IBM System x3650 (Intel Xeon E5320)

SPECfp_base2006 = 12.4

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: Feb-2007

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:41:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2008.