



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 129

PowerEdge 2900 III (Intel Xeon E5430, 2.66 GHz)

SPECint\_rate\_base2006 = 119

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

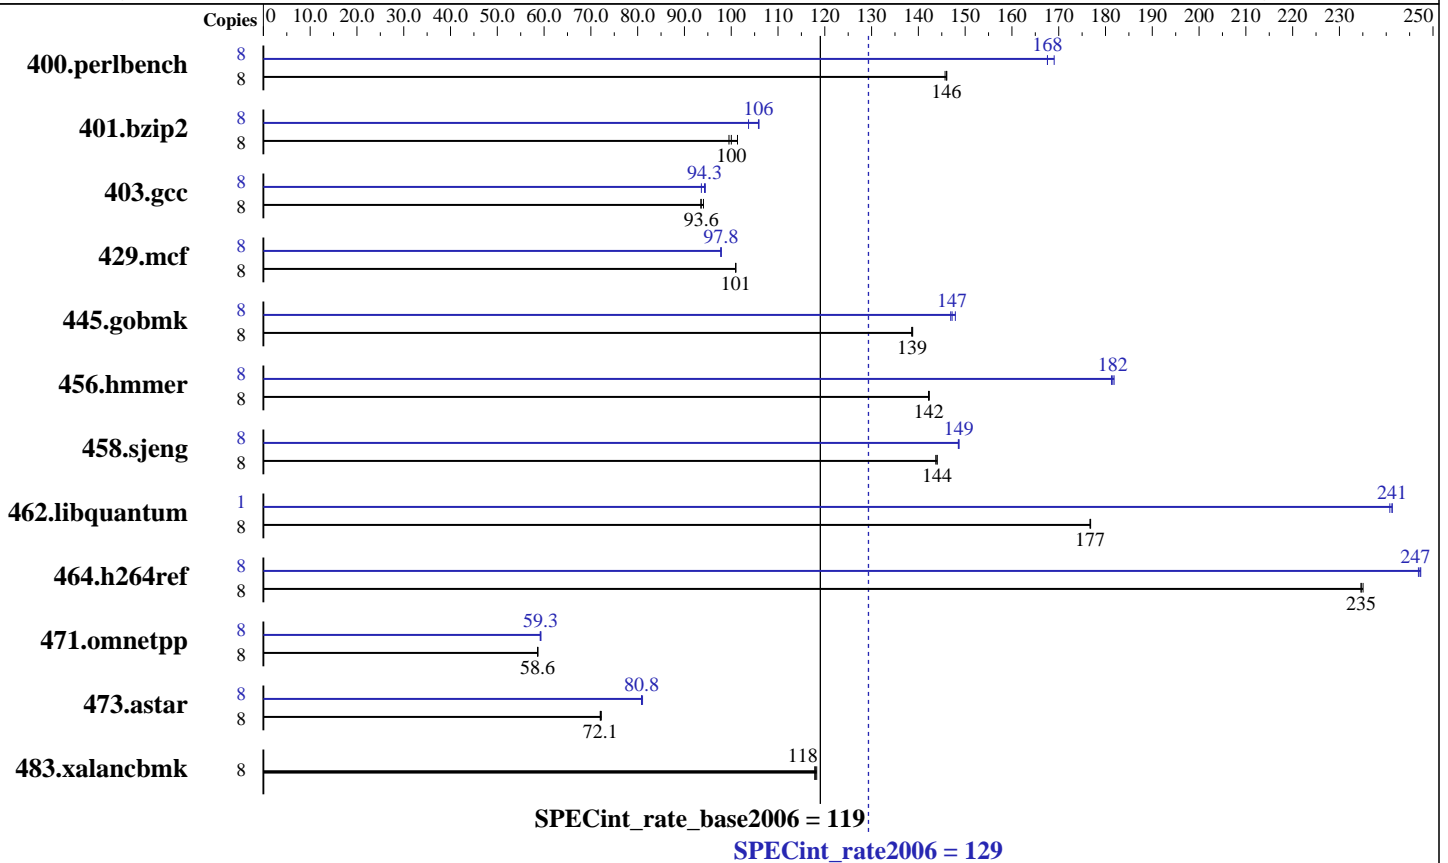

## Hardware

CPU Name: Intel Xeon E5430  
 CPU Characteristics:  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-667 FBDIMM)  
 Disk Subsystem: 2 x 73 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 129

PowerEdge 2900 III (Intel Xeon E5430, 2.66 GHz)

SPECint\_rate\_base2006 = 119

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Nov-2008  
Hardware Availability: Sep-2008  
Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	536	146	535	146	<u>535</u>	<u>146</u>	8	<u>466</u>	<u>168</u>	462	169	466	168
401.bzip2	8	776	99.5	762	101	<u>772</u>	<u>100</u>	8	<u>730</u>	<u>106</u>	729	106	744	104
403.gcc	8	685	94.1	689	93.5	<u>688</u>	<u>93.6</u>	8	682	94.5	<u>683</u>	<u>94.3</u>	688	93.6
429.mcf	8	723	101	723	101	<u>723</u>	<u>101</u>	8	<u>746</u>	<u>97.8</u>	746	97.9	746	97.8
445.gobmk	8	<u>605</u>	<u>139</u>	605	139	606	139	8	571	147	<u>570</u>	<u>147</u>	567	148
456.hammer	8	524	142	525	142	<u>525</u>	<u>142</u>	8	412	181	410	182	<u>411</u>	<u>182</u>
458.sjeng	8	<u>672</u>	<u>144</u>	674	144	672	144	8	<u>651</u>	<u>149</u>	651	149	652	149
462.libquantum	8	<u>938</u>	<u>177</u>	937	177	938	177	1	85.9	241	<u>85.9</u>	<u>241</u>	86.1	241
464.h264ref	8	753	235	<u>755</u>	<u>235</u>	755	235	8	717	247	716	247	<u>716</u>	<u>247</u>
471.omnetpp	8	853	58.6	<u>853</u>	<u>58.6</u>	852	58.7	8	845	59.2	843	59.3	<u>844</u>	<u>59.3</u>
473.astar	8	777	72.2	<u>779</u>	<u>72.1</u>	780	72.0	8	693	81.0	<u>695</u>	<u>80.8</u>	695	80.8
483.xalancbmk	8	<u>468</u>	<u>118</u>	467	118	468	118	8	<u>468</u>	<u>118</u>	467	118	468	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 462.libquantum peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 129

PowerEdge 2900 III (Intel Xeon E5430, 2.66 GHz)

SPECint\_rate\_base2006 = 119

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 129

PowerEdge 2900 III (Intel Xeon E5430, 2.66 GHz)

SPECint\_rate\_base2006 = 119

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
 -opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
 -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
 -opt-malloc-options=3 -parallel -par-runtime-control  
 -opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -ansi-alias -opt-ra-region-strategy=block  
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 129

PowerEdge 2900 III (Intel Xeon E5430, 2.66 GHz)

SPECint\_rate\_base2006 = 119

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:12:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 December 2008.