



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®_rate2006 = 257

ASUS RS500-E6/RS520-E6 (Z8NR-D12) server system
(Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016


Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

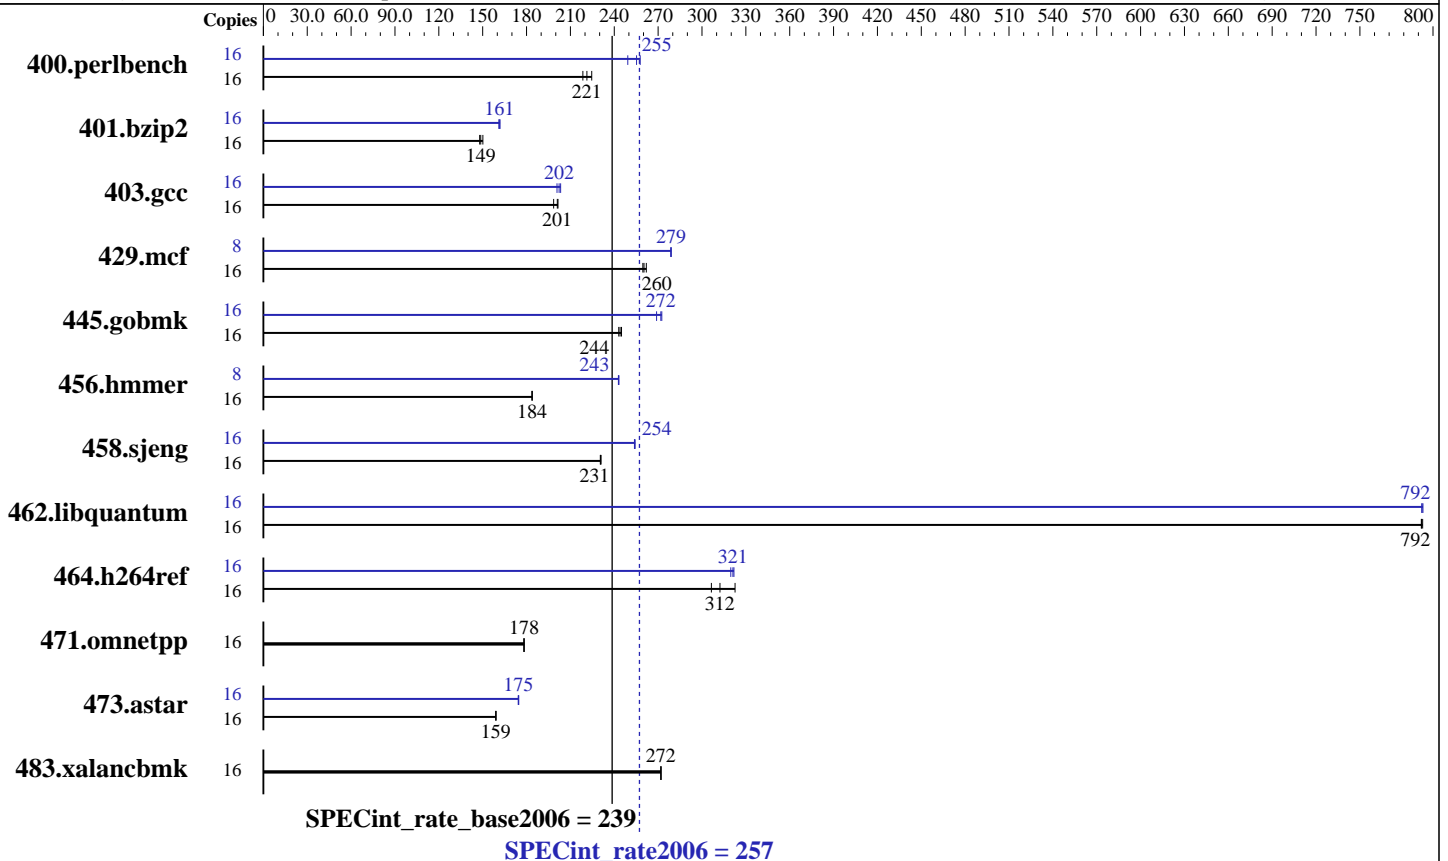

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)
 Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2
 Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 257

ASUS RS500-E6/RS520-E6 (Z8NR-D12) server system
(Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	706	221	715	219	696	225	16	627	249	607	258	612	255
401.bzip2	16	1038	149	1028	150	1044	148	16	957	161	959	161	954	162
403.gcc	16	639	202	649	199	641	201	16	637	202	634	203	641	201
429.mcf	16	557	262	561	260	562	260	8	262	279	262	279	262	279
445.gobmk	16	685	245	691	243	688	244	16	616	273	617	272	624	269
456.hammer	16	812	184	812	184	812	184	8	307	243	307	243	307	243
458.sjeng	16	839	231	838	231	840	230	16	761	254	763	254	763	254
462.libquantum	16	418	793	419	792	418	792	16	418	792	418	793	418	792
464.h264ref	16	1097	323	1156	306	1134	312	16	1108	320	1103	321	1100	322
471.omnetpp	16	561	178	561	178	561	178	16	561	178	561	178	561	178
473.astar	16	706	159	706	159	706	159	16	644	174	643	175	643	175
483.xalancbmk	16	406	272	406	272	406	272	16	406	272	406	272	406	272

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS setting:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled
Tested system compliance with Intel EEB 3.61 spec
SSI Server Power Supply 650W or higher
System was configured with ASPEED AST2050 VGA (on board VGA)

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 257

ASUS RS500-E6/RS520-E6 (Z8NR-D12) server system
(Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 257

ASUS RS500-E6/RS520-E6 (Z8NR-D12) server system
(Intel Xeon X5570)

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test date: Apr-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS500-E6/RS520-E6 (Z8NR-D12) server system
(Intel Xeon X5570)

SPECint_rate2006 = 257

SPECint_rate_base2006 = 239

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:47:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.