



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation SPARC Enterprise M8000

SPECint®_rate2006 = **882**
SPECint_rate_base2006 = 806

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Nov-2010

Hardware Availability: Dec-2010

Software Availability: Sep-2010

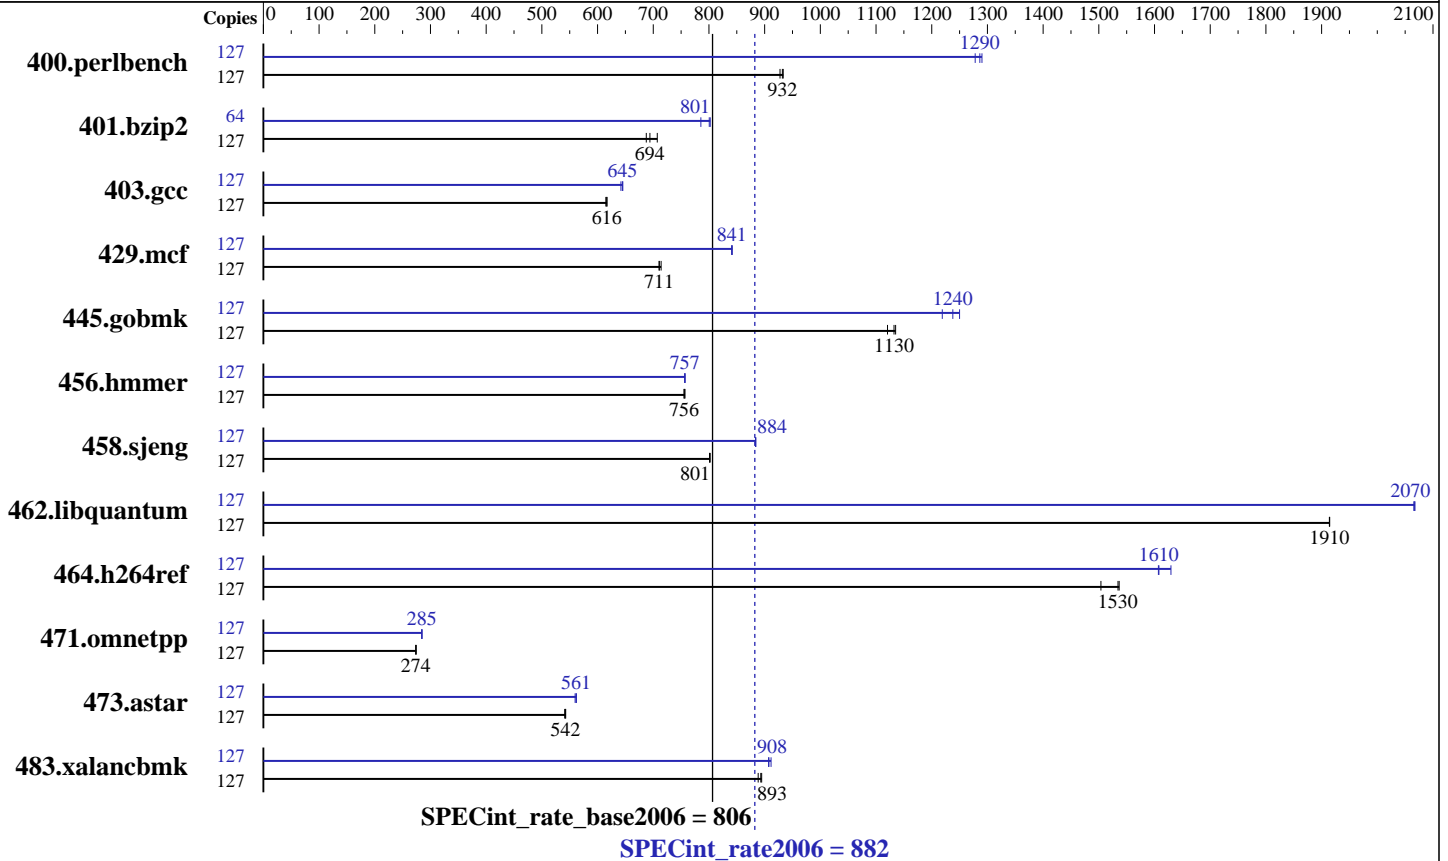

Hardware

CPU Name: SPARC64 VII+
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 512 GB (128 x 4 GB, 8-way interleaved)
 Disk Subsystem: 698 GB mirrored partition on
 12 x 146 GB 15K RPM SAS disks
 in each of 2 StorageTek 2530 Array
 (24 total disk, 12 in each array)
 Other Hardware: None

Software

Operating System: Oracle Solaris 10 9/10
 Compiler: Oracle Solaris Studio 12.2
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M8000

SPECint_rate2006 = 882
SPECint_rate_base2006 = 806

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	127	1338	928	1329	933	<u>1332</u>	<u>932</u>	127	971	1280	<u>965</u>	<u>1290</u>	962	1290
401.bzip2	127	1783	687	1733	707	<u>1766</u>	<u>694</u>	64	786	785	770	802	<u>771</u>	<u>801</u>
403.gcc	127	<u>1659</u>	<u>616</u>	1657	617	1663	615	127	<u>1586</u>	<u>645</u>	1584	645	1593	642
429.mcf	127	1622	714	<u>1629</u>	<u>711</u>	1630	711	127	<u>1377</u>	<u>841</u>	1376	842	1377	841
445.gobmk	127	1189	1120	1174	1140	<u>1177</u>	<u>1130</u>	127	1066	1250	1093	1220	<u>1076</u>	<u>1240</u>
456.hammer	127	1565	757	<u>1568</u>	<u>756</u>	1569	755	127	1566	757	<u>1566</u>	<u>757</u>	1565	757
458.sjeng	127	<u>1917</u>	<u>801</u>	1918	801	1916	802	127	1739	884	<u>1739</u>	<u>884</u>	1738	884
462.libquantum	127	<u>1375</u>	<u>1910</u>	1374	1910	1375	1910	127	1273	2070	1274	2070	<u>1273</u>	<u>2070</u>
464.h264ref	127	<u>1832</u>	<u>1530</u>	1829	1540	1869	1500	127	<u>1748</u>	<u>1610</u>	1725	1630	1749	1610
471.omnetpp	127	2894	274	2901	274	<u>2899</u>	<u>274</u>	127	2789	285	<u>2789</u>	<u>285</u>	2790	285
473.astar	127	1643	543	<u>1645</u>	<u>542</u>	1648	541	127	1586	562	<u>1588</u>	<u>561</u>	1593	560
483.xalancbmk	127	979	895	<u>981</u>	<u>893</u>	986	888	127	961	912	<u>965</u>	<u>908</u>	966	907

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
118683-05 119963-20 120753-08
Oracle Solaris Studio 12.2 and patches are available at
<http://oracle.com/goto/solarisstudio>

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autoup=600
```

Causes pages older than the listed number of seconds to be written by fsflush.

```
tune_t_fsflushr=10
```

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M8000

SPECint_rate2006 = 882
SPECint_rate_base2006 = 806

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Operating System Notes (Continued)

lpg_alloc_prefer=1
Indicates that extra effort should be taken to ensure that pages are created in the nearby lgroup (NUMA location).
The "webconsole" service was turned off using
svcadm disable webconsole
The system had 75 GB of swap space.

Platform Notes

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a SPARC Enterprise M8000 server from Oracle. The SPARC Enterprise M8000 server from Oracle and from Fujitsu are electrically equivalent.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=std -ll2amm

C++ benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xalias_level=compatible
-xdepend -library=stlport4 -lfast



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M8000

SPECint_rate2006 = 882
SPECint_rate_base2006 = 806

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Base Other Flags

C benchmarks:
-xjobs=32 -V -#
C++ benchmarks:
-xjobs=32 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:
cc
C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:
400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=1
-xalias_level=std -xrestrict -Xc -xO4 -xprefetch=latx:0.5
-lfast
401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=strong -xchip=generic
403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xalias_level=std -xprefetch=no
-xarch=sparcfmaf -ll2amm
429.mcf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xprefetch_auto_type=indirect_array_access
-xchip=generic -xlinkopt -W2,-Apf:l1list=3
-W2,-Apf:noninnerl1list -lfast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M8000

SPECint_rate2006 = 882
SPECint_rate_base2006 = 806

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Optimization Flags (Continued)

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=std -xrestrict -xlinkopt
-xprefetch=no%auto -xunroll=6 -lfast -ll2amm

456.hmmr: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xO4 -xlinkopt -xprefetch=no%auto
-ll2amm

462.libquantum: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=no
-lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xarch=sparcfmaf -xalias_level=std -xprefetch=no
-ll2amm

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-fma=fused -xipo=2 -Qoption cg -Qlp-av=0 -xO4 -lfast

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-M /usr/lib/ld/map.bssalign -fma=fused -xipo=2
-xprefetch=no%auto -lfast -lbsdmalloc

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xdepend -library=stlport4
-fma=fused -xipo=2 -xprefetch=no -xO4 -lfast

Peak Other Flags

C benchmarks:
-xjobs=32 -V -#

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M8000

SPECint_rate2006 = 882
SPECint_rate_base2006 = 806

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Nov-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

Peak Other Flags (Continued)

C++ benchmarks:
-xjobs=32 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:42:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.