



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 390

PowerEdge R710 (Intel Xeon X5675, 3.06 GHz)

SPECint\_rate\_base2006 = 362

CPU2006 license: 55


Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

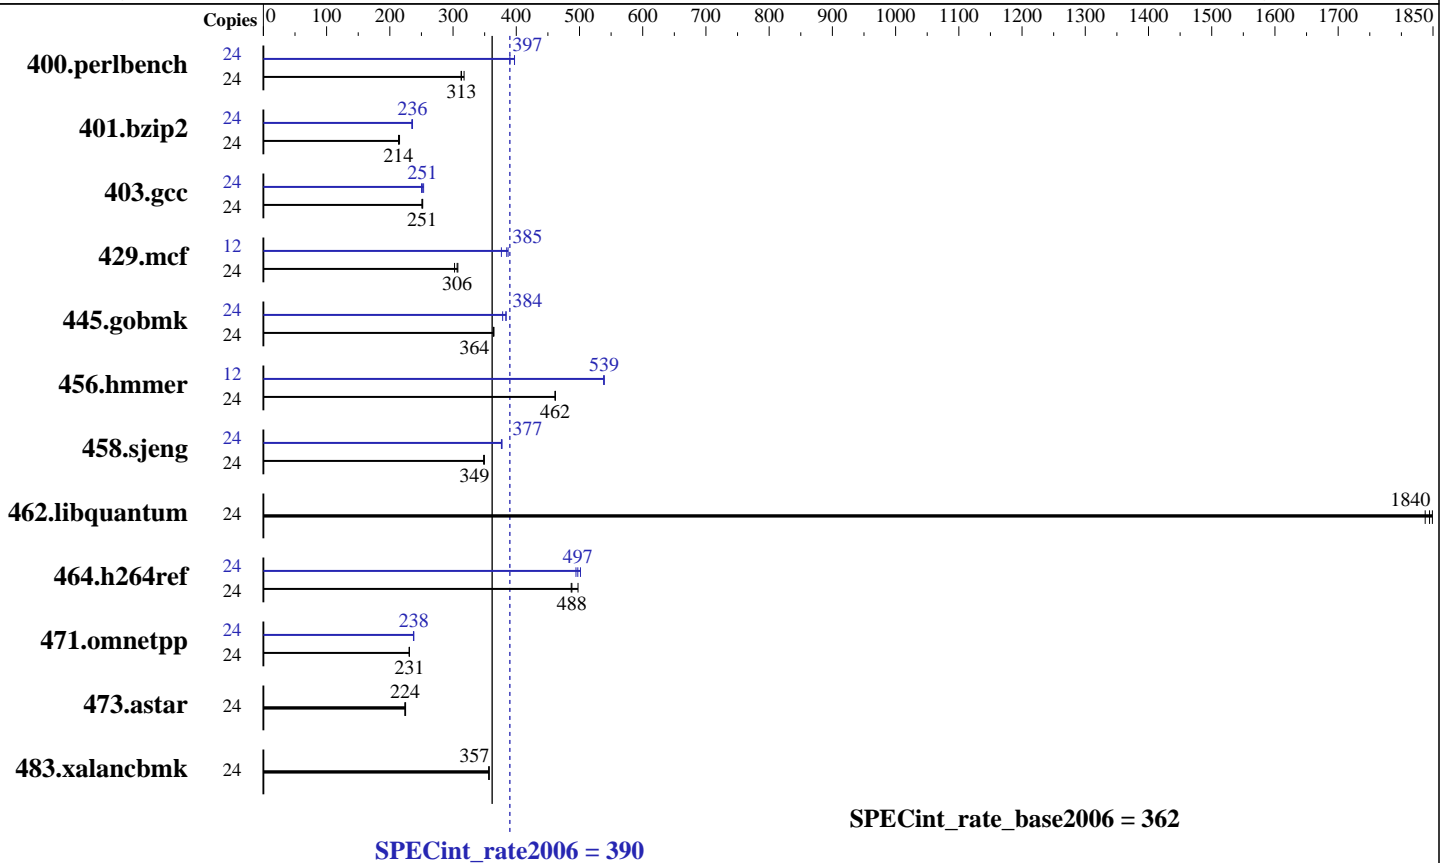

## Hardware

CPU Name: Intel Xeon X5675  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz  
 CPU MHz: 3067  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 146 GB 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 390

PowerEdge R710 (Intel Xeon X5675, 3.06 GHz)

SPECint\_rate\_base2006 = 362

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Feb-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	739	317	<b>748</b>	<b>313</b>	750	313	24	601	390	590	397	<b>590</b>	<b>397</b>
401.bzip2	24	1083	214	<b>1082</b>	<b>214</b>	1075	215	24	986	235	982	236	<b>983</b>	<b>236</b>
403.gcc	24	770	251	767	252	<b>768</b>	<b>251</b>	24	762	253	<b>768</b>	<b>251</b>	772	250
429.mcf	24	724	302	<b>714</b>	<b>306</b>	712	308	12	291	376	<b>284</b>	<b>385</b>	283	387
445.gobmk	24	690	365	<b>692</b>	<b>364</b>	692	364	24	<b>656</b>	<b>384</b>	656	384	665	378
456.hammer	24	<b>485</b>	<b>462</b>	485	462	485	461	12	<b>208</b>	<b>539</b>	208	539	208	538
458.sjeng	24	831	349	<b>832</b>	<b>349</b>	834	348	24	771	376	<b>770</b>	<b>377</b>	770	377
462.libquantum	24	<b>270</b>	<b>1840</b>	269	1850	271	1840	24	<b>270</b>	<b>1840</b>	269	1850	271	1840
464.h264ref	24	1067	498	1091	487	<b>1088</b>	<b>488</b>	24	1059	502	<b>1068</b>	<b>497</b>	1074	494
471.omnetpp	24	650	231	649	231	<b>650</b>	<b>231</b>	24	631	238	632	237	<b>631</b>	<b>238</b>
473.astar	24	749	225	<b>752</b>	<b>224</b>	752	224	24	749	225	<b>752</b>	<b>224</b>	752	224
483.xalancbmk	24	<b>464</b>	<b>357</b>	465	356	464	357	24	<b>464</b>	<b>357</b>	465	356	464	357

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R710 model. Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 390

PowerEdge R710 (Intel Xeon X5675, 3.06 GHz)

SPECint\_rate\_base2006 = 362

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 390

PowerEdge R710 (Intel Xeon X5675, 3.06 GHz)

SPECint\_rate\_base2006 = 362

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 390

PowerEdge R710 (Intel Xeon X5675, 3.06 GHz)

SPECint\_rate\_base2006 = 362

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 15:50:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 March 2011.