



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint[®]_rate2006 = 300

NovaScale R460 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint_rate_base2006 = 279

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Mar-2010

Software Availability: Jan-2011

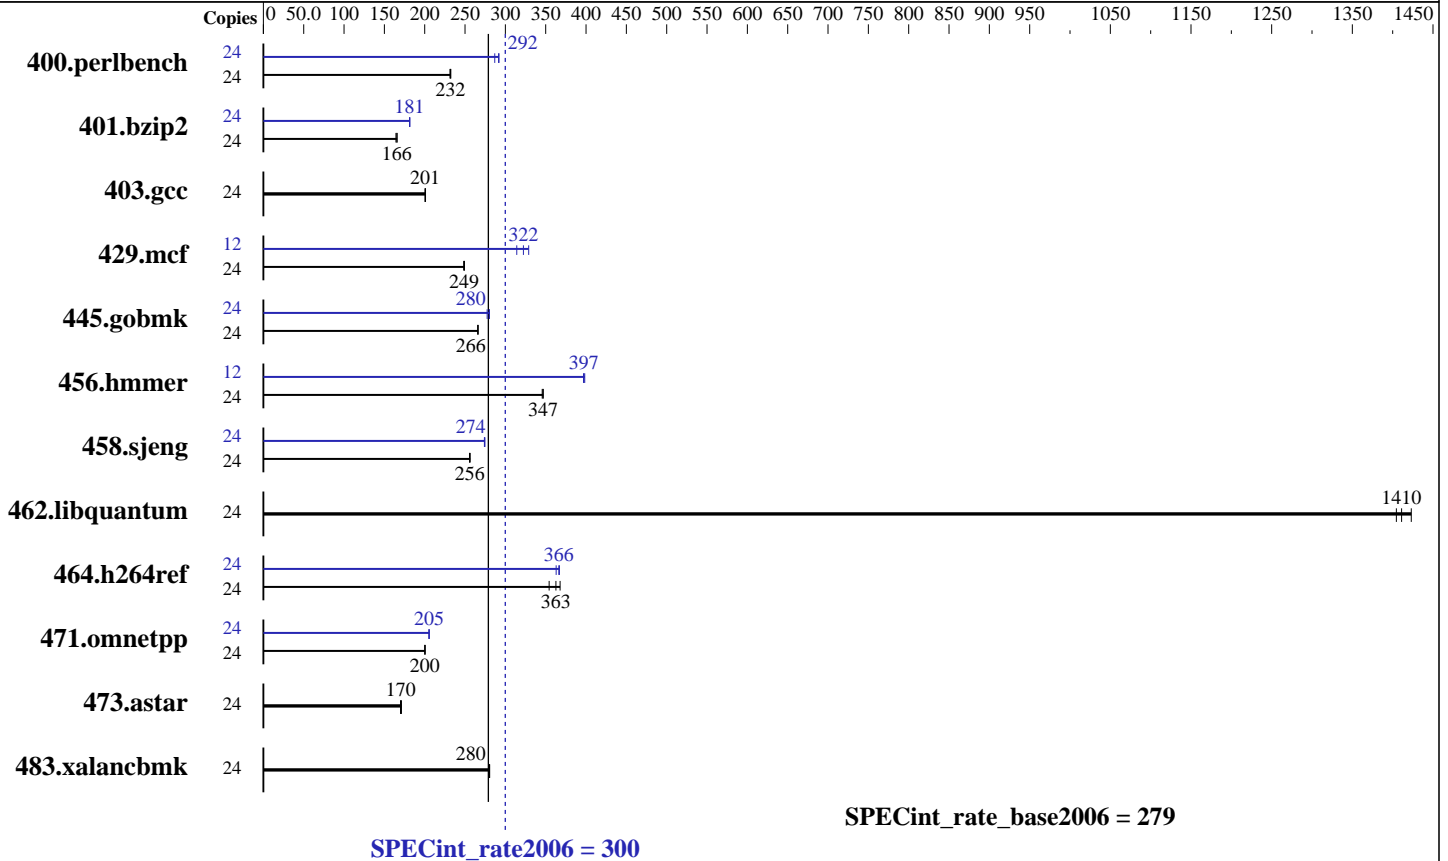

Hardware

CPU Name: Intel Xeon L5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 300

NovaScale R460 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint_rate_base2006 = 279

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Mar-2010
Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>1011</u>	<u>232</u>	1009	232	1014	231	24	817	287	803	292	<u>804</u>	<u>292</u>
401.bzip2	24	1409	164	<u>1399</u>	<u>166</u>	1397	166	24	<u>1278</u>	<u>181</u>	1278	181	1275	182
403.gcc	24	964	200	961	201	<u>963</u>	<u>201</u>	24	964	200	961	201	<u>963</u>	<u>201</u>
429.mcf	24	881	248	878	249	<u>879</u>	<u>249</u>	12	348	314	<u>339</u>	<u>322</u>	333	329
445.gobmk	24	946	266	<u>946</u>	<u>266</u>	947	266	24	898	280	<u>899</u>	<u>280</u>	908	277
456.hammer	24	646	347	<u>646</u>	<u>347</u>	648	346	12	282	397	281	398	<u>282</u>	<u>397</u>
458.sjeng	24	<u>1135</u>	<u>256</u>	1133	256	1137	256	24	<u>1059</u>	<u>274</u>	1060	274	1058	275
462.libquantum	24	349	1420	<u>352</u>	<u>1410</u>	354	1400	24	349	1420	<u>352</u>	<u>1410</u>	354	1400
464.h264ref	24	1444	368	<u>1465</u>	<u>363</u>	1499	354	24	1447	367	1463	363	<u>1450</u>	<u>366</u>
471.omnetpp	24	750	200	748	201	<u>749</u>	<u>200</u>	24	<u>730</u>	<u>205</u>	731	205	730	206
473.astar	24	984	171	<u>988</u>	<u>170</u>	991	170	24	984	171	<u>988</u>	<u>170</u>	991	170
483.xalancbmk	24	591	280	<u>591</u>	<u>280</u>	590	281	24	591	280	<u>591</u>	<u>280</u>	590	281

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R710 model. Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 300

NovaScale R460 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint_rate_base2006 = 279

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Mar-2010
Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 300

NovaScale R460 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint_rate_base2006 = 279

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Mar-2010
Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 300

NovaScale R460 F2 (Intel Xeon L5640, 2.26 GHz)

SPECint_rate_base2006 = 279

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:49:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.