



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11


Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jul-2010

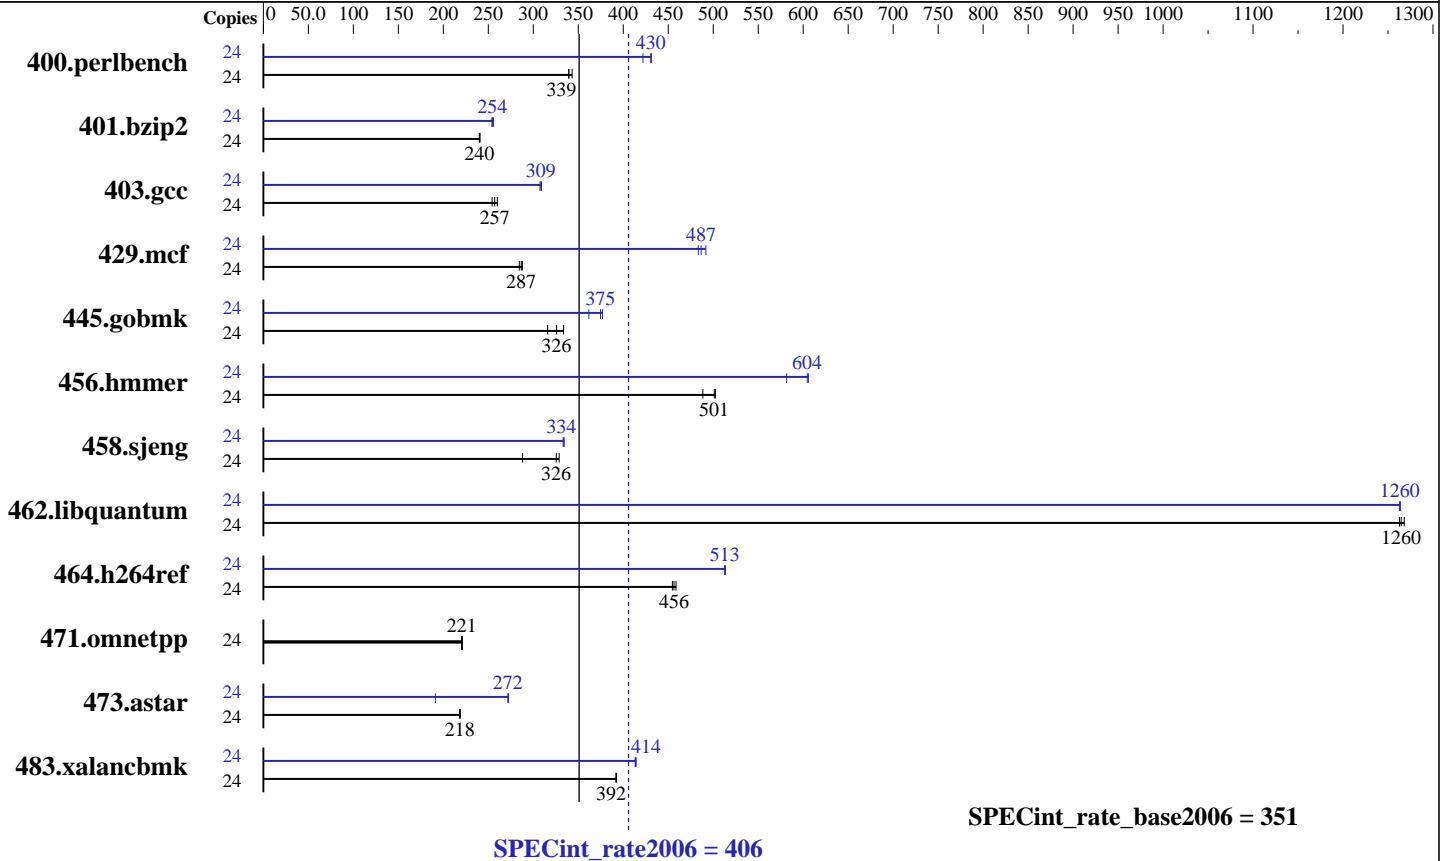

Hardware

CPU Name: AMD Opteron 6176
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	683	343	691	339	<u>691</u>	<u>339</u>	24	556	422	544	431	<u>545</u>	<u>430</u>
401.bzip2	24	<u>964</u>	<u>240</u>	962	241	965	240	24	<u>910</u>	<u>254</u>	912	254	905	256
403.gcc	24	<u>751</u>	<u>257</u>	743	260	760	254	24	625	309	628	307	<u>626</u>	<u>309</u>
429.mcf	24	769	284	760	288	<u>764</u>	<u>287</u>	24	453	483	<u>450</u>	<u>487</u>	445	492
445.gobmk	24	797	316	755	334	<u>772</u>	<u>326</u>	24	668	377	696	362	<u>672</u>	<u>375</u>
456.hammer	24	458	488	<u>447</u>	<u>501</u>	446	502	24	385	582	370	606	<u>370</u>	<u>604</u>
458.sjeng	24	<u>892</u>	<u>326</u>	1008	288	883	329	24	872	333	<u>870</u>	<u>334</u>	869	334
462.libquantum	24	<u>393</u>	<u>1260</u>	392	1270	394	1260	24	394	1260	394	1260	<u>394</u>	<u>1260</u>
464.h264ref	24	1158	459	<u>1164</u>	<u>456</u>	1168	455	24	1034	513	<u>1035</u>	<u>513</u>	1036	513
471.omnetpp	24	681	220	<u>680</u>	<u>221</u>	678	221	24	681	220	<u>680</u>	<u>221</u>	678	221
473.astar	24	770	219	<u>771</u>	<u>218</u>	772	218	24	881	191	618	273	<u>620</u>	<u>272</u>
483.xalancbmk	24	422	393	<u>422</u>	<u>392</u>	423	392	24	401	413	<u>400</u>	<u>414</u>	400	414

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Settings:
Operating Mode set to Performance Mode

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/64:/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Jul-2010

General Notes (Continued)

Binaries were compiled on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -CG:local_sched_alg=1
 -INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
 -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
 -CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Jul-2010

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
 -LNO:ignore_feedback=off -CG:p2align=on
 -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
 -OPT:alias=disjoint -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:local_sched_alg=1 -CG:cflow=0
 -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11

Test date: Aug-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
 -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
 -WOPT:if_conv=0 -GRA:optimize_boundary=on
 -OPT:alias=disjoint -INLINE:aggressive=on
 -IPA:small_pu=3000 -IPA:plimit=3000 -m32
 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
 -fno-emit-exceptions
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 406

IBM System x3755 M3 (AMD Opteron 6176)

SPECint_rate_base2006 = 351

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Jul-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:37:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 October 2011.