



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

SPECint®\_rate2006 = 414

SPECint\_rate\_base2006 = 365

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

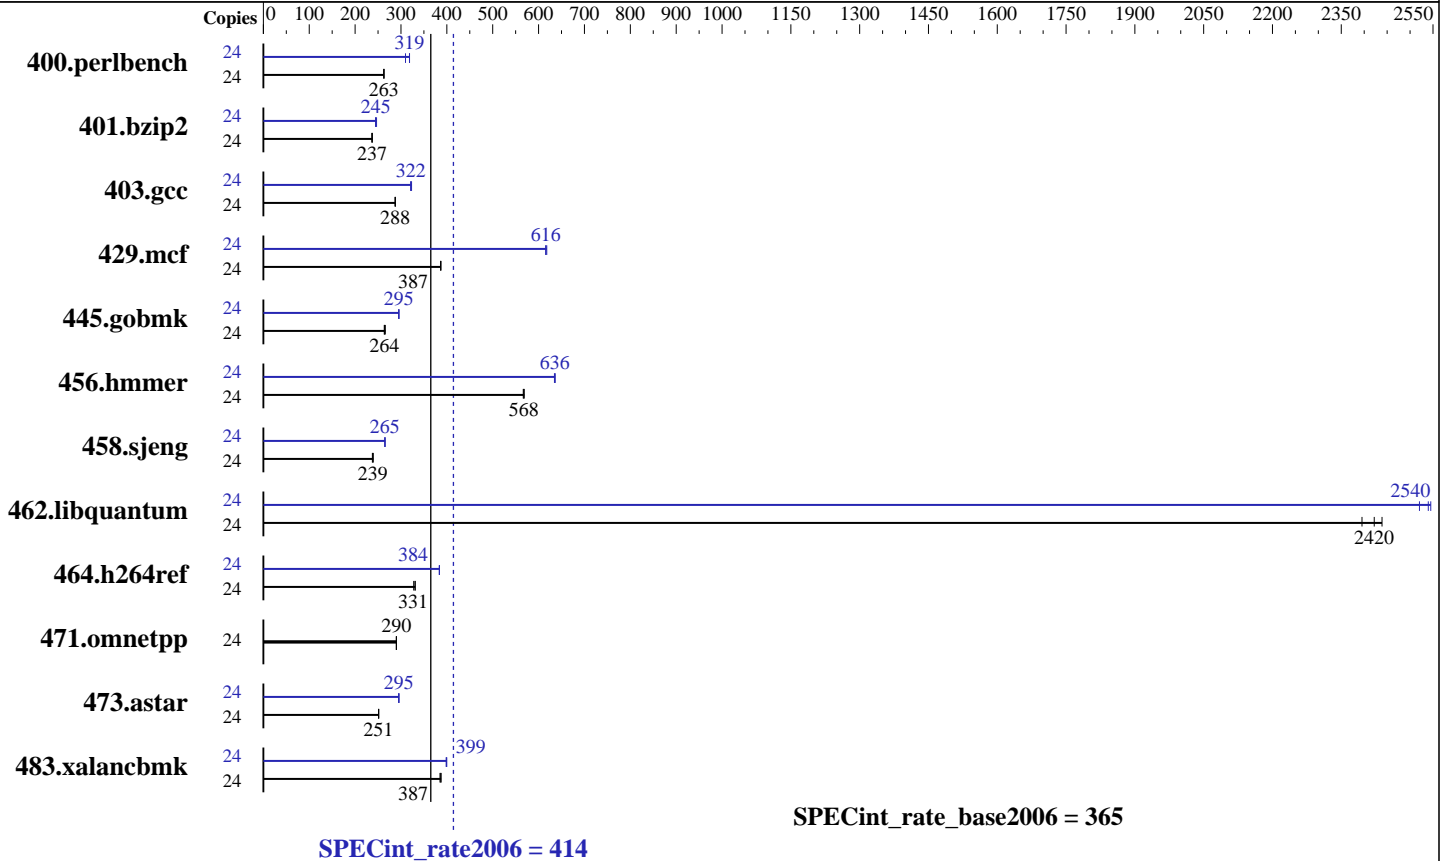

**Hardware**

CPU Name: AMD Opteron 6238  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 2 chips  
 Primary Cache: 384 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 160 GB SAS, 15000 RPM  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.1,  
 Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 414

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

SPECint\_rate\_base2006 = 365

CPU2006 license: 55

Test date: Nov-2011

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	893	262	892	263	<u>892</u>	<u>263</u>	24	757	310	<u>736</u>	<u>319</u>	736	319		
401.bzip2	24	975	238	979	237	<u>977</u>	<u>237</u>	24	946	245	<u>946</u>	<u>245</u>	939	247		
403.gcc	24	<u>672</u>	<u>288</u>	672	288	673	287	24	598	323	602	321	<u>601</u>	<u>322</u>		
429.mcf	24	<u>566</u>	<u>387</u>	566	387	566	387	24	354	618	356	615	<u>355</u>	<u>616</u>		
445.gobmk	24	947	266	955	264	<u>954</u>	<u>264</u>	24	853	295	<u>853</u>	<u>295</u>	852	296		
456.hammer	24	<u>395</u>	<u>568</u>	394	569	395	567	24	<u>352</u>	<u>636</u>	353	635	352	636		
458.sjeng	24	1213	240	<u>1217</u>	<u>239</u>	1222	238	24	1094	265	<u>1096</u>	<u>265</u>	1097	265		
462.libquantum	24	204	2440	208	2400	<u>205</u>	<u>2420</u>	24	<u>196</u>	<u>2540</u>	197	2520	195	2550		
464.h264ref	24	1604	331	<u>1607</u>	<u>331</u>	1621	328	24	1384	384	1384	384	<u>1384</u>	<u>384</u>		
471.omnetpp	24	<u>517</u>	<u>290</u>	517	290	517	290	24	<u>517</u>	<u>290</u>	517	290	517	290		
473.astar	24	<u>670</u>	<u>251</u>	671	251	670	251	24	570	295	571	295	<u>570</u>	<u>295</u>		
483.xalancbmk	24	<u>428</u>	<u>387</u>	430	385	427	387	24	<u>415</u>	<u>399</u>	415	399	414	400		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1  
Huge pages, transparent Huge pages, and space randomization is controlled with the following settings:  
echo 57344 > /proc/sys/vm/nr\_hugepages  
mount -t hugetlbfs nodev /mnt/hugepages  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
echo 0 > /proc/sys/kernel/randomize\_va\_space=0

## Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"  
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

**SPECint\_rate2006 = 414**

**SPECint\_rate\_base2006 = 365**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## General Notes (Continued)

<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peek=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

**SPECint\_rate2006 = 414**

**SPECint\_rate\_base2006 = 365**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
-IPA:plimit=20000 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
-CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
-OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
-INLINE:aggressive=on -CG:gcm=off  
-GRA:prioritize\_by\_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1  
-LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
-OPT:alias=disjoint -OPT:unroll\_times\_max=16  
-OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
-HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

**SPECint\_rate2006 = 414**

**SPECint\_rate\_base2006 = 365**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Nov-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R715  
(AMD Opteron 6238, 2.60 GHz)

**SPECint\_rate2006 = 414**

**SPECint\_rate\_base2006 = 365**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Nov-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:28:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 December 2011.