



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint®\_rate2006 = 581**

**SPECint\_rate\_base2006 = 550**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2012  
Hardware Availability: May-2011  
Software Availability: Dec-2011

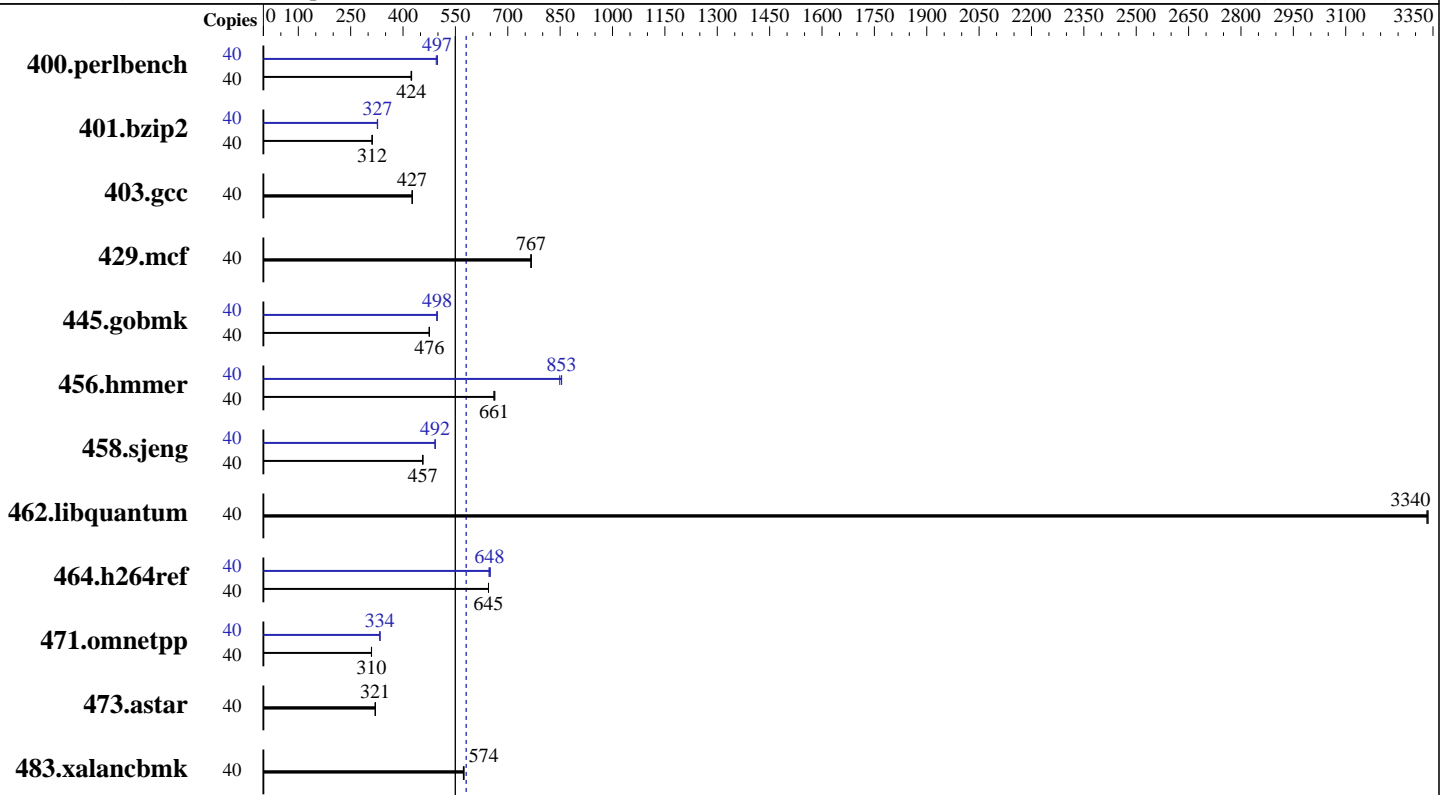

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 550**

### Hardware

CPU Name: Intel Xeon E7-2870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint\_rate2006 = 581

SPECint\_rate\_base2006 = 550

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: May-2011

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<u>922</u>	<u>424</u>	920	425	924	423	40	784	499	<u>786</u>	<u>497</u>	789	495
401.bzip2	40	<u>1238</u>	<u>312</u>	1241	311	1236	312	40	1180	327	<u>1180</u>	<u>327</u>	1183	326
403.gcc	40	756	426	754	427	<u>755</u>	<u>427</u>	40	756	426	754	427	<u>755</u>	<u>427</u>
429.mcf	40	476	766	<u>476</u>	<u>767</u>	475	767	40	476	766	<u>476</u>	<u>767</u>	475	767
445.gobmk	40	882	476	884	475	<u>882</u>	<u>476</u>	40	<u>843</u>	<u>498</u>	842	498	845	497
456.hammer	40	565	660	<u>564</u>	<u>661</u>	563	663	40	<u>437</u>	<u>853</u>	437	854	440	849
458.sjeng	40	1062	456	<u>1060</u>	<u>457</u>	1059	457	40	984	492	984	492	<u>984</u>	<u>492</u>
462.libquantum	40	248	3340	<u>248</u>	<u>3340</u>	249	3330	40	248	3340	<u>248</u>	<u>3340</u>	249	3330
464.h264ref	40	<u>1373</u>	<u>645</u>	1373	645	1373	645	40	1362	650	1370	646	<u>1366</u>	<u>648</u>
471.omnetpp	40	808	310	<u>807</u>	<u>310</u>	807	310	40	749	334	749	334	<u>749</u>	<u>334</u>
473.astar	40	876	320	<u>876</u>	<u>321</u>	876	321	40	876	320	<u>876</u>	<u>321</u>	876	321
483.xalancbmk	40	<u>481</u>	<u>574</u>	482	573	480	575	40	<u>481</u>	<u>574</u>	482	573	480	575

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Turbo Boost Power Optimization set to Traditional in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on megallon-pete Fri Jul 13 16:38:15 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7- 2870 @ 2.40GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint\_rate2006 = 581

SPECint\_rate\_base2006 = 550

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2012  
Hardware Availability: May-2011  
Software Availability: Dec-2011

### Platform Notes (Continued)

```
siblings : 20
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264468348 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux megallon-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 13 16:23
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_megallonpete-lv_root
                ext4      264G   86G  166G  35% /
```

```
Additional information from dmidecode:
Memory:
32x Hynix HMT31GR7BFR8A-G7 8 GB 1067 MHz 4 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 550**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2012  
**Hardware Availability:** May-2011  
**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 550**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2012

**Hardware Availability:** May-2011

**Software Availability:** Dec-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/smartheap -lsmartheap

473.astar: basepeak = yes

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3690 X5 (Intel Xeon E7-2870, 2.40 GHz)

**SPECint\_rate2006 = 581**

**SPECint\_rate\_base2006 = 550**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2012  
**Hardware Availability:** May-2011  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:35:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.